

东莞市高畅电子科技有限公司

Dongguan Gaochang Electronic Technology Co., Ltd.

No. 2, Building 2, Fengde Road, Fenggang Town, Dongguan City,

Guangdong Province

产 品 规 格 书

Product specification

客 户:

CUSTOMER:

客 户 案 号:

CUSTOMER P/N:

本 厂 编 号:

GC-BT620FPC-L180-OP

OUR MODEL NO:

品 名 / 规 格:

BT-620FPC 内置天线

SPECIFICATIONS:

样 品 数:

0

Q' TY:


日 期:

2026-6-3

1. Technical Specification

A. Electrical Characteristics	
Working Frequency Range	2400~2500MHz
S.W.R.	2400~2500MHz:<2.0
Antenna Gain(avg.)	2400~2500MHz: 3.34dBi
Impedance	50ohm
B. Material	
brass	
C. Environmental	
Operation Temperature	-45℃~+85℃
Storage Temperature	-45℃~+85℃

2. Matching Circuits

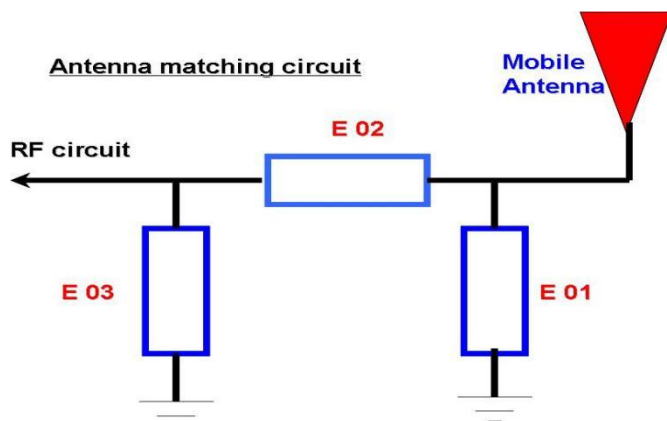

Element	Value	Vender
E1(0402)	OPEN	/
E2(0402)	SHORT	50 Ω

E3(0402)	OPEN	/
----------	------	---


3. Curing antenna S11 Testing Result.

The S11 parameter was performed using a Agilent 8753D Network Analyzer and BEST'S test fixture that was using customer-providing device.

VSWR (Voltage standing wave ratio)

The Voltage Standing Wave Ratio (VSWR) is an indication of how good the impedance match is. VSWR is often abbreviated as SWR. If the transmission line and the antenna are not matched, the antenna will not accept all the power from the transmission line. The part it does not accept is reflected back and forth between the transmitter and the antenna. This sets up a fixed wave pattern along the line which we can measure and which is called the voltage standing wave ration(VSWR).The VSWR (ratio of maximum voltage to the minimum voltage along the line)expresses the degree of match between the transmission line and the antenna. When the VSWR is 1 to 1(1:1) the match is perfect and all the energy is transferred to the antenna prior to be radiated. When the VSWR is 1.5:1, 96% of the power reaches the antenna. By definition VSWR can never be less than 1.VSWR and reflected power are different ways of measuring and expressing the same thing. A high VSWR is indication that the signal is reflected prior to being radiated by the antenna.

驻波 VSWR

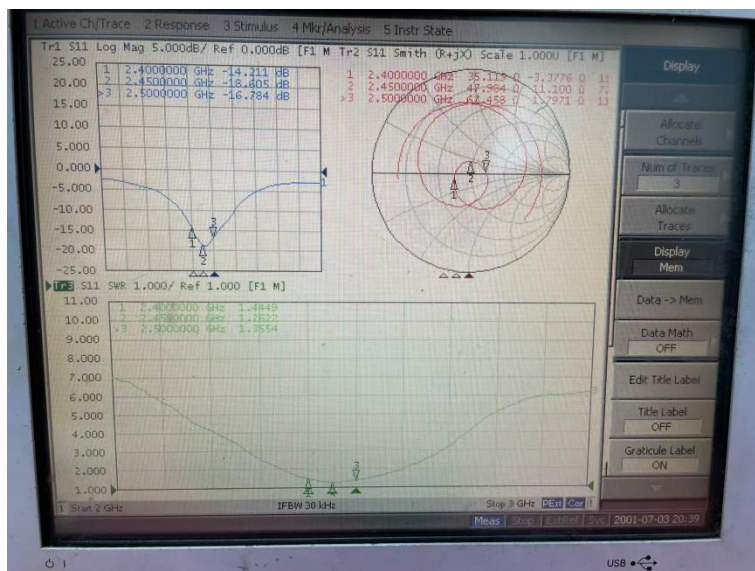


Marker	2400MHz	2450MHz	2500MHz
S.W.R	<2.0		

4.测试 3D 报告


Frequency: 2400MHZ Gain: 2.68dbi

2400.000MHz




Frequency: 2450MHZ Gain: 3.34dbi

2450.000MHz

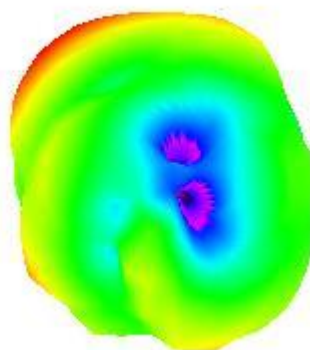

Frequency: 2500MHZ Gain: 3.03dbi

2500.000MHz

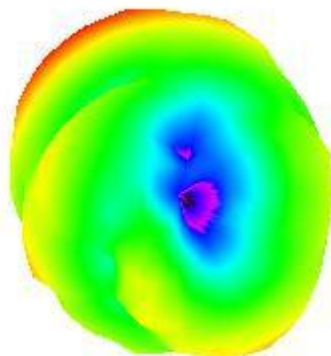

5. Passive test data

Passive Test For 2.4G			
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	61.01	-2.15	2.68
2410	61.1	-2.09	2.75
2420	61.47	-2.01	2.77
2430	61.51	-1.99	2.81
2440	63.53	-1.97	2.98
2450	65.58	-1.83	3.34
2460	64.88	-1.88	3.33
2470	64.78	-1.95	3.24
2480	64.75	-1.89	3.21
2490	64.76	-1.85	3.08
2500	63.82	-1.88	3.03

6.Product appearance

