
SPECIFICATION FOR APPROVAL

CUSTOMER: Shenzhen Maen Technology Co., Ltd.

CUST P/N: 56566

DESC: J-MN56566-L50

DATE: 20230424

VERSION: A.0

PREPARED BY	CHECKED BY	APPROVED BY	CUSTOMER APPROVE
Yang Maoxin	Liu Xi Jiang	Luo jie	

DONGGUAN JIOU ELECTRONIC TECHNOLOGY CO,LTD

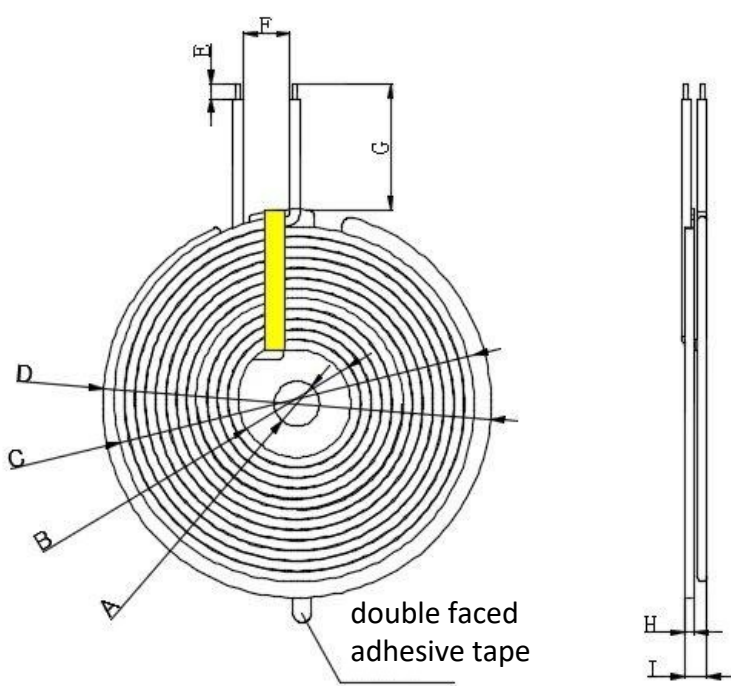
Company Address: Newfa Industrial Zone, Shijie Town, Dongguan City

[TEL:0769-83067050](tel:0769-83067050)

E-mail: lybofmana@163.com

Version Change History

Rev	Before Change	After Change	Change Date	Approved BY
A.0	new issue		20230424	Luo jie

DESC	J-MN56566-L50	REV:A.1	CUST	Maen
			CUST P/N	56566
一、 DIMENSION(MM)				
 Note: 1. Double-sided adhesive is applied on the back of the coil. 2. The magnetic shielding sheet is 43*5.0*1.0 with two slots. 3. The H value does not include the thickness of the release paper for the double-sided adhesive. 4. 5mm heat-resistant tape is attached at the lead-out points of the coil.			A	5.0±0.3
			B	12.5±1
			C	39±1
			D	43±0.5
			E	4±1
			F	5 Ref
			G	50±2
			H	1±0.1
			I	2.6Max

二、Winding Specification:

Wire	Turns	Winding Direction
Silk braided cable 0.08 * 105P	12TS	back-roll

四、ELECTRICAL CHARACTERISTICS:

TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, RELATIVE HUMIDITY : $65 \pm 20\%$

TIEM	SPECIFICATION	TEST FREQUENCY	TEST EQUIPMENTS
IND	$6.4\text{UH} \pm 10\%$	100 KHZ/1.0V	LCZ METER 1062B
DCR	$50\text{m}\Omega$ Max		LCZ METER 1062B

PREPAREDBY	CHECKED BY	DATE
Yang Maoxin	Liu Xi Jiang	20230424