

Acknowledgment Letter

customer name: dian xiao er

Customer P/N: 101.0069

Model: A11-G43*5.3*0.9-6.5UH-10MM

datelanded: 2025 年 5 月 30 日

Supplier: 东莞捷瑞思科技有限公司

draw	Review	Approve
Wang lizhi	Deng Xianggui	Lu rusheng

The customer acknowledges:

Qualified	Unqualified	acknowledge
Note		


Dongguan Jierestech Technology Co., Ltd.

Tel: _____

Fax: 86+13632701380

Address: No. 96, Langhu Road, Dalingshan Town, Dongguan City (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

一、Plan view diagram: Unit: MM

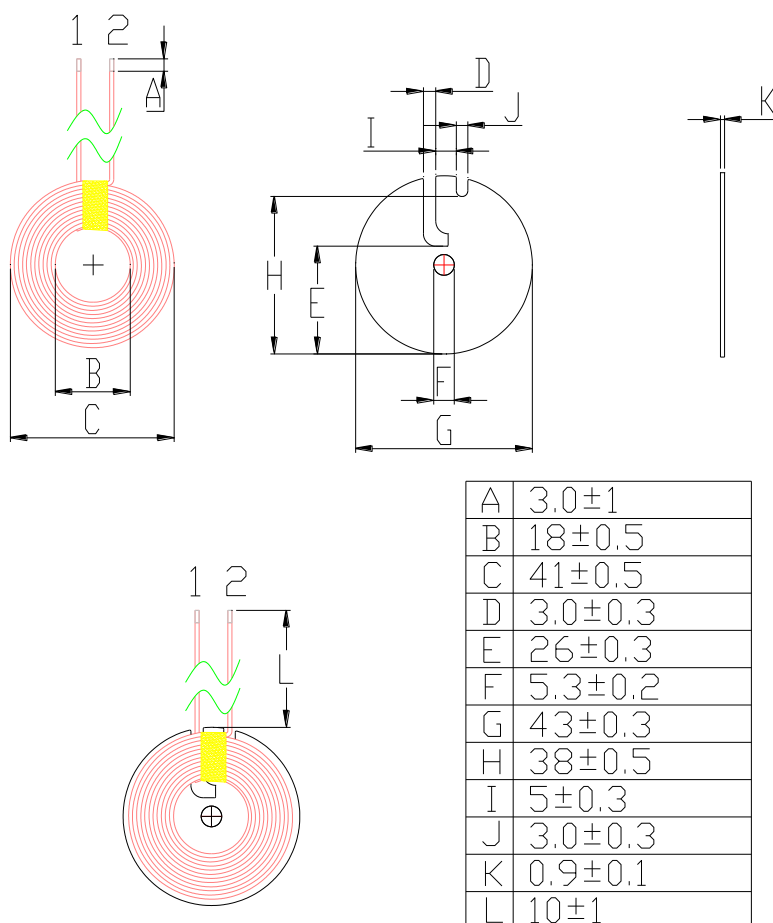

二、Product Parameter

foot position	Path	Turns	Note
1 - 2	0.08*105P	11T	silk-covered wire

三、technical requirements

1. Secure the ends of the wires to prevent them from loosening or breaking.
2. Cut the excessively long wire ends according to the customer's requirements, tin them, and ensure that the tin coating depth is uniformly 3 ± 1 MM.
3. Apply an appropriate amount of white glue on the magnetic plate, attach the coil, and keep the product surface clean and tidy during the process.
4. The hard magnetic plates used have round holes and are free from any damage.




四. Electrical Parameters:

1. Inductance value, Q factor:

$$\text{PIN } 1 - 2 = 6.5\mu\text{H} \pm 0.3\mu\text{H}$$

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100KHZ/1.0Vrms or an equivalent instrument.

五、 bill of materials:

No	Name	materials	Supplier	Note
1	silk-covered wire	0.08*105P		
2	Disk	G43 * 5.3 * 0.9 Hard substrate		
3	Tin	High-temperature environmental protection		
4	Whit Glue	BY882		
5	double faced adhesive tape	Diameter: 42*8MM		
6	high-temperature adhesive tape	6MM		