

acknowledgment

customer name: dian xiao er

Customer P/N: 101.0132

Mode: RC-G25-2.5-7.8UH-3400GS-40MM

datelanded: 2026 年 3 月 25 日

Supplier: Dongguan Jierestech Technology Co., Ltd.

draw	audit	rat
Wang lizhi	Deng Xianggui	Lu rusheng

customer acknowledges:

qualified	unqualified	acknowledges
Note		



Dongguan Jierestech Technology Co., Ltd.

Tel: _____

Fax: 86+13632701380

Address: No. 96 Langhu Road, Dalingshan Town, Dongguan (Building L, 3rd Floor, Jinxiangda Science and Technology Park)

一、Plan view diagram: Unit: MM

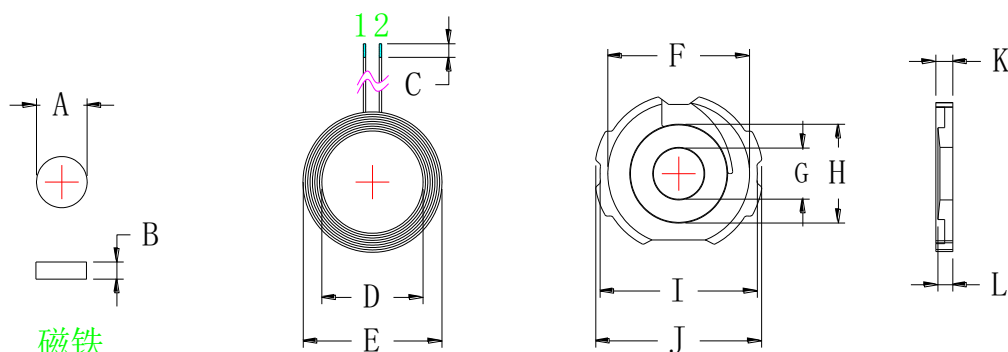

A	7.4 ± 0.1
B	2.5 ± 0.1
C	2.0 ± 1
D	14.0 ± 0.2
E	20.5 ± 0.5
F	21.1 ± 0.2
G	7.5 ± 0.1
H	13.5 ± 0.1
I	23.5 ± 0.2
J	25.0 ± 0.2
K	2.5 ± 0.15
L	2.4 ± 0.1 中柱高度
M	40 ± 1

二、Product Parameter

Position of the foot	Diameter	Turns	Note
1-2	0.08*24P	14T	Hot air twisted yarn

三、technical requirements

1. Secure the ends of the wires to prevent them from loosening or breaking.
2. Cut the excessively long wire according to the customer's requirements, tin it, and ensure that the tin coating depth is uniformly 2 ± 1 MM.
3. Apply appropriate white glue on the magnetic sheet, attach the coil, and during the process, keep the product surface clean and tidy.
4. The used soft magnetic sheet has round holes and no damaged holes.
5. Additional processing (as per customer's requirements): Install a 7.4*2.5MM magnet in the middle round hole of the finished product, and attach a 14MM diameter circular double-sided adhesive on the back of the finished product, and then package.



四、electrical parameter

1.inductance

$$\text{PIN } 1-2 = 7.8 \pm 0.3 \mu\text{H}$$

Q value 25

The above inductance and Q value were measured using the Quanhua 1062A instrument, with a standard of 100KHZ/1.0Vrms or an equivalent instrument.

五、bill of materials:

No	Name	materials	Supplier	Note
1	Hot air twisted yarn	0.08*24P	Uighur Han or equivalent	
2	Disk	G25 Soft Magnetic Sheet	Tiantong or equivalent	
3	Tin	High-temperature environmental protection	Thousand Islands or equivalent	
4	White Glue	BY882	Bao Yue or equivalent	
5	Strong magnetism	7.4*2.5*3400 200GS	Lianxin or equivalent	
6	Double-sided adhesive tape	513-14MM	Honghui or d	round