

GSM850_GPRS10_Right Cheek_190**DUT: EUT**

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042
Medium: H900 Medium parameters used: $f = 837$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 40.171$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 836.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.315 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.370 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.228 W/kg

Ratio of SAR at M2 to SAR at M1 = 81.8%

Maximum value of SAR (measured) = 0.315 W/kg

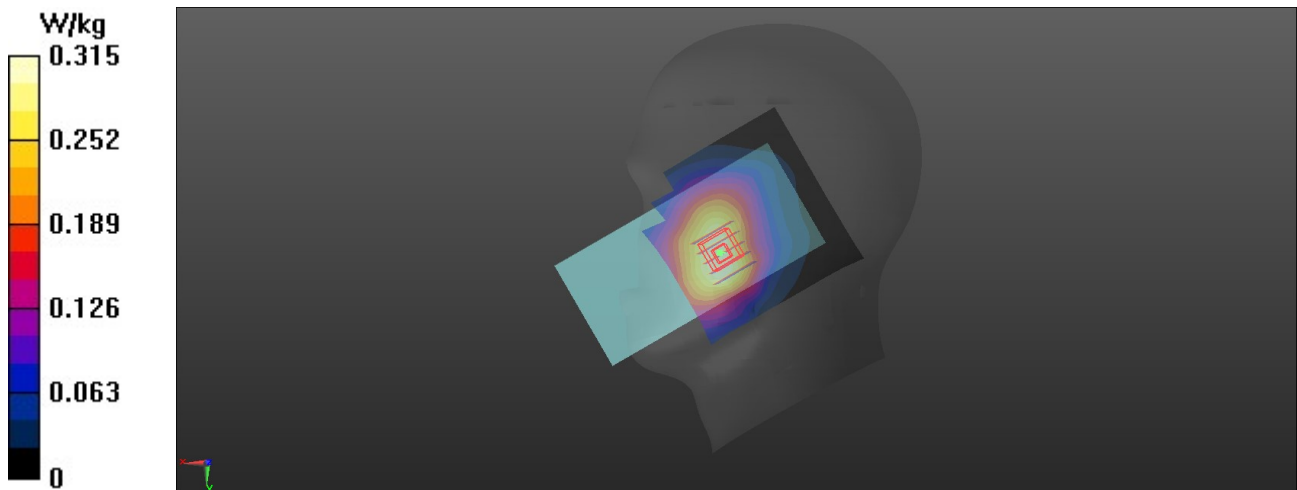

GSM1900_GPRS10_Left Cheek_661**DUT: EUT**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.325 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.120 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.2%

Maximum value of SAR (measured) = 0.314 W/kg

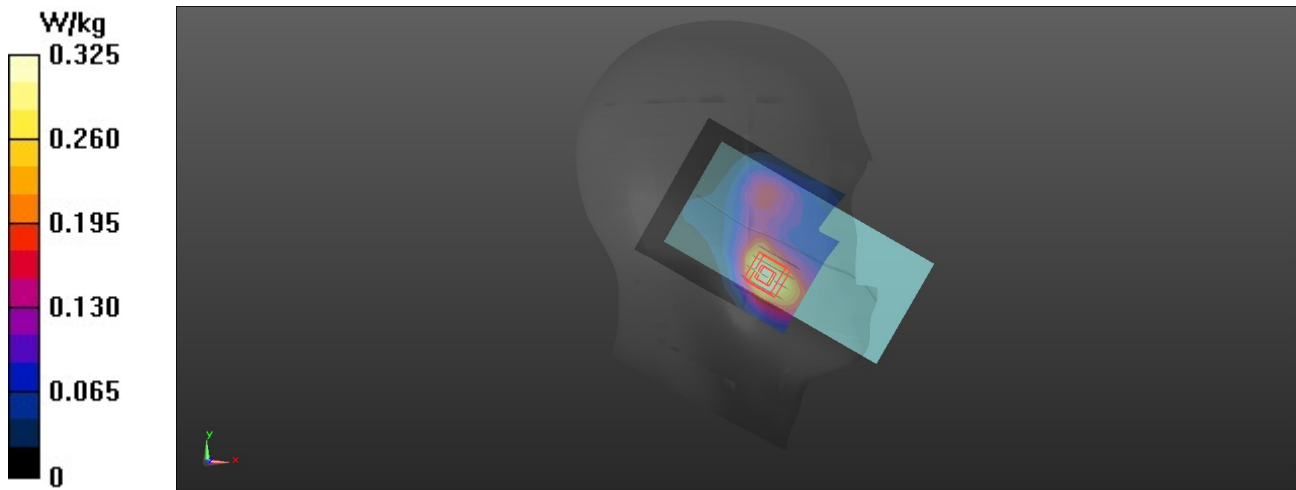

WCDMA II_RMC12.2K_Left Cheek_9400**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.351 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.072 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 13 mm

Ratio of SAR at M2 to SAR at M1 = 67.4%

Maximum value of SAR (measured) = 0.336 W/kg

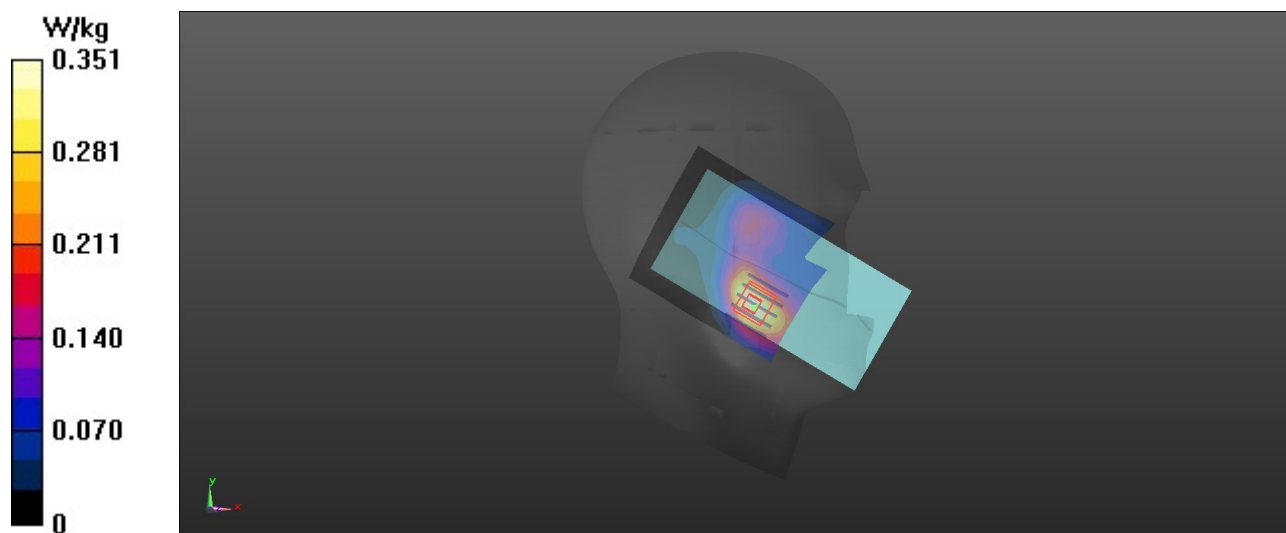

WCDMA IV_RMC12.2K_Left Cheek_1413**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.312$ S/m; $\epsilon_r = 39.734$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1732.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.434 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.509 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.524 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.236 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.3%

Maximum value of SAR (measured) = 0.416 W/kg

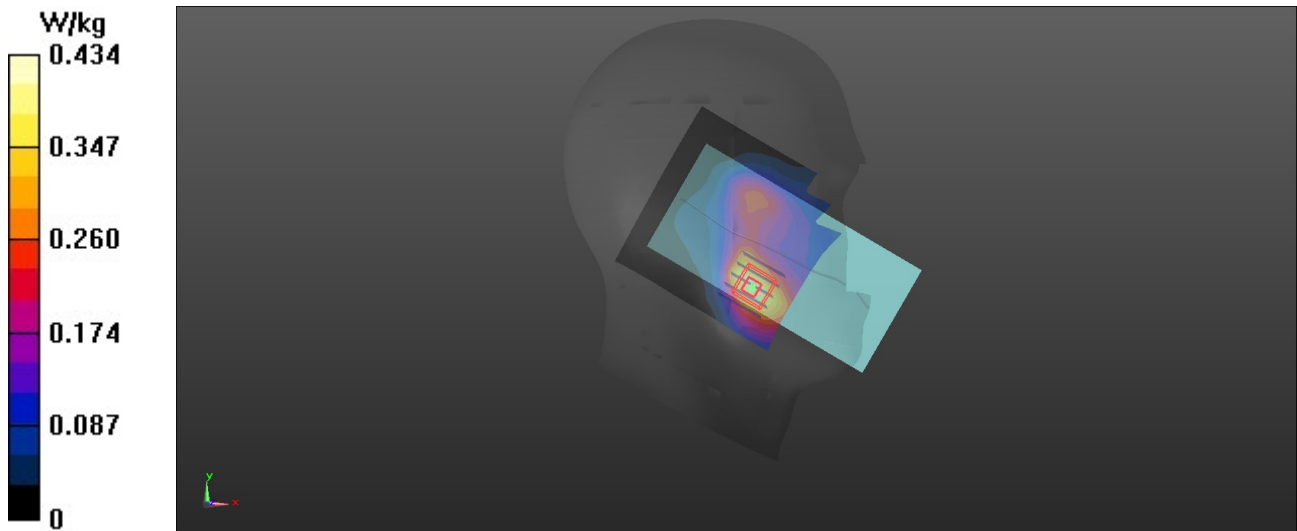

WCDMA V_RMC12.2K_Right Cheek_4182**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: H900 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 40.159$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 836.4 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.208 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.419 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 82.9%

Maximum value of SAR (measured) = 0.206 W/kg

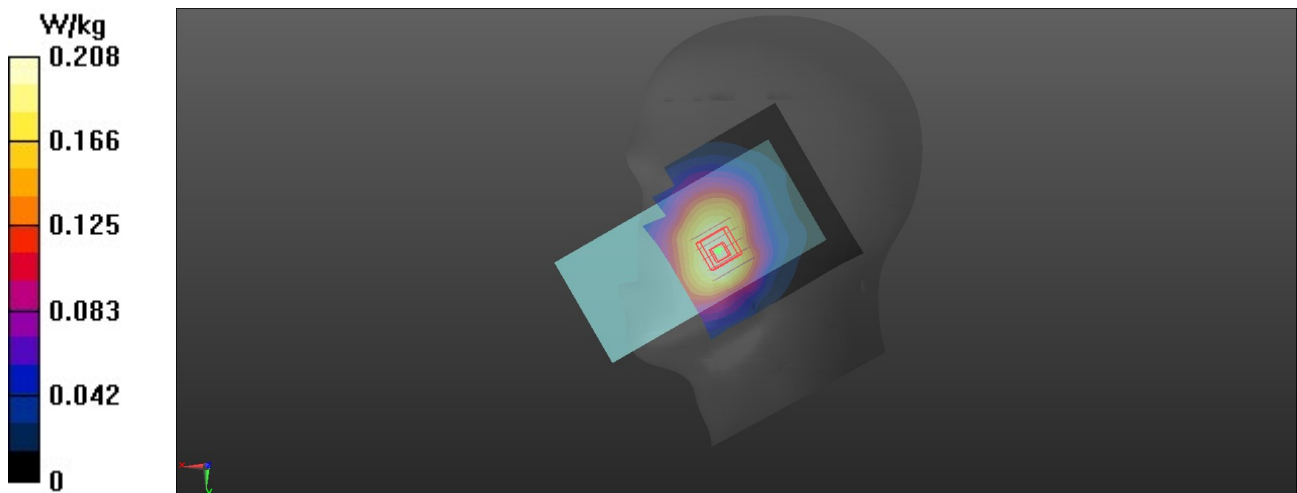

LTE 12_QPSK10M_1_25_Right Cheek_23060**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.153$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 704 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.168 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.102 V/m ; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.156 W/kg ; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 82%

Maximum value of SAR (measured) = 0.167 W/kg

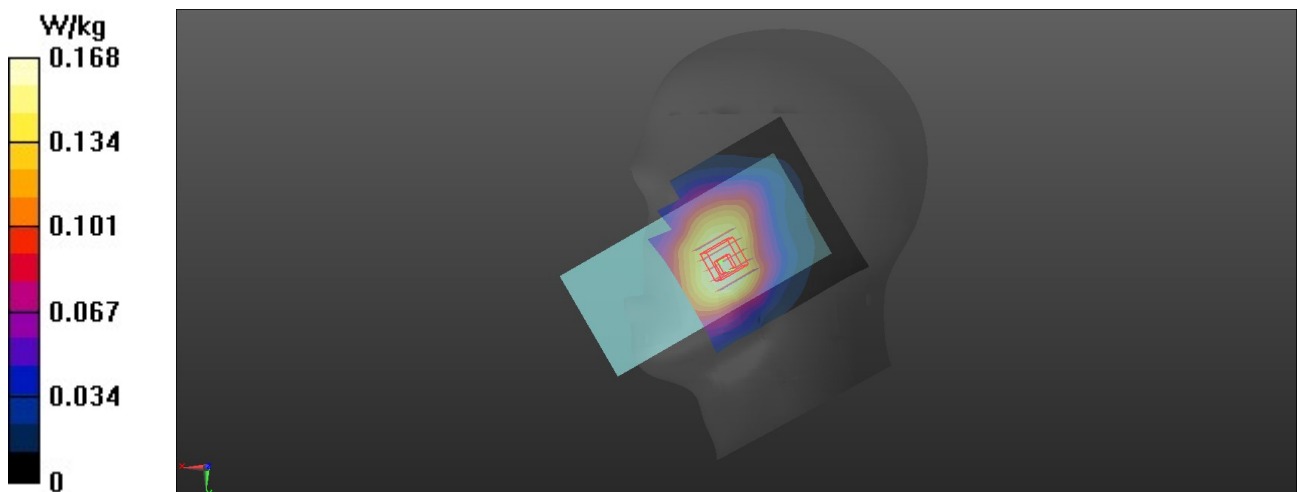

LTE 7_QPSK20M_Left Tilted_Ch21350_1RB_OS49_Ant 4**DUT: EUT**

Communication System: UID 0, LTE; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 38.459$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2560 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.16 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.2%

Maximum value of SAR (measured) = 1.27 W/kg

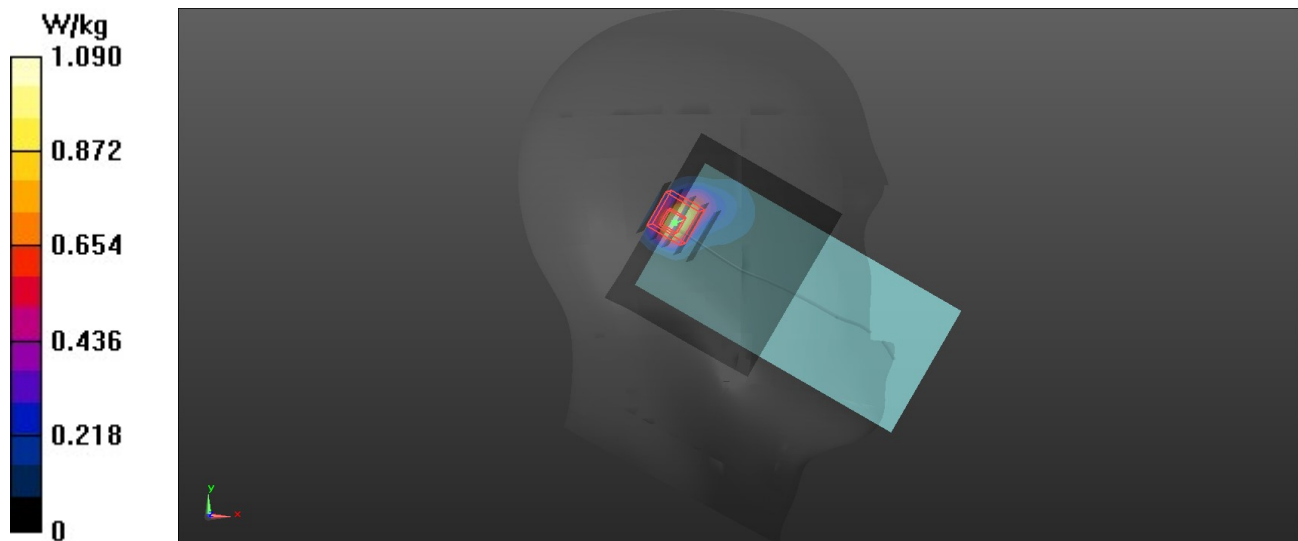

LTE 13_QPSK10M_1_25_Right Cheek_23230**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 40.901$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 782 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.216 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.185 V/m ; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.199 W/kg ; SAR(10 g) = 0.159 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 80.4%

Maximum value of SAR (measured) = 0.214 W/kg

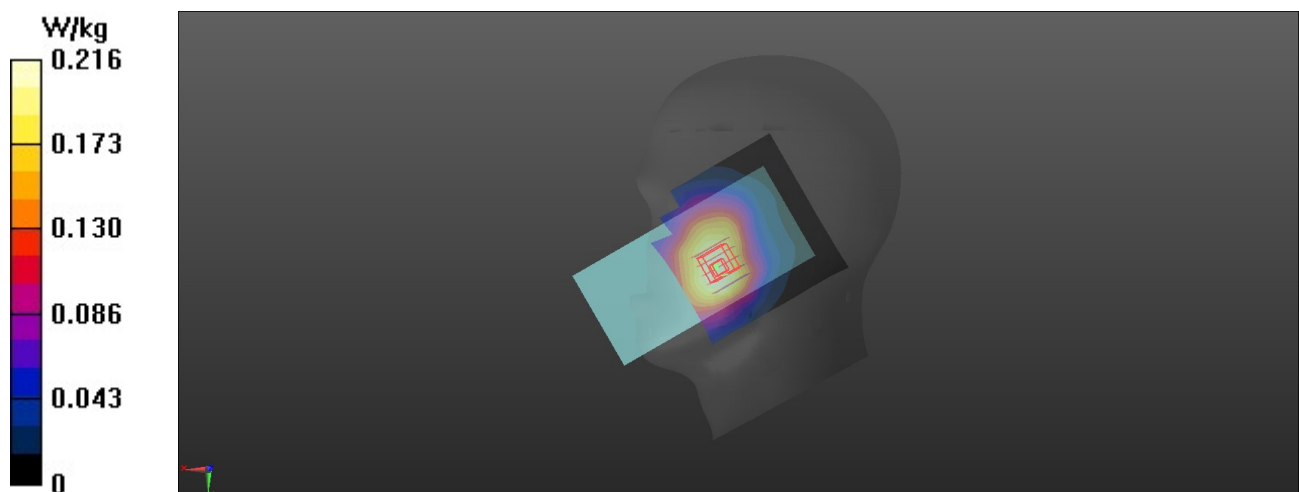

LTE 25_QPSK20M_1_49_Right Tilted_26365**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1882.5$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.041$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1882.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.914 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.730 W/kg; SAR(10 g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 0.894 W/kg

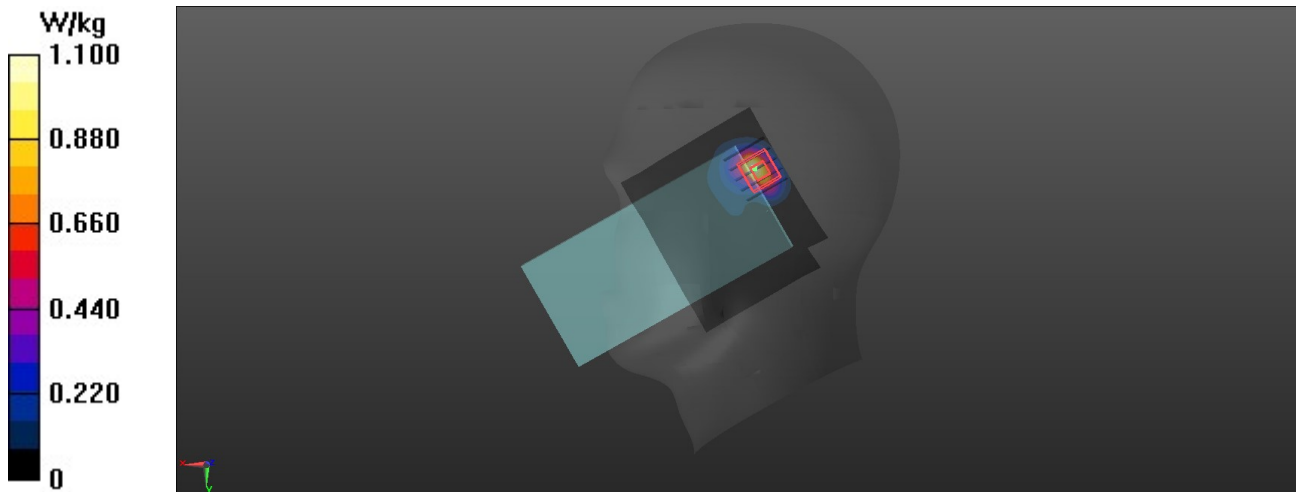

LTE 26_QPSK15M_1_38_Right Cheek_26865**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: H900 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 40.671$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 831.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.254 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.187 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 83.3%

Maximum value of SAR (measured) = 0.251 W/kg

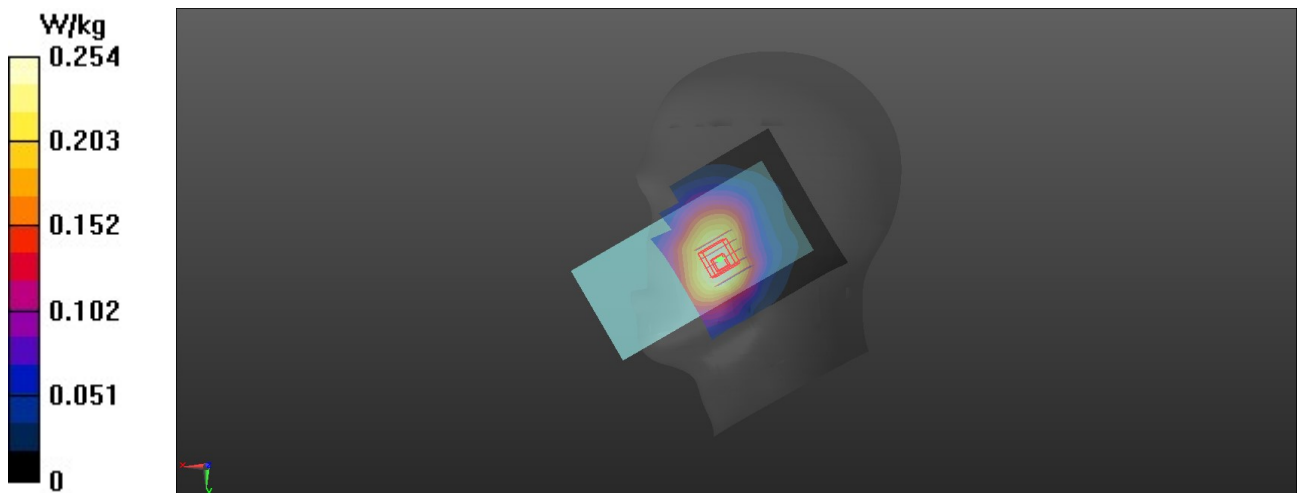

LTE 30_QPSK10M_1_0_Right Cheek_27710**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 40.326$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.9, 4.9, 4.9) @ 2310 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x91x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.0638 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0.5350 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.0960 W/kg

SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 0.0615 W/kg

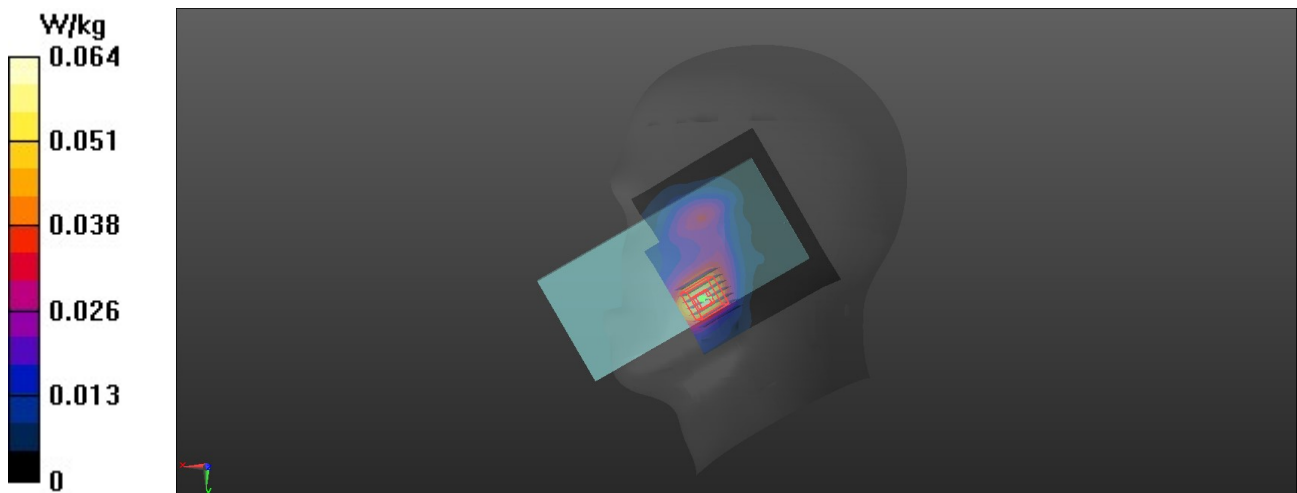

LTE 41_QPSK20M_Left Tilted_Ch41490_1RB_OS99_Ant 4**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 2680 MHz; Duty Cycle: 1:1.58
Medium: H2600 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.078$ S/m; $\epsilon_r = 38.008$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2680 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.15 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.27 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 48.8%

Maximum value of SAR (measured) = 1.37 W/kg

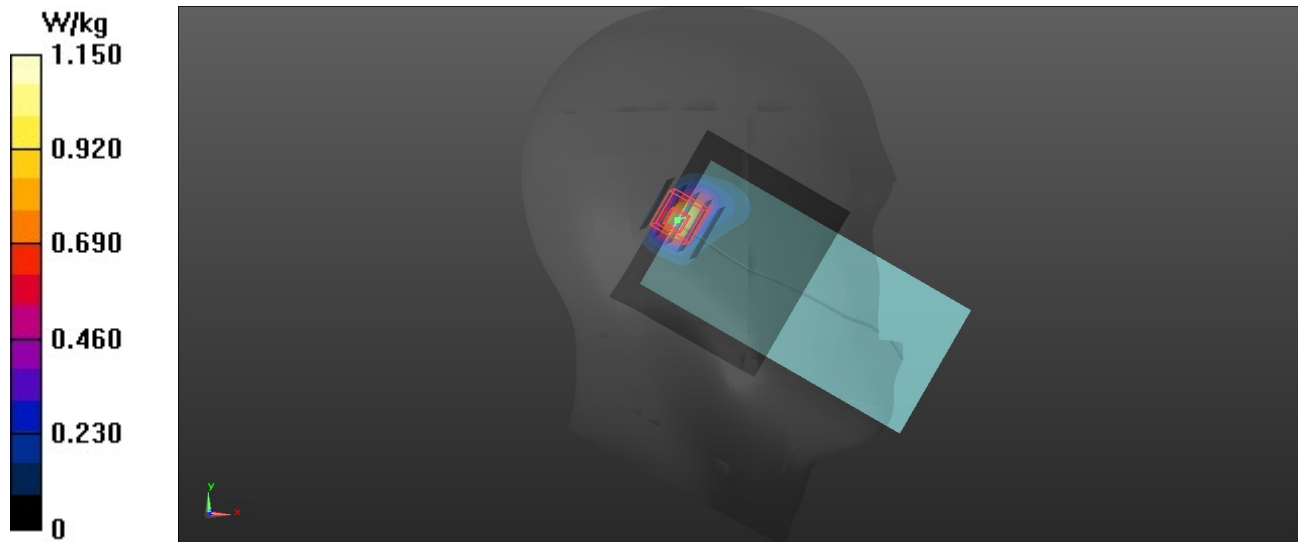

LTE 42_QPSK20M_Right Cheek_Ch42990_1RB_OS99_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3540 MHz; Duty Cycle: 1:1.58
Medium: H3500 Medium parameters used: $f = 3540$ MHz; $\sigma = 2.902$ S/m; $\epsilon_r = 37.595$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3540 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 10.79 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.410 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.1%

Maximum value of SAR (measured) = 1.68 W/kg

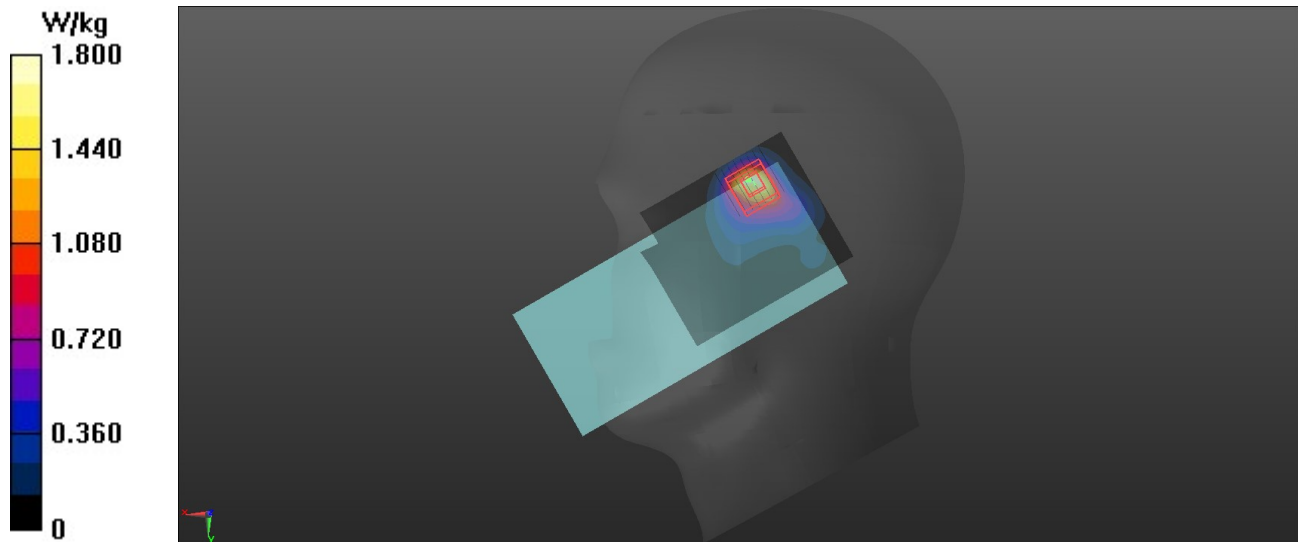

LTE 43_QPSK20M_Right Cheek_Ch45490_1RB_OS99_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3790 MHz; Duty Cycle: 1:1.58
Medium: H3700 Medium parameters used: $f = 3790$ MHz; $\sigma = 3.106$ S/m; $\epsilon_r = 37.166$; $\rho = 1000 = \text{kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3790 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.879 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.330 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 1.41 W/kg

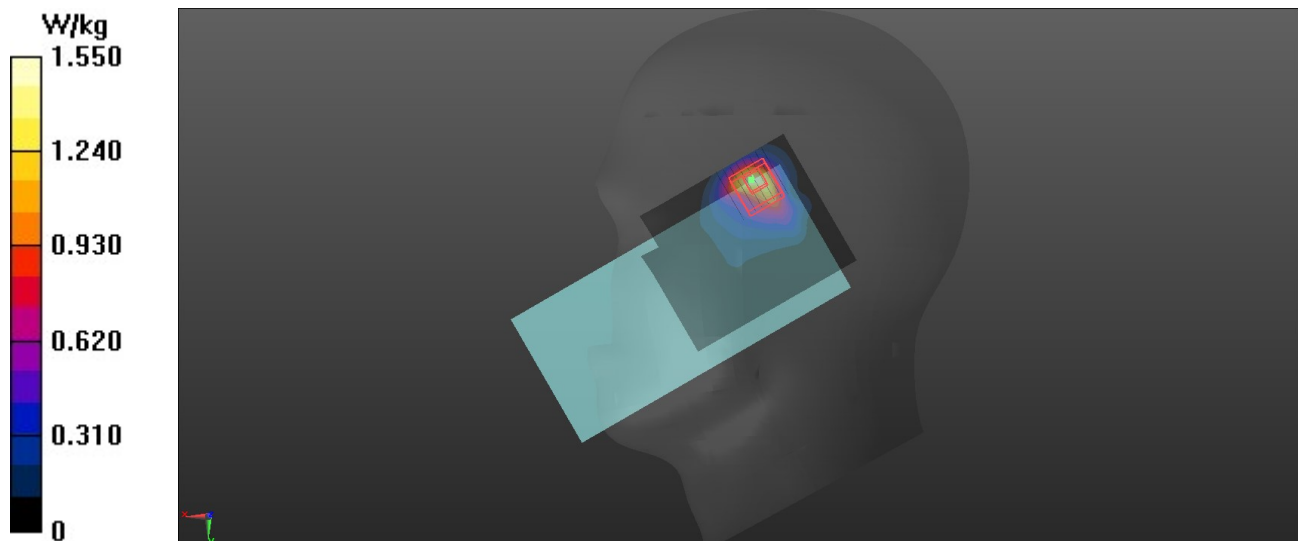

LTE 48_QPSK20M_Right Cheek_Ch56640_1RB_OS0_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3690 MHz; Duty Cycle: 1:1.58
Medium: H3700 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.154$ S/m; $\epsilon_r = 37.992$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3690 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x101x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 7.172 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 74.5%

Maximum value of SAR (measured) = 1.41 W/kg

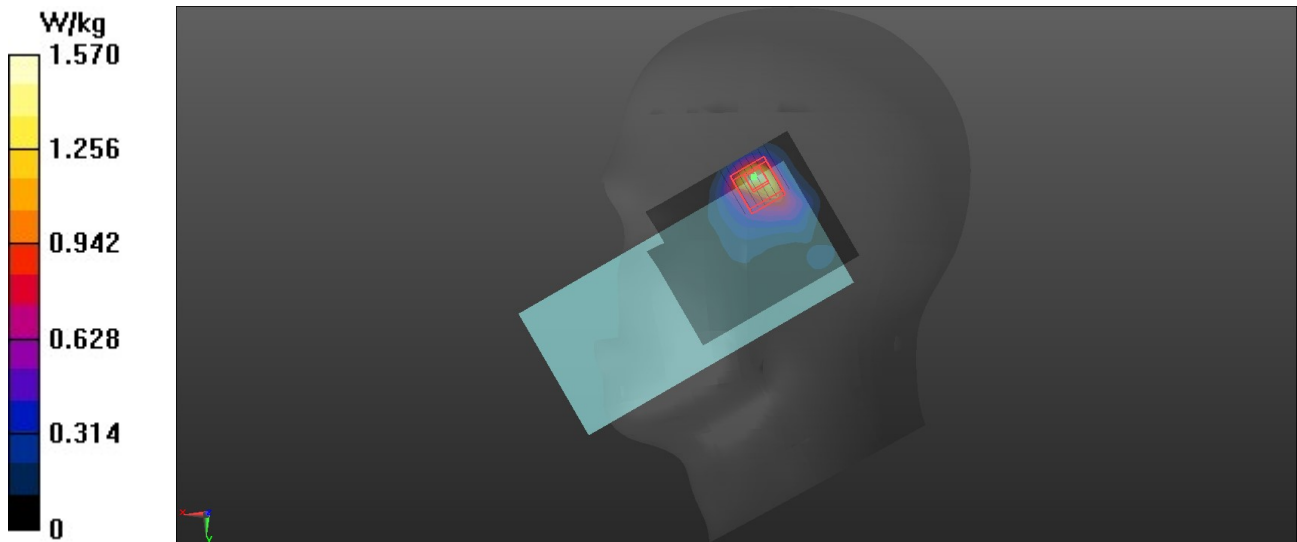

LTE 66_QPSK20M_1_99_Right Cheek_132072**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1720 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.507 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.432 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 49.6%

Maximum value of SAR (measured) = 0.408 W/kg

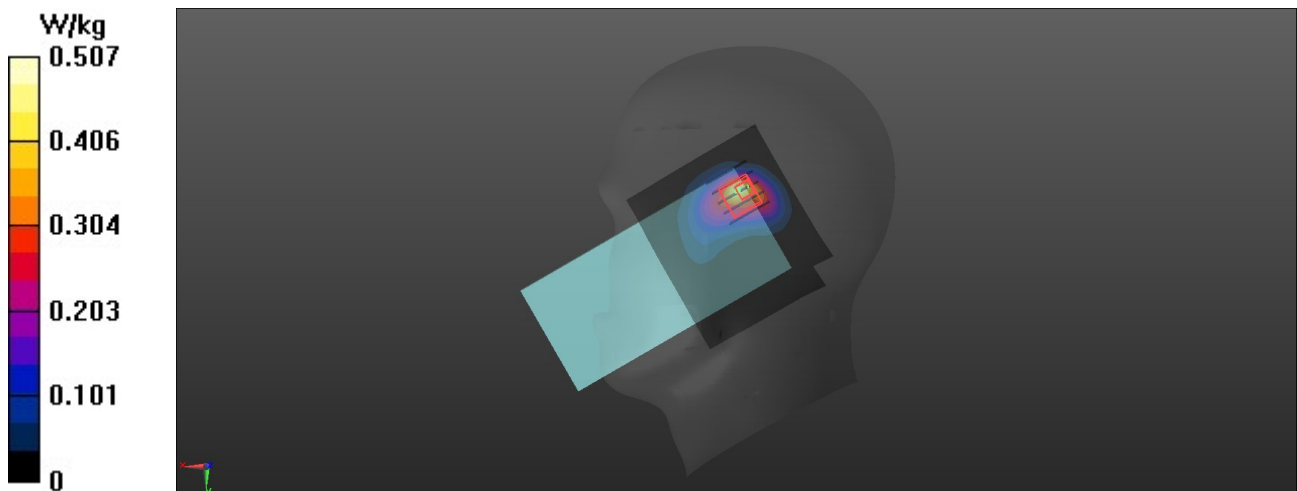

LTE 71_QPSK20M_1_99_Right Cheek_133222**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.245$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 673 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.199 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 3.305 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.150 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 85.7%

Maximum value of SAR (measured) = 0.196 W/kg

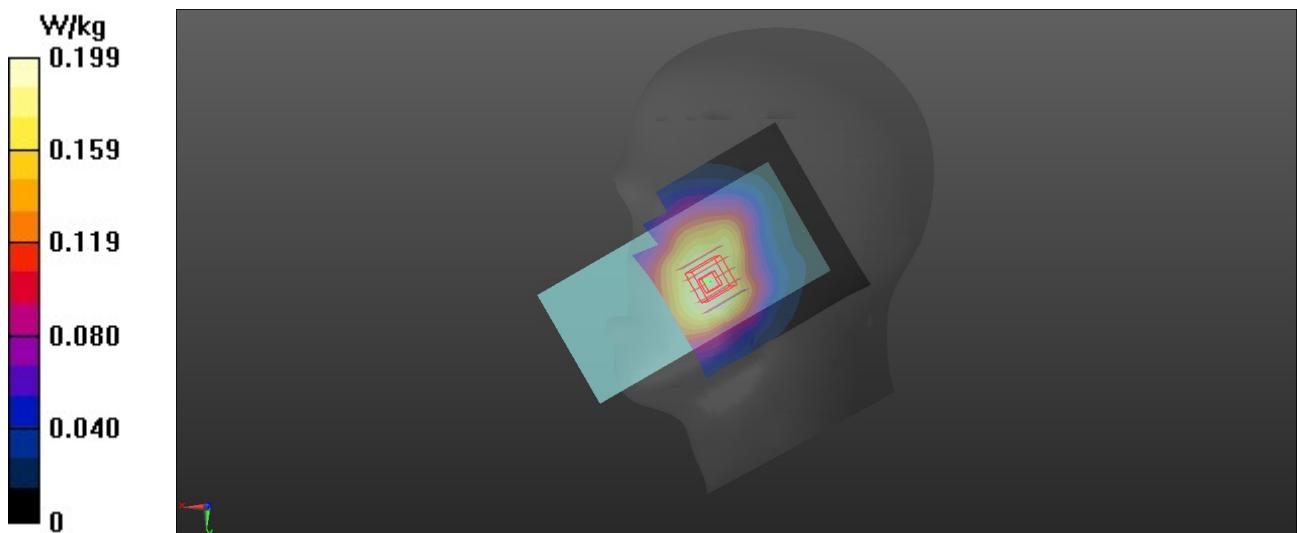

**N7_15kHz_DFT-s-OFDM_QPSK20M_Left Tilted_Ch512000_Innter
Full_Mid_Ant 4****DUT: EUT**

Communication System: UID 0, 5G NR; Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.942$ S/m; $\epsilon_r = 37.581$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.9, 7.43, 6.85) @ 2560 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (71x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.928 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.00 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.299 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.4%

Maximum value of SAR (measured) = 1.22 W/kg

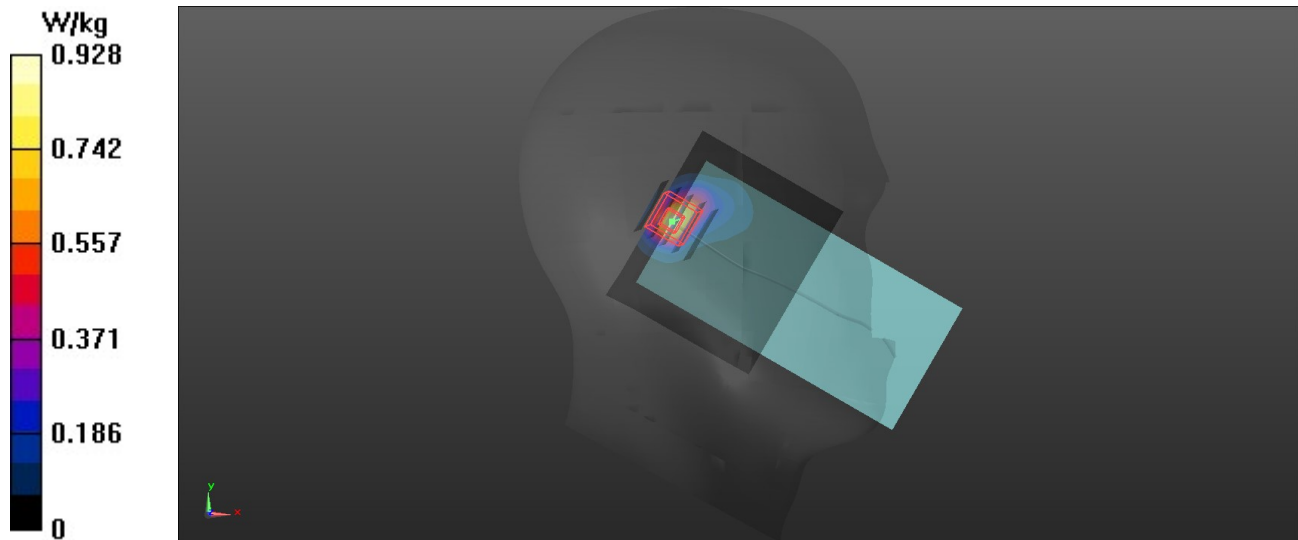

N12_15kHz_DFT-s-OFDM_QPSK15M_Right Cheek_141700_Innter_Full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR (0); Frequency: 708.5 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used : $f = 708.5$ MHz; $\sigma = 0.858$ S/m; $\epsilon_r = 41.114$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 708.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.163 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.251 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 83.8%

Maximum value of SAR (measured) = 0.161 W/kg

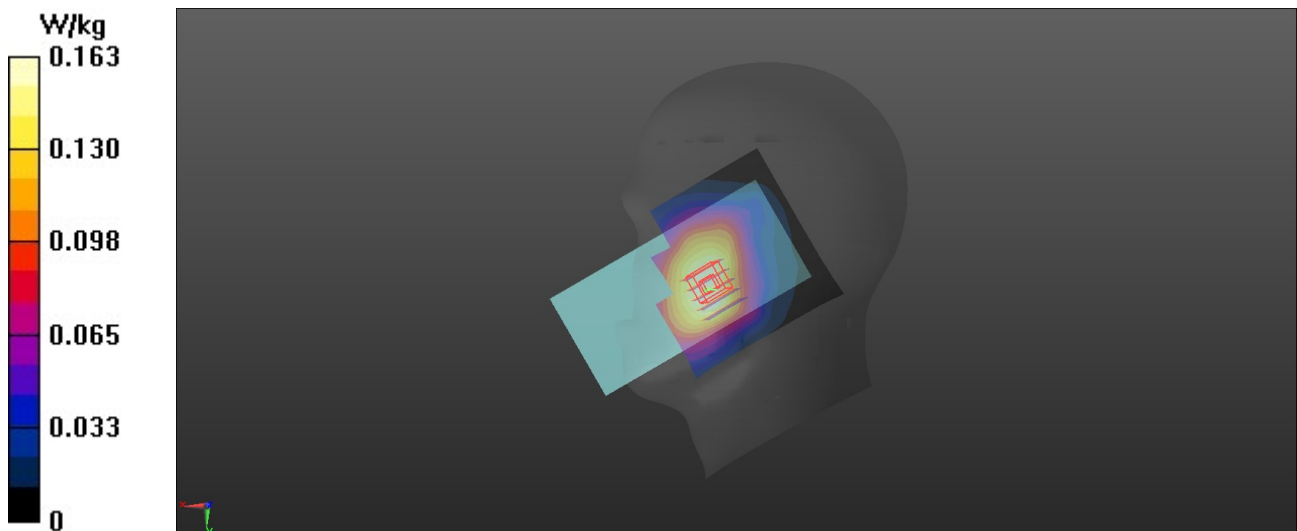

N25_15kHz_DFT-s-OFDM_QPSK20M_Left Cheek_372000_Innter_Full_Mid**DUT: EUT**

Communication System: UID 0, 5G NR (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 40.033$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1860 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.314 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.920 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 69.5%

Maximum value of SAR (measured) = 0.301 W/kg

