

GSM1900_GPRS10_Bottom Side_10mm_661**DUT: EUT**

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.805 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.64 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.649 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 0.789 W/kg

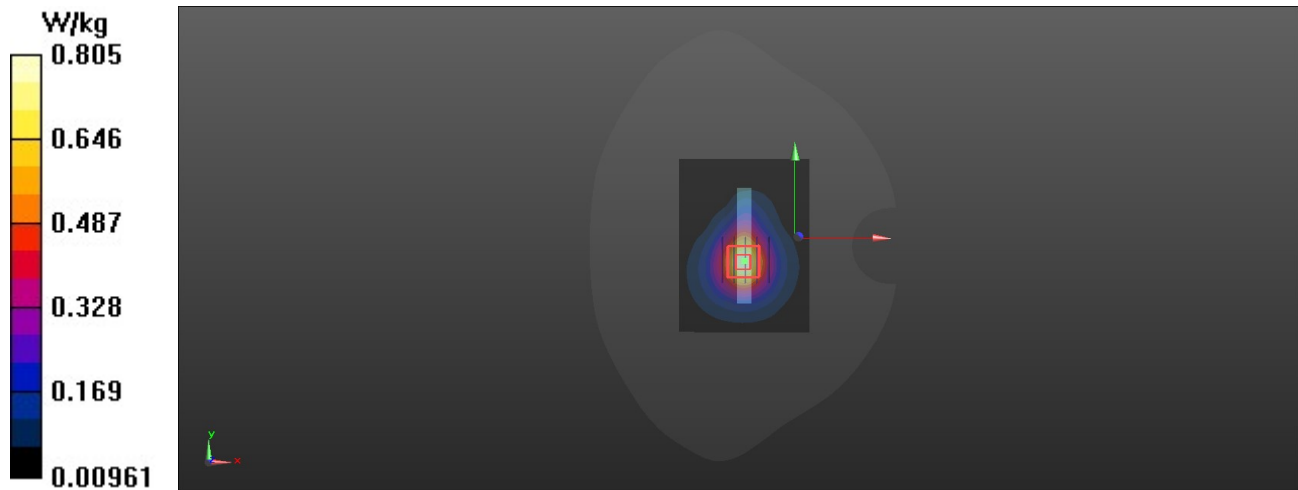

WCDMA II_RMC12.2K_Rear Face_10mm_9400**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.763 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.87 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.360 W/kg

Smallest distance from peaks to all points 3 dB below = 16 mm

Ratio of SAR at M2 to SAR at M1 = 59.9%

Maximum value of SAR (measured) = 0.697 W/kg

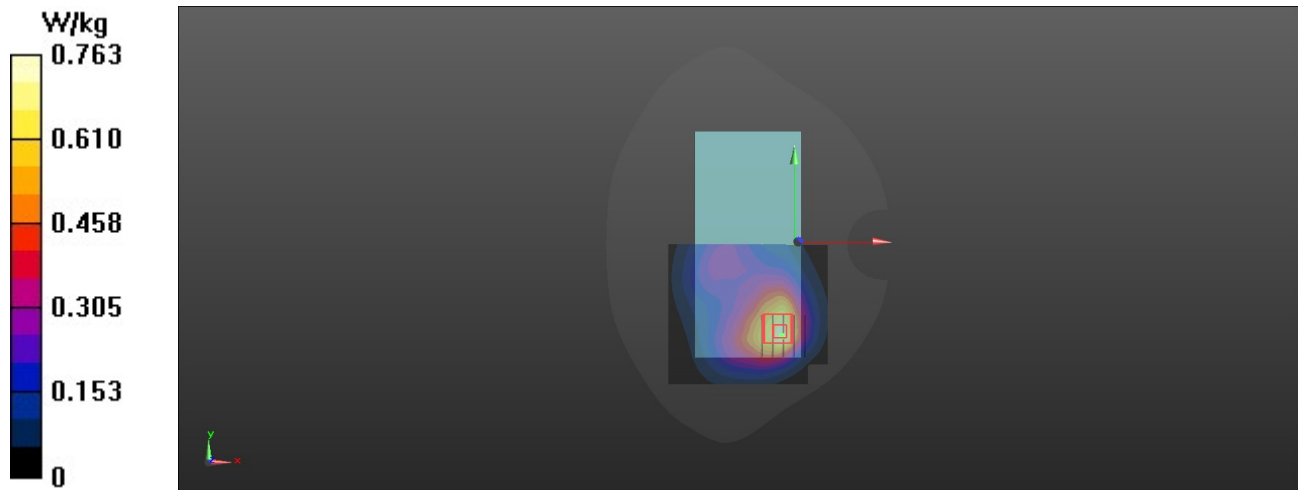

WCDMA II_RMC12.2K_Left Side_10mm_9400**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1880$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 39.112$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1880 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.768 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.40 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 15.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.729 W/kg

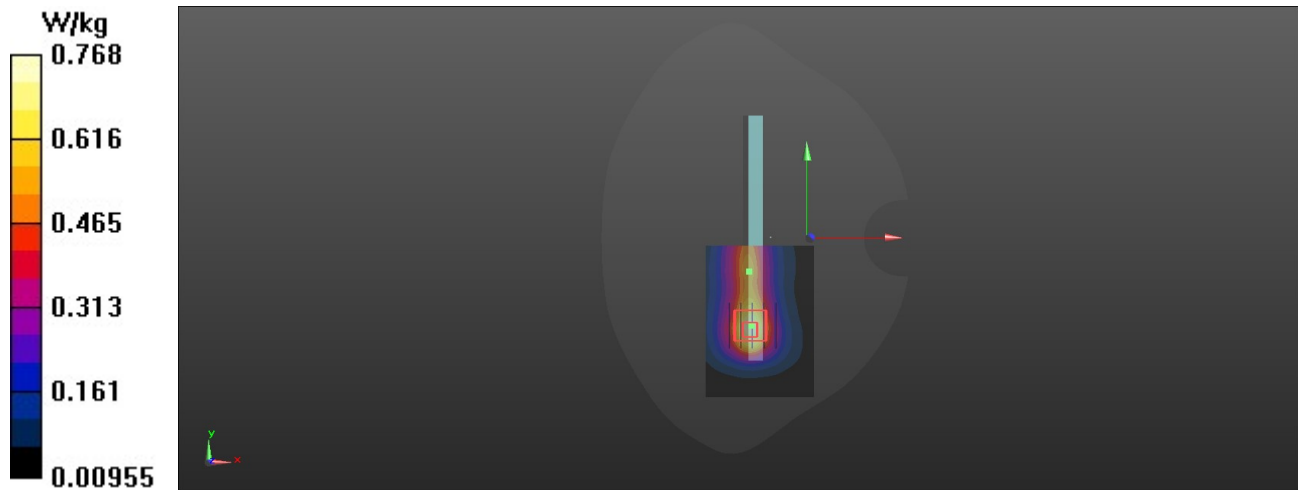

WCDMA IV_RMC12.2K_Rear Face_10mm_1513**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 39.737$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1752.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.10 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.651 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 1.32 W/kg

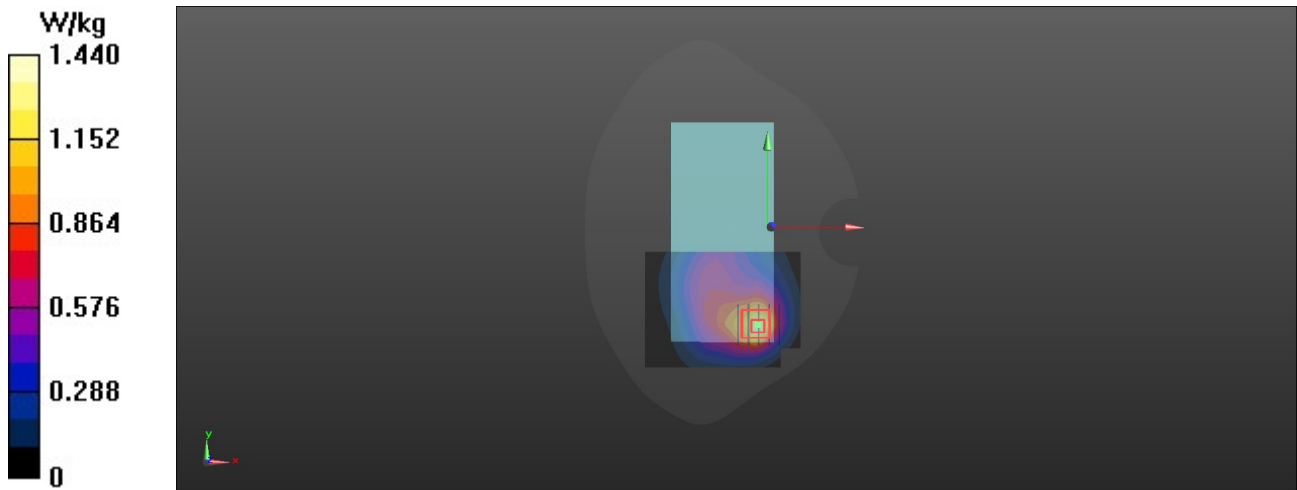

WCDMA IV_RMC12.2K_Bottom Side_10mm_1513**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 39.737$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1752.6 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.40 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.687 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.3%

Maximum value of SAR (measured) = 1.38 W/kg

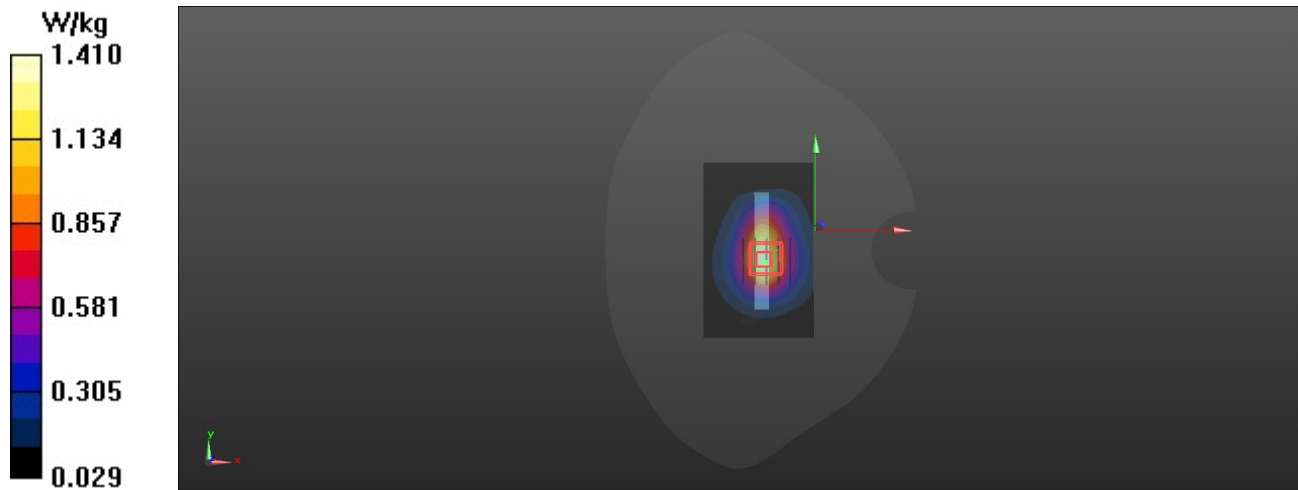

WCDMA V_RMC12.2K_Rear Face_10mm_4182**DUT: EUT**

Communication System: UID 0, Generic WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: H900 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.942$ S/m; $\epsilon_r = 40.159$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 836.4 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.421 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.98 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.567 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 15.1 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 0.424 W/kg

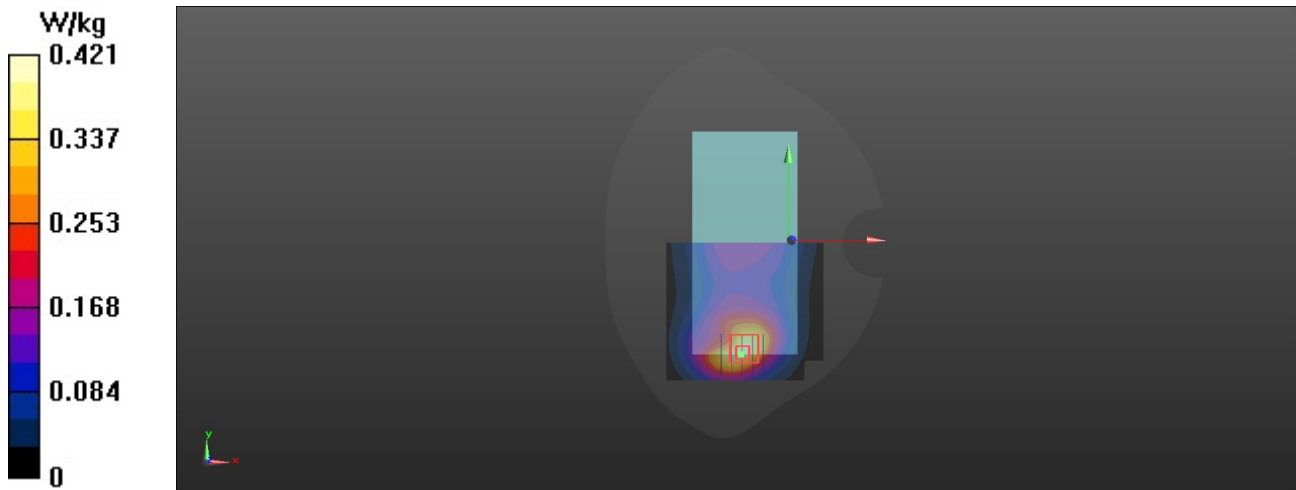

LTE 7_QPSK20M_1_0_Front Face_10mm_20850**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.946$ S/m; $\epsilon_r = 39.529$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2510 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.882 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.372 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.741 W/kg; SAR(10 g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 0.849 W/kg

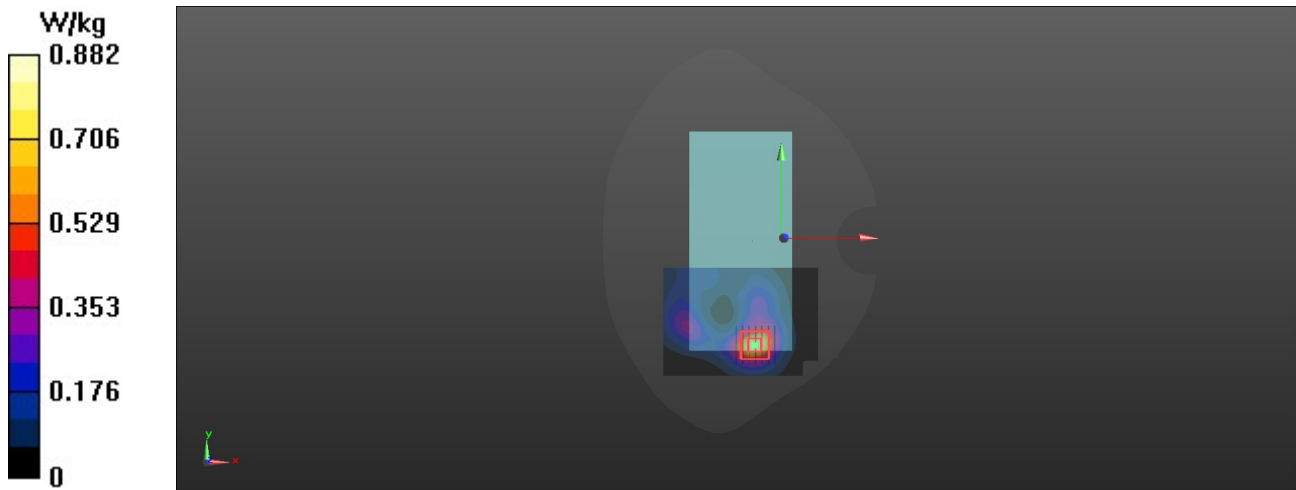

LTE 12_QPSK10M_1_25_Rear Face_10mm_23060**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 704 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.153$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 704 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.242 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.10 V/m ; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.329 W/kg

SAR(1 g) = 0.203 W/kg ; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 0.240 W/kg

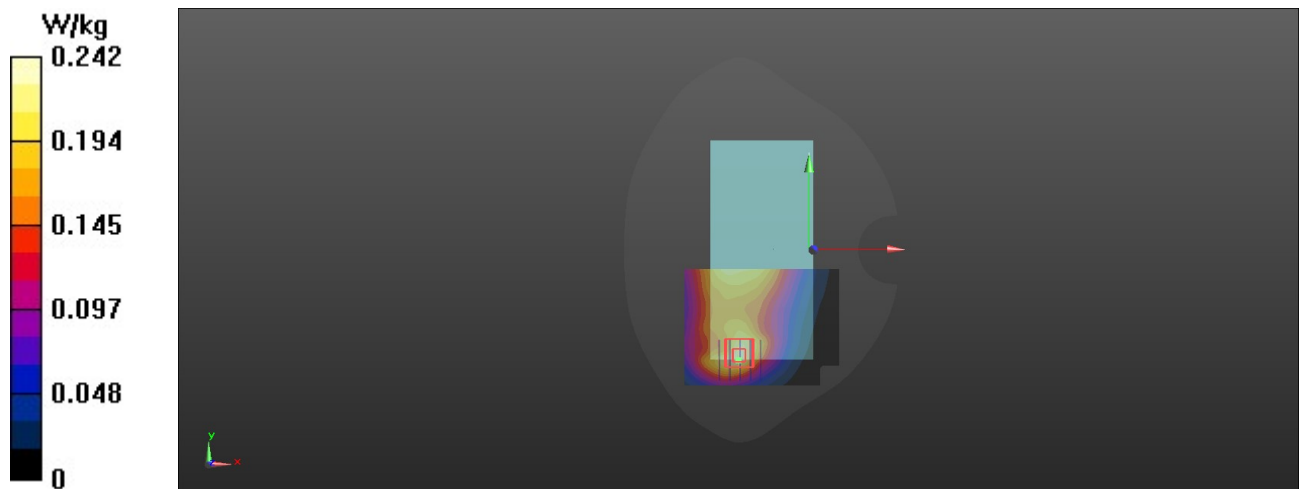

LTE 13_QPSK10M_1_25_Rear Face_10mm_23230**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 40.901$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 782 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.374 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.66 V/m ; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.317 W/kg ; SAR(10 g) = 0.199 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.372 W/kg

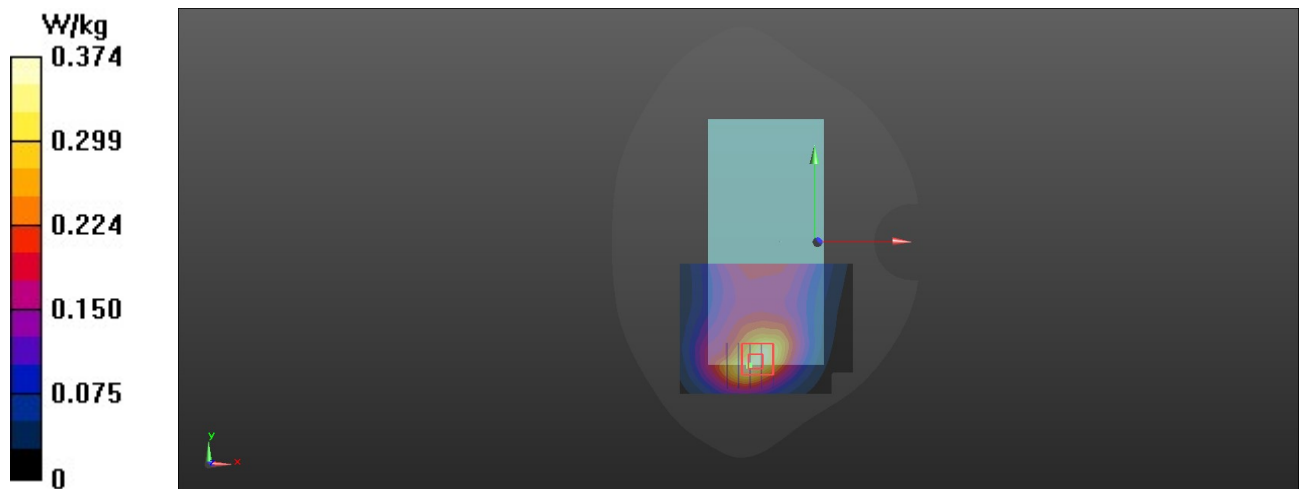

LTE 25_QPSK20M_1_99_Front Face_10mm_26140**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used : $f = 1860$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.072$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.08, 5.08, 5.08) @ 1860 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.860 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.24 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.423 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 0.831 W/kg

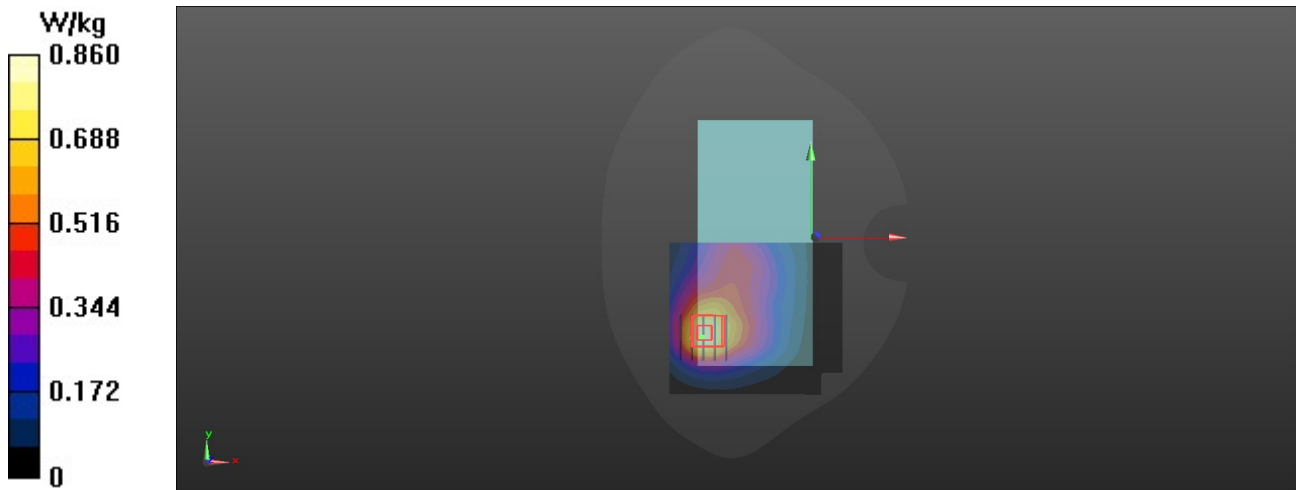

LTE 26_QPSK15M_1_38_Rear Face_10mm_26865**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: H900 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 40.671$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.16, 6.16, 6.16) @ 831.5 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.510 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.03 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.432 W/kg; SAR(10 g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 0.507 W/kg

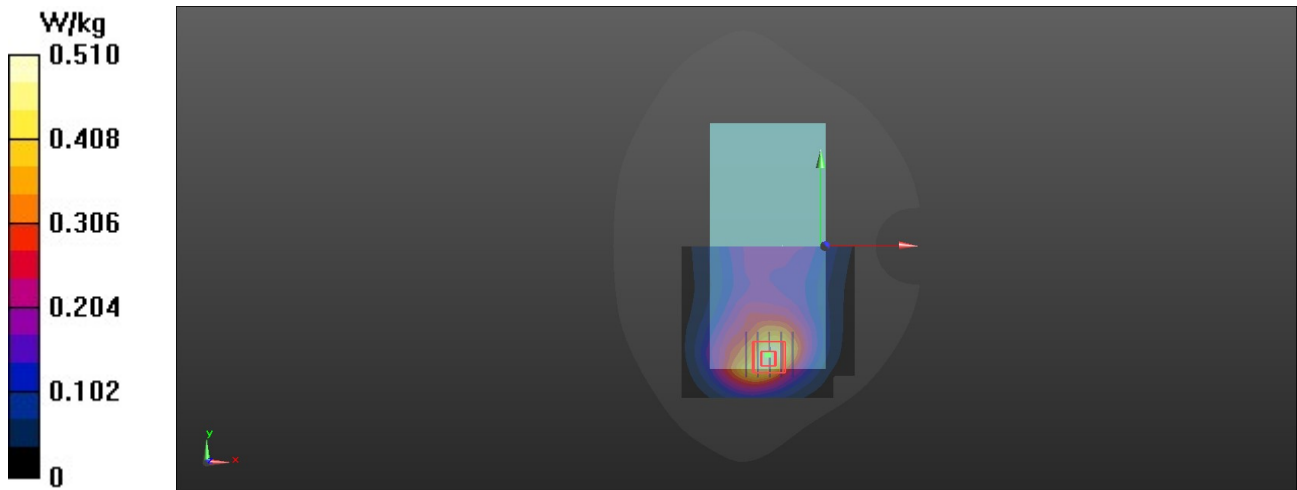

LTE 30_QPSK10M_1_0_Front Face_10mm_27710**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 40.326$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.9, 4.9, 4.9) @ 2310 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.415 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.959 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.419 W/kg

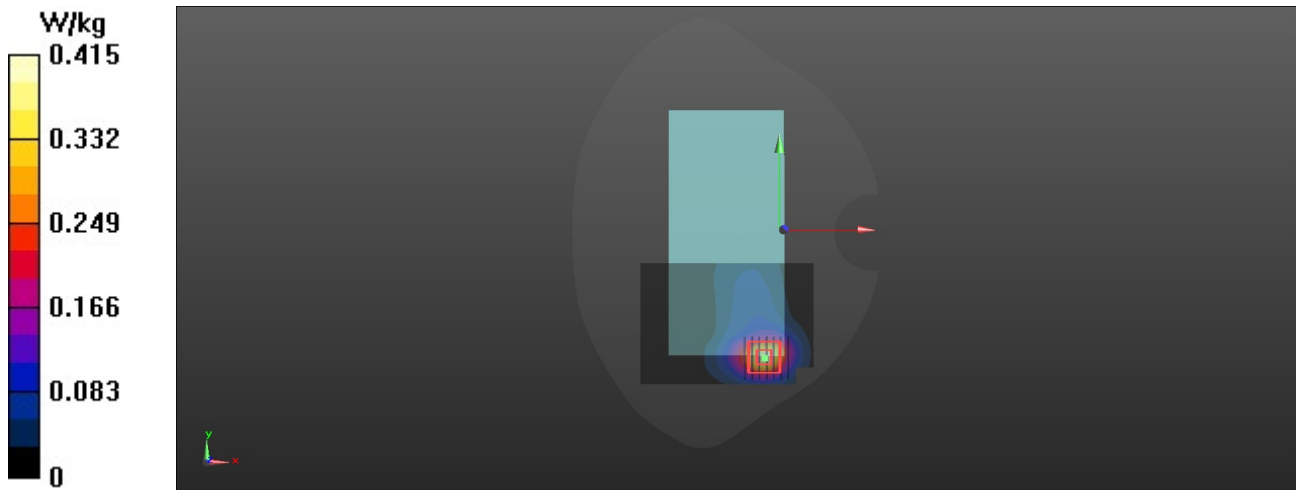

LTE 30_QPSK10M_1_0_Bottom Side_10mm_27710**DUT: EUT**


Communication System: UID 0, Generic LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: H2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.715$ S/m; $\epsilon_r = 40.326$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.9, 4.9, 4.9) @ 2310 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 15.26 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.381 W/kg
Smallest distance from peaks to all points 3 dB below = 11 mm
Ratio of SAR at M2 to SAR at M1 = 52.3%
Maximum value of SAR (measured) = 1.02 W/kg

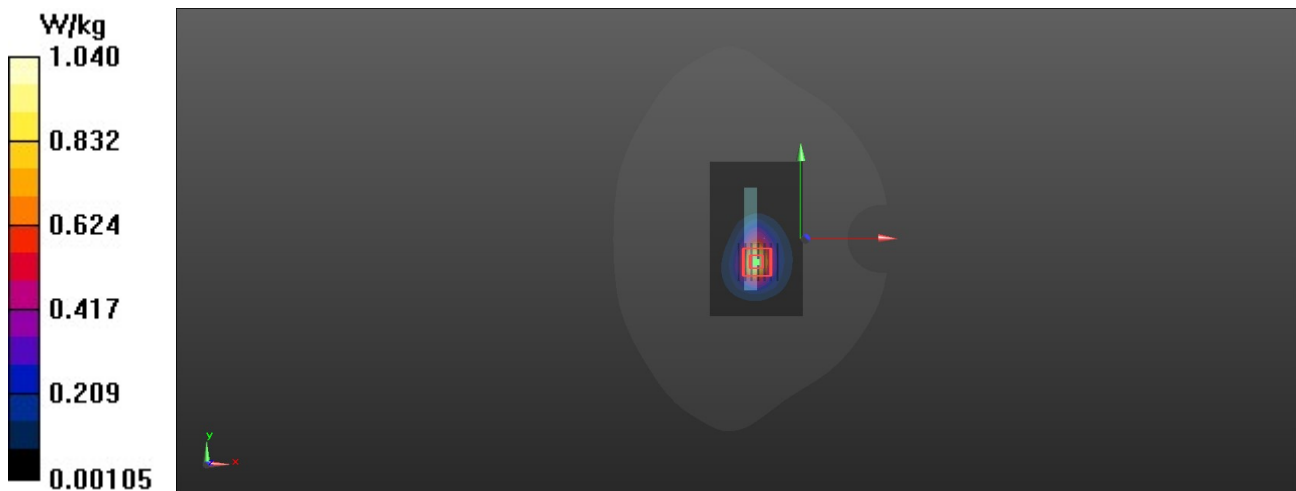

LTE 41_QPSK20M_1_99_Front Face_10mm_39750**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 2506 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2506$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 39.509$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2506 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.635 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.028 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.929 W/kg

SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.630 W/kg

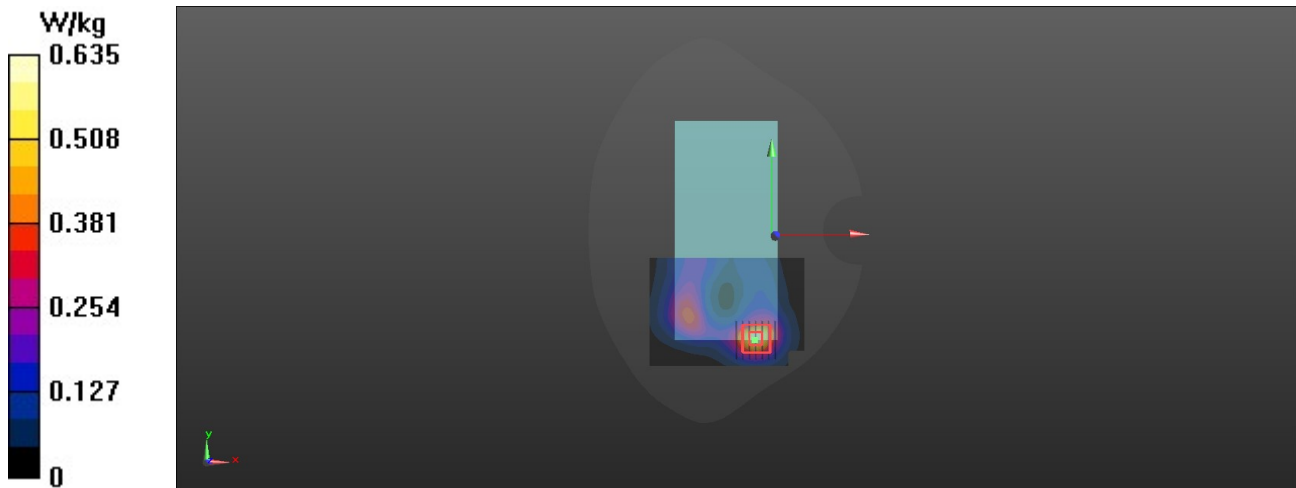

LTE 42_QPSK20M_Rear Face_1cm_Ch42590_1RB_OS99_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3500 MHz; Duty Cycle: 1:1.58

Medium: H3500 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.837$ S/m; $\epsilon_r = 38.451$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.22, 6.7, 6.18) @ 3500 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.863 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.808 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.5%

Maximum value of SAR (measured) = 0.834 W/kg

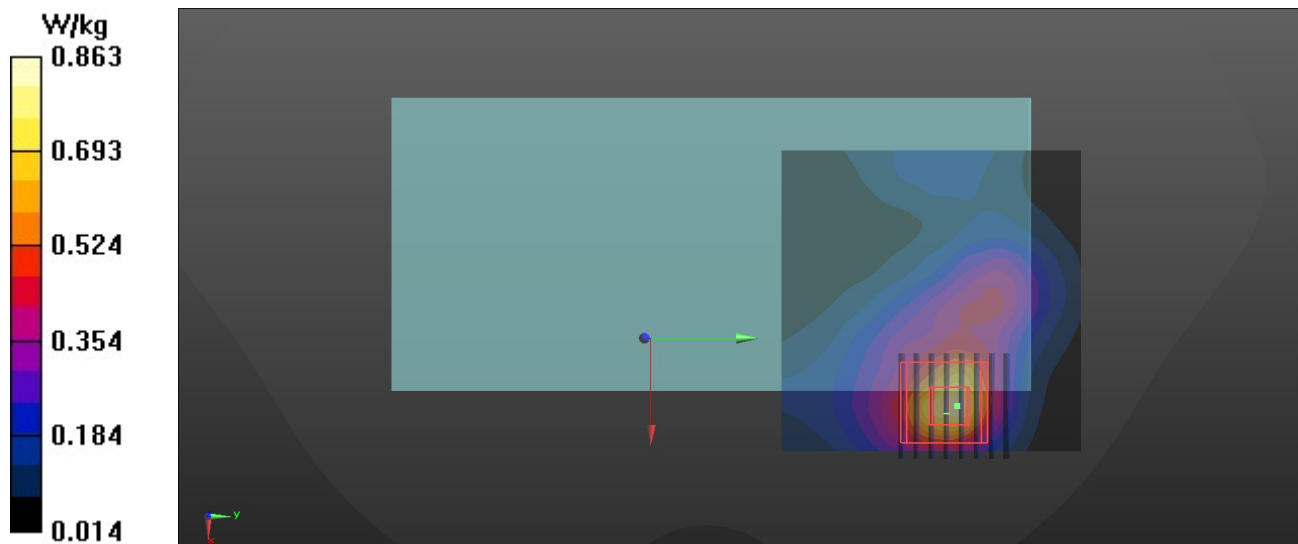

LTE 43_QPSK20M_Rear Face_1cm_Ch45490_1RB_OS99_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3790 MHz; Duty Cycle: 1:1.58

Medium: H3700 Medium parameters used: $f = 3790$ MHz; $\sigma = 3.106$ S/m; $\epsilon_r = 37.166$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3790 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (91x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.44 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.877 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.4%

Maximum value of SAR (measured) = 1.40 W/kg

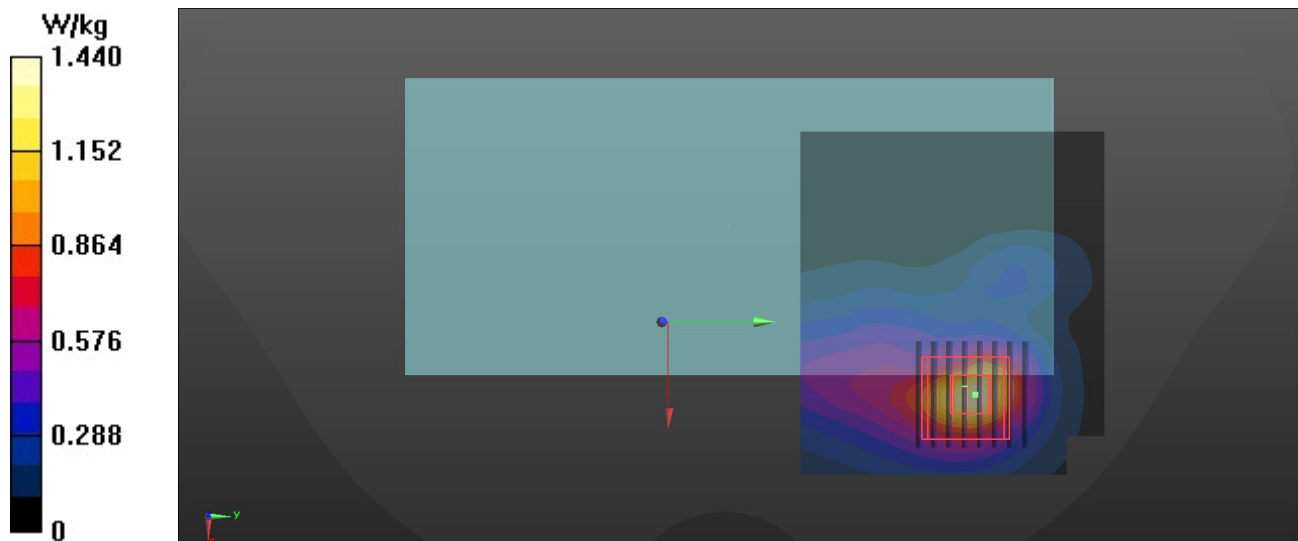

LTE 48_QPSK20M_Rear Face_1cm_Ch56640_1RB_OS0_Ant 3**DUT: EUT**

Communication System: UID 0, LTE TDD; Frequency: 3690 MHz; Duty Cycle: 1:1.58

Medium: H3700 Medium parameters used: $f = 3690$ MHz; $\sigma = 3.154$ S/m; $\epsilon_r = 37.992$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.14, 6.61, 6.1) @ 3690 MHz; Calibrated: 2025/11/28
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.962 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.277 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.242 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.7%

Maximum value of SAR (measured) = 0.998 W/kg

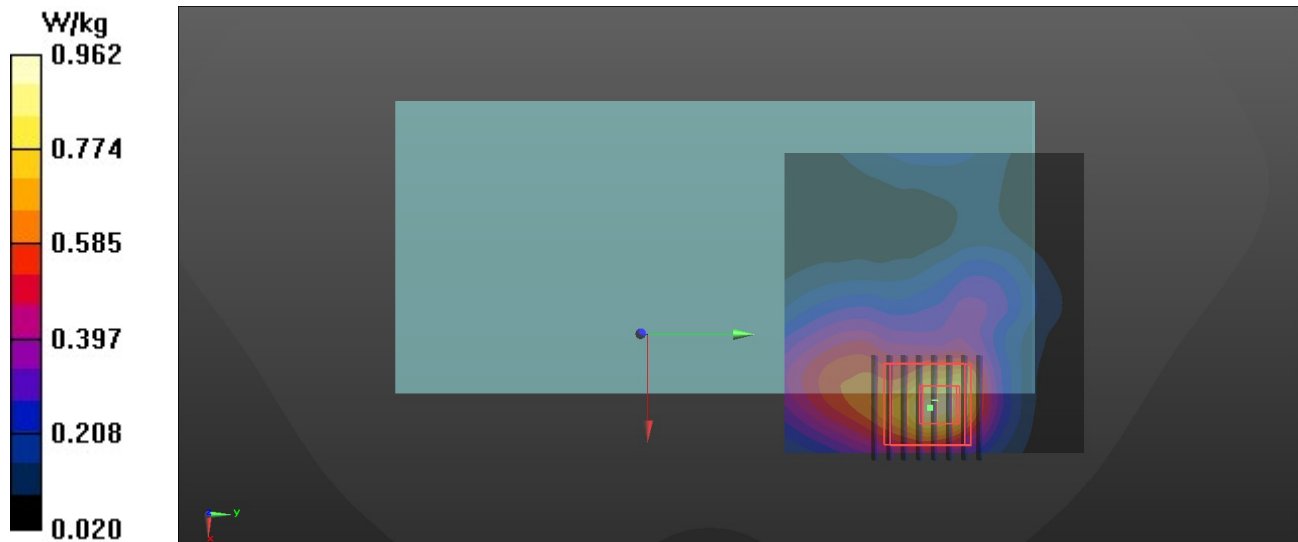

LTE 66_QPSK20M_1_0_Rear Face_15mm_132072**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.3$ S/m; $\epsilon_r = 39.775$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.41, 5.41, 5.41) @ 1720 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.582 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 14.13 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.762 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 18.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 0.559 W/kg

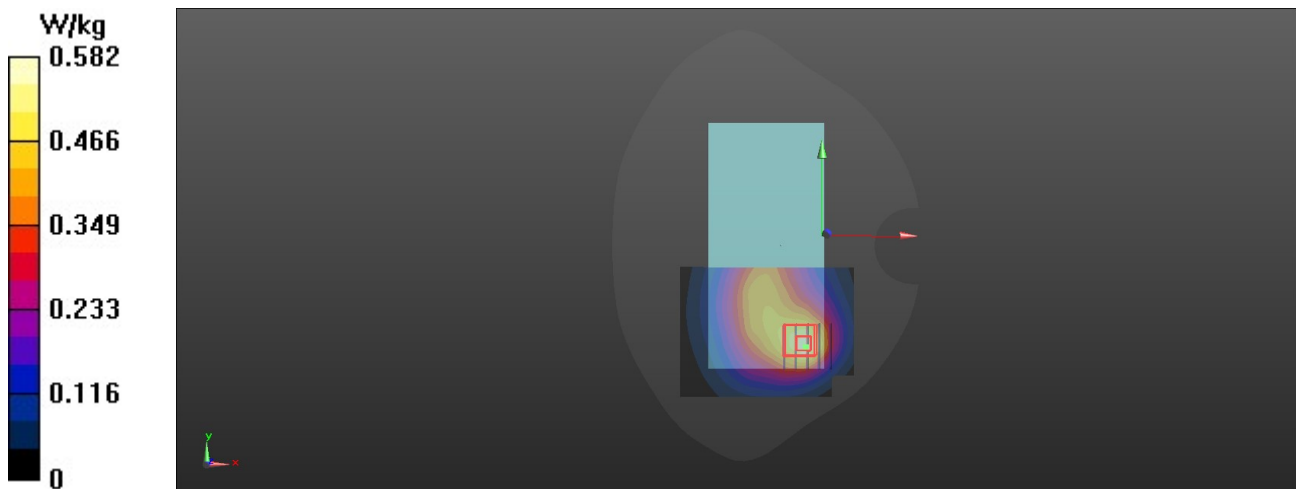

LTE 71_QPSK20M_1_99_Rear Face_10mm_133222**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.245$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 673 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.288 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.42 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 62.1%

Maximum value of SAR (measured) = 0.273 W/kg

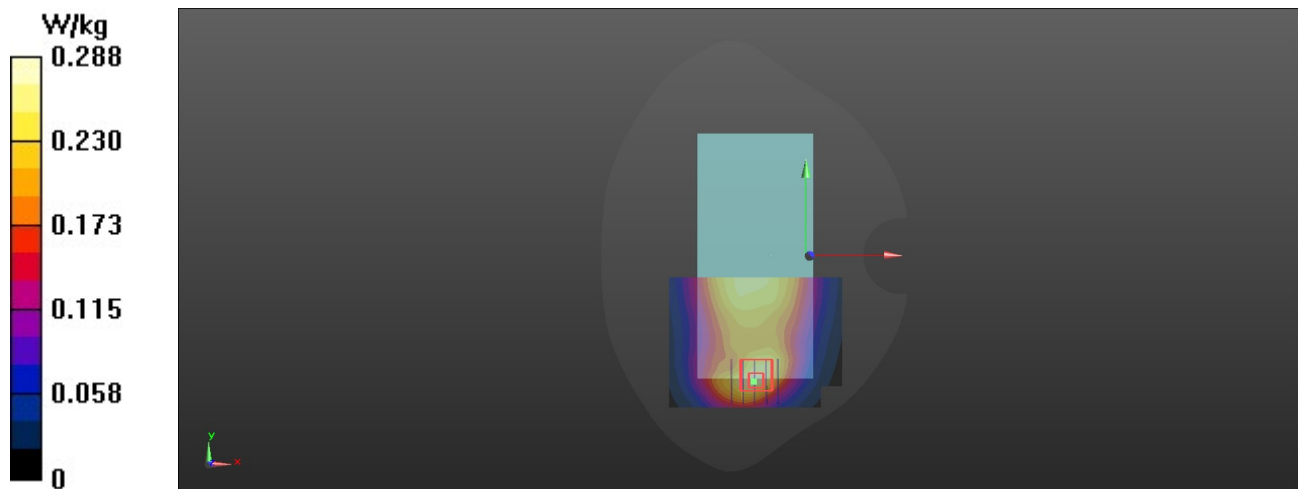

LTE 71_QPSK20M_1_99_Bottom Side_10mm_133222**DUT: EUT**

Communication System: UID 0, Generic LTE (0); Frequency: 673 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 673$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 41.245$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.38, 6.38, 6.38) @ 673 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.323 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.61 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 10.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.3%

Maximum value of SAR (measured) = 0.357 W/kg

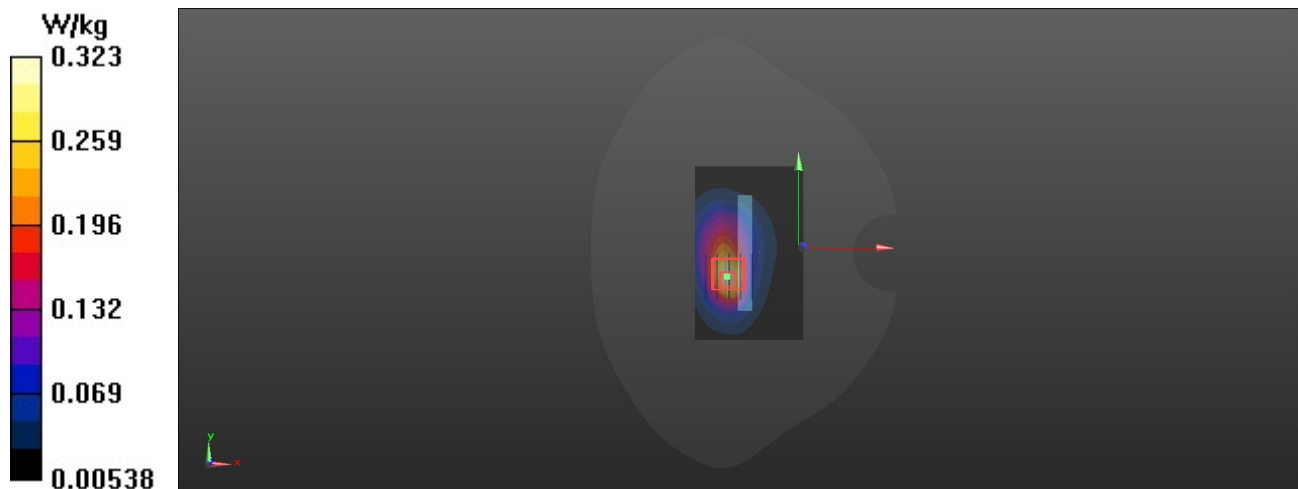

N7_15kHz_DFT-s-OFDM_QPSK20M_Front Face_10mm_512000_Innter_1_Right**DUT: EUT**

Communication System: UID 0, 5G NR (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.934$ S/m; $\epsilon_r = 38.233$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.54, 4.54, 4.54) @ 2560 MHz; Calibrated: 2025/12/15
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2025/12/15
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: TP/1335
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (101x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.115 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.221 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.107 W/kg

