



Certificate #4312.01

FCC TEST REPORT

Product Name: Smartphone
Trade Mark: INVENTUS
Model No.: Inventus PD1
Add. Model No.: N/A
Report Number: 26052925036RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
FCC ID: 2BDXXPD1
Test Result: PASS
Date of Issue: September 28, 2026

Prepared for:

INVENTUS GROUP LTD
C/O FLB ACCOUNTANTS LLP 1010 ESKDALE ROAD
WINNERSH TRIANGLE WOKINGHAM UNITED KINGDOM RG41 5TS

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F., Block A, Building 6, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, Guangdong, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:

David Chen

Senior Project Engineer

Reviewed by:

Henry Lu

Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date:

September 28, 2026

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Version

Version No.	Date	Description
V1.0	September 28, 2026	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	5
1.5 DESCRIPTION OF SUPPORT UNITS	5
1.6 TEST LOCATION	5
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	6
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	6
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
1.11 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	7
3. EQUIPMENT LIST	8
4. TEST CONFIGURATION	9
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	9
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	9
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	9
4.2 TEST CHANNELS	9
4.3 EUT TEST STATUS	9
4.4 TEST SETUP	10
4.4.1 FOR RADIATED EMISSIONS TEST SETUP	10
4.4.2 FOR CONDUCTED EMISSIONS TEST SETUP	11
4.4.3 FOR CONDUCTED RF TEST SETUP	12
4.5 SYSTEM TEST CONFIGURATION	12
4.6 DUTY CYCLE	13
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	16
5.1 REFERENCE DOCUMENTS FOR TESTING	16
5.2 ANTENNA REQUIREMENT	16
5.3 CONDUCTED PEAK OUTPUT POWER	17
5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH	18
5.5 POWER SPECTRAL DENSITY	31
5.6 CONDUCTED OUT OF BAND EMISSION	38
5.7 RADIATED SPURIOUS EMISSIONS	63
5.8 BAND EDGE MEASUREMENTS (RADIATED)	70
5.9 CONDUCTED EMISSION	79
APPENDIX 1 PHOTOS OF TEST SETUP	82
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	82

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	INVENTUS GROUP LTD
Address of Applicant:	C/O FLB ACCOUNTANTS LLP 1010 ESKDALE ROAD WINNERSH TRIANGLE WOKINGHAM UNITED KINGDOM RG41 5TS
Manufacturer:	INVENTUS GROUP LTD
Address of Manufacturer:	C/O FLB ACCOUNTANTS LLP 1010 ESKDALE ROAD WINNERSH TRIANGLE WOKINGHAM UNITED KINGDOM RG41 5TS

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smartphone			
Model No.:	Inventus PD1			
Trade Mark:	INVENTUS			
DUT Stage:	Identical Prototype			
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM 850/ PCS 1900		
	UTRA Bands:	Band II/ Band IV/ Band V		
	E-UTRA Bands:	FDD Band 2/ 4/ 5/ 7/ 12/ 13/ 17/ 25/ 26/ 30/ 66/ 71		
		TDD Band 38/ 41/ 42/ 43/ 48		
	NR Bands:	FDD n2/ 5/ 7/ 12/ 25/ 26/ 66/ 71		
		TDD n38/ 41/ 77/ 78		
	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax		
		Bluetooth V5.4		
	U-NII 5 GHz Bands:	5 150 - 5 250 MHz	IEEE 802.11a/n/ac/ax	
		5 250 - 5 350 MHz	IEEE 802.11a/n/ac/ax	
		5 470 - 5 725 MHz	IEEE 802.11a/n/ac/ax	
		5 725 - 5 850 MHz	IEEE 802.11a/n/ac/ax	
	U-NII 6 GHz Bands:	5 925 - 6 425 MHz	IEEE 802.11ax	
6 425 - 6 525 MHz		IEEE 802.11ax		
6 525 - 6 875 MHz		IEEE 802.11ax		
6 875 - 7 125 MHz		IEEE 802.11ax		
RNSS Bands:	1559 - 1610 MHz	GPS/ Galileo/ GLONASS/ BDS		
NFC:	13.553 MHz to 13.567 MHz			
WPTs (Only Rx):	119 kHz to 140 kHz			
Software Version:	SW1_V4.10_GPD1INVS_ROW_A16_040826 (Provided by the customer)			
Hardware Version:	HW1 (Provided by the customer)			
Sample Received Date:	May 25, 2026			
Sample Tested Date:	June 5, 2026 to August 11, 2026			
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Refer to Report 26052925036EMC-1 for accessories.

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2402 MHz to 2480 MHz
Bluetooth Version:	Bluetooth LE/2LE/LE Code
Type of Modulation:	GFSK
Number of Channels:	40
Channel Separation:	2 MHz
Antenna Type: (Provided by the customer)	PIFA Antenna
Antenna Gain: (Provided by the customer)	-1.32 dBi
Maximum Peak Power:	1.02 dBm
Normal Test Voltage:	3.87 Vdc and/or 120V~60Hz

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
$f = 2402 + 2k \text{ MHz}, k = 0, \dots, 39$	
Note:	
f	is the operating frequency (MHz);
k	is the operating channel.

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-01D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	Applicant

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±3.1 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	± 6.5 × 10 ⁻⁸

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

12	Transmission Time	$\pm 0.19 \%$
----	-------------------	---------------

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020 Clause 11.9.1.2	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020 Clause 11.8.1	PASS
Occupied Bandwidth	N/A	ANSI C63.10-2020 Clause 6.9.3	None; for reporting purposes only.
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2020 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020 Clause 11.12	PASS
Duty Cycle	N/A	ANSI C63.10-2020 Clause 11.6	None; for reporting purposes only.
Disclaimer and Explanations: The declared of product specification and data (e.g., antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3 m SAC	ETS-Lindgren	3 m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Loop Antenna	ETS-Lindgren	6502	00202525	26-Jan-2026	25-Jan-2027
☒	Broadband Antenna	ETS-Lindgren	3142E	00201566	26-Oct-2025	25-Oct-2026
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	26-Oct-2025	25-Oct-2026
☒	Double-Ridged Waveguide Horn Antenna(Pre-amplifier)	ETS-Lindgren	3117-PA	00201541	21-Mar-2026	20-Mar-2027
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	21-Mar-2026	20-Mar-2027
☒	Double-Ridged Waveguide Horn Antenna(Pre-amplifier)	ETS-Lindgren	3116C-PA	00202652	30-Oct-2025	29-Oct-2026
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	24-Oct-2025	23-Oct-2026
☒	Receiver	ROHDE & SCHWARZ	ESIB26	100114	24-Oct-2025	23-Oct-2026
☒	Pre-amplifier	HP	8447F	2805A02960	24-Oct-2025	23-Oct-2026
☒	Band Reject Filter(2400MHz~2500MHz)	Micro-tronics	BRM50702	G590	24-Oct-2025	23-Oct-2026
☒	Multi device Controller	ETS-Lindgren	7006-001	160105.00	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	LISN	ROHDE & SCHWARZ	ENV216	3560.6550.12	22-Jan-2026	21-Jan-2027
☐	LISN	ETS-Lindgren	3816/2SH	00201088	22-Jan-2026	21-Jan-2027
☒	Receiver	ROHDE & SCHWARZ	ESCI 3	101192	24-Oct-2025	23-Oct-2026
☒	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT001270-1246	25-Oct-2024	24-Oct-2027
☒	Test Software	EZ-EMC	EZ-CON	Software Version:EMC-CON 3A1.1		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Signal Analyzer	KEYSIGHT	N9010A	MY51440197	20-Mar-2026	19-Mar-2027
☒	Shielding room	ETS-Lindgren	333	Euroshiedpn-TJ2343-S1608	20-Mar-2026	19-Mar-2029
☒	Automatic control switch	Tonscend	JS0806-2	24G80620875	N/A	N/A
☒	Test Software	Tonscend	JS1120-3	Software Version: V3.5.39		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.87Vdc and/or 120 Vac	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Sample No.	Tested by
AC Power Line Conducted Emission	S202607209259-ZJF01/5	Shirley Wu
Conducted Peak Output Power	S202605259698-ZJB10/12	Erina Chen
6dB Bandwidth & Occupied Bandwidth		
Power Spectral Density		
Conducted Out of Band Emission		
Radiated Spurious Emissions	S202606088878-ZJC02/4	Leo Li
Band Edge Measurements (Radiated)		

4.2 TEST CHANNELS

Type of Modulation	Tx/Rx Frequency	Test RF Channel Lists		
GFSK	2402 MHz to 2480 MHz	Lowest(L)	Middle(M)	Highest(H)
		Channel 0/1	Channel 19	Channel 39/38
		2402/2404 MHz	2440 MHz	2480/2478 MHz

4.3 EUT TEST STATUS

Type of Modulation	Tx Function	Description
GFSK	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting (Provided by the customer)

Not applicable, test used software default power level.

Test Software (Provided by the customer)

EngineerMode(*##3646633##*)

4.4 TEST SETUP

4.4.1 For Radiated Emissions test setup

Figure 1. Below 30MHz




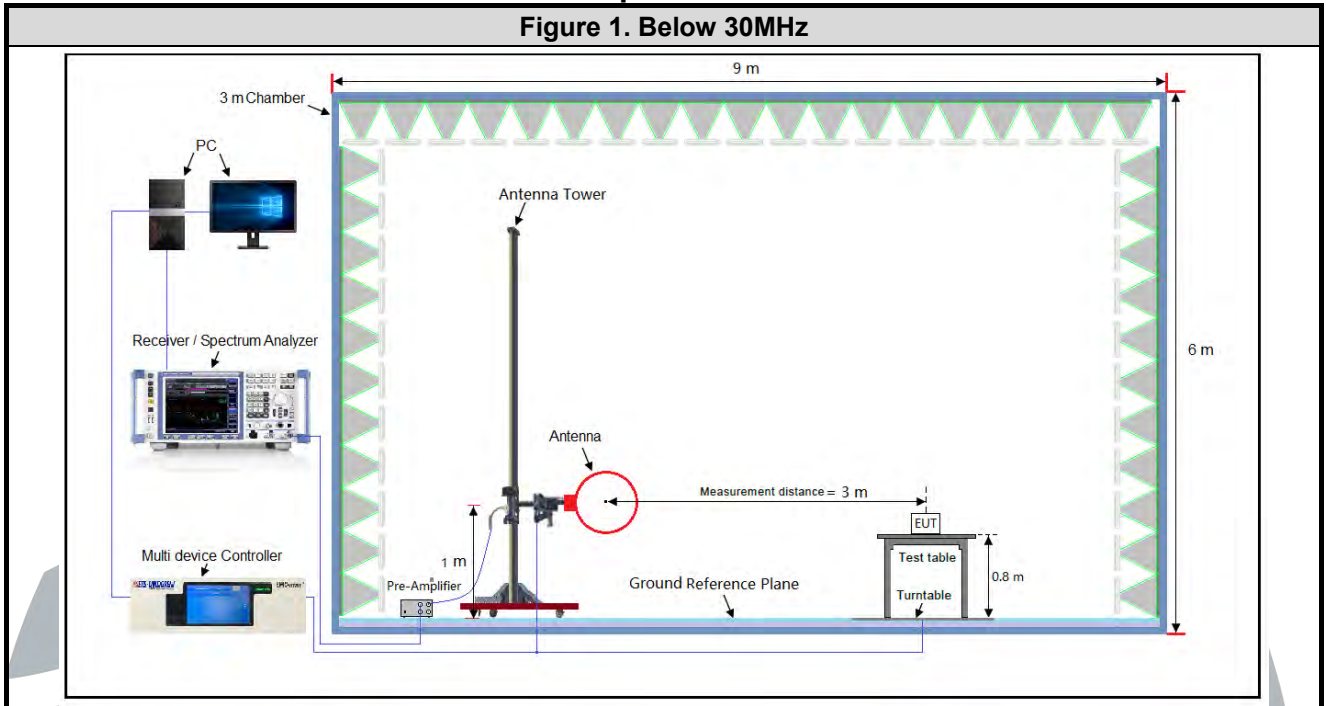


Figure 2. 30MHz to 1GHz

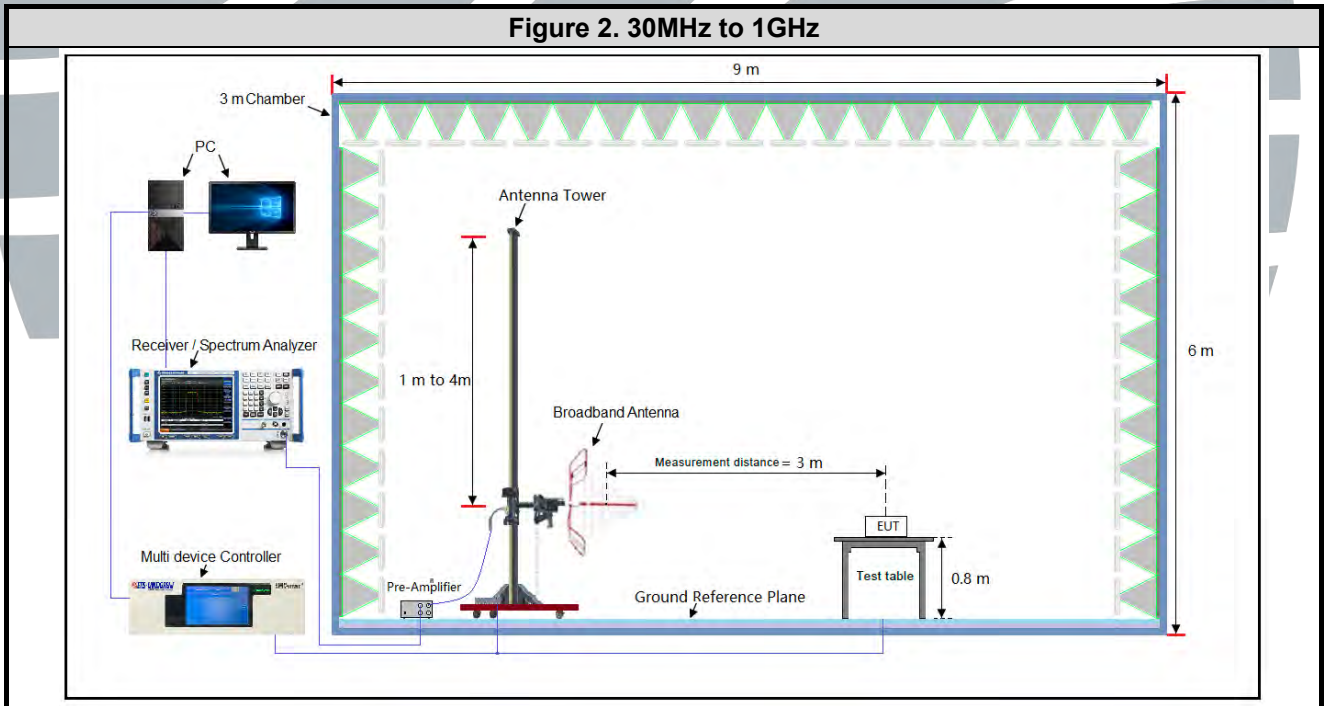


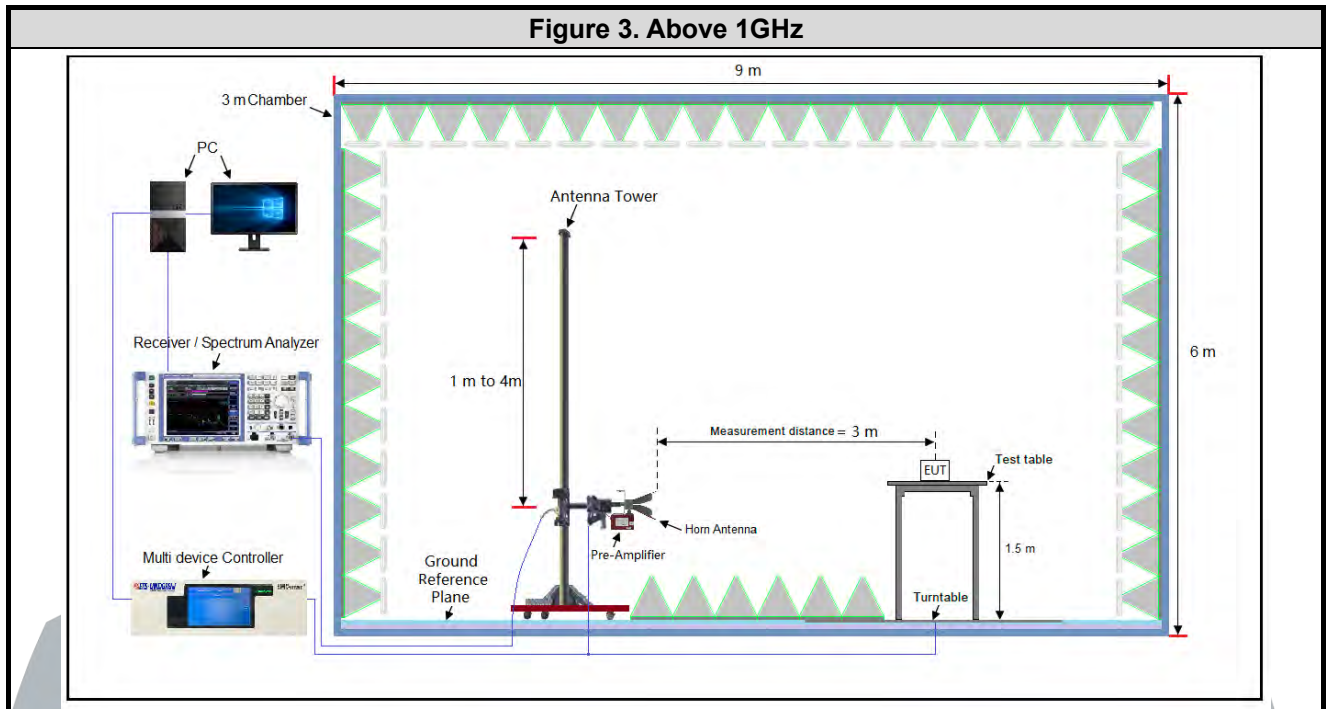

4.4.2 For Conducted Emissions test setup

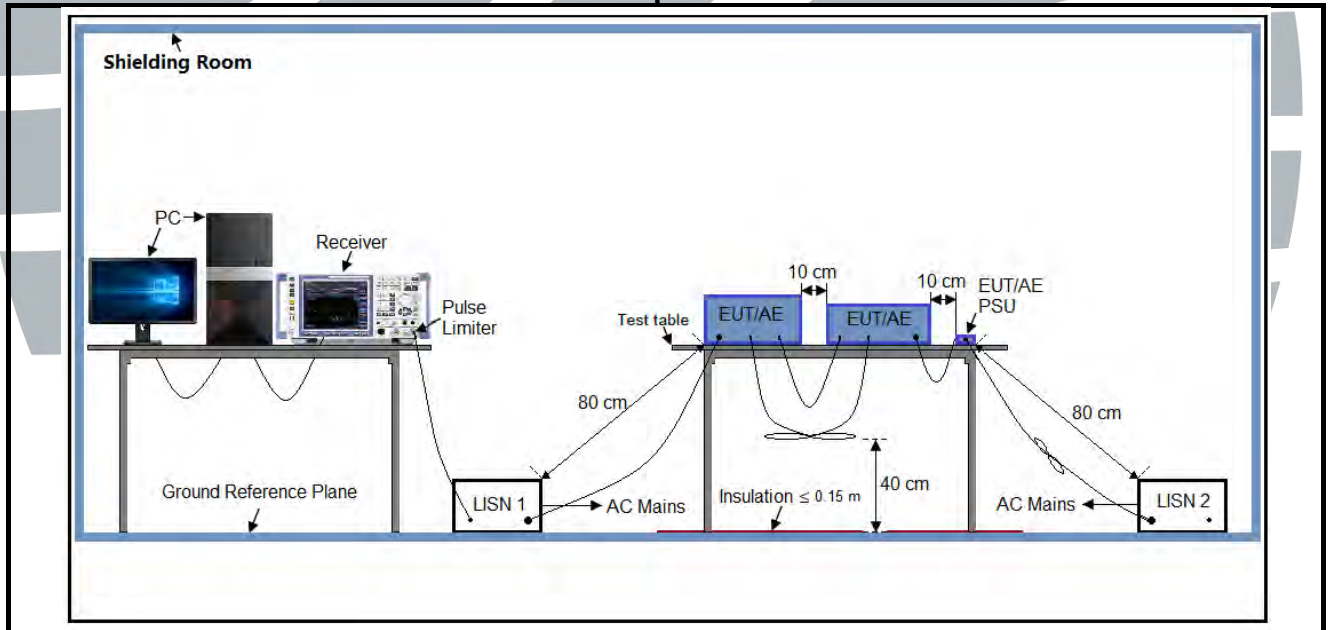

4.4.3 For Conducted RF test setup

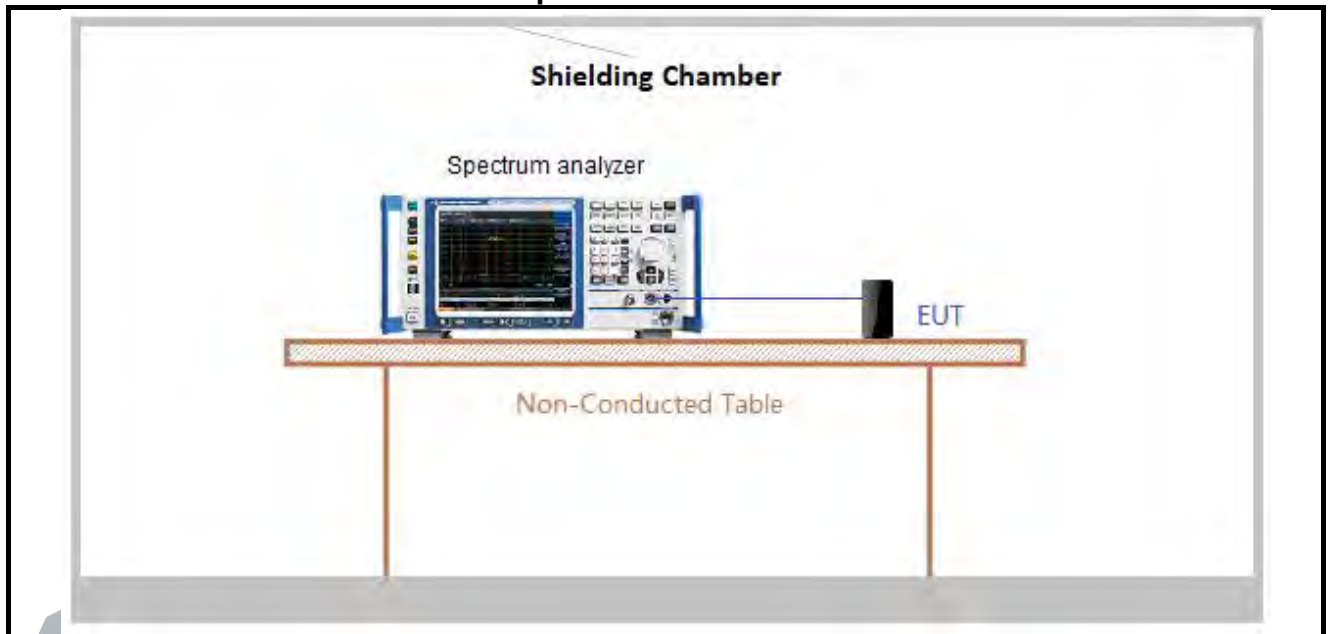

4.5 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.87V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in orientation.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.6 DUTY CYCLE

Test Procedure: ANSI C63.10-2020 Clause 11.6.


Test Results


Mode	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
BLE_1M	2.13	2.50	0.8520	85.20	0.70	0.47
BLE_2M	1.07	1.87	0.5722	57.22	2.42	0.93
BLE_125K	17.05	17.50	0.9743	97.43	0.11	0.06
BLE_500K	4.55	5.00	0.9100	91.00	0.41	0.22

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;

The test plot as follows

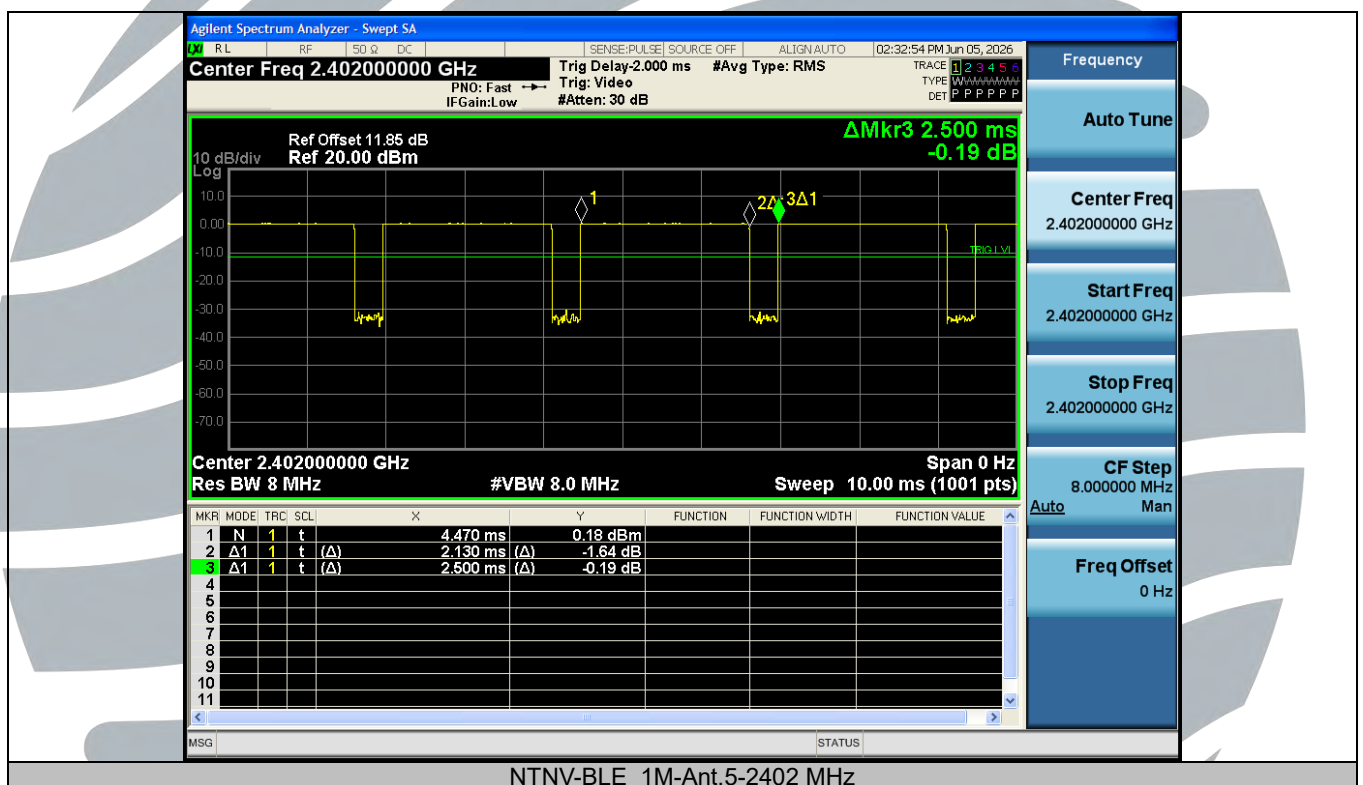

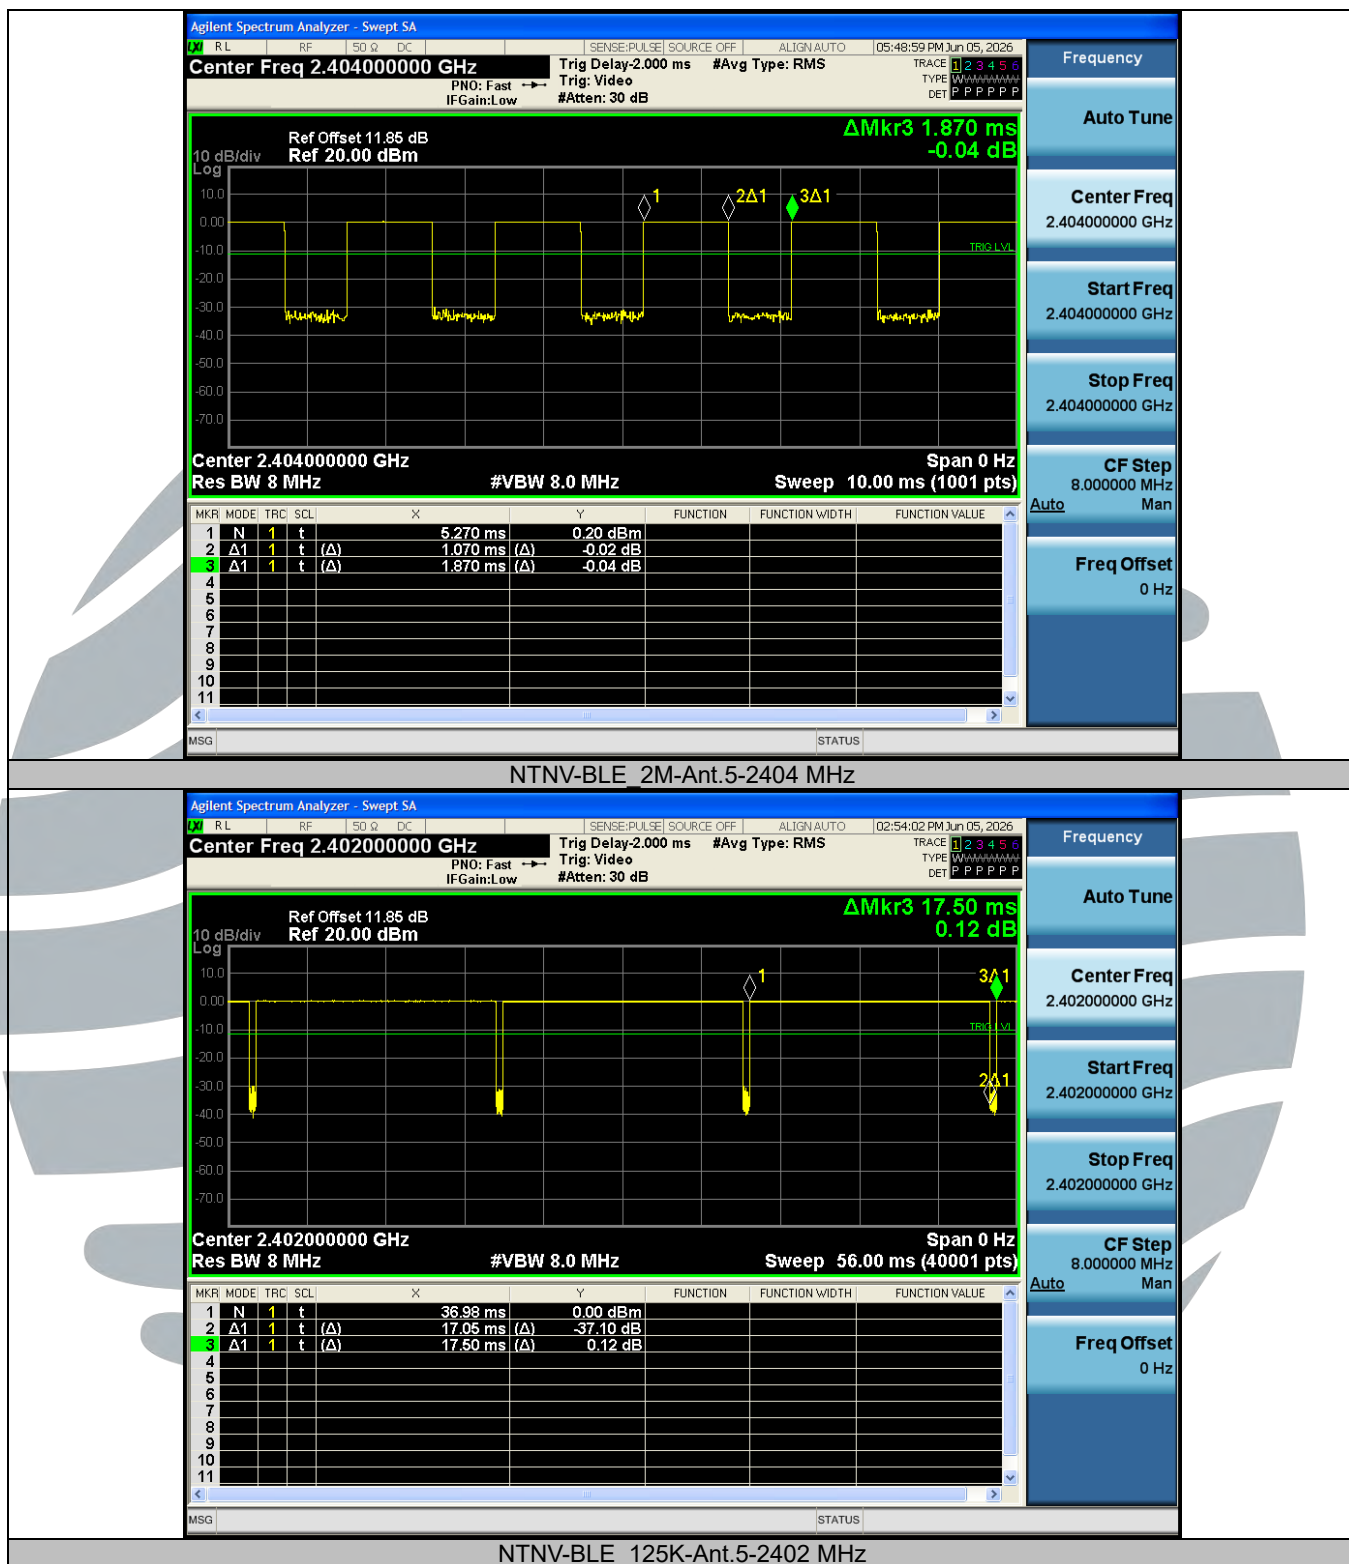

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

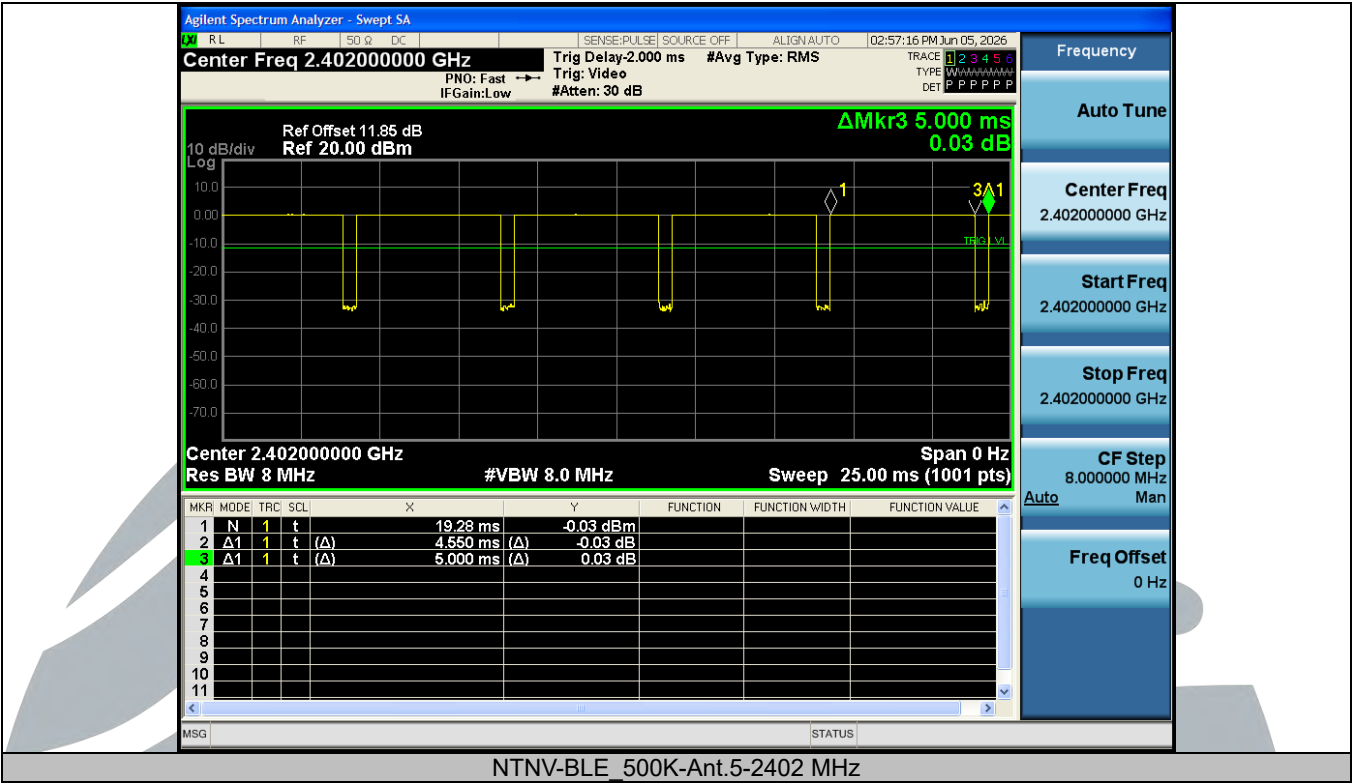

NTNV-BLE_500K-Ant.5-2402 MHz

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCCPART15.247-V1.1

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is -1.32 dBi.

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)

Test Method: ANSI C63.10-2020 Clause 11.9.1.2

Limit: For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details

Test Results: Pass

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Max. Avg. Power [dBm]	Verdict
BLE 1M	Ant 5	2402	0.39	≤30	-0.45	PASS
BLE 1M	Ant 5	2440	0.95	≤30	0.17	PASS
BLE 1M	Ant 5	2480	0.58	≤30	-0.29	PASS
BLE 2M	Ant 5	2404	0.36	≤30	-2.12	PASS
BLE 2M	Ant 5	2440	0.80	≤30	-1.57	PASS
BLE 2M	Ant 5	2478	1.02	≤30	-1.61	PASS
BLE 125K	Ant 5	2402	0.41	≤30	0.14	PASS
BLE 125K	Ant 5	2440	0.93	≤30	0.84	PASS
BLE 125K	Ant 5	2480	0.58	≤30	0.43	PASS
BLE 500K	Ant 5	2402	0.35	≤30	-0.14	PASS
BLE 500K	Ant 5	2440	0.93	≤30	0.51	PASS
BLE 500K	Ant 5	2480	0.63	≤30	0.04	PASS

Note: The antenna gain of -1.32 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
Test Method: ANSI C63.10-2020 Clause 11.8.1
Limit: For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
Use the following spectrum analyzer settings:

6dB Bandwidth

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.

Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.


Instruments Used: Refer to section 3 for details

Test Mode: Tx mode

Test Results:

Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	6dB Bandwidth
BLE 1M	Ant 5	2402	1.0585	0.5075
BLE 1M	Ant 5	2440	1.0528	0.6758
BLE 1M	Ant 5	2480	1.0586	0.6650
BLE 2M	Ant 5	2404	2.1260	1.221
BLE 2M	Ant 5	2440	2.1085	1.252
BLE 2M	Ant 5	2478	2.1159	1.245
BLE 125K	Ant 5	2402	1.0727	0.6936
BLE 125K	Ant 5	2440	1.0672	0.6874
BLE 125K	Ant 5	2480	1.0680	0.6961
BLE 500K	Ant 5	2402	1.0522	0.6745
BLE 500K	Ant 5	2440	1.0416	0.7013
BLE 500K	Ant 5	2480	1.0487	0.6758

6dB Bandwidth

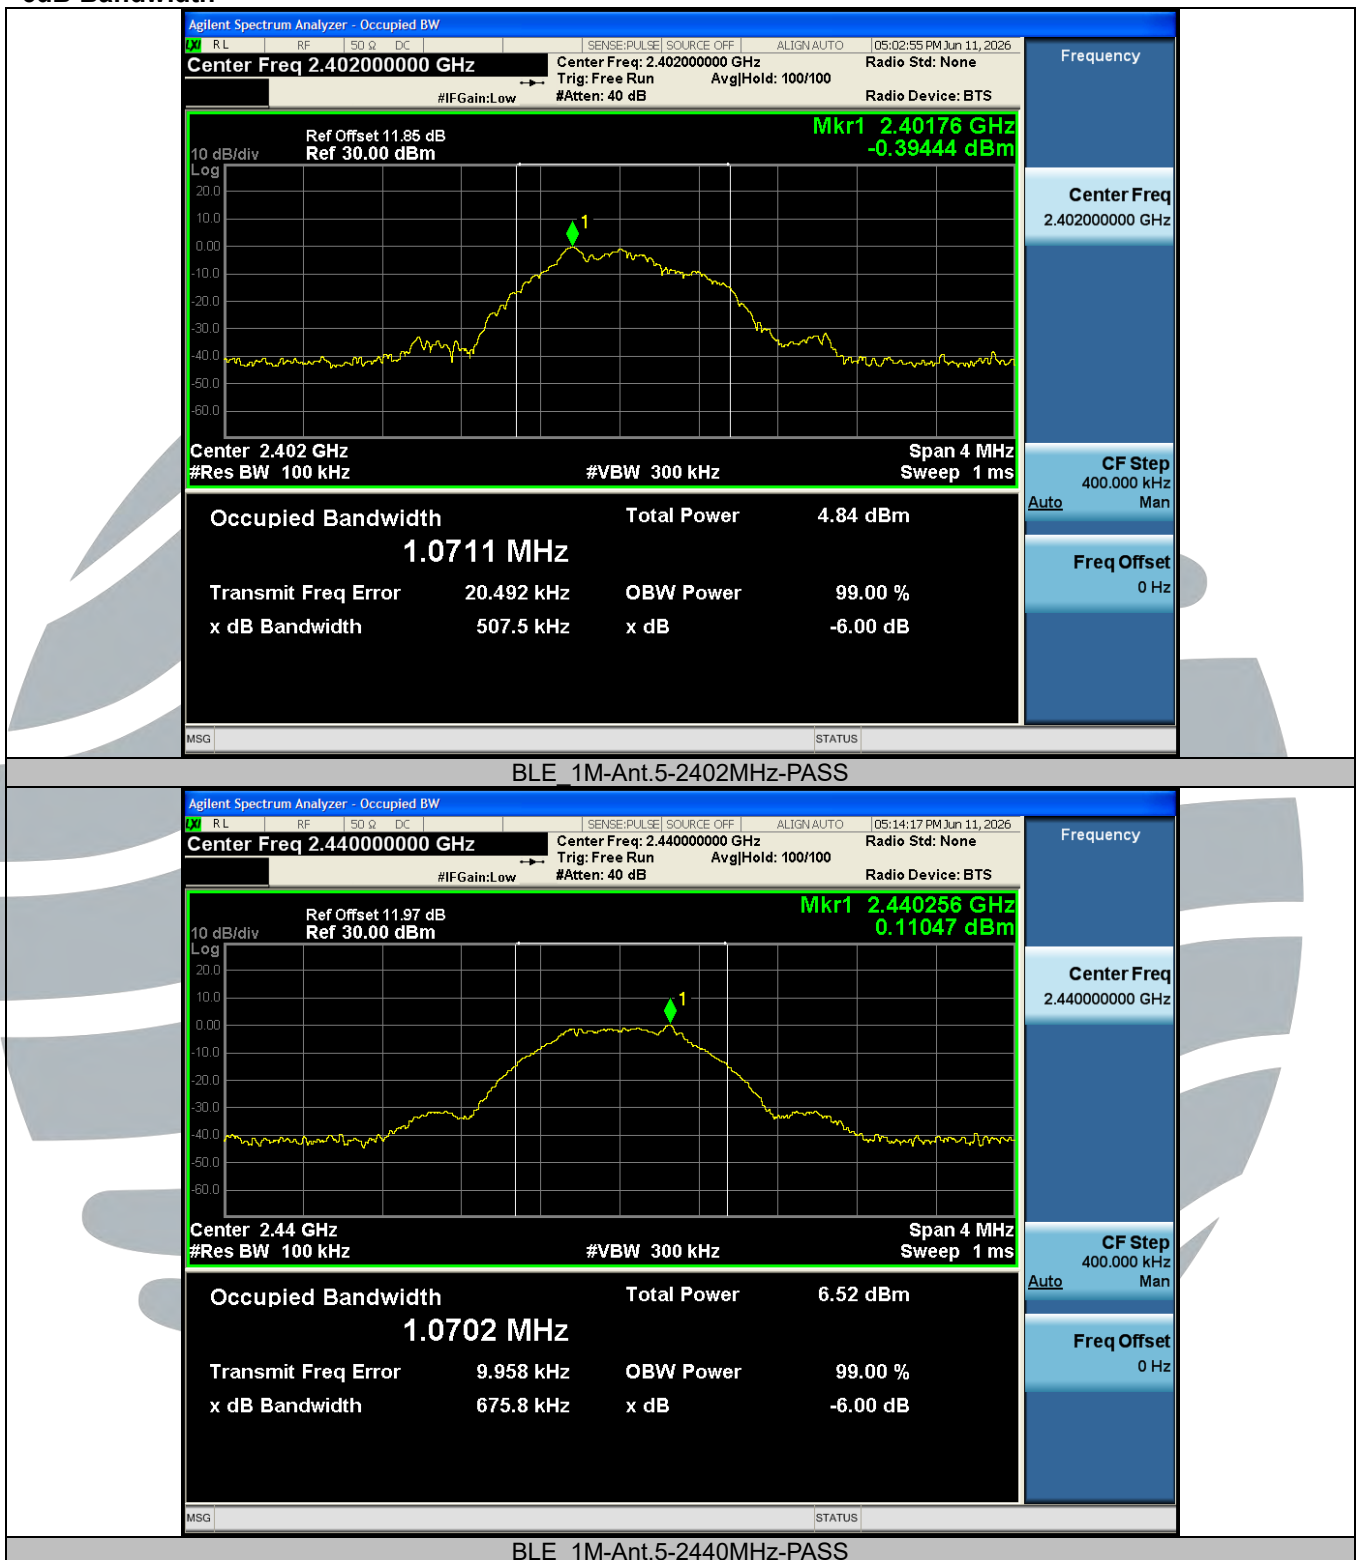

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

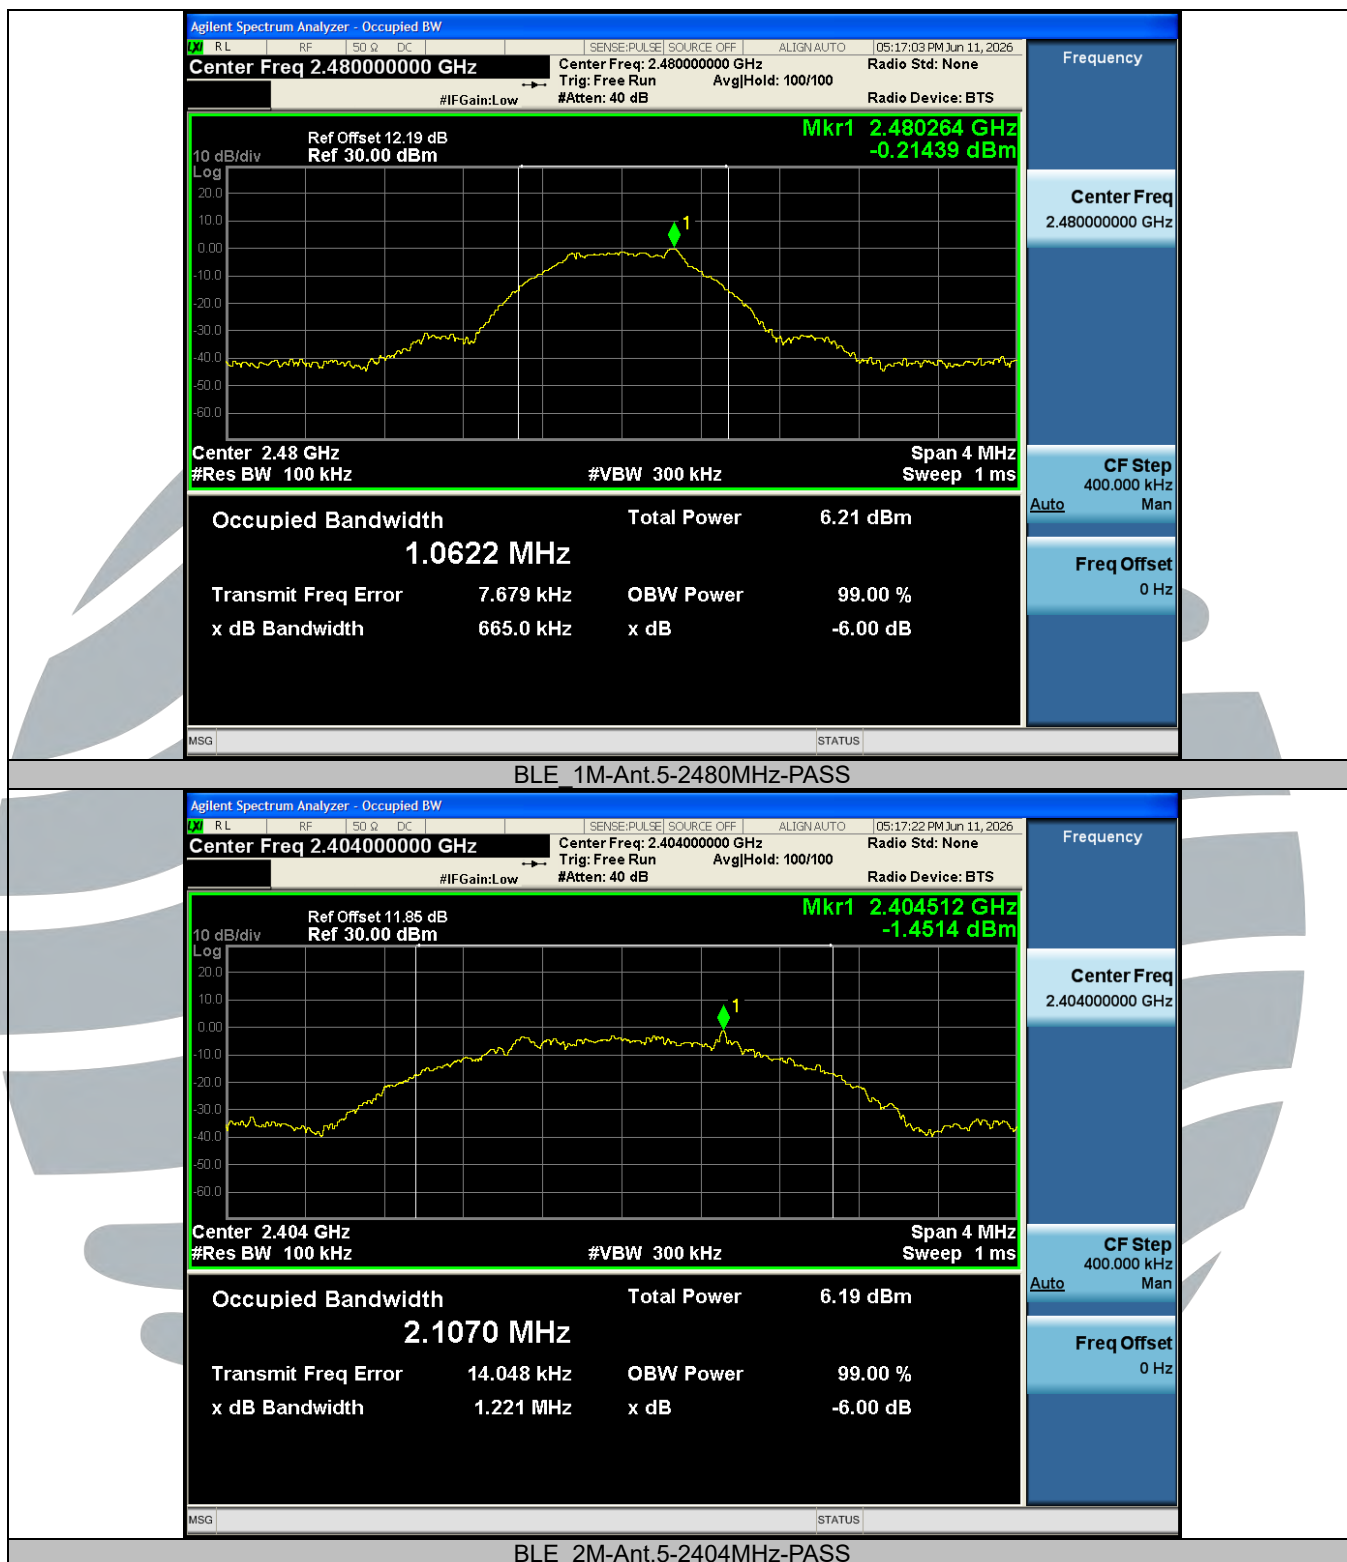

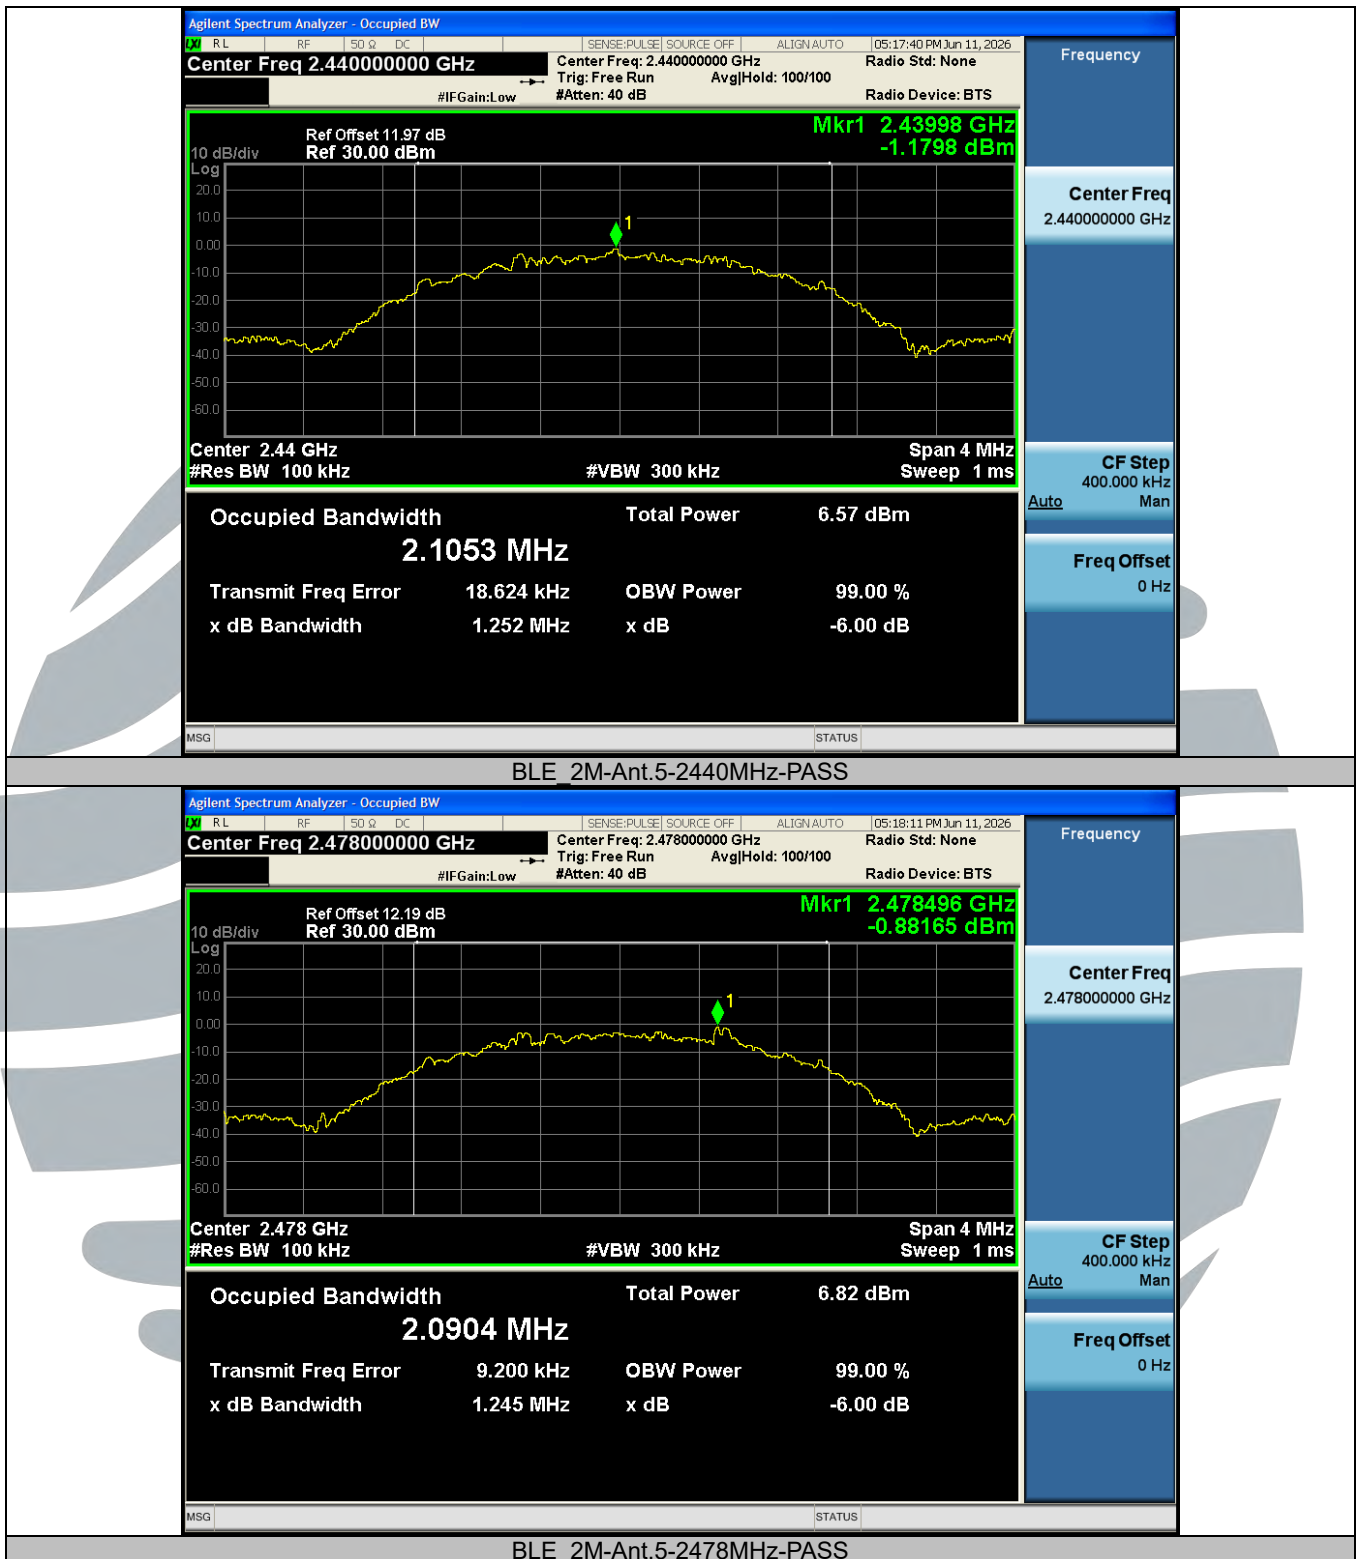

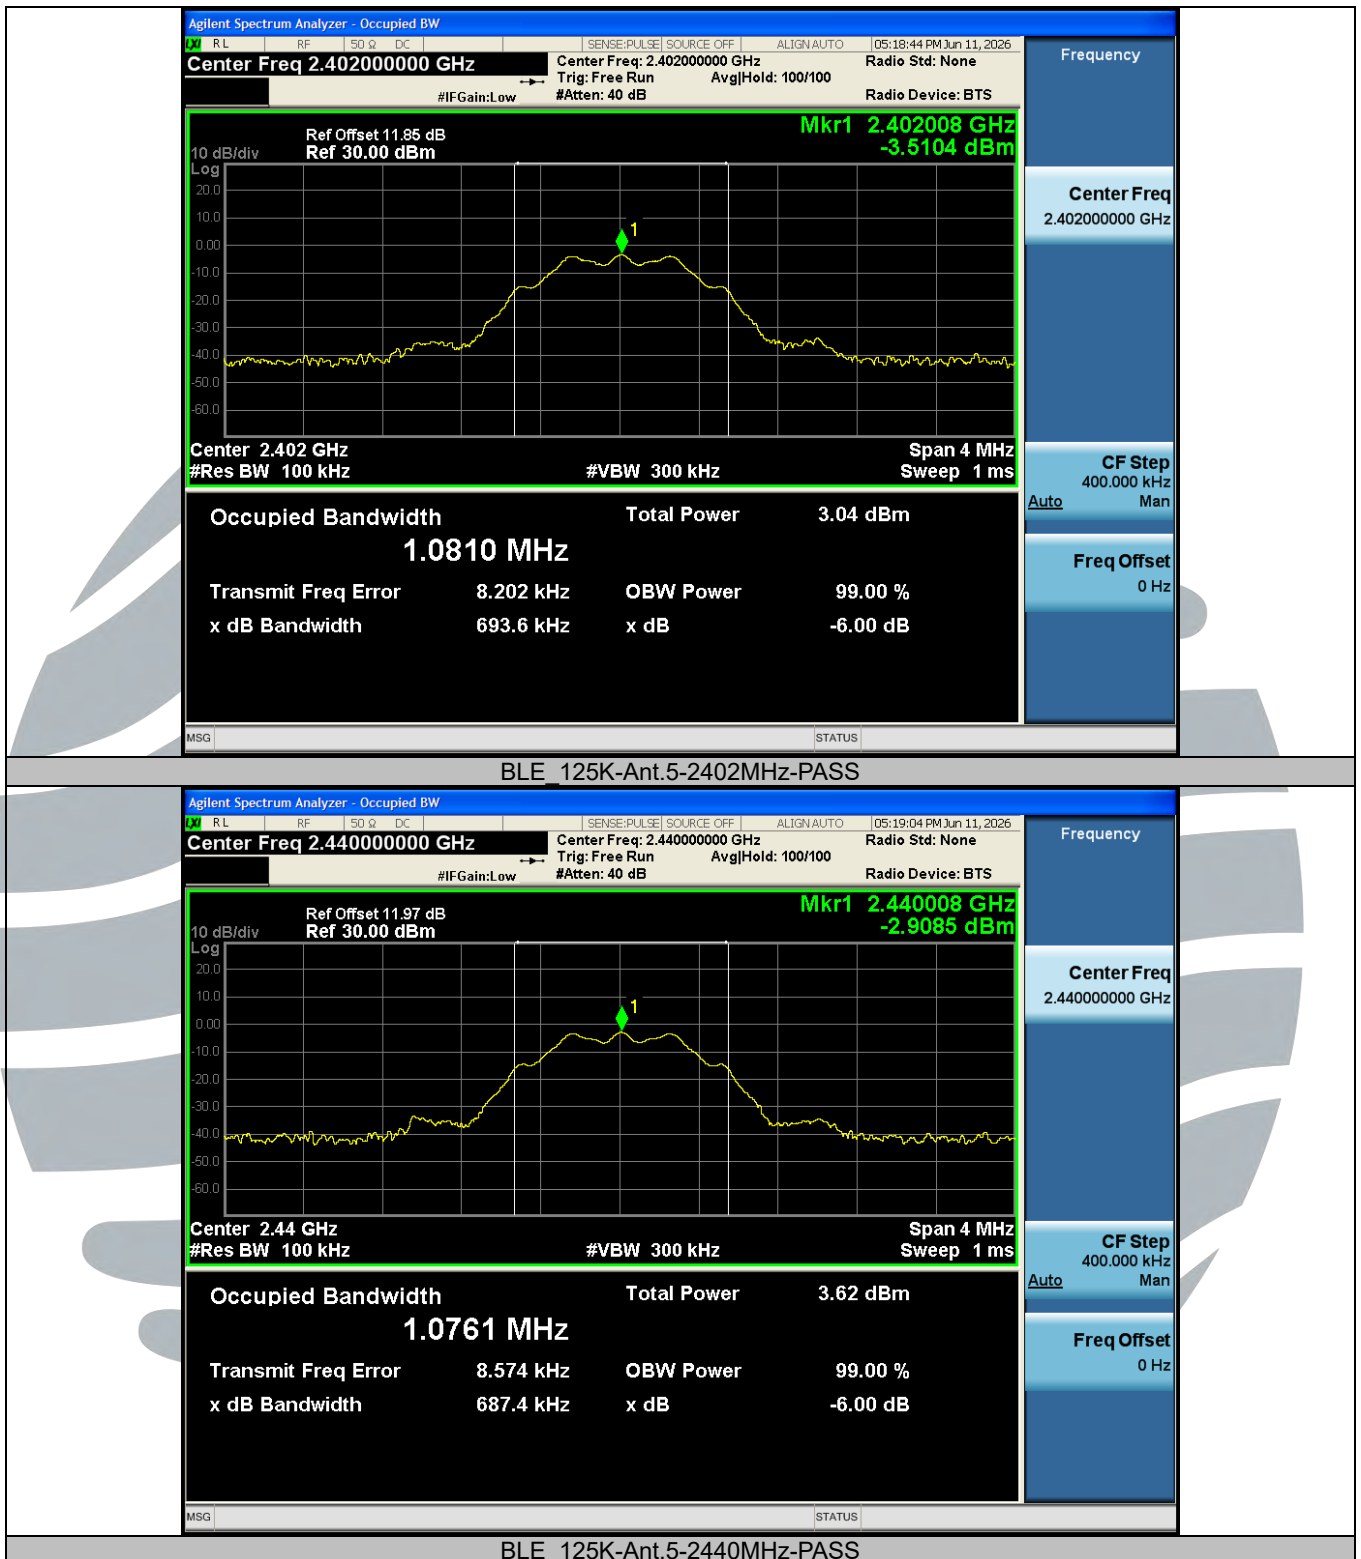

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

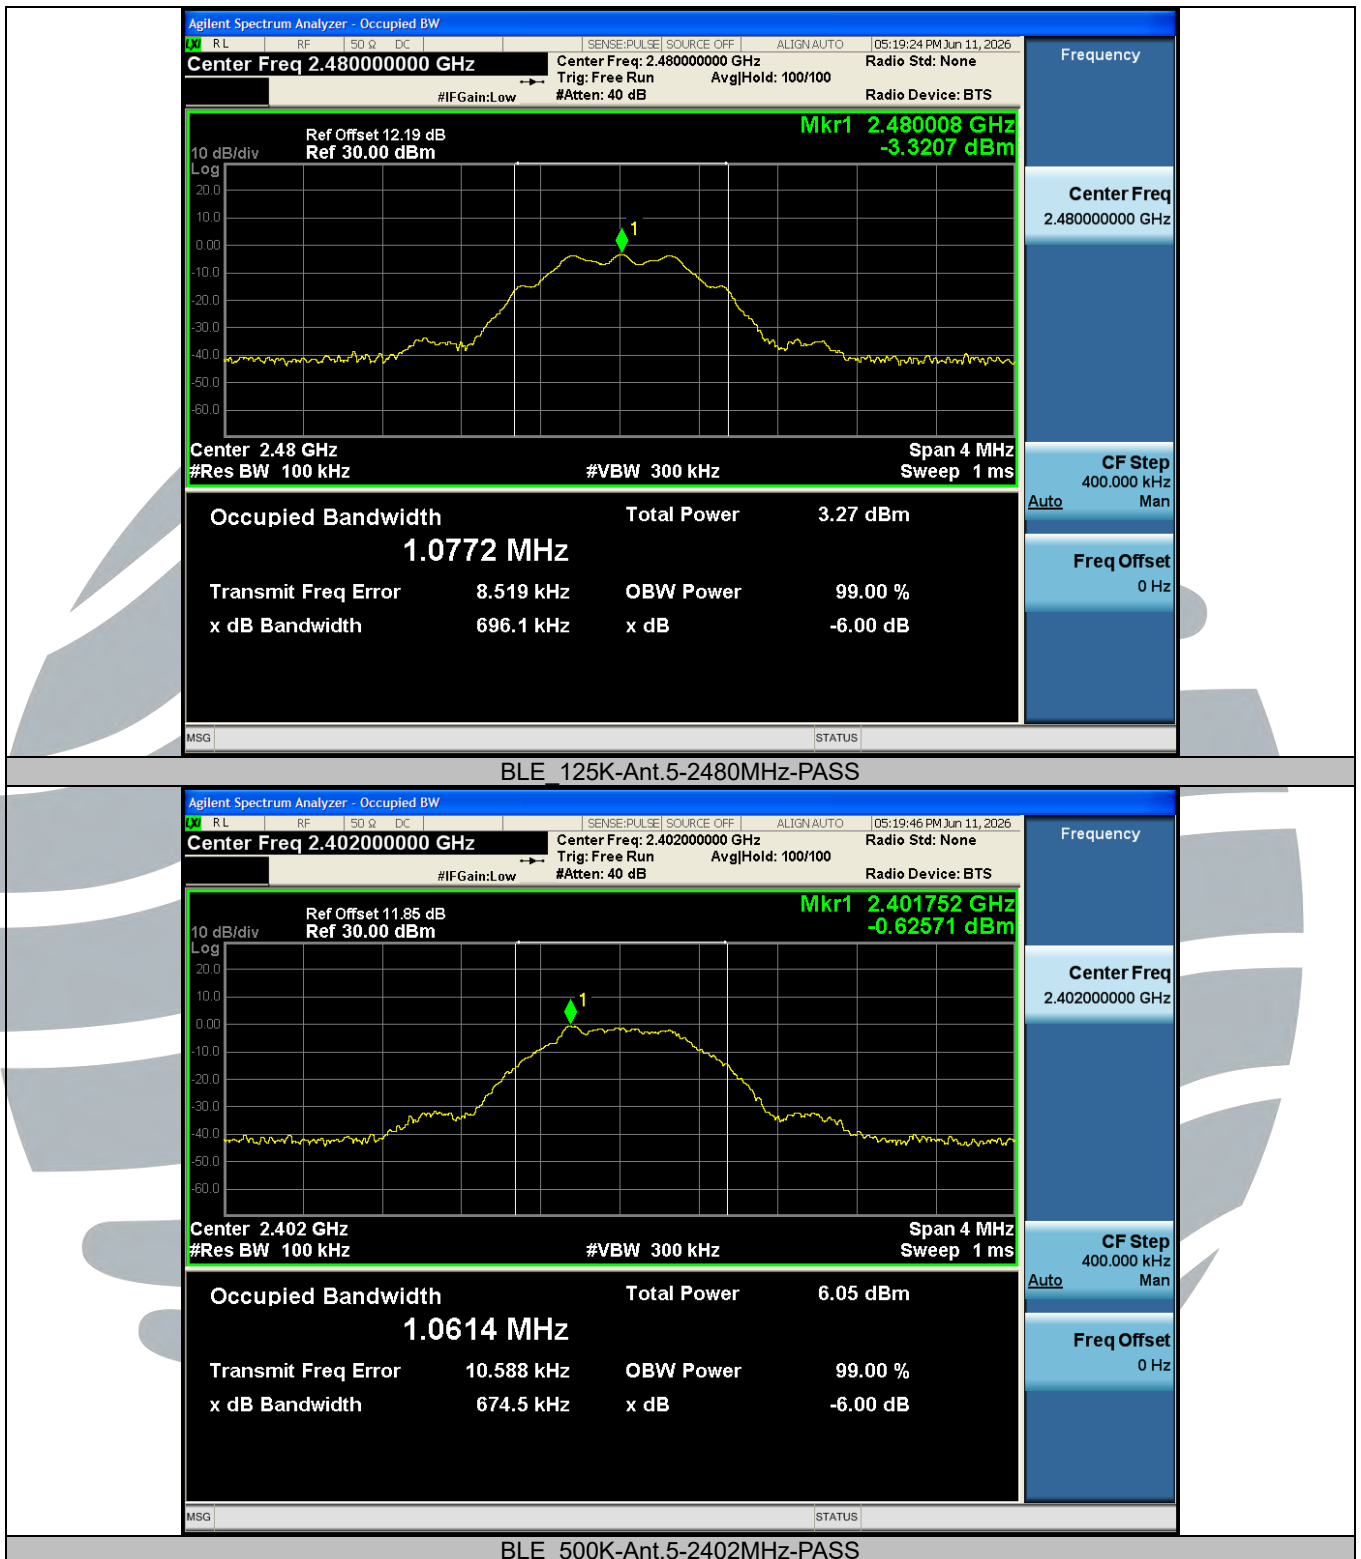

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

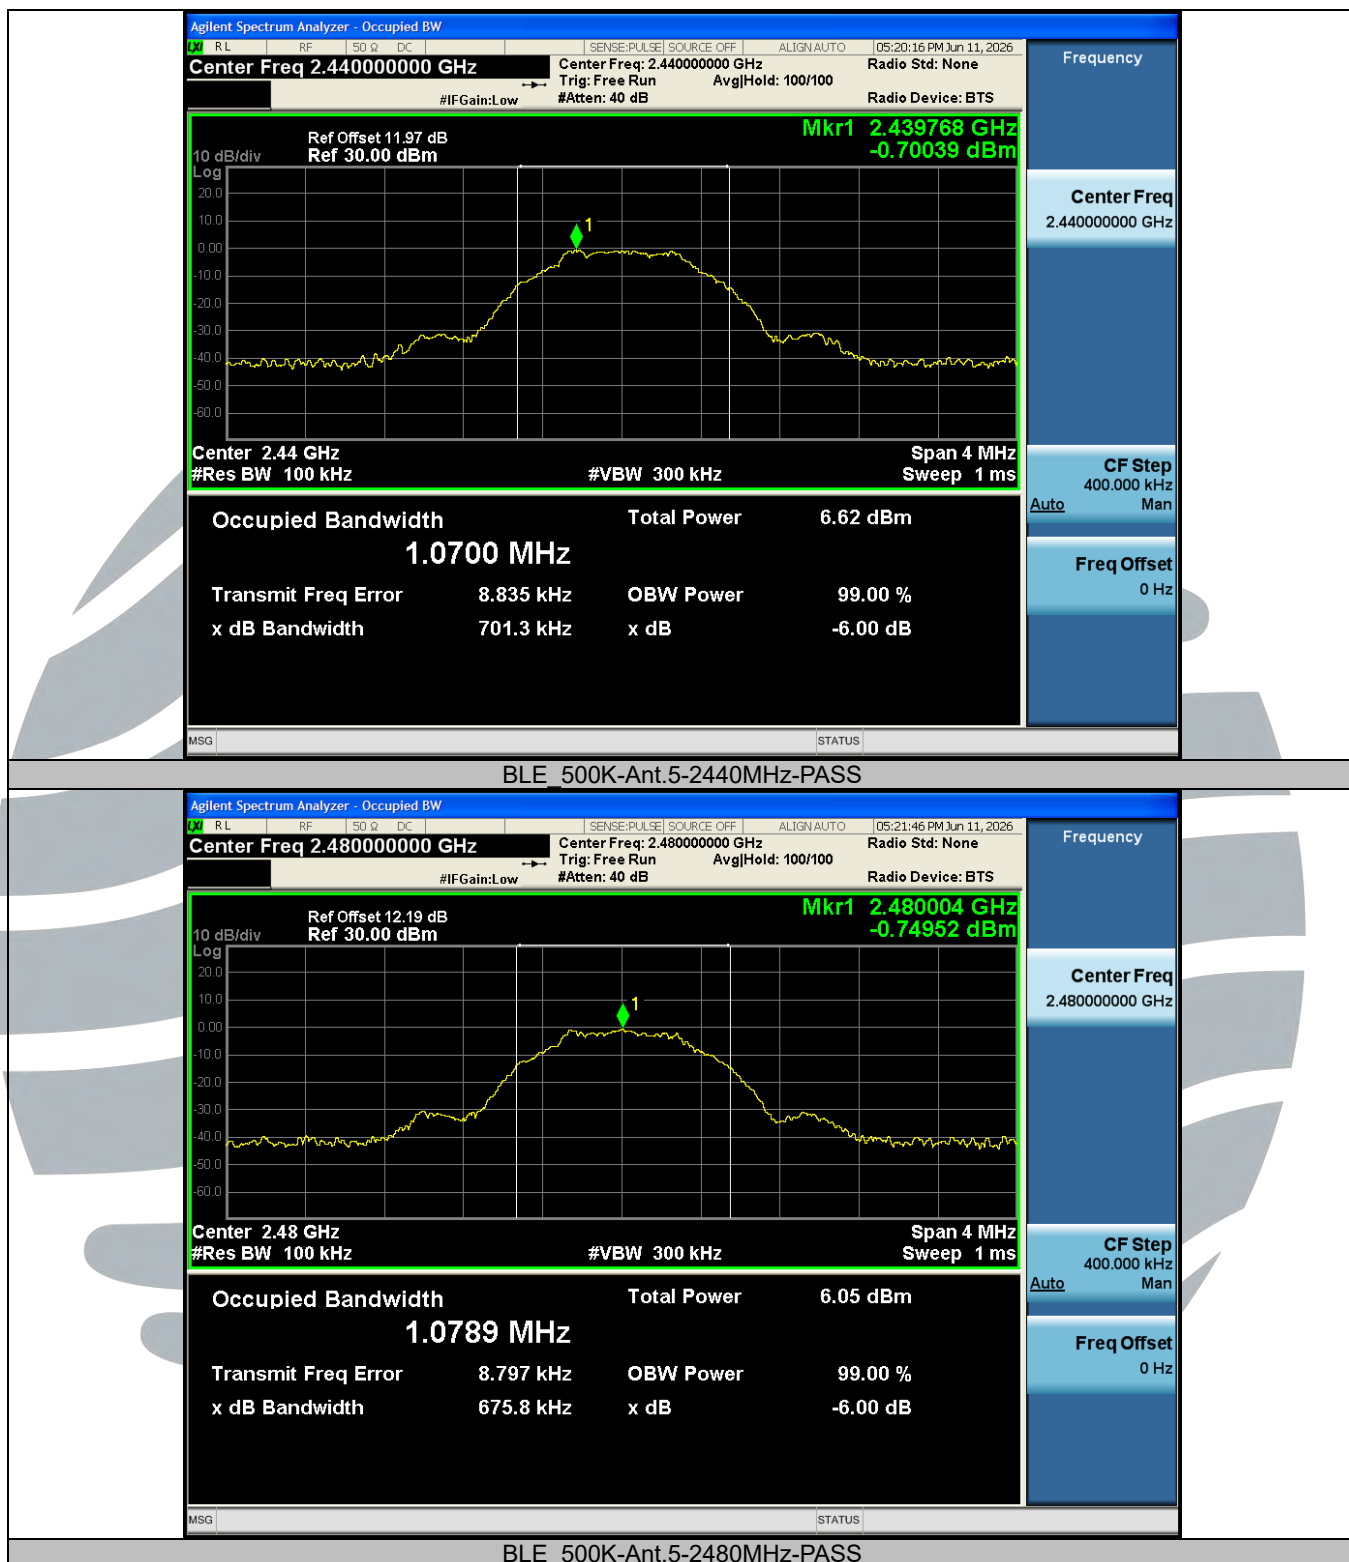

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Occupied Bandwidth

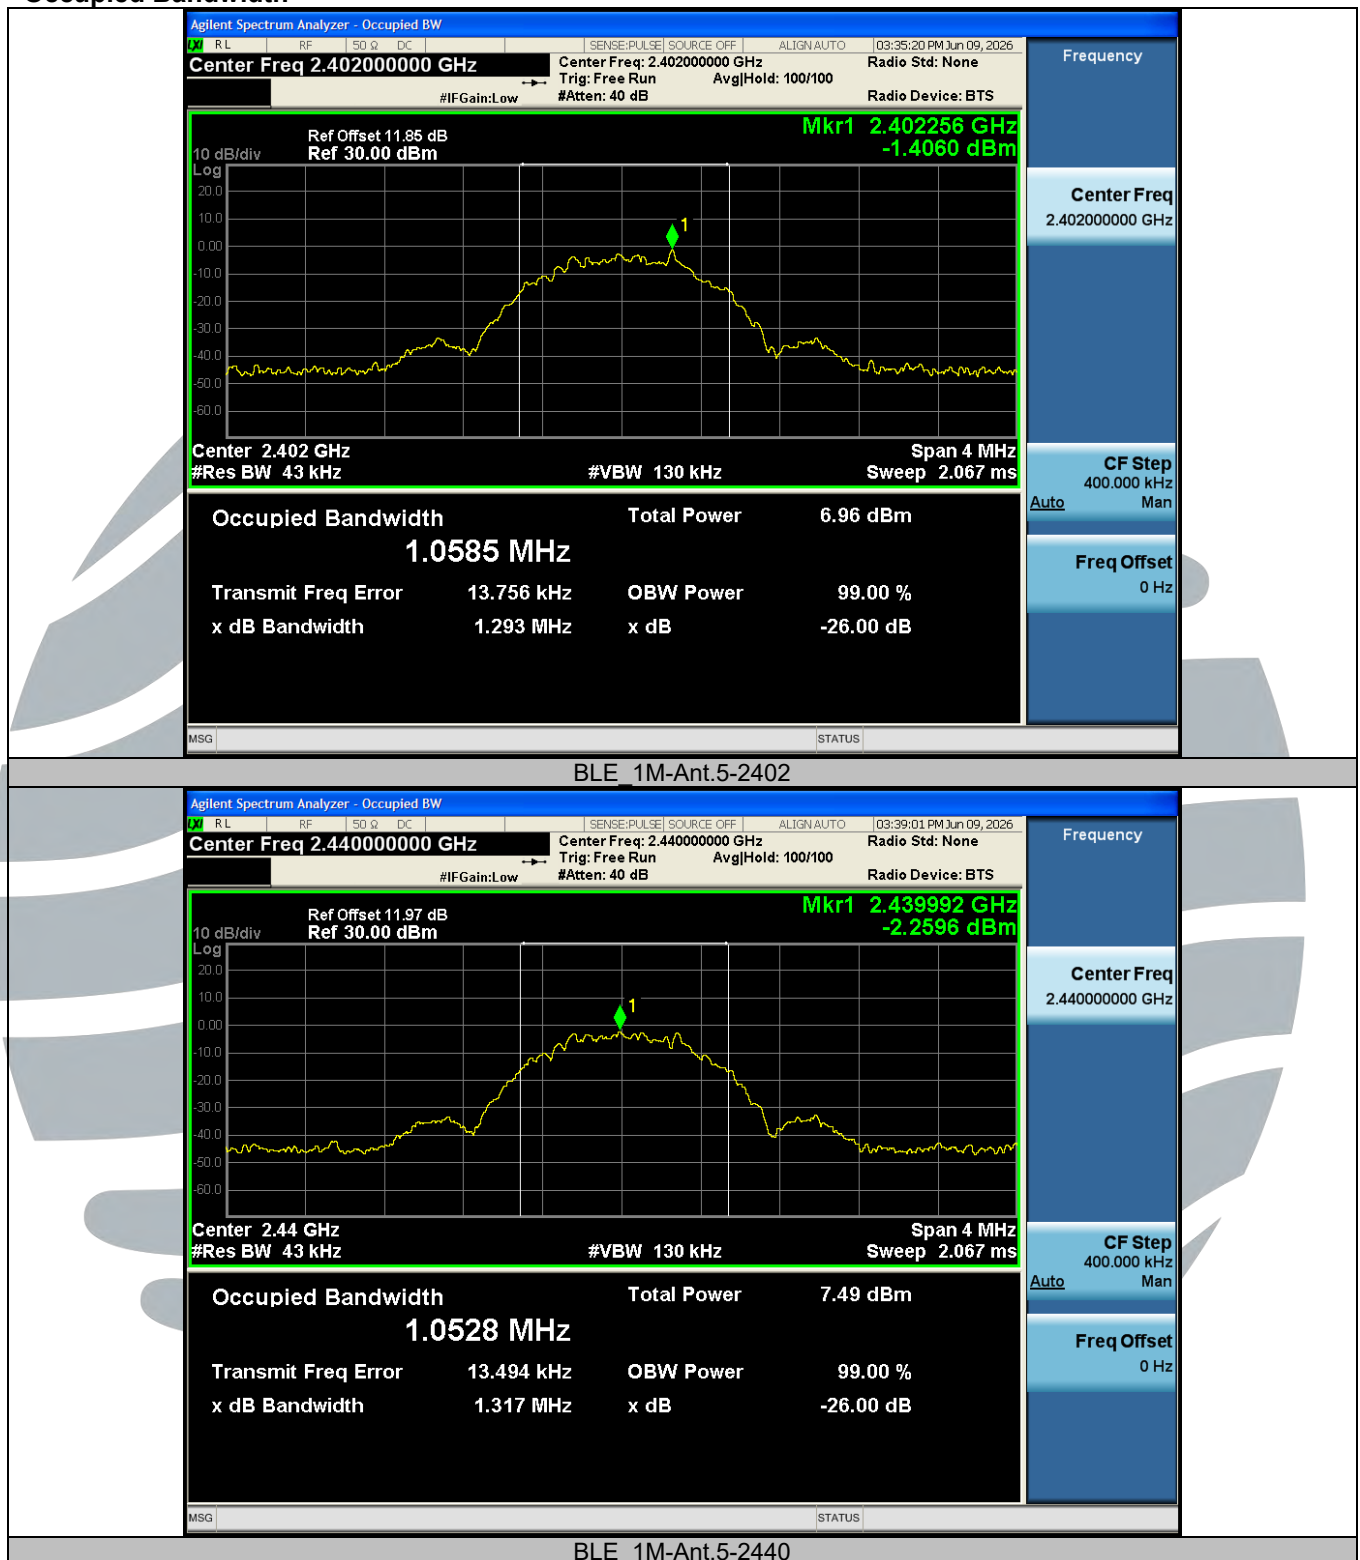

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

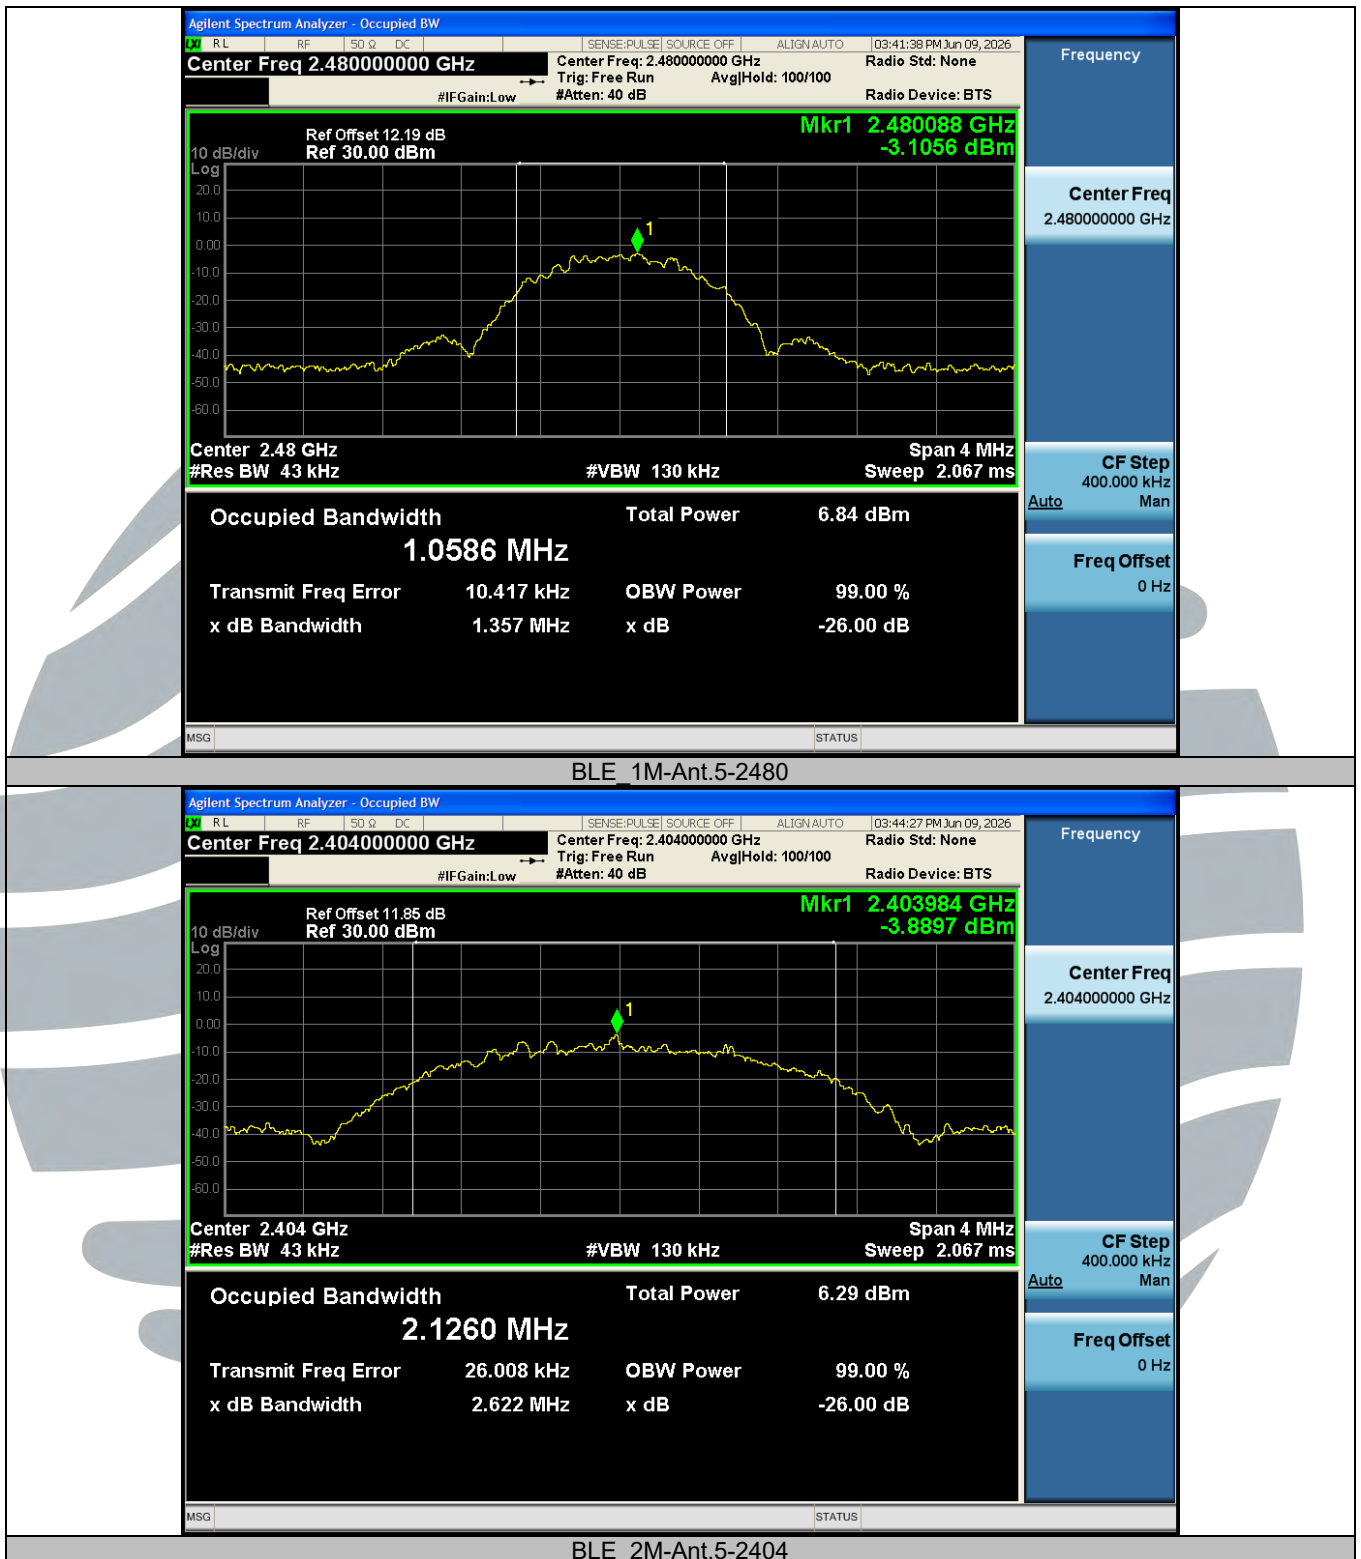

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

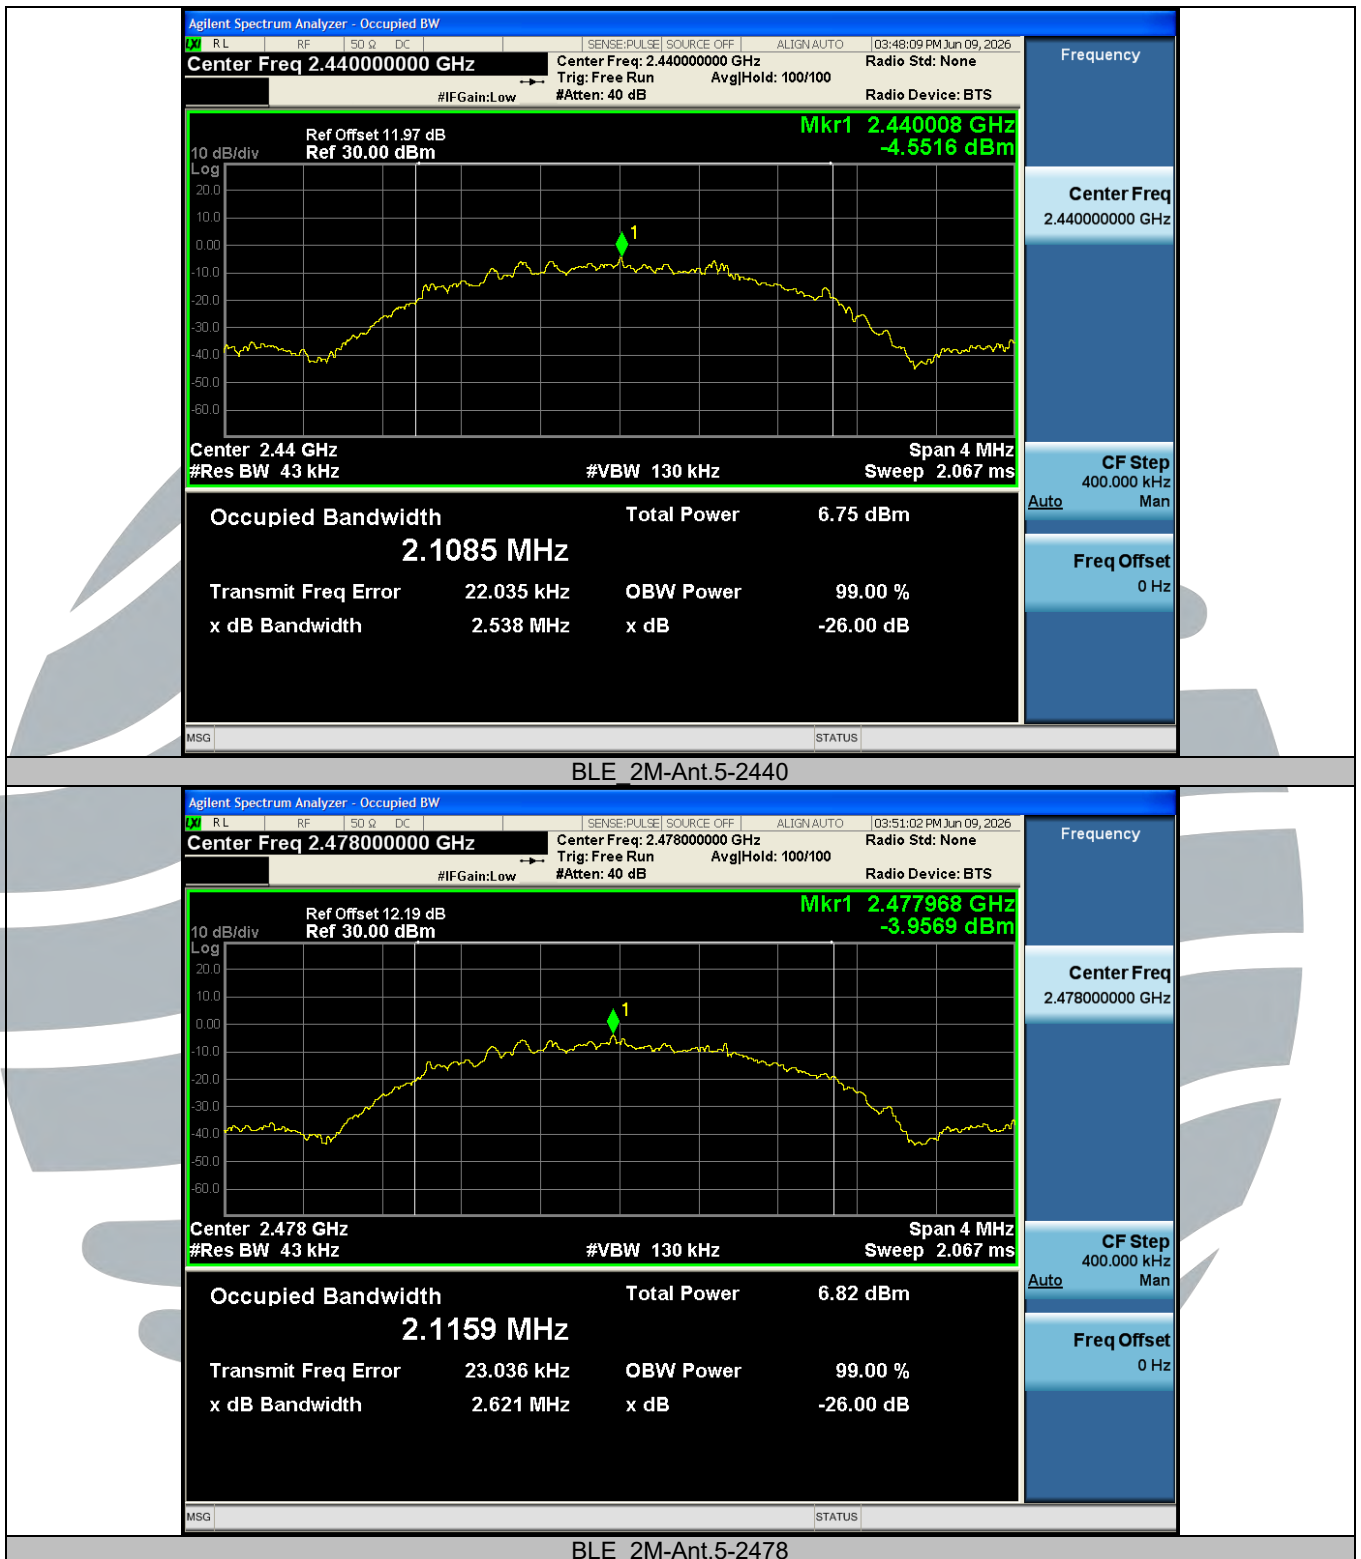

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

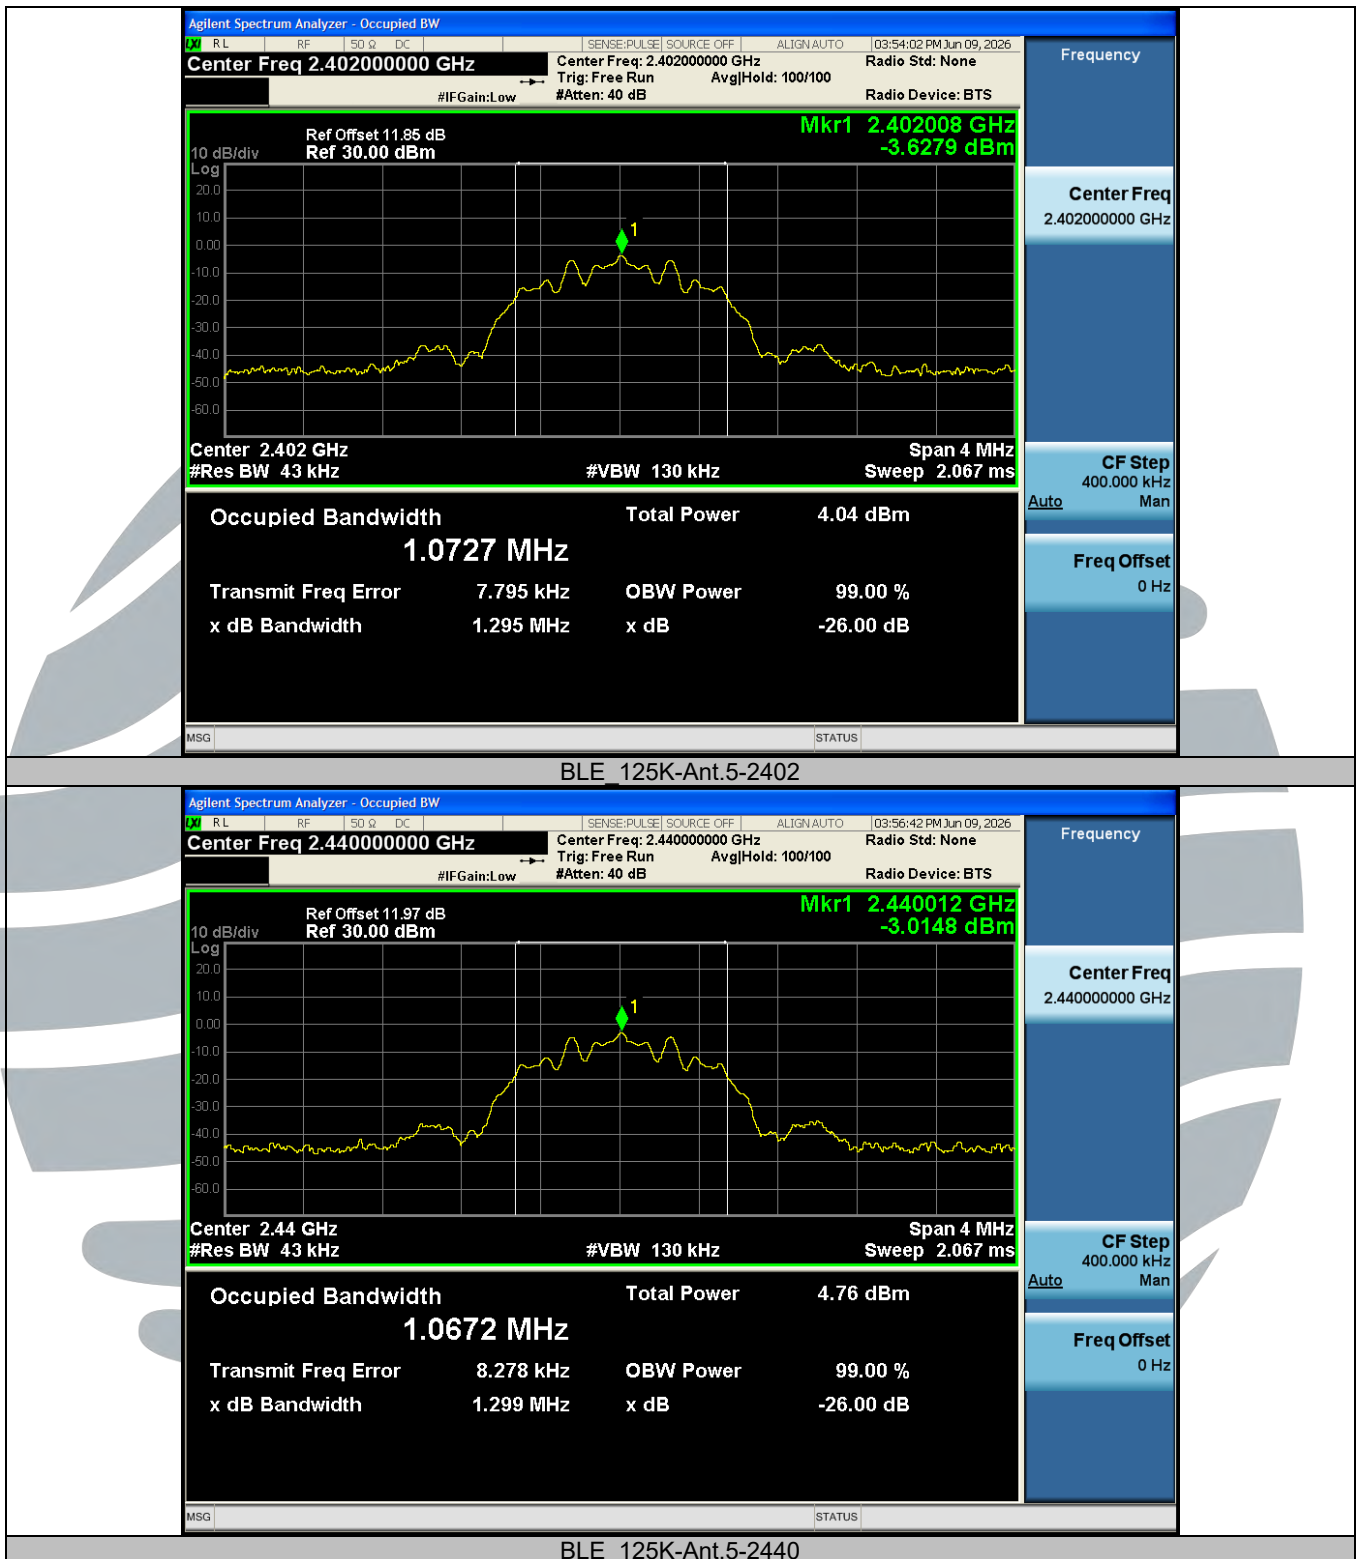

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

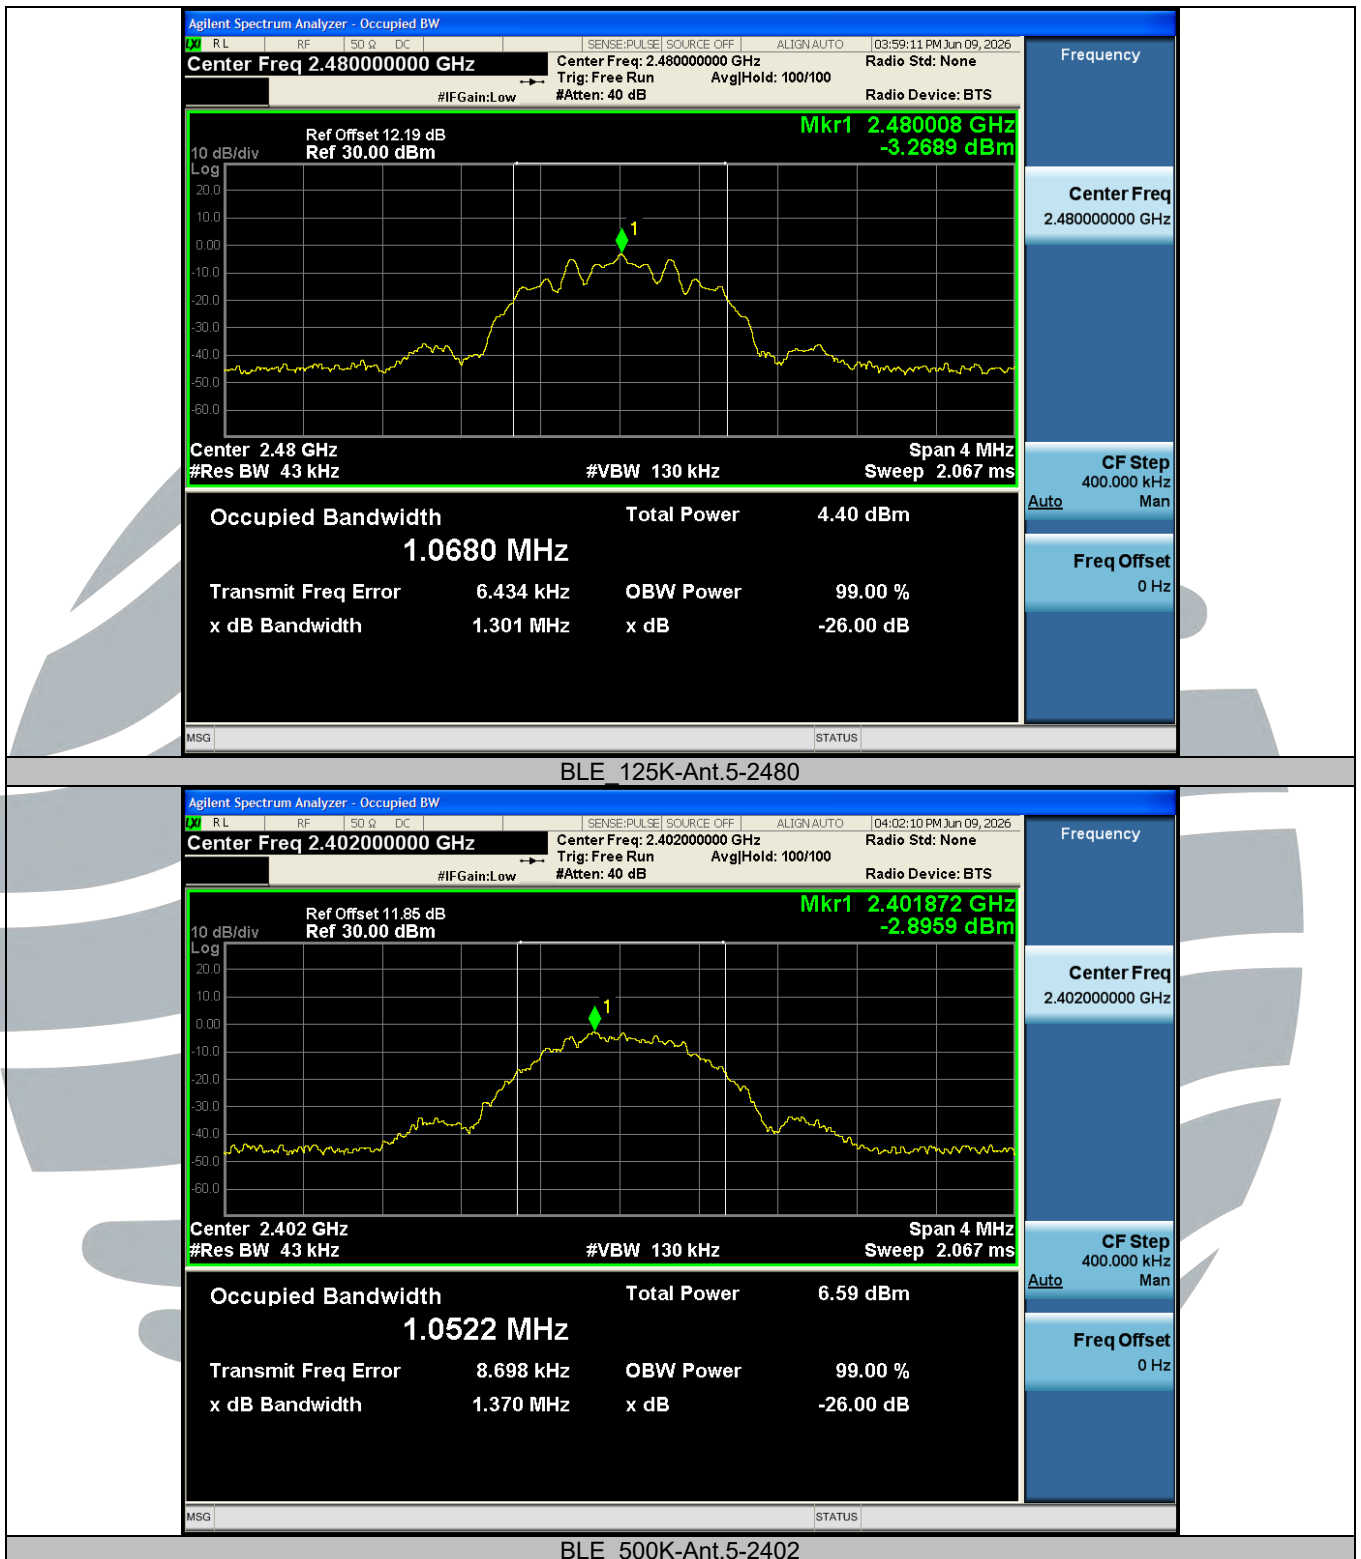

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

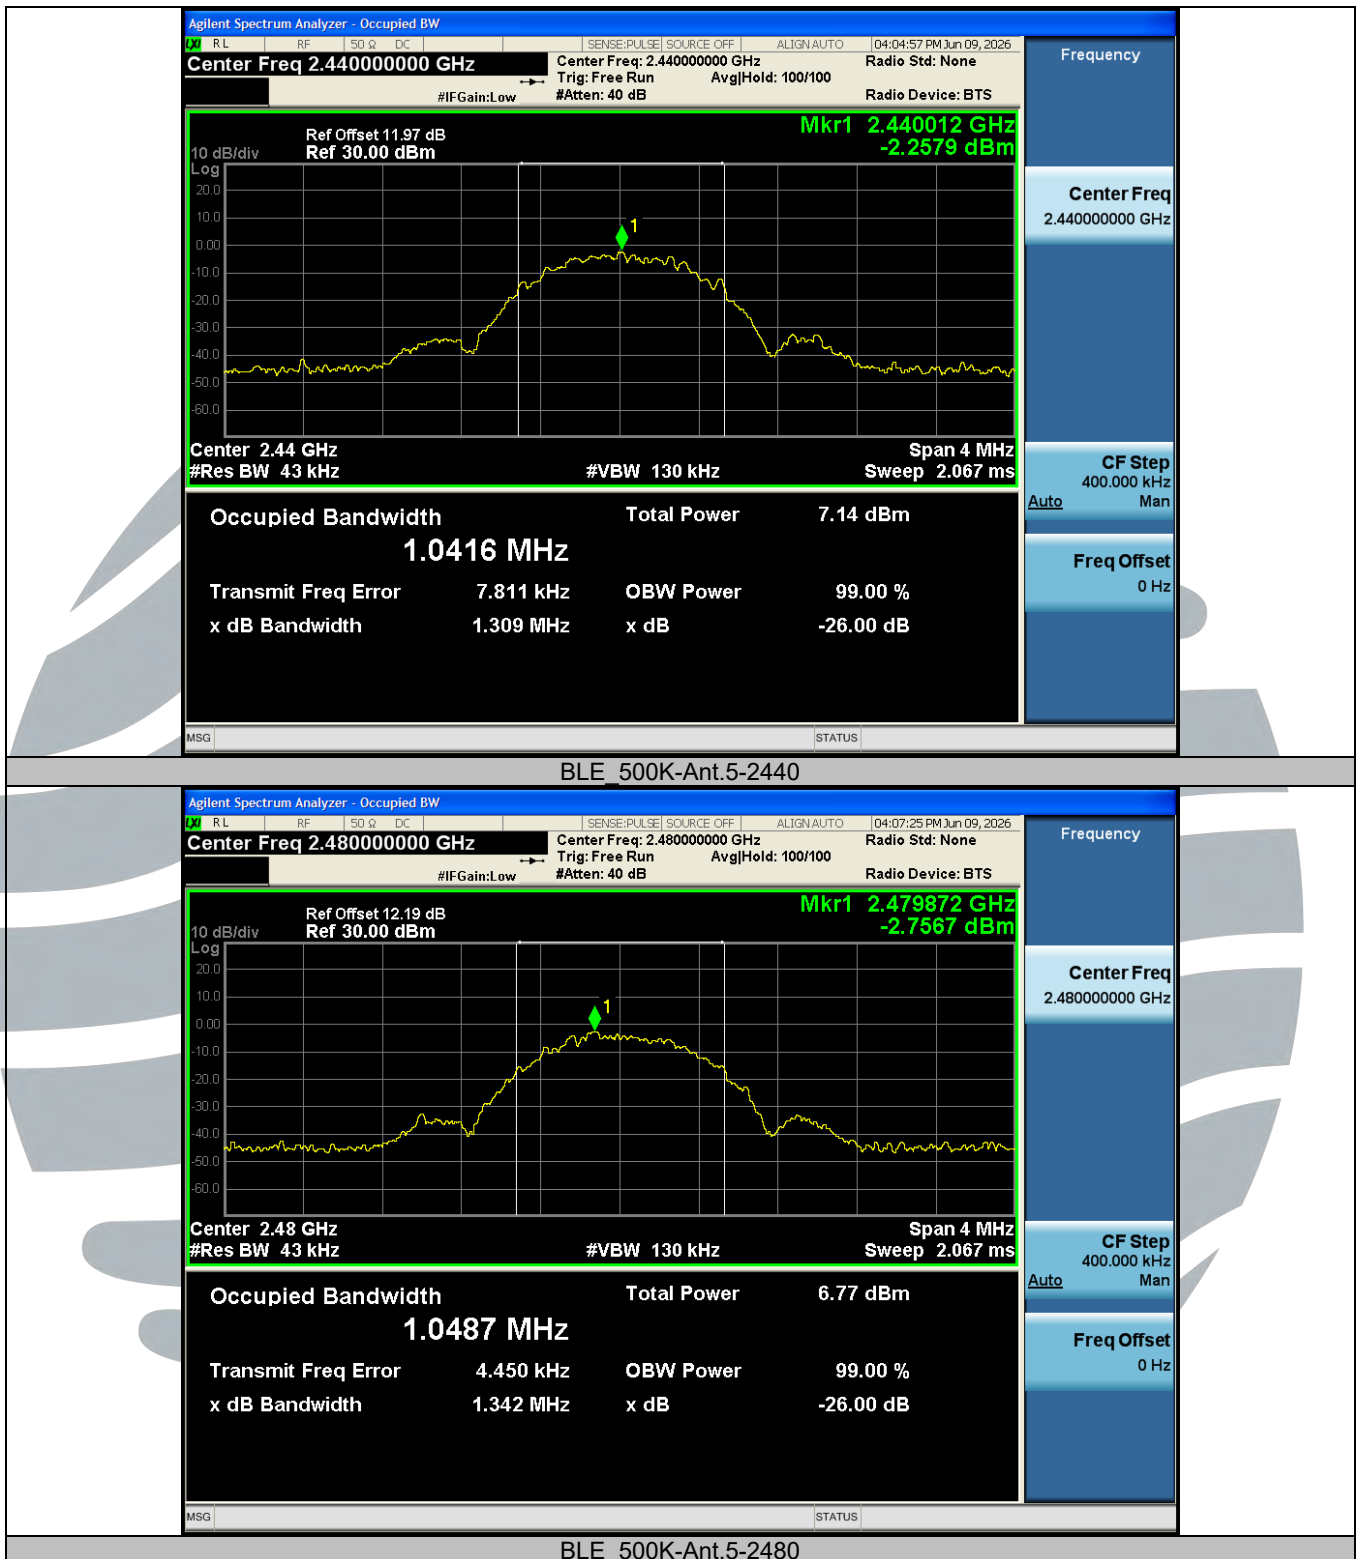

5.5 POWER SPECTRAL DENSITY

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247 (e)

Test Method: ANSI C63.10-2020 Clause 11.10.2

Limit: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq 3 \times \text{RBW}$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


Test Setup: Refer to section 4.4.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Tx mode

Test Results:

Test Mode	Antenna	Frequency [MHz]	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
BLE_1M	Ant 5	2402	-16.16	≤ 8.00	PASS
BLE_1M	Ant 5	2440	-15.70	≤ 8.00	PASS
BLE_1M	Ant 5	2480	-15.63	≤ 8.00	PASS
BLE_2M	Ant 5	2404	-18.40	≤ 8.00	PASS
BLE_2M	Ant 5	2440	-18.10	≤ 8.00	PASS
BLE_2M	Ant 5	2478	-17.77	≤ 8.00	PASS
BLE_125K	Ant 5	2402	-6.01	≤ 8.00	PASS
BLE_125K	Ant 5	2440	-5.47	≤ 8.00	PASS
BLE_125K	Ant 5	2480	-5.49	≤ 8.00	PASS
BLE_500K	Ant 5	2402	-6.23	≤ 8.00	PASS
BLE_500K	Ant 5	2440	-5.74	≤ 8.00	PASS
BLE_500K	Ant 5	2480	-5.71	≤ 8.00	PASS

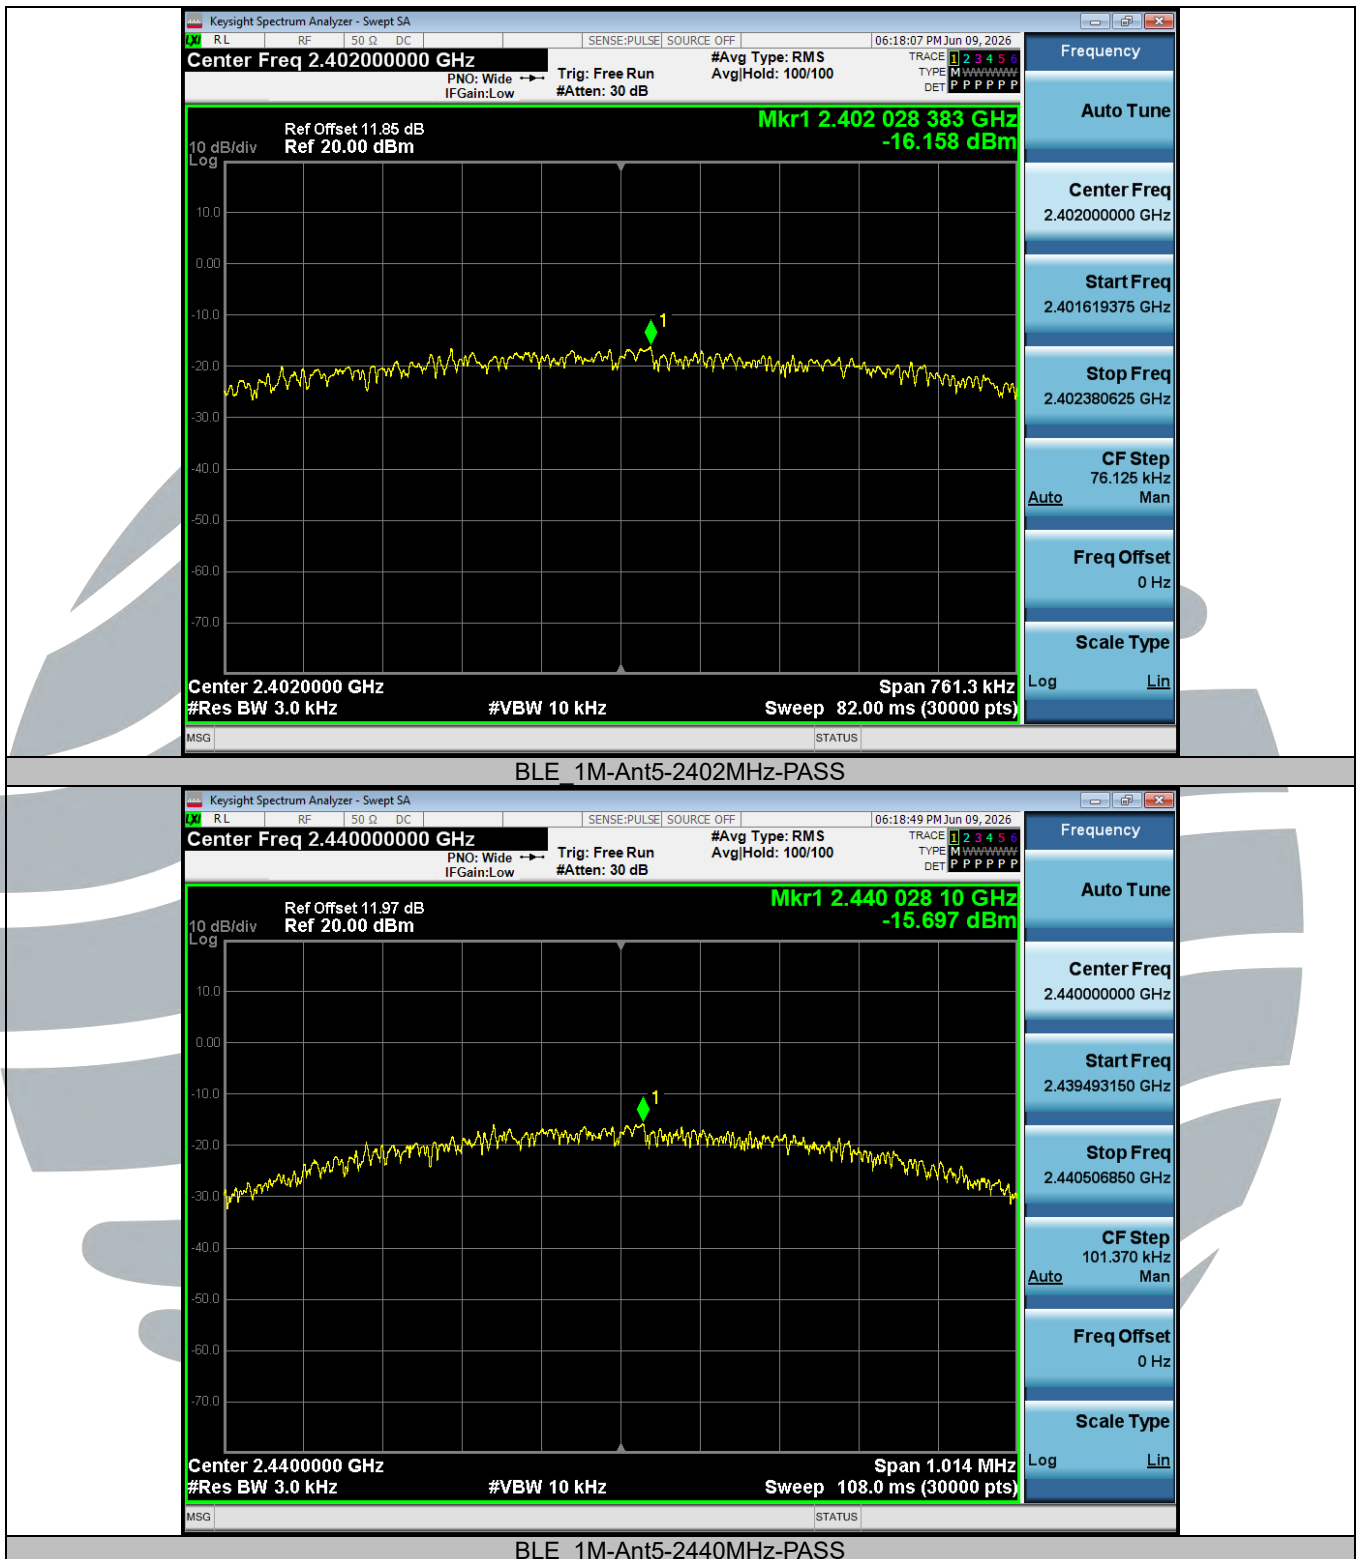

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

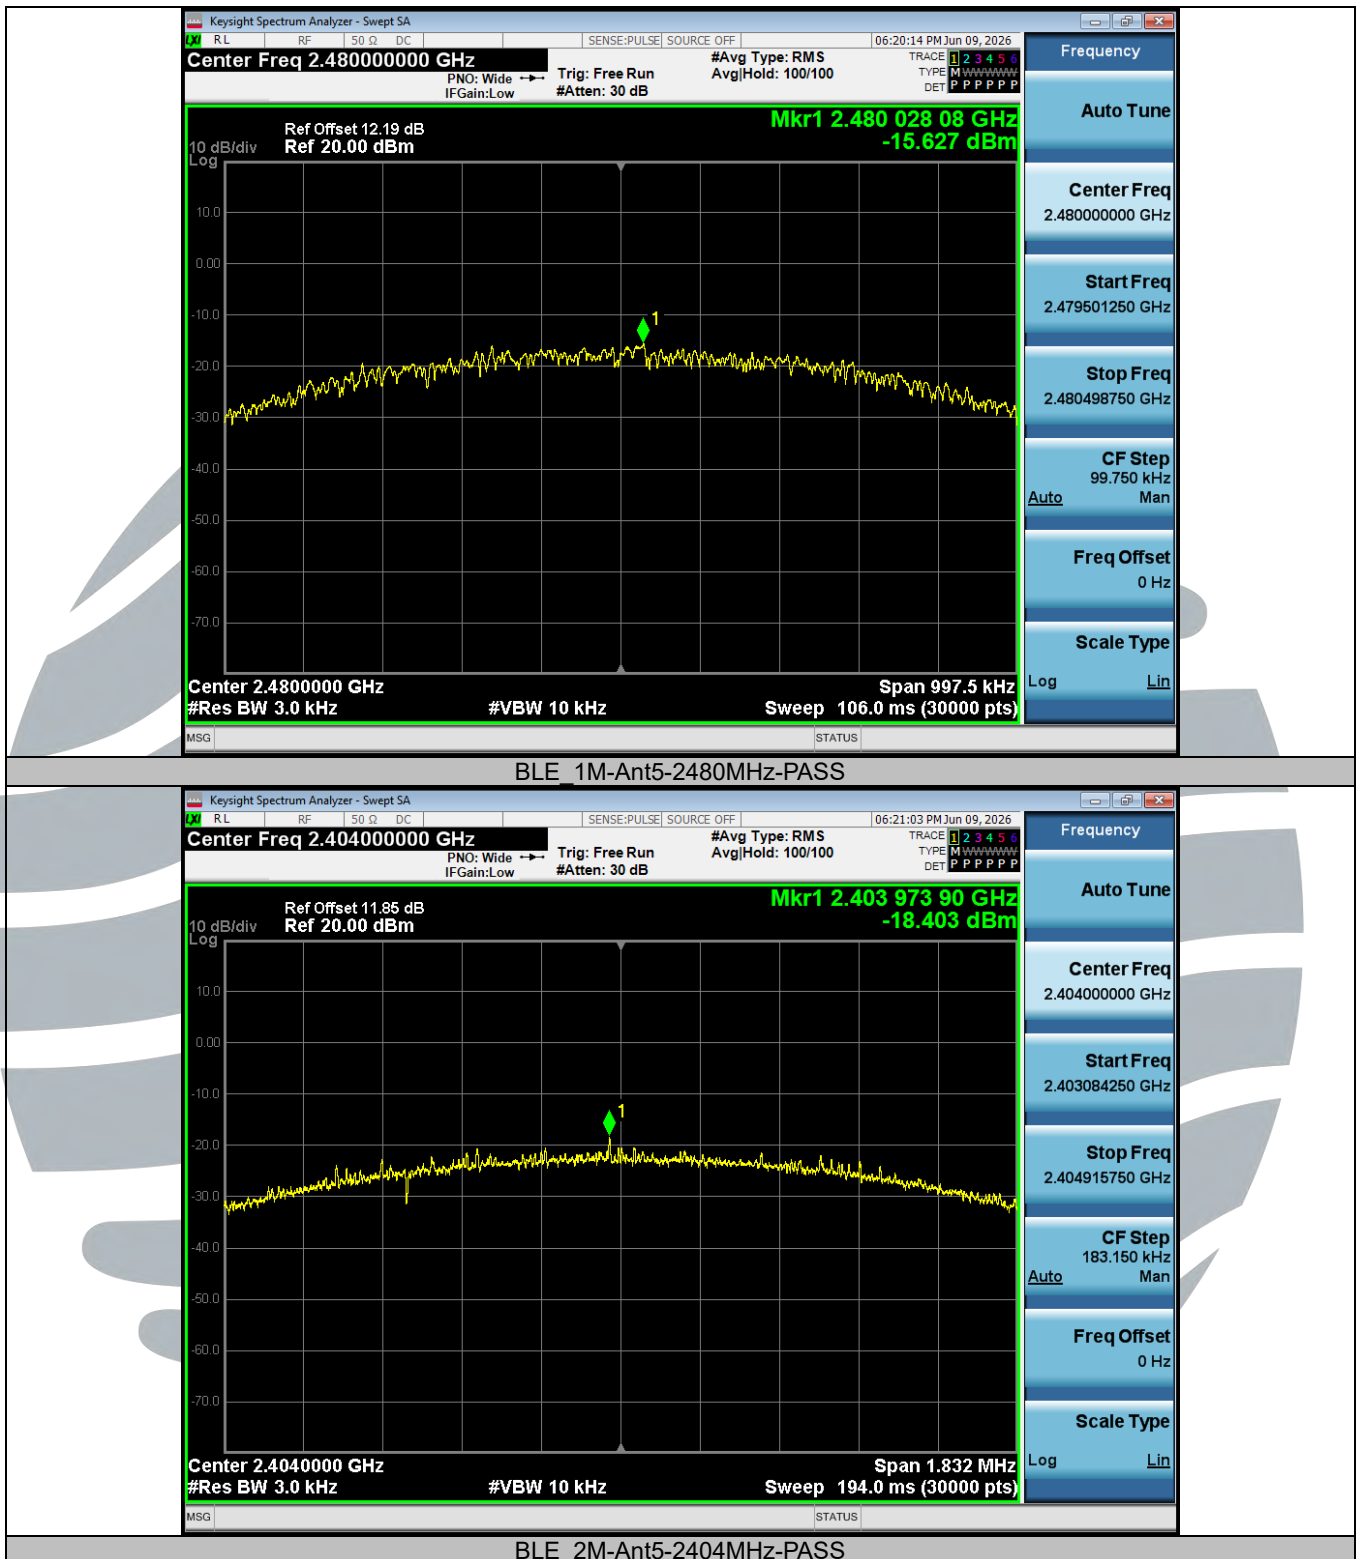

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

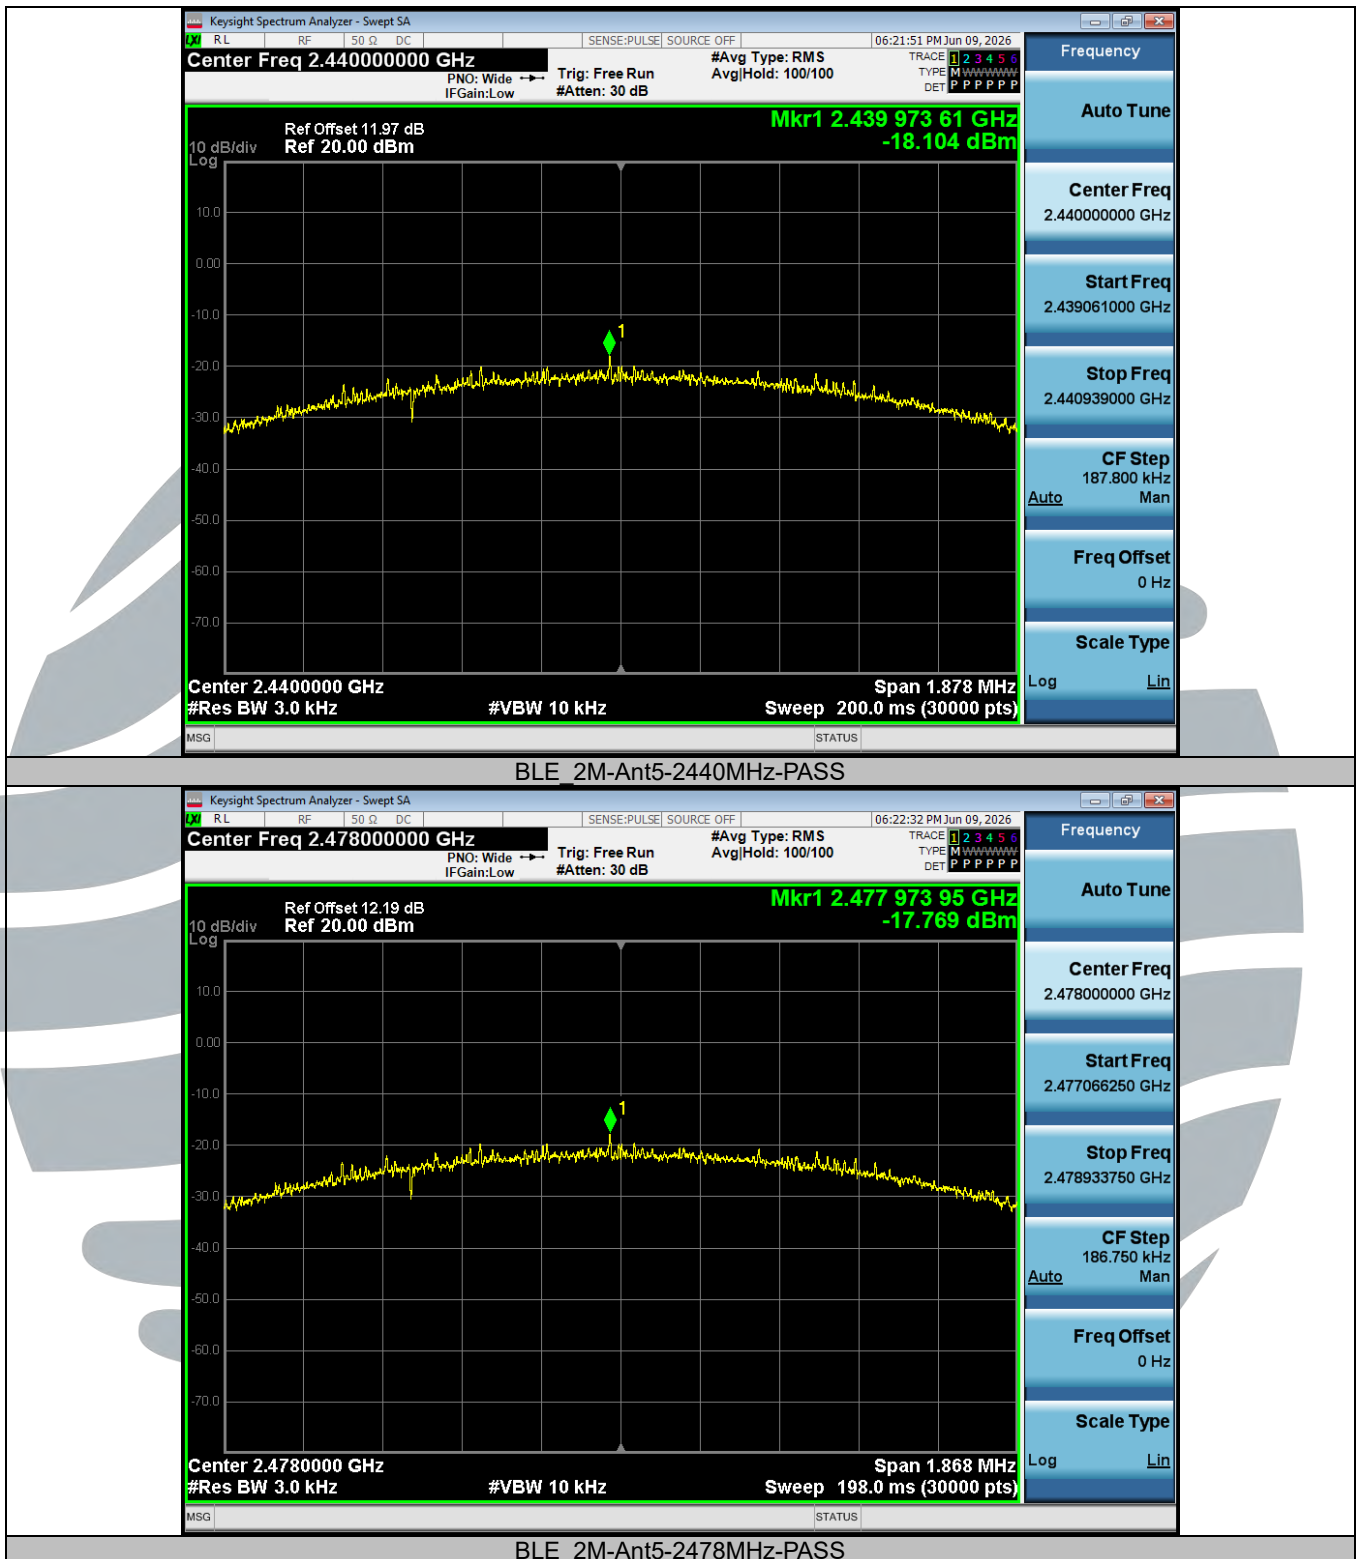

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

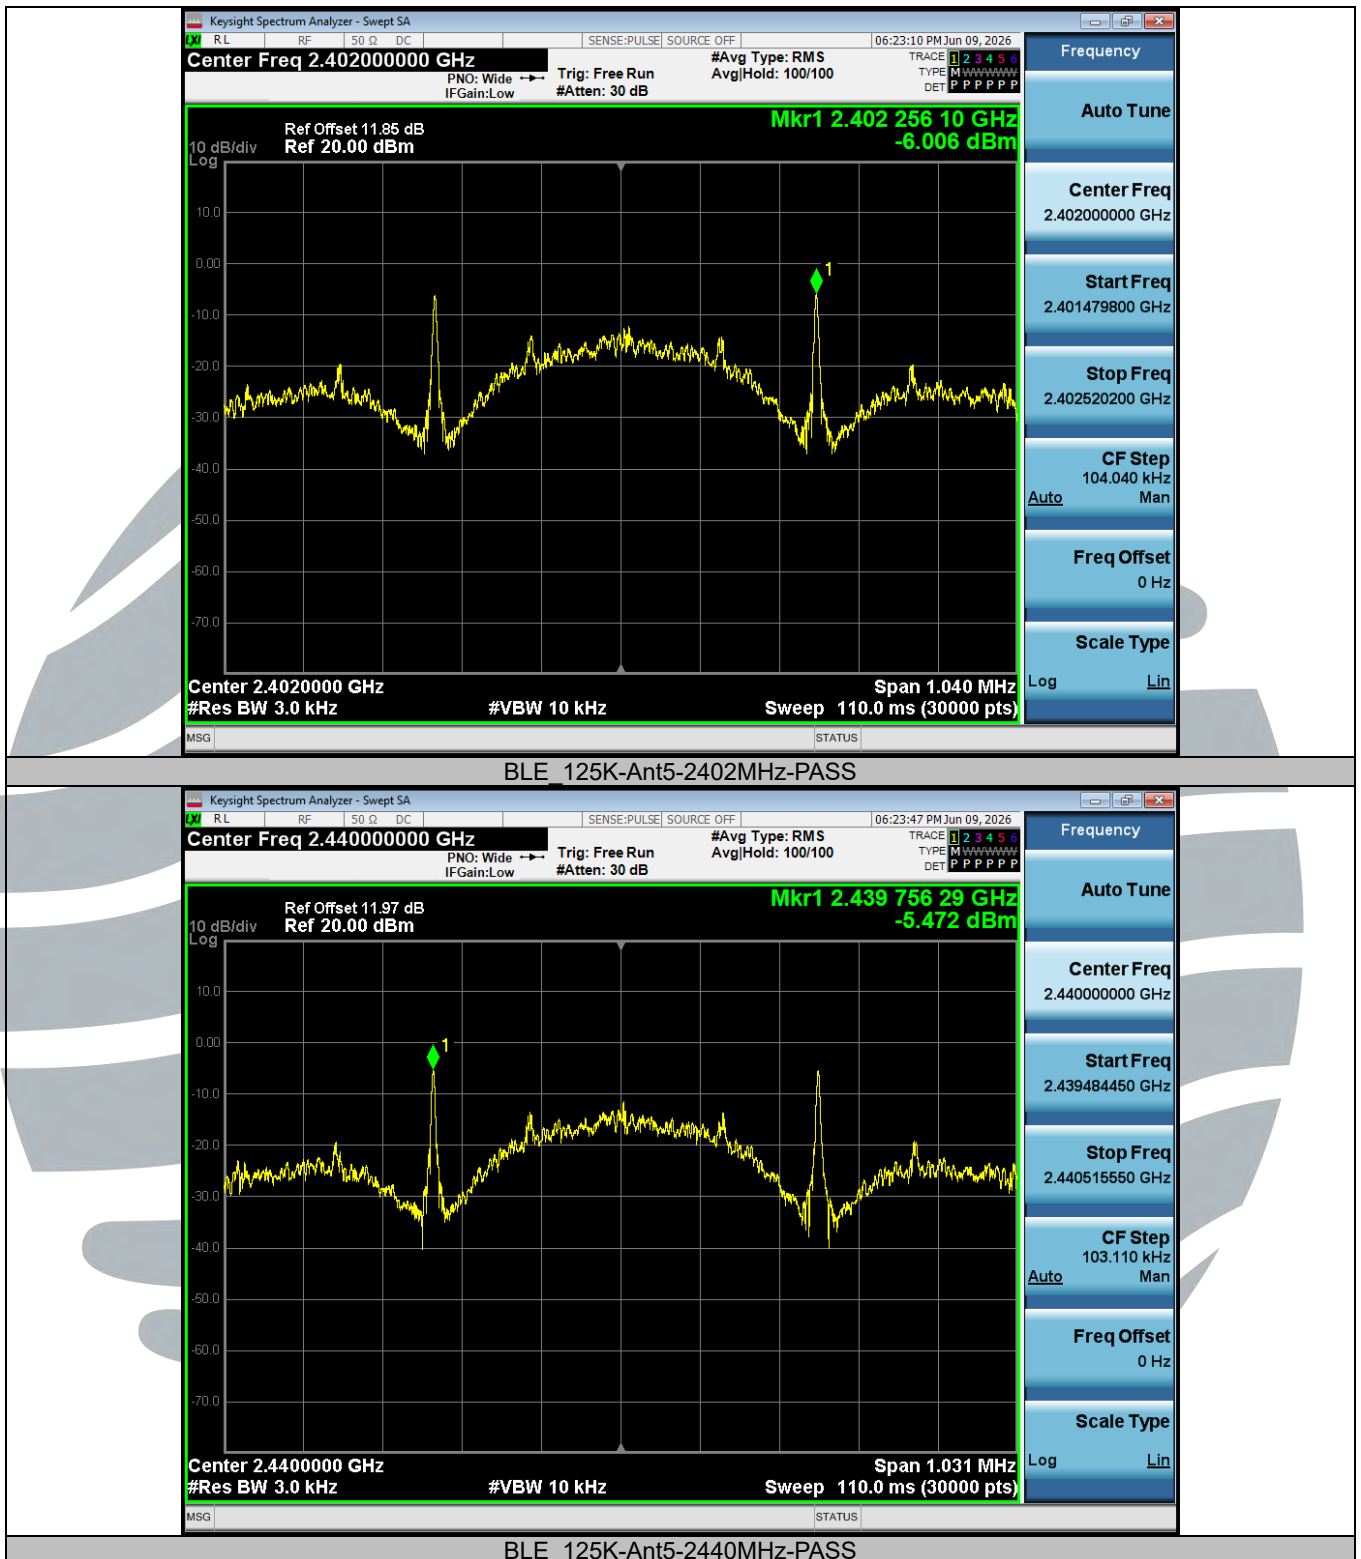

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

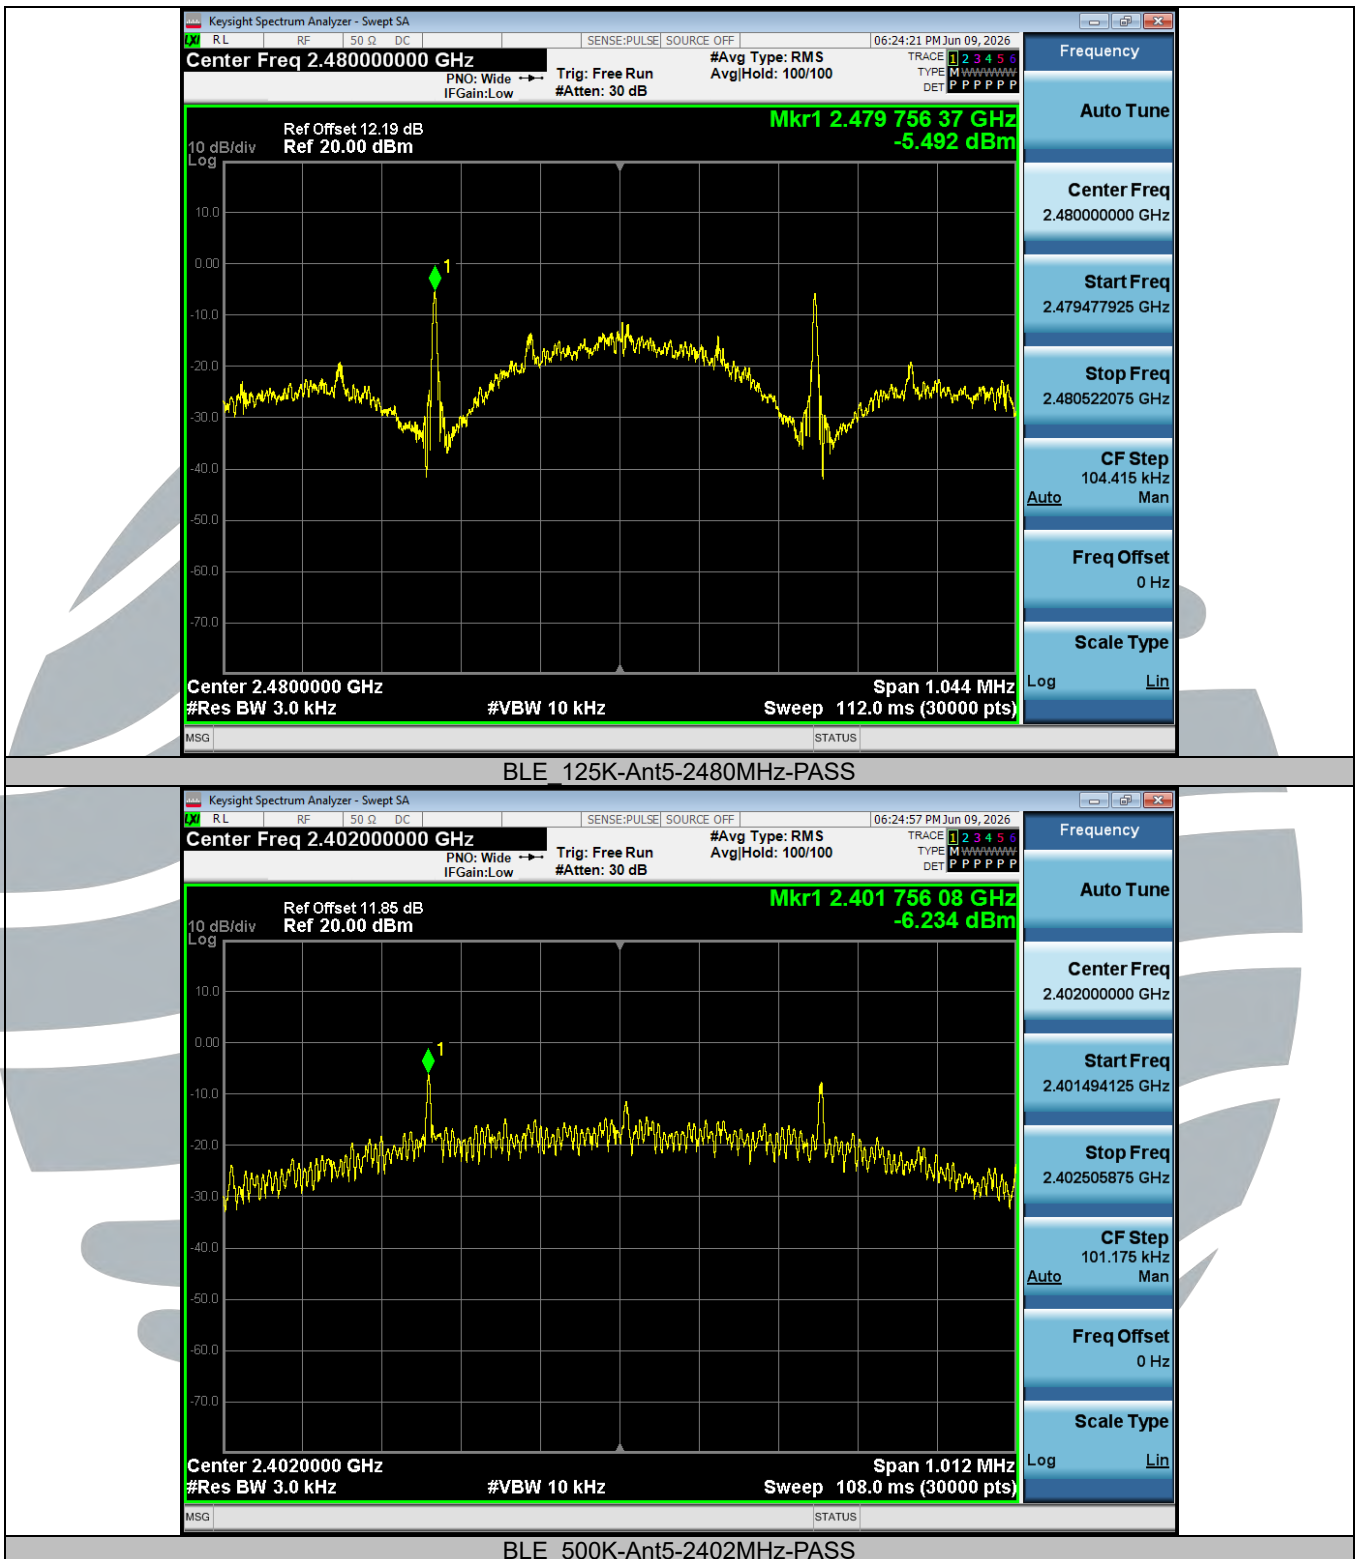

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

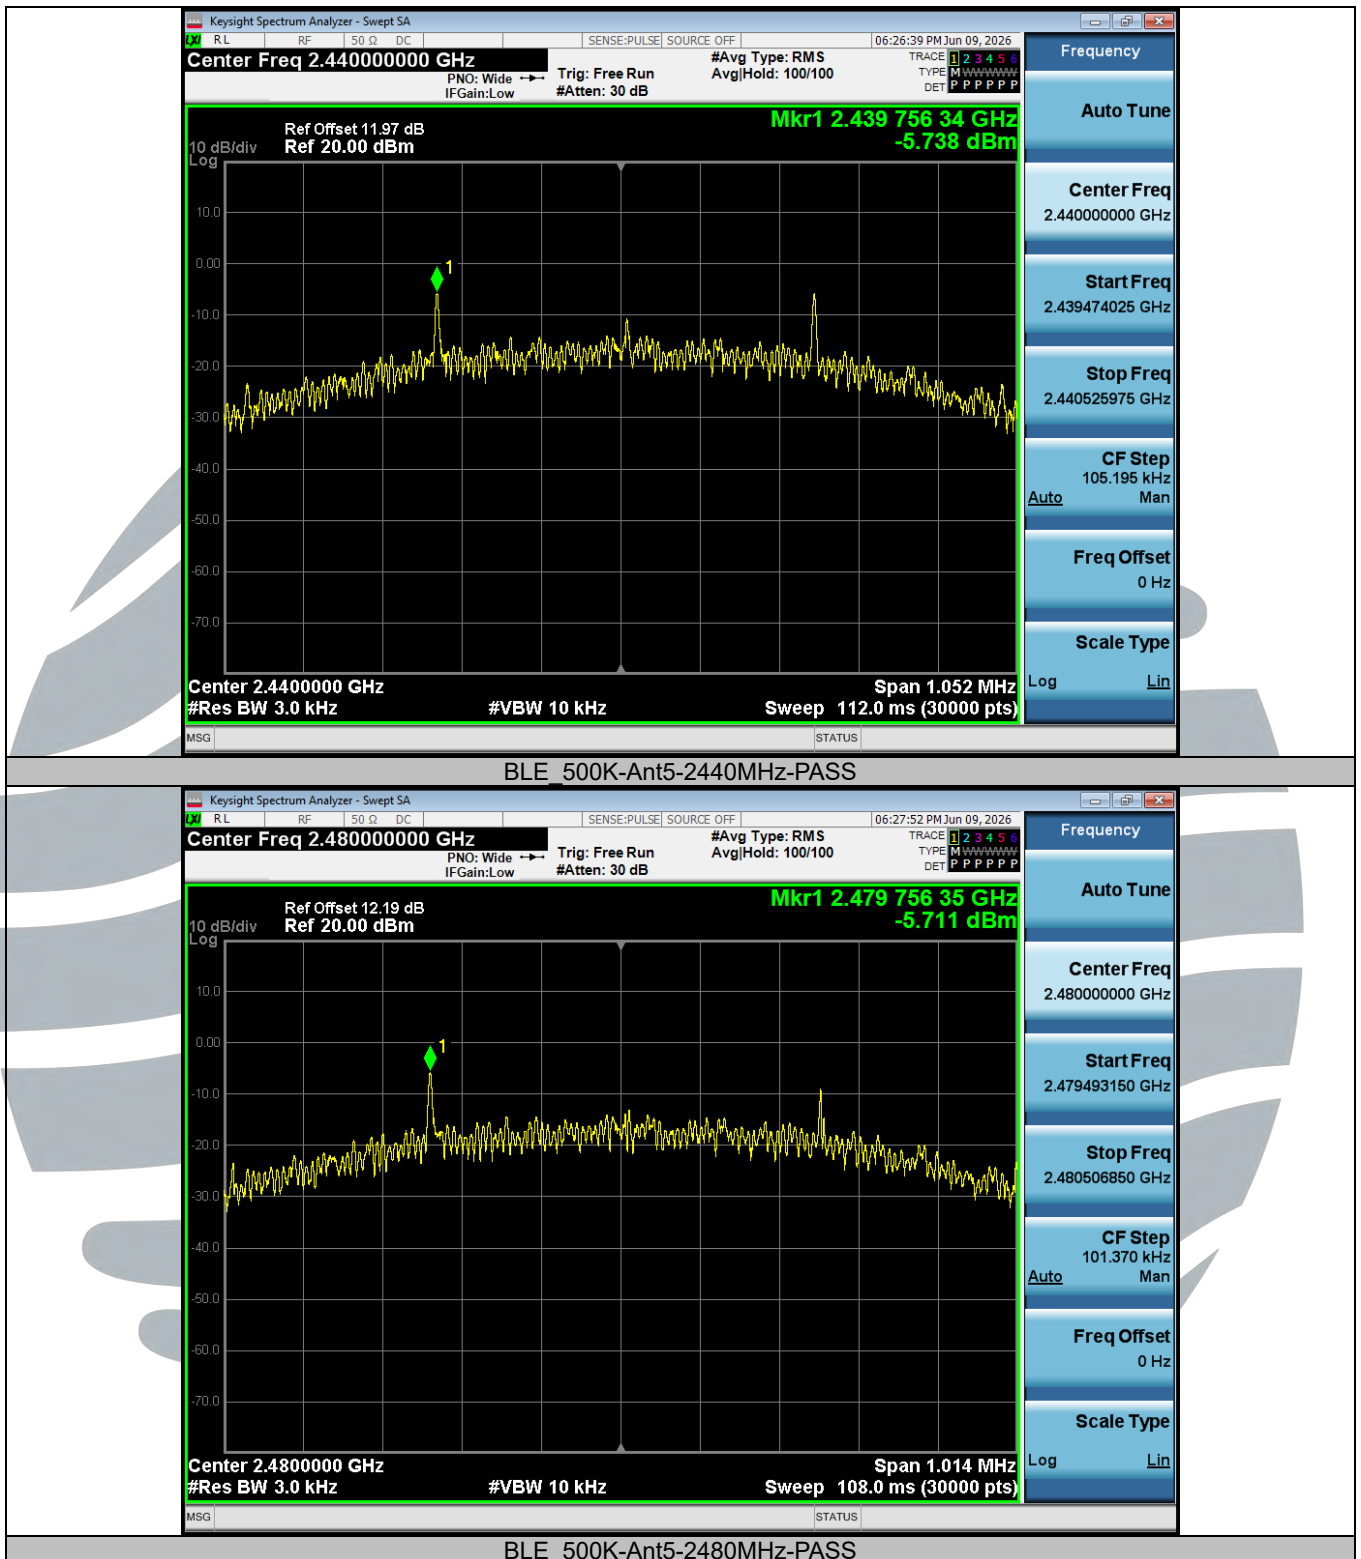

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.247(d)

Test Method: ANSI C63.10-2020 Clause 11.11

Limit: In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Test Procedure: Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.
- j) Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Step 2: Measurement Procedure OOB

- a) Set RBW = 100 kHz.
- b) Set VBW ≥ 300 kHz.
- c) Detector = peak.
- d) Sweep = auto couple.
- e) Trace Mode = max hold.
- f) Allow trace to fully stabilize.
- g) Use the peak marker function to determine the maximum amplitude level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.4.3 for details.


Instruments Used: Refer to section 3 for details

Test Mode: Tx mode

Test Results:

REF & CSE

Test Mode	Antenna	Frequency [MHz]	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE 1M	Ant.5	2402	0~Reference	-1.37	-1.37	---	PASS
BLE 1M	Ant.5	2402	30~1000	-1.37	-60.73	≤-21.37	PASS
BLE 1M	Ant.5	2402	1000~26500	-1.37	-25.05	≤-21.37	PASS
BLE 1M	Ant.5	2440	0~Reference	-0.23	-0.23	---	PASS
BLE 1M	Ant.5	2440	30~1000	-0.23	-60.78	≤-20.23	PASS
BLE 1M	Ant.5	2440	1000~26500	-0.23	-25.6	≤-20.23	PASS
BLE 1M	Ant.5	2480	0~Reference	-1.54	-1.54	---	PASS
BLE 1M	Ant.5	2480	30~1000	-1.54	-60.71	≤-21.54	PASS
BLE 1M	Ant.5	2480	1000~26500	-1.54	-26.51	≤-21.54	PASS
BLE 2M	Ant.5	2404	0~Reference	-1.19	-1.19	---	PASS
BLE 2M	Ant.5	2404	30~1000	-1.19	-61.05	≤-21.19	PASS
BLE 2M	Ant.5	2404	1000~26500	-1.19	-24.98	≤-21.19	PASS
BLE 2M	Ant.5	2440	0~Reference	-2.76	-2.76	---	PASS
BLE 2M	Ant.5	2440	30~1000	-2.76	-60.58	≤-22.76	PASS
BLE 2M	Ant.5	2440	1000~26500	-2.76	-25.98	≤-22.76	PASS
BLE 2M	Ant.5	2478	0~Reference	-1.88	-1.88	---	PASS
BLE 2M	Ant.5	2478	30~1000	-1.88	-60.57	≤-21.88	PASS
BLE 2M	Ant.5	2478	1000~26500	-1.88	-26.67	≤-21.88	PASS
BLE 125K	Ant.5	2402	0~Reference	-3.39	-3.39	---	PASS
BLE 125K	Ant.5	2402	30~1000	-3.39	-59.9	≤-23.39	PASS
BLE 125K	Ant.5	2402	1000~26500	-3.39	-24.3	≤-23.39	PASS
BLE 125K	Ant.5	2440	0~Reference	-2.88	-2.88	---	PASS
BLE 125K	Ant.5	2440	30~1000	-2.88	-60.64	≤-22.88	PASS
BLE 125K	Ant.5	2440	1000~26500	-2.88	-25.7	≤-22.88	PASS
BLE 125K	Ant.5	2480	0~Reference	-3.29	-3.29	---	PASS
BLE 125K	Ant.5	2480	30~1000	-3.29	-60.69	≤-23.29	PASS
BLE 125K	Ant.5	2480	1000~26500	-3.29	-26.16	≤-23.29	PASS
BLE 500K	Ant.5	2402	0~Reference	-1.91	-1.91	---	PASS
BLE 500K	Ant.5	2402	30~1000	-1.91	-60.8	≤-21.91	PASS
BLE 500K	Ant.5	2402	1000~26500	-1.91	-24.98	≤-21.91	PASS
BLE 500K	Ant.5	2440	0~Reference	-1.00	-1.00	---	PASS
BLE 500K	Ant.5	2440	30~1000	-1.00	-60.57	≤-21	PASS
BLE 500K	Ant.5	2440	1000~26500	-1.00	-25.84	≤-21	PASS
BLE 500K	Ant.5	2480	0~Reference	-0.51	-0.51	---	PASS
BLE 500K	Ant.5	2480	30~1000	-0.51	-60.71	≤-20.51	PASS
BLE 500K	Ant.5	2480	1000~26500	-0.51	-26.54	≤-20.51	PASS

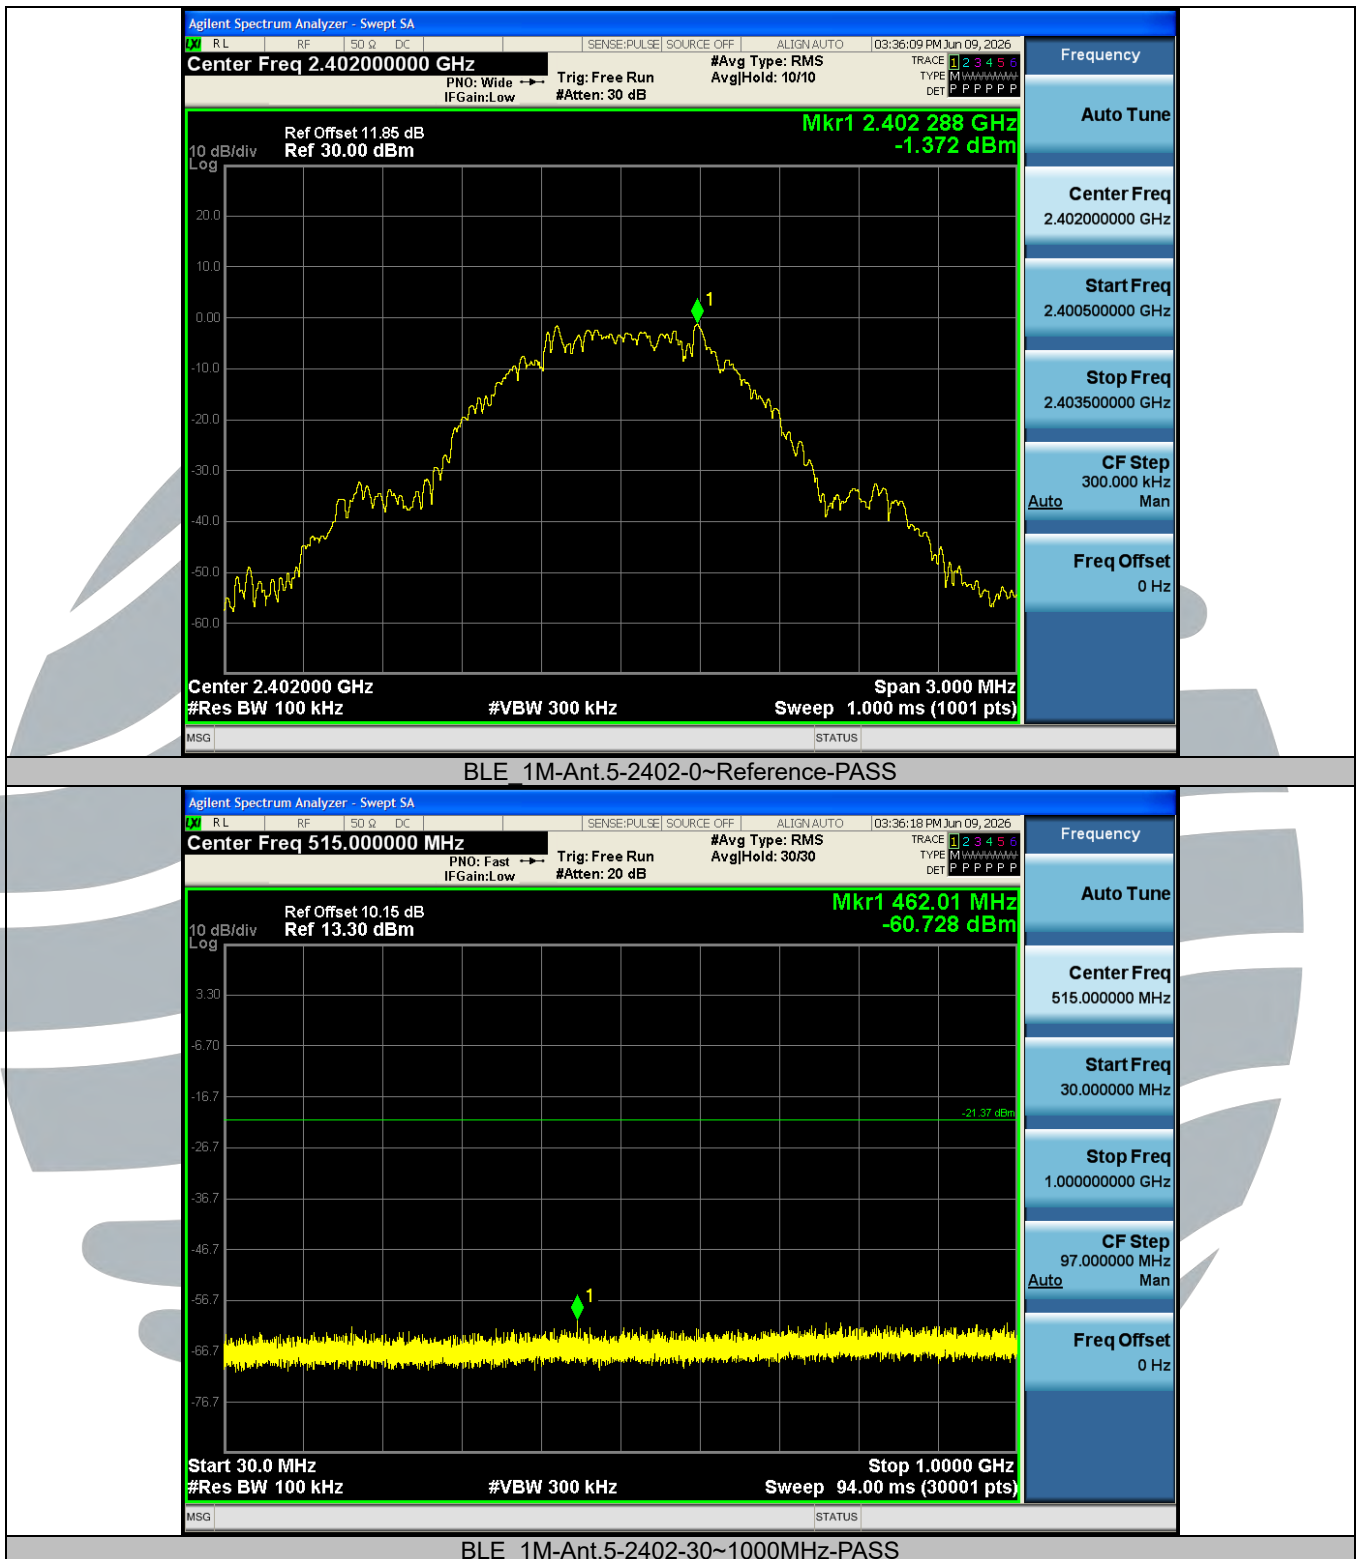

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

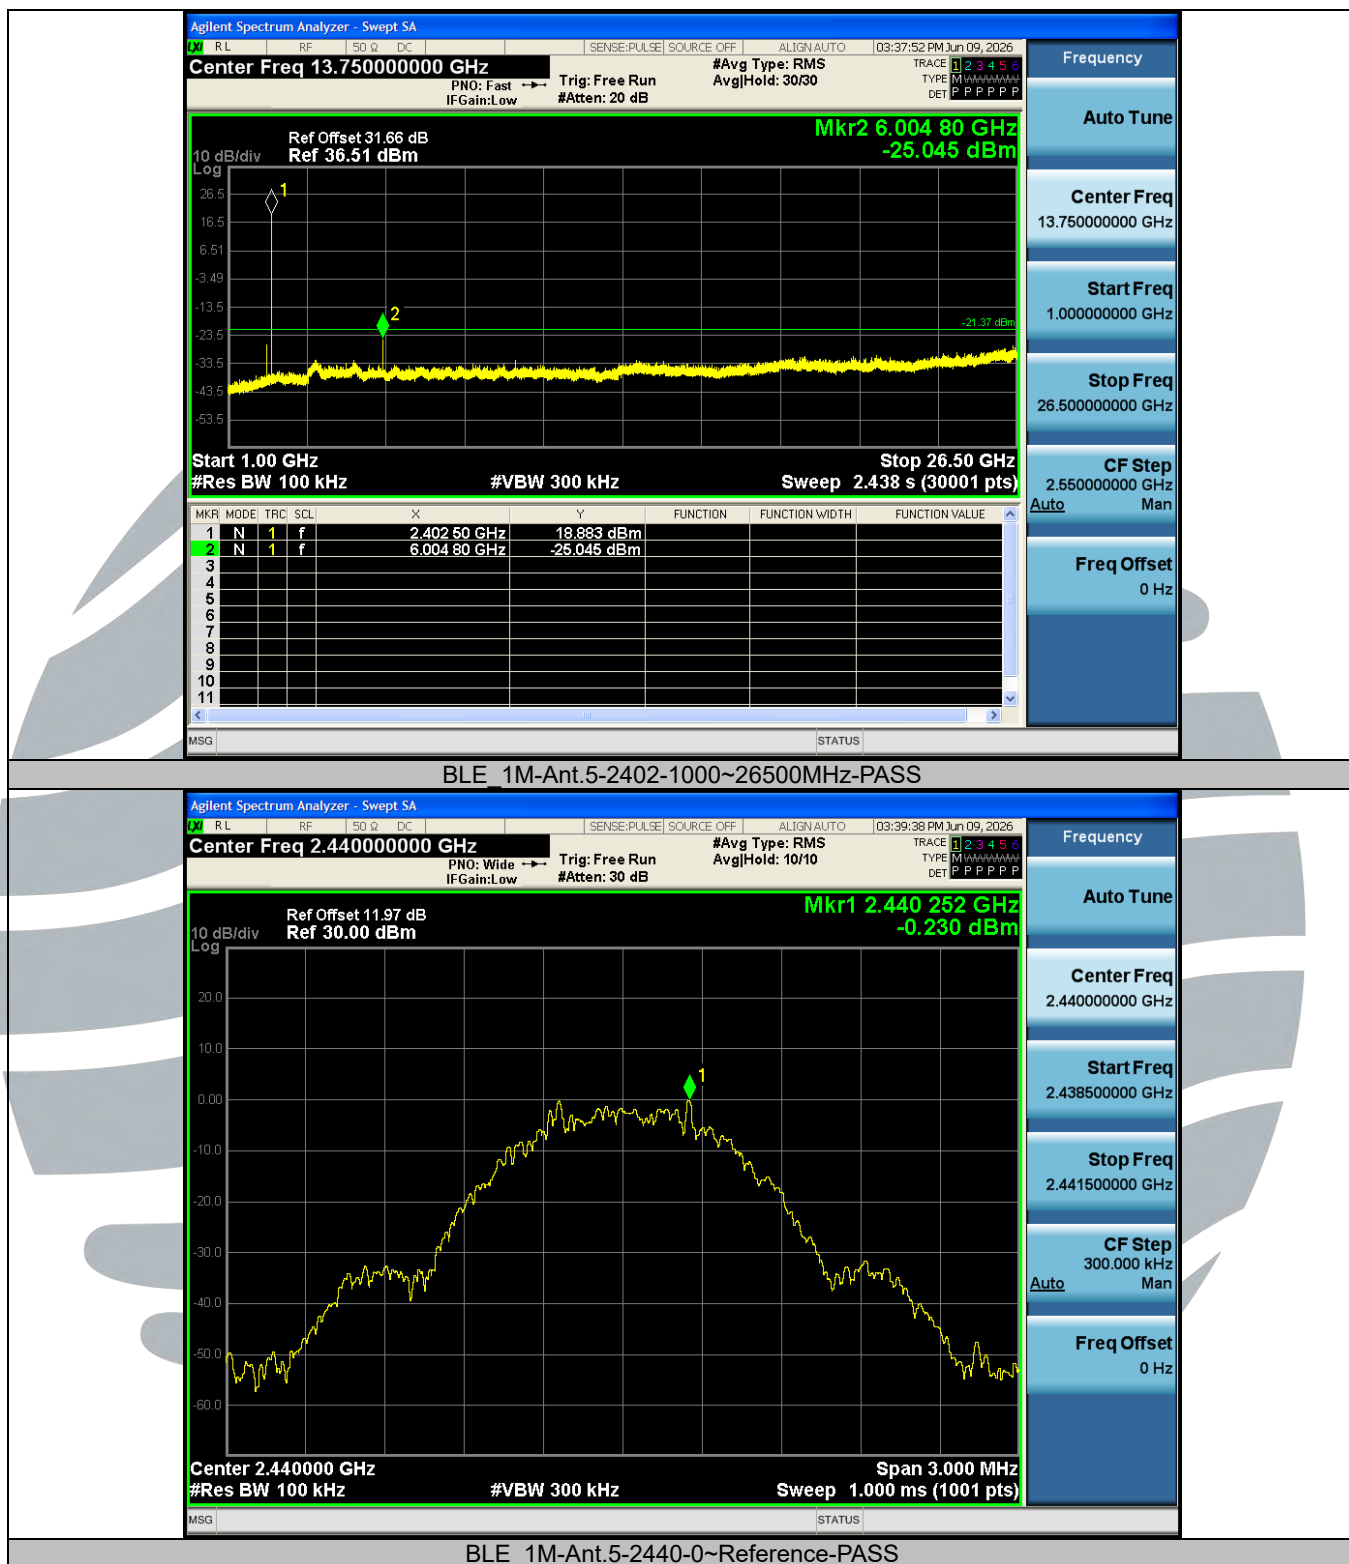

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

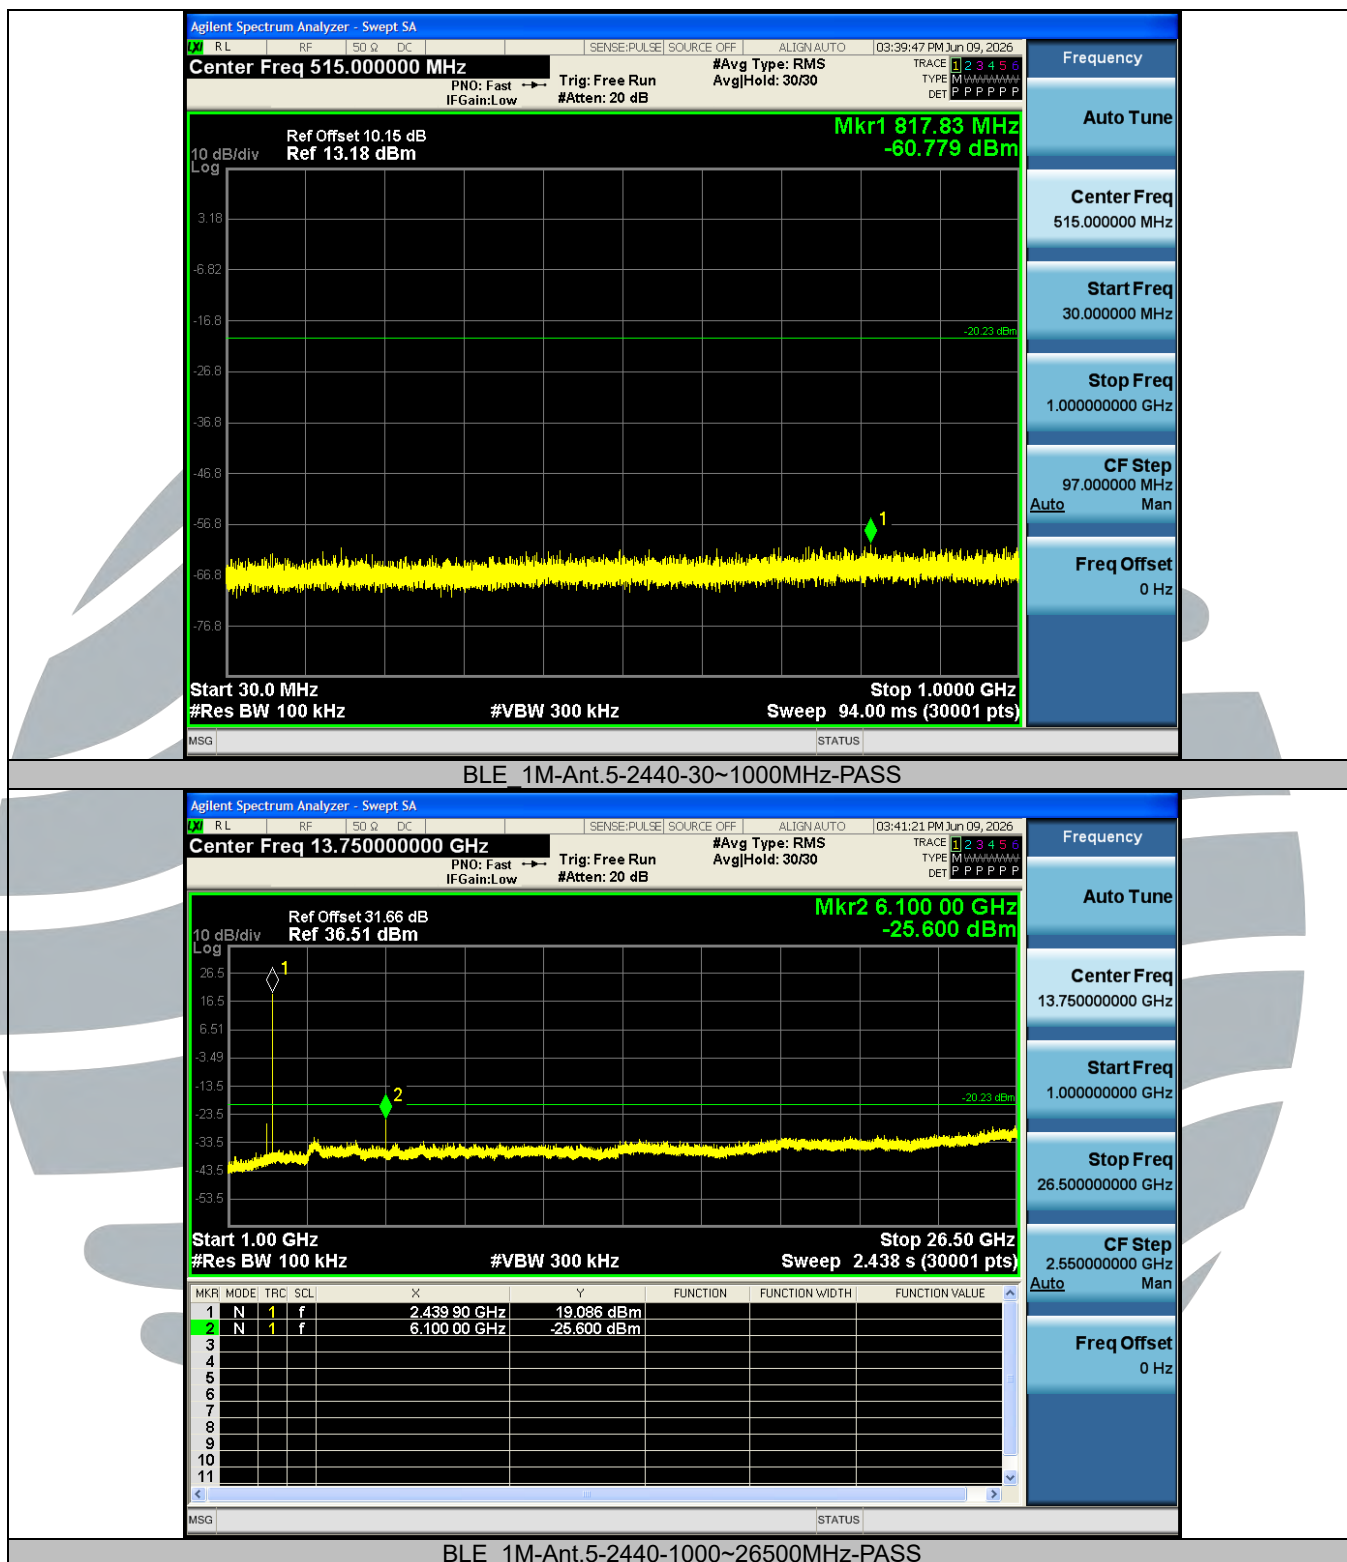

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

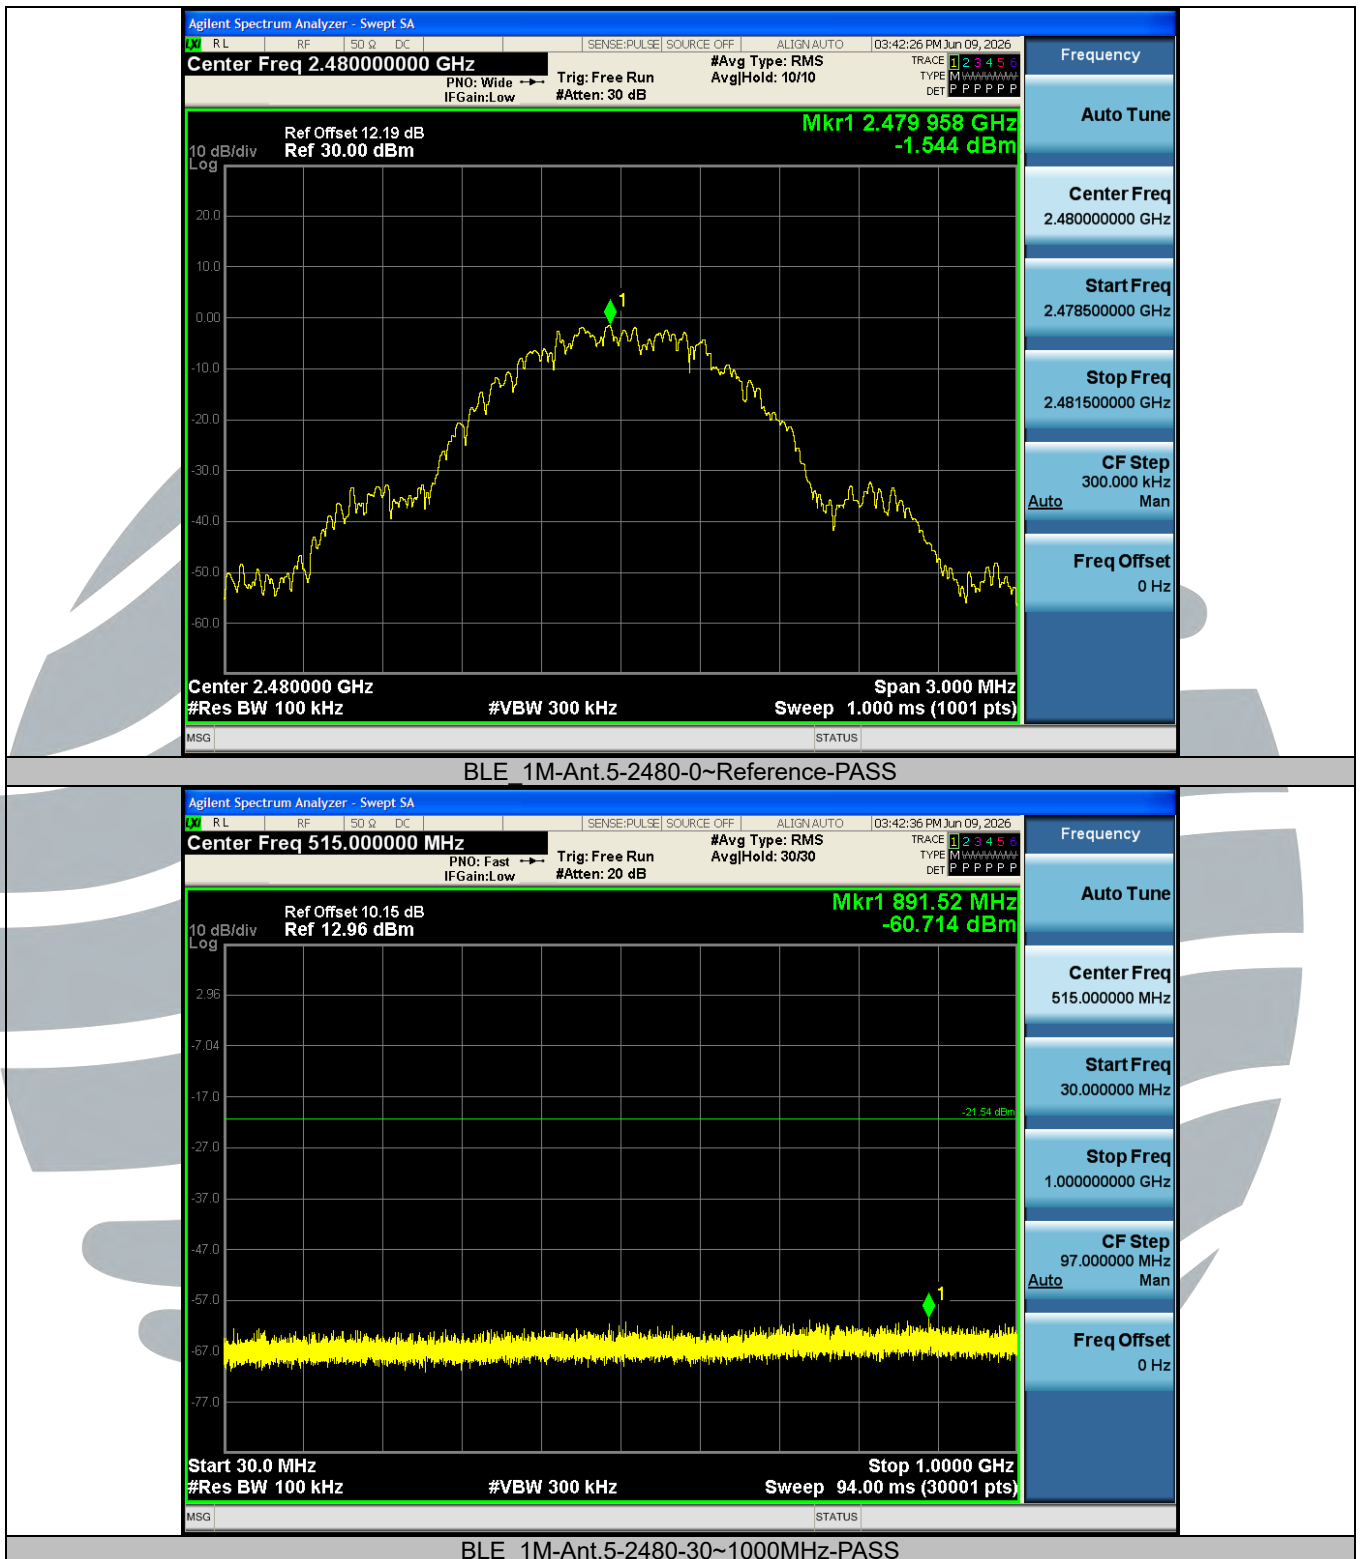

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

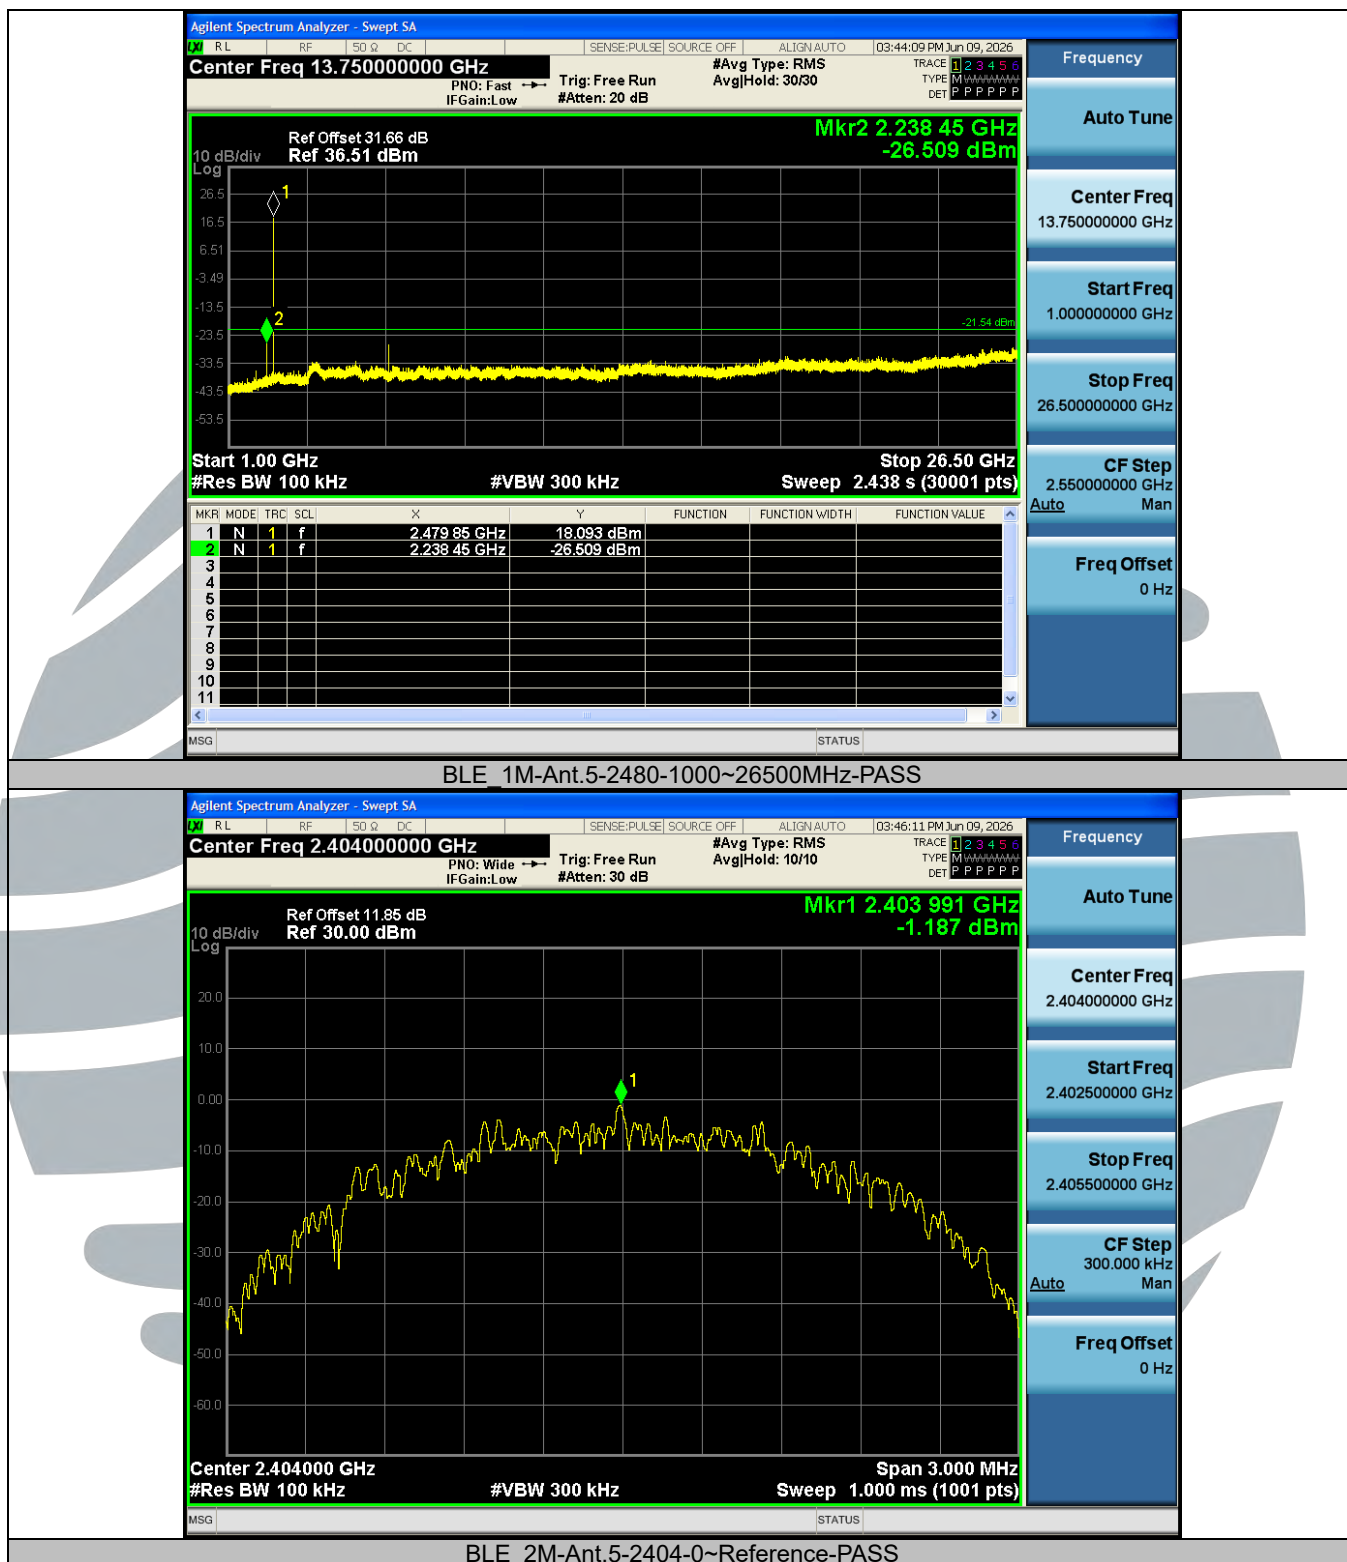

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

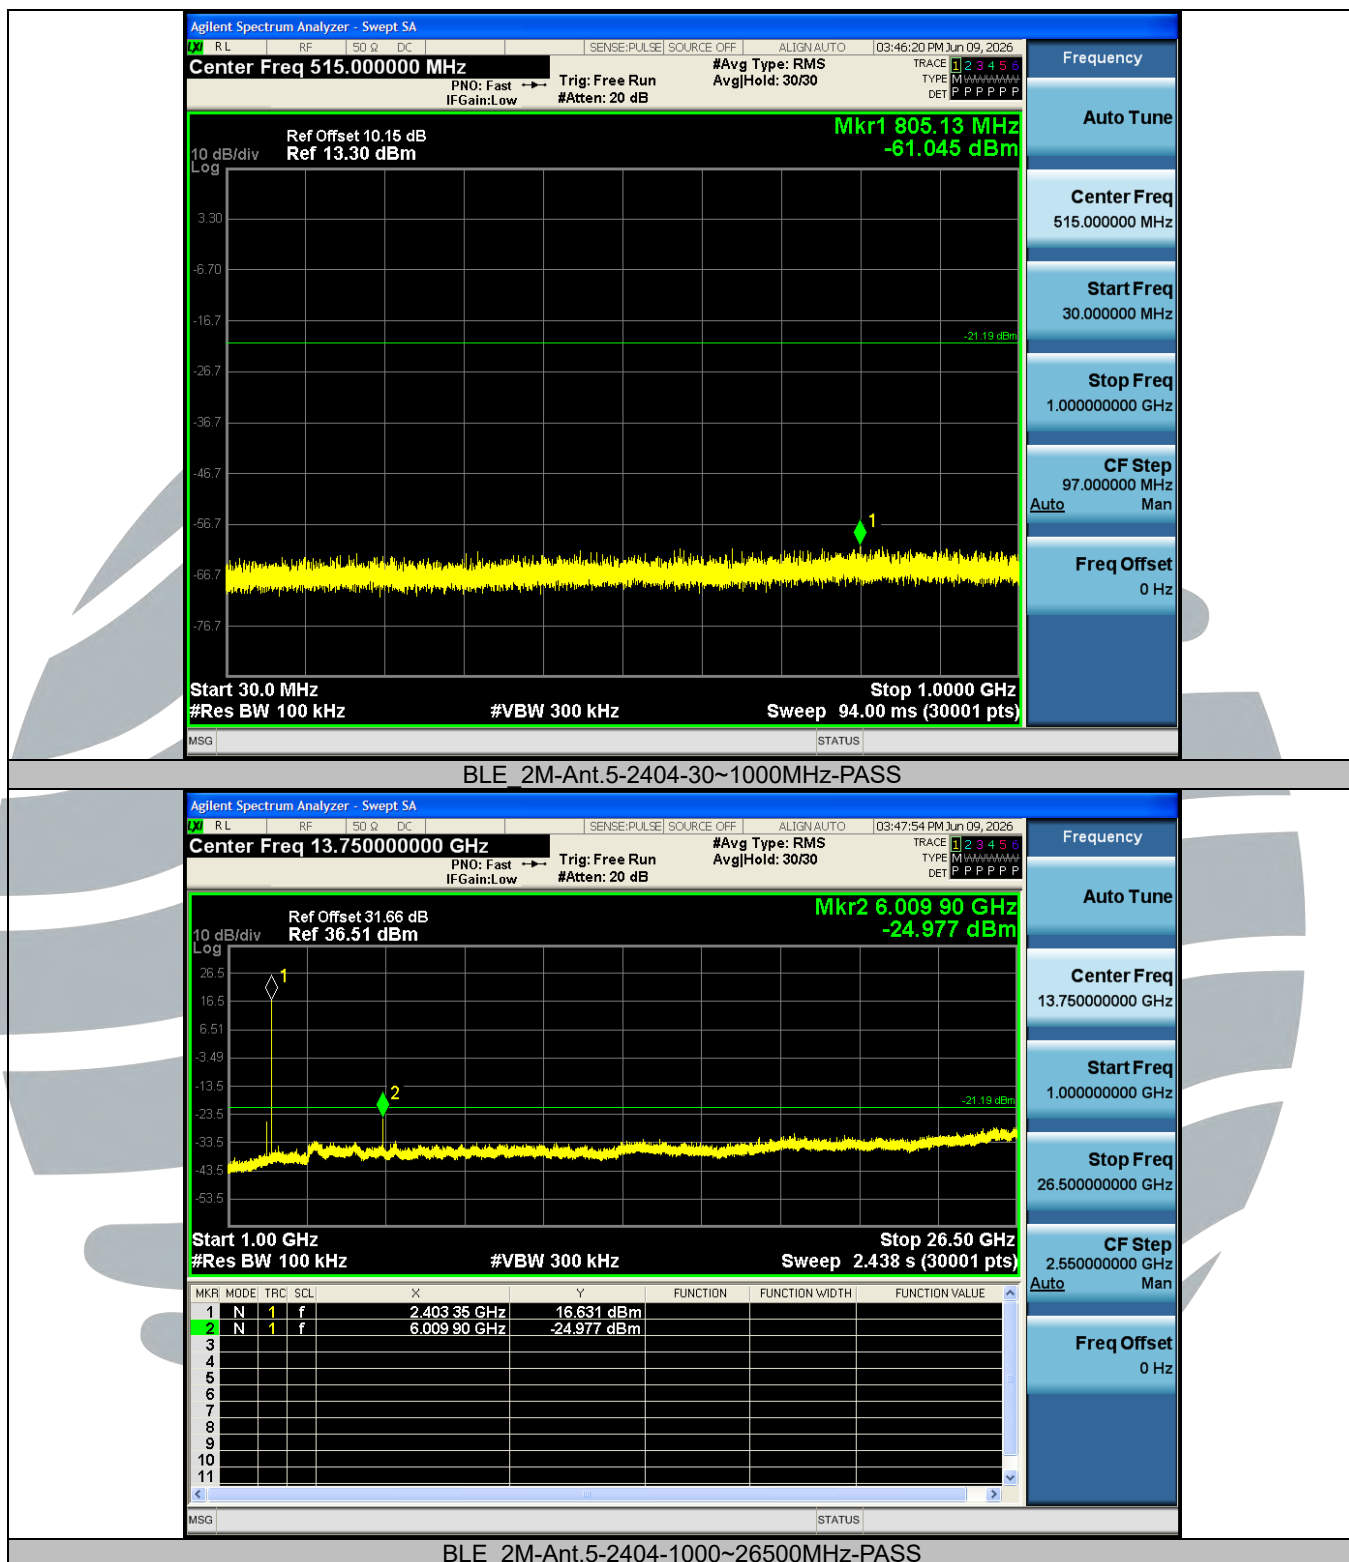

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

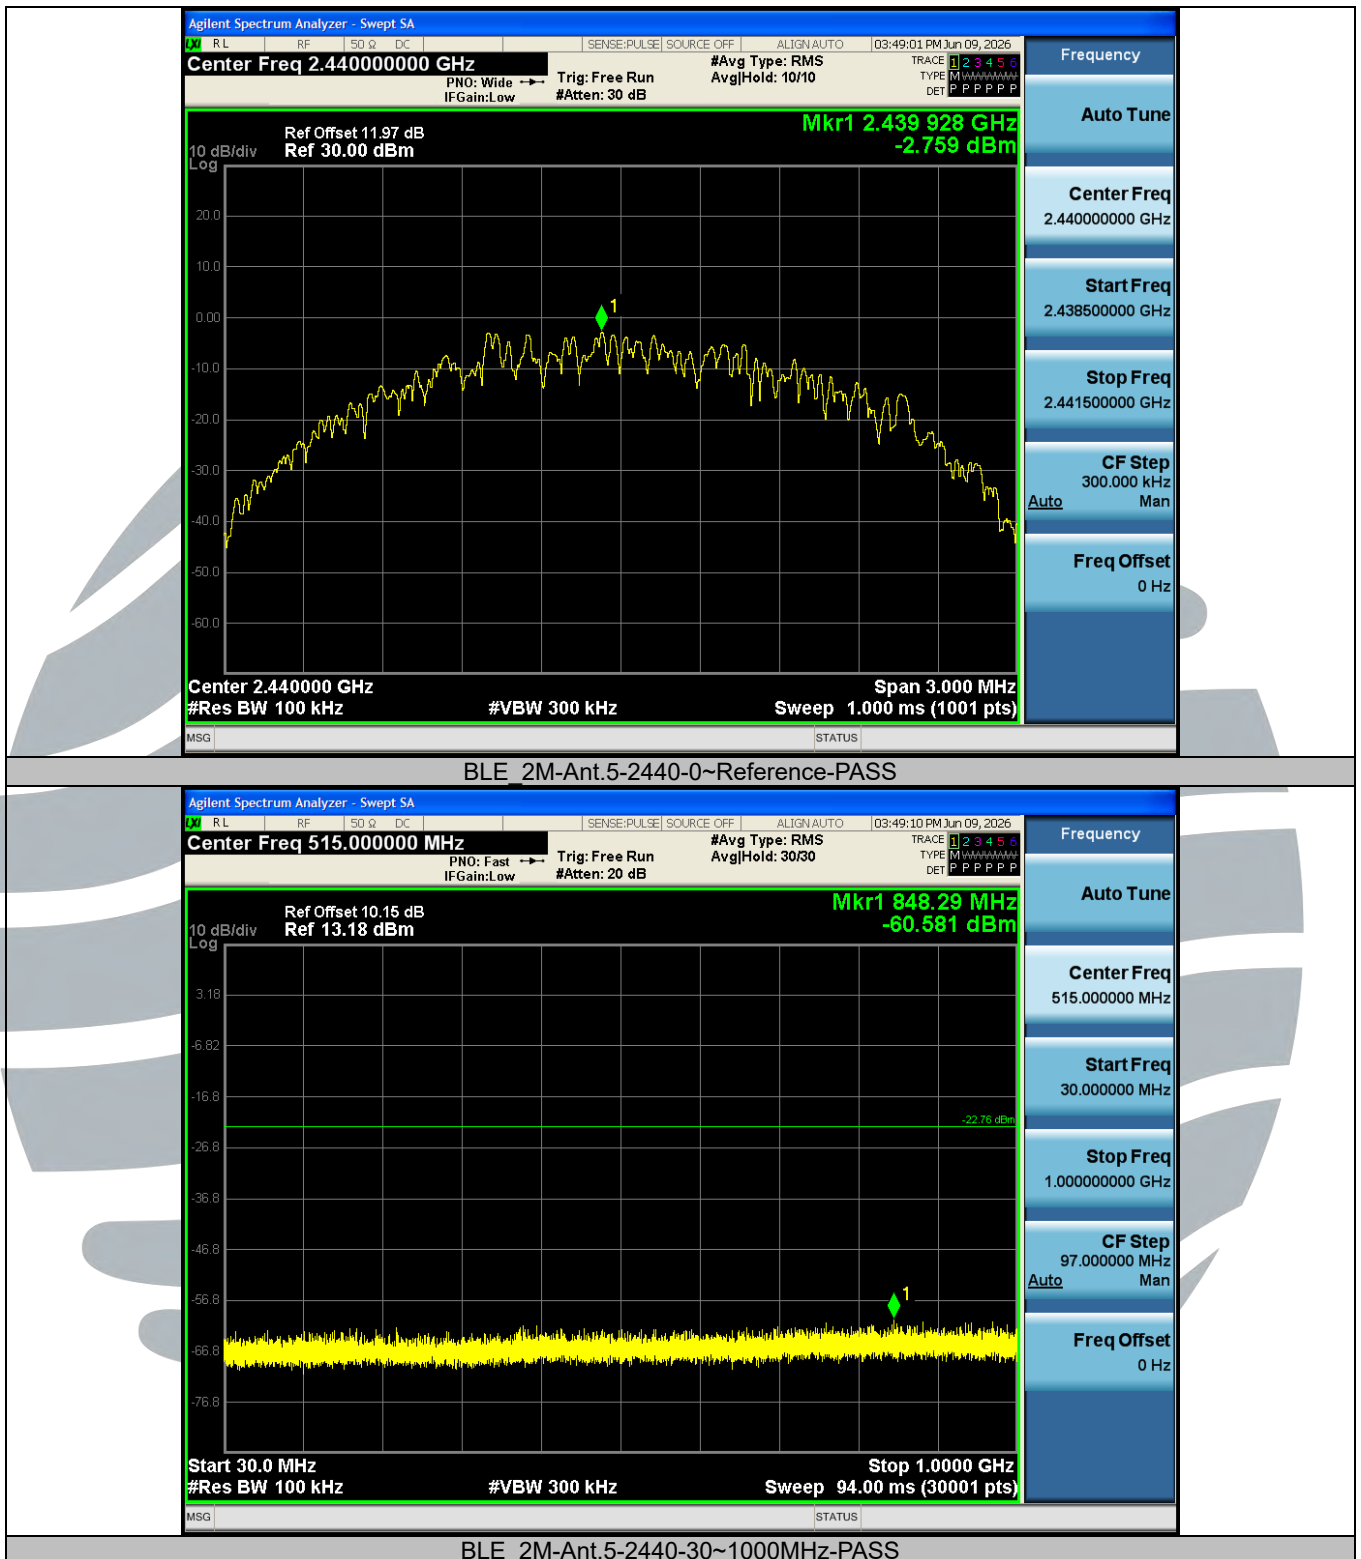

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

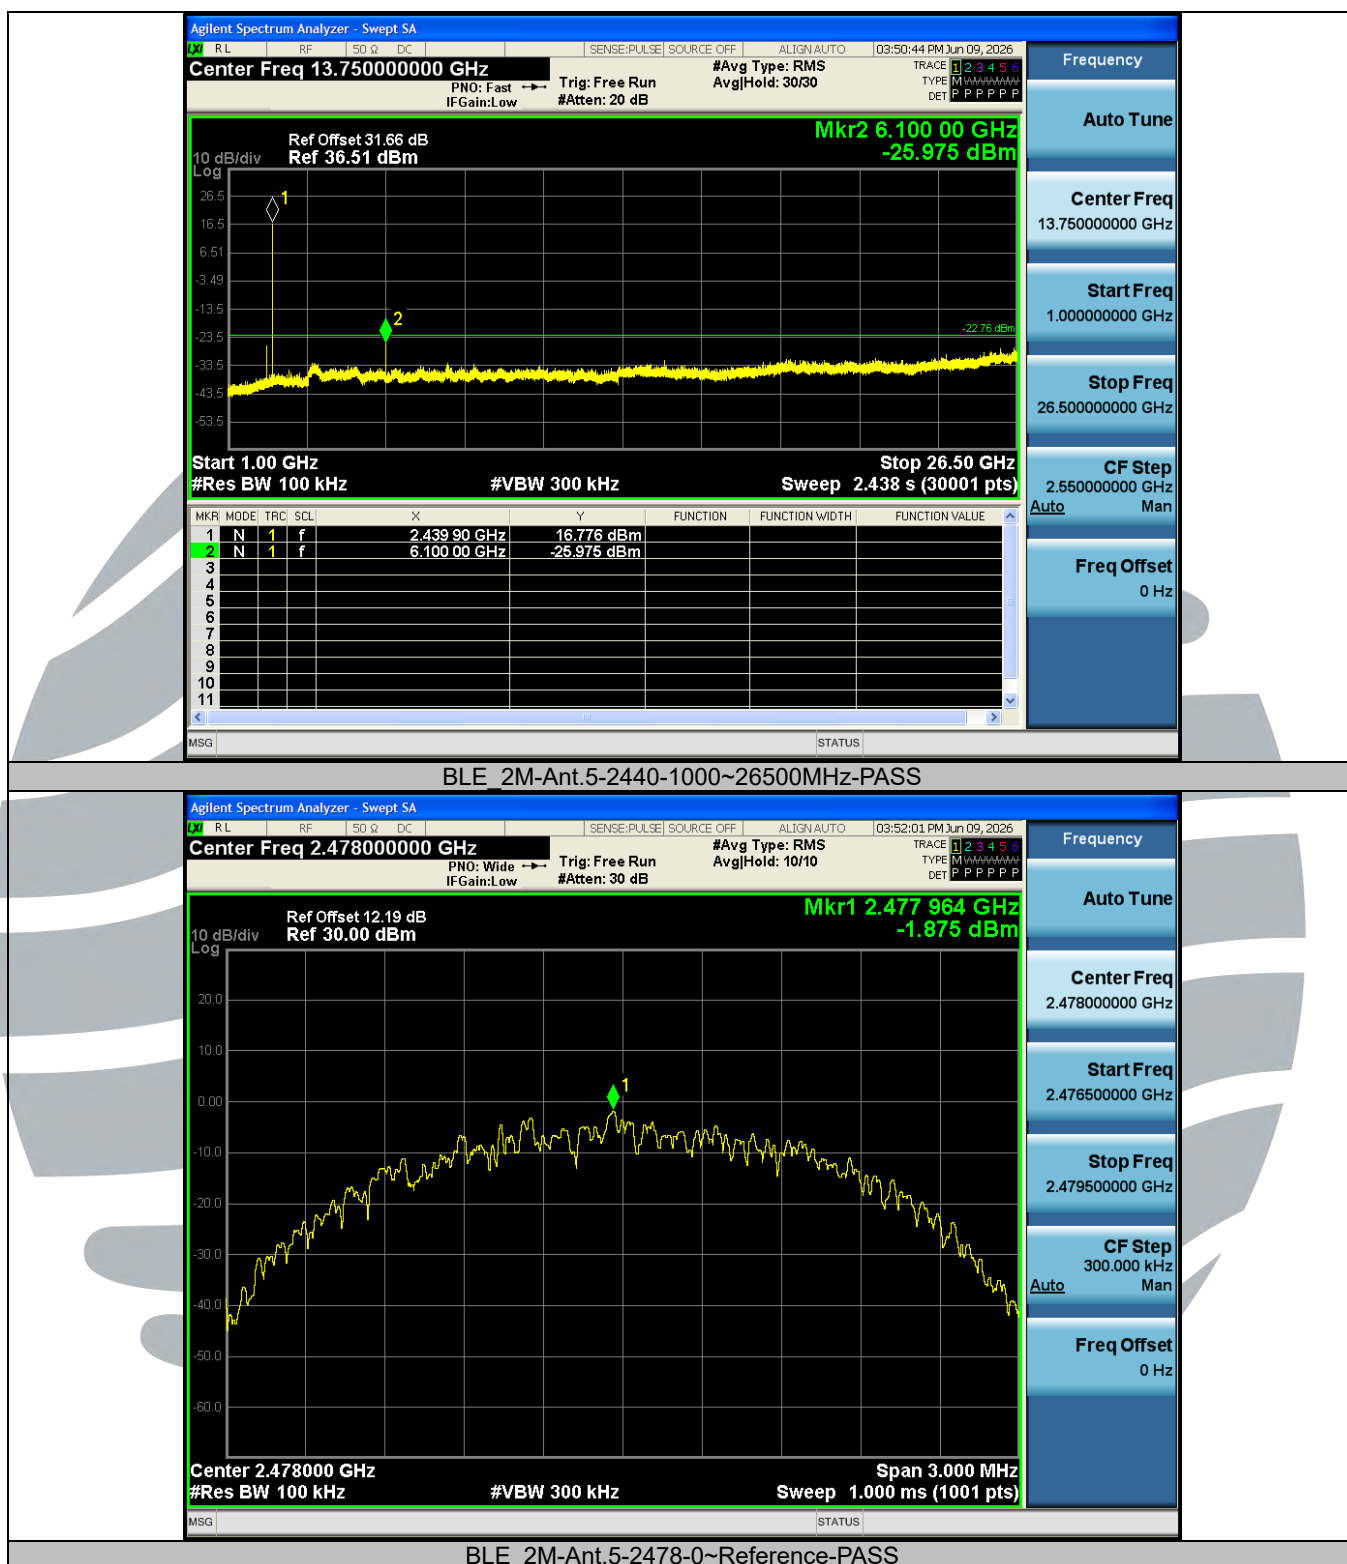

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

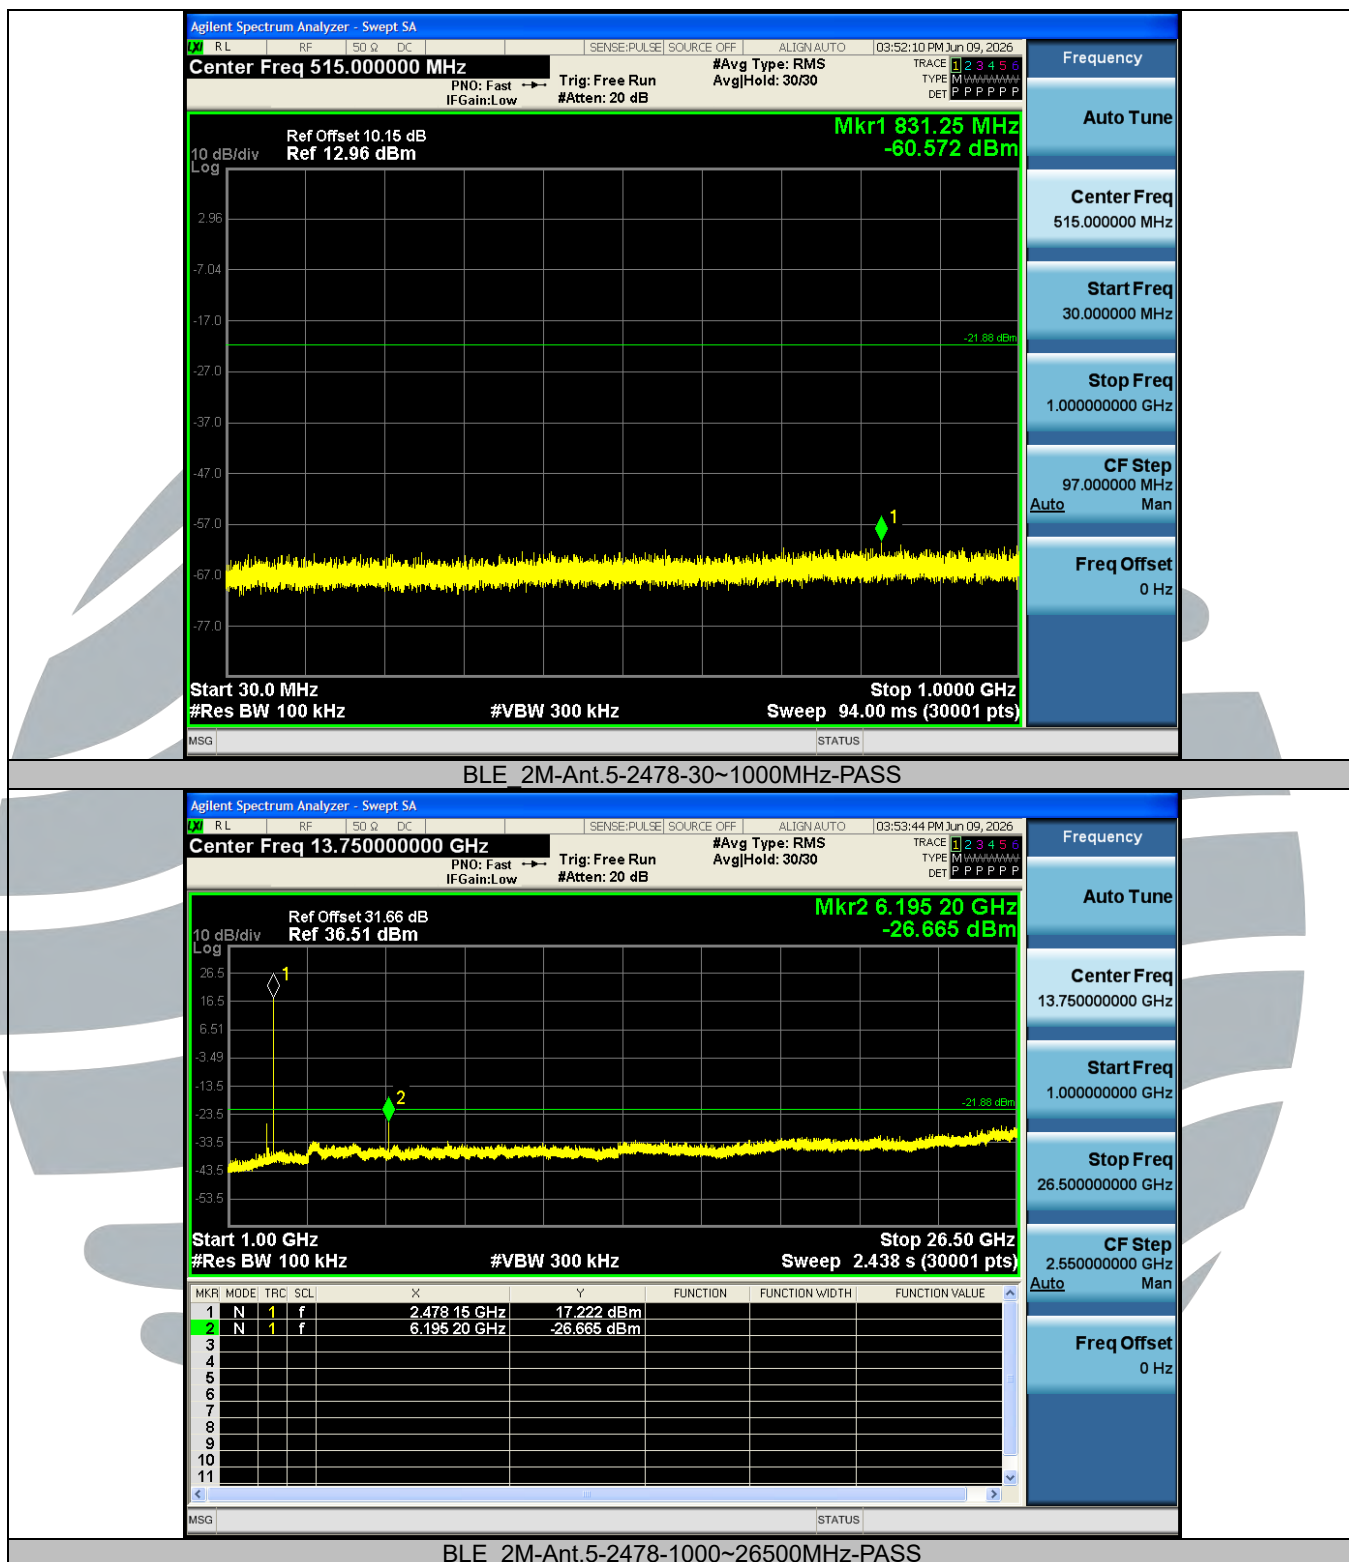

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

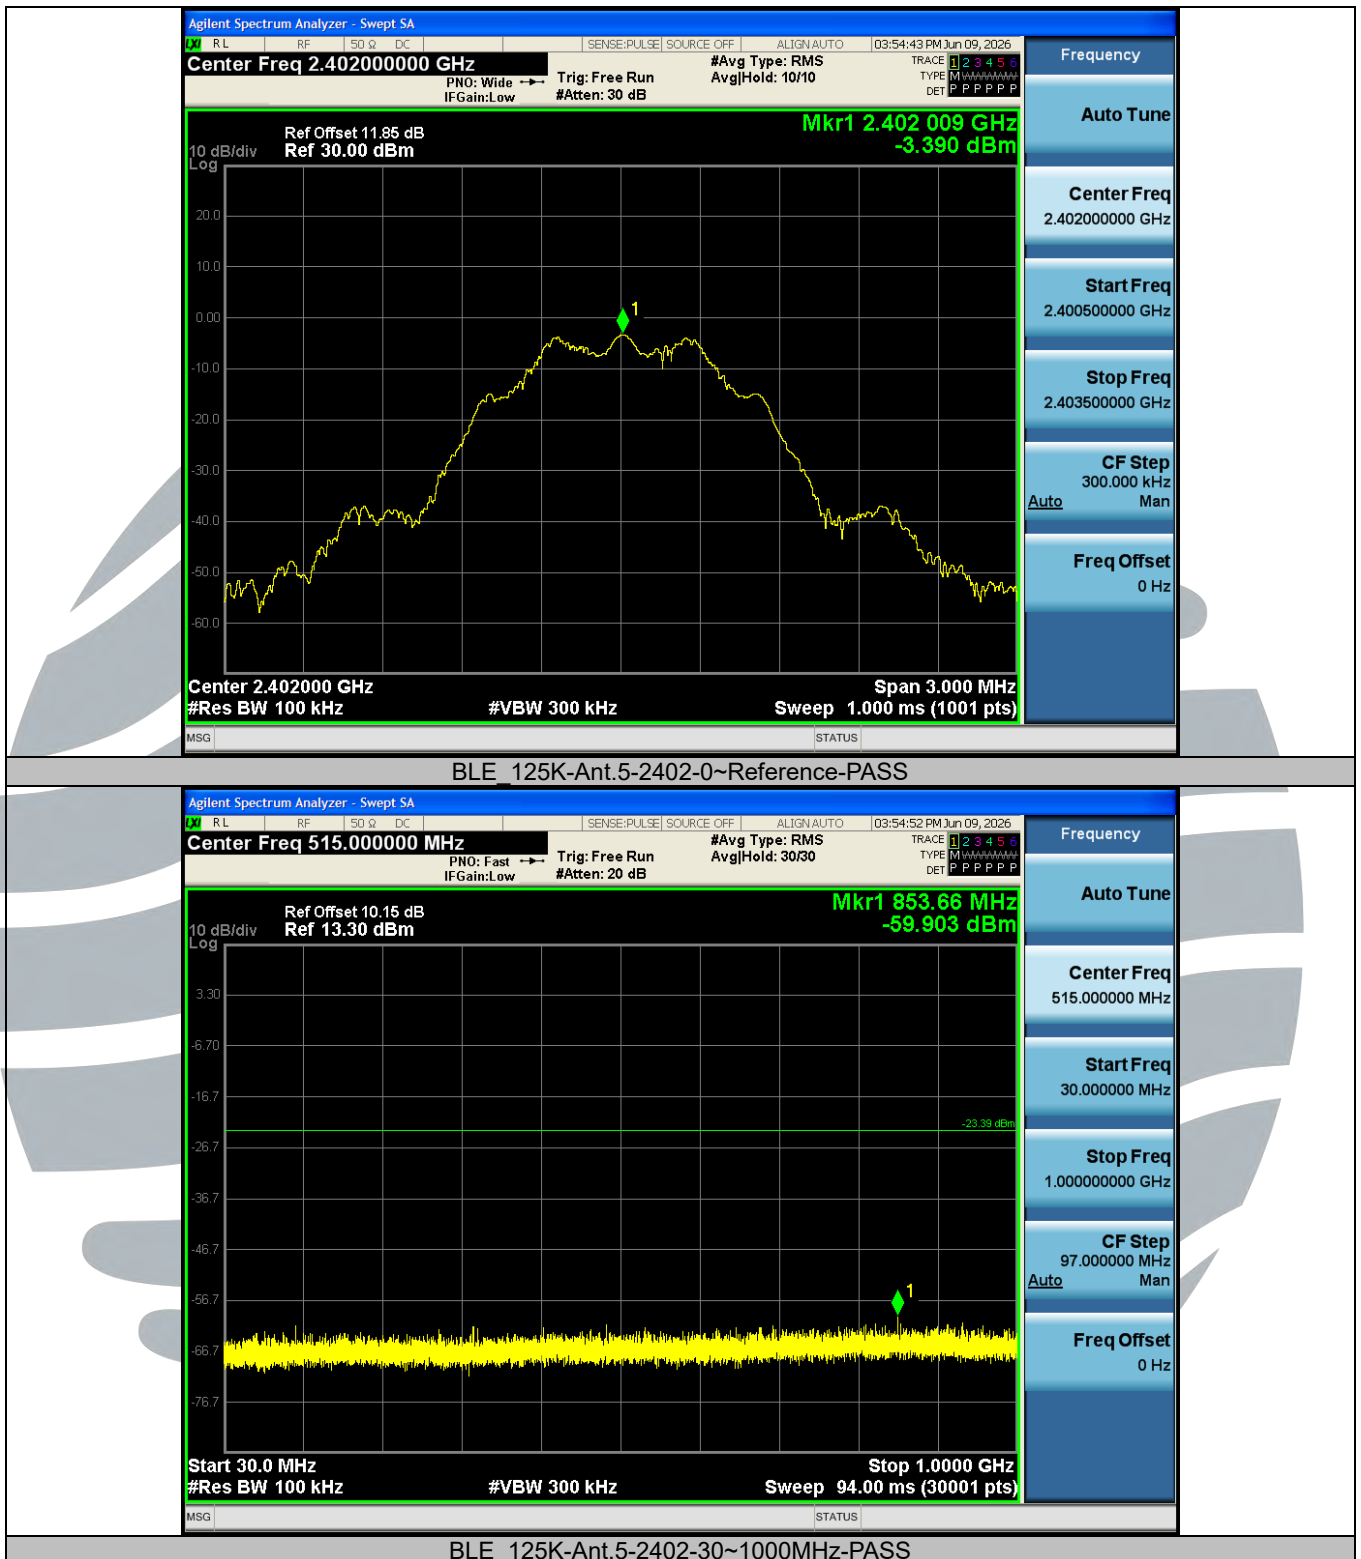

Shenzhen UnionTrust Quality and Technology Co., Ltd.


Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

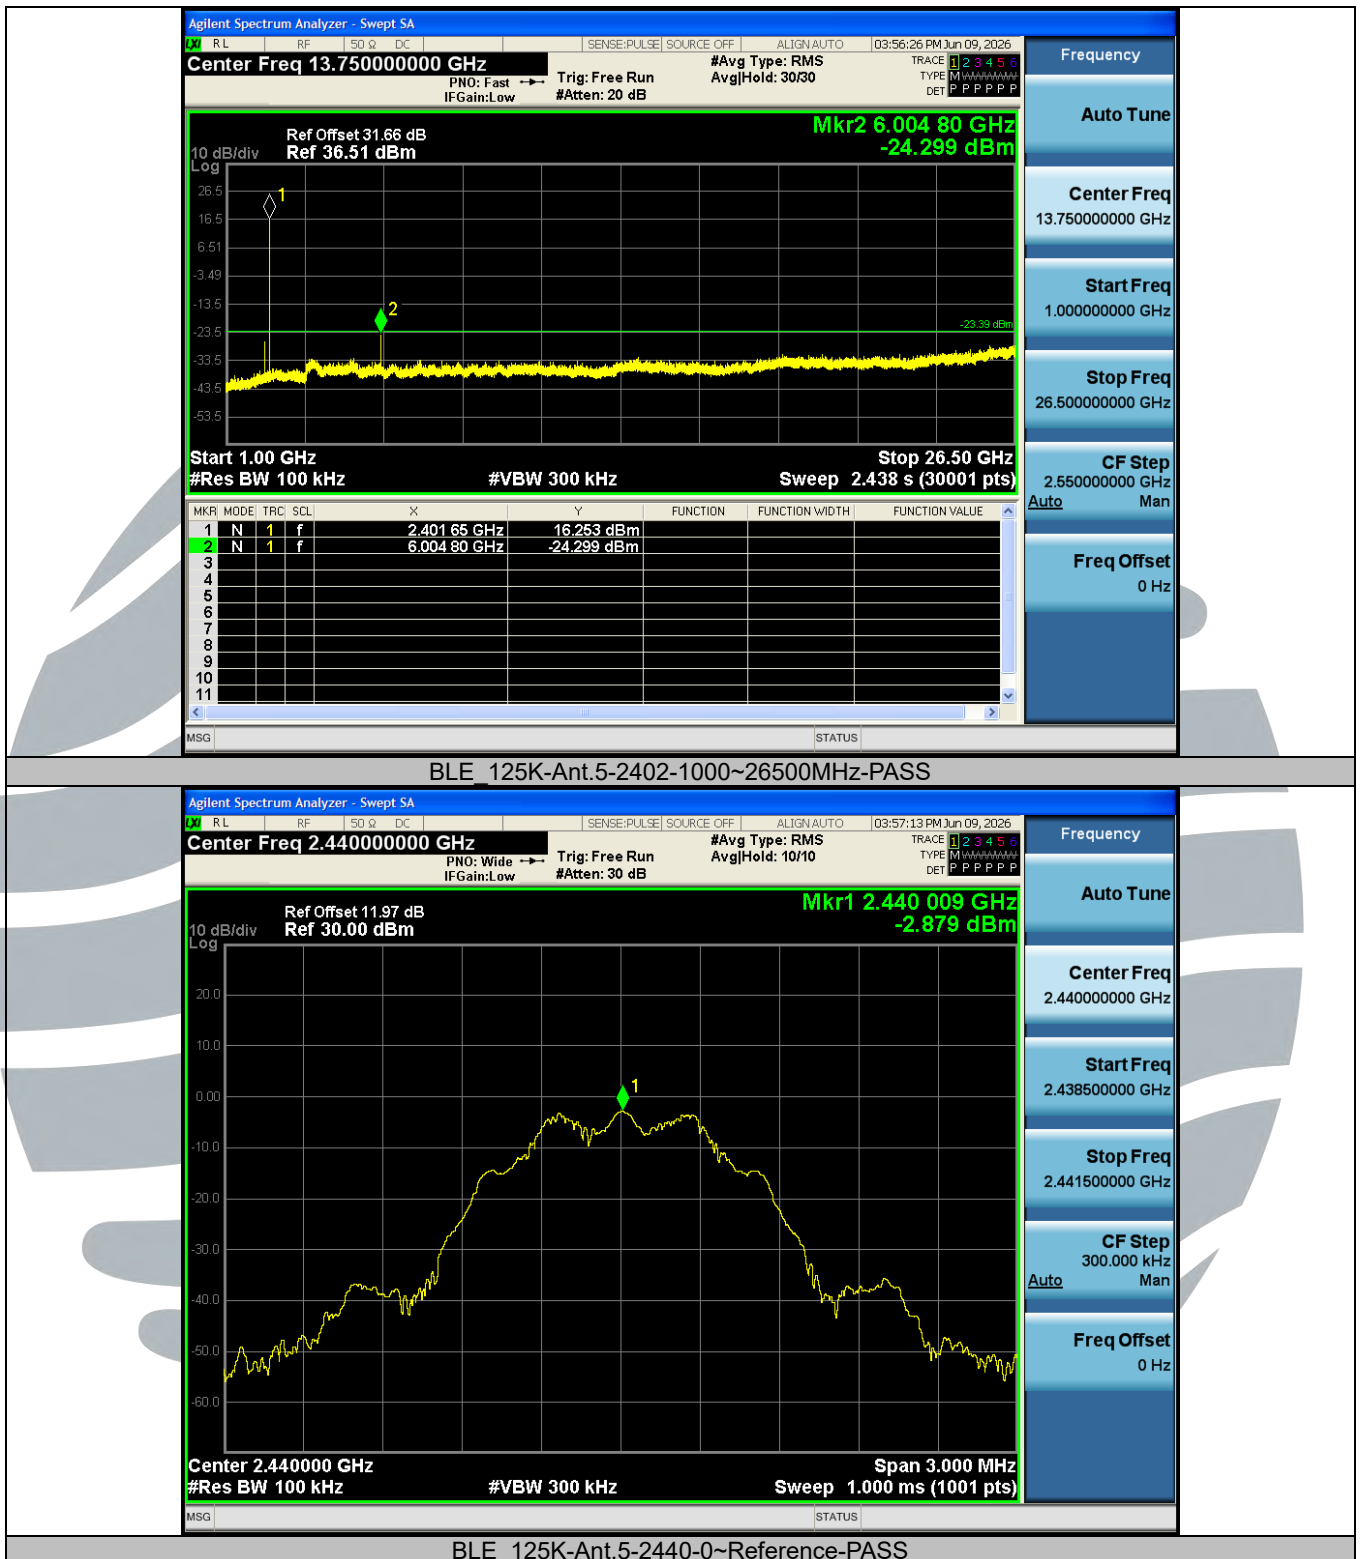

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

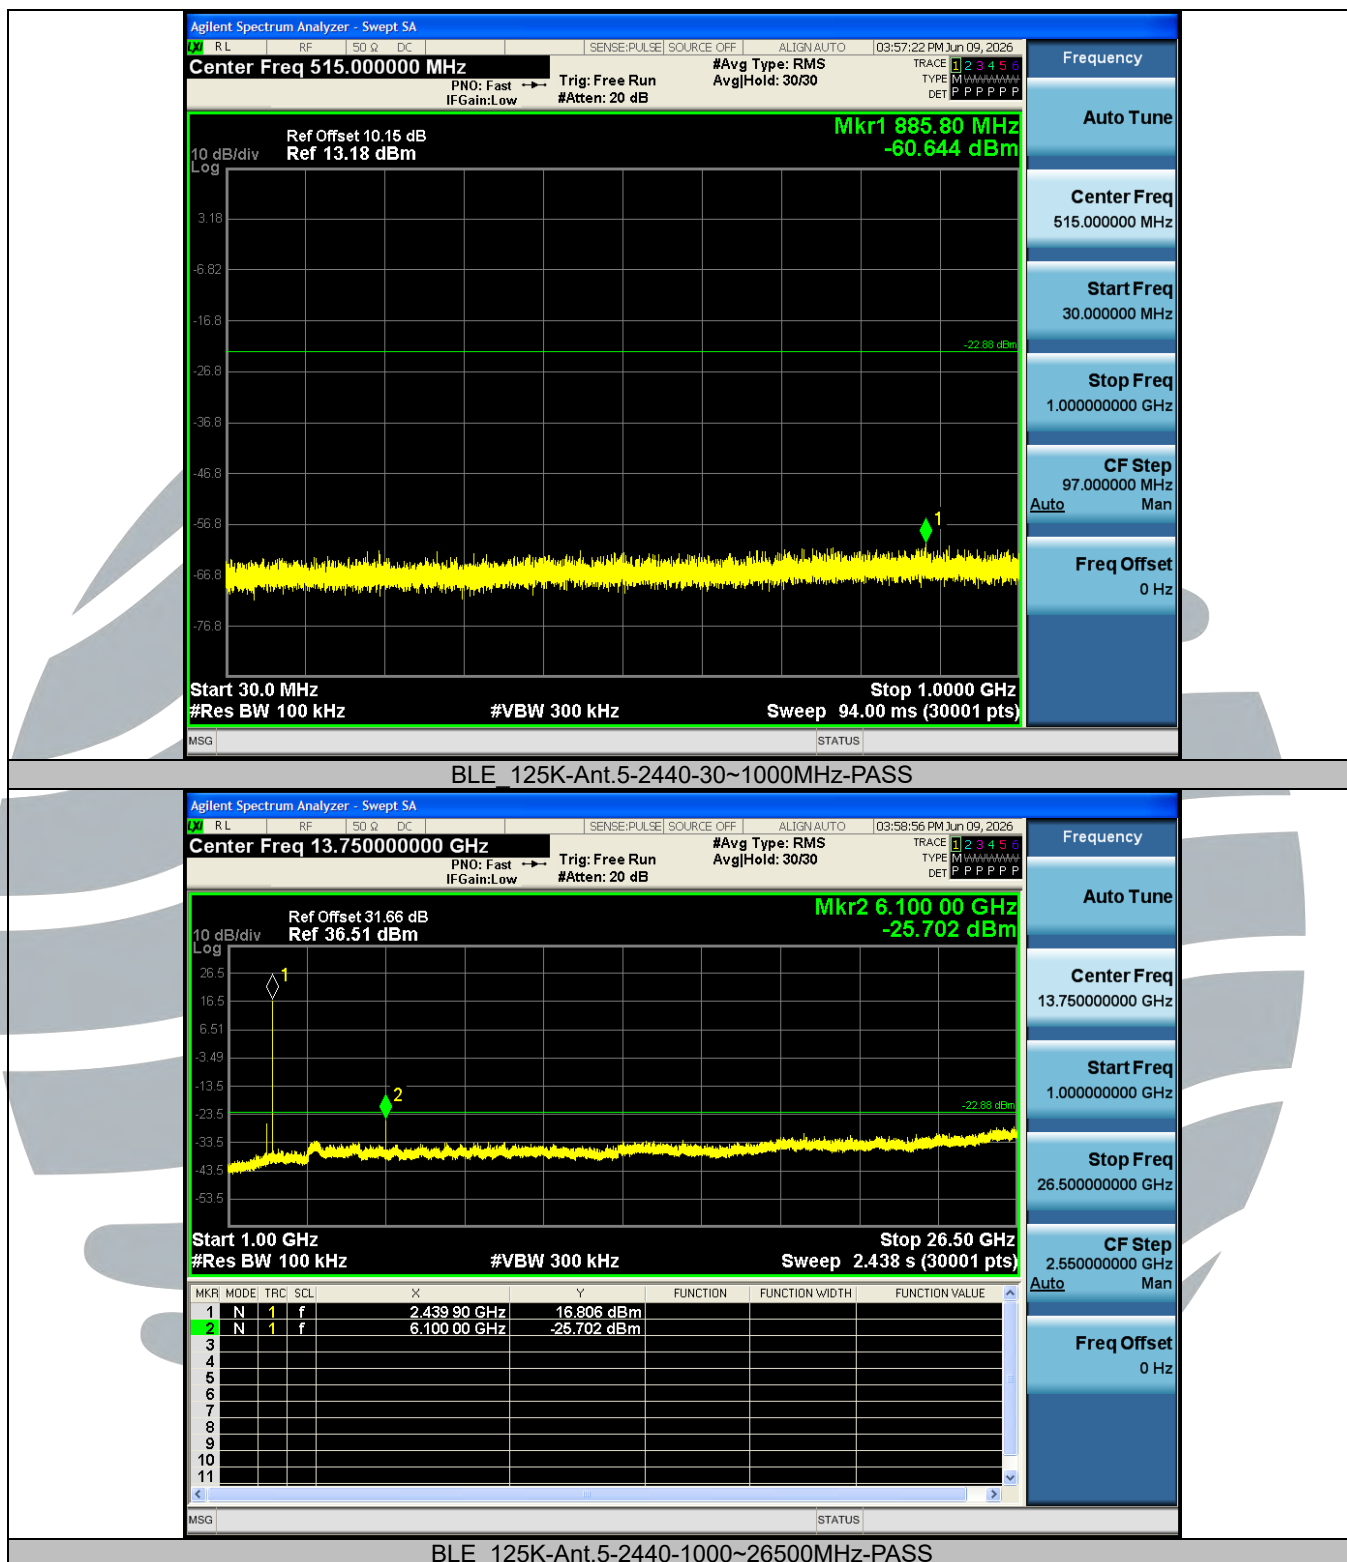**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

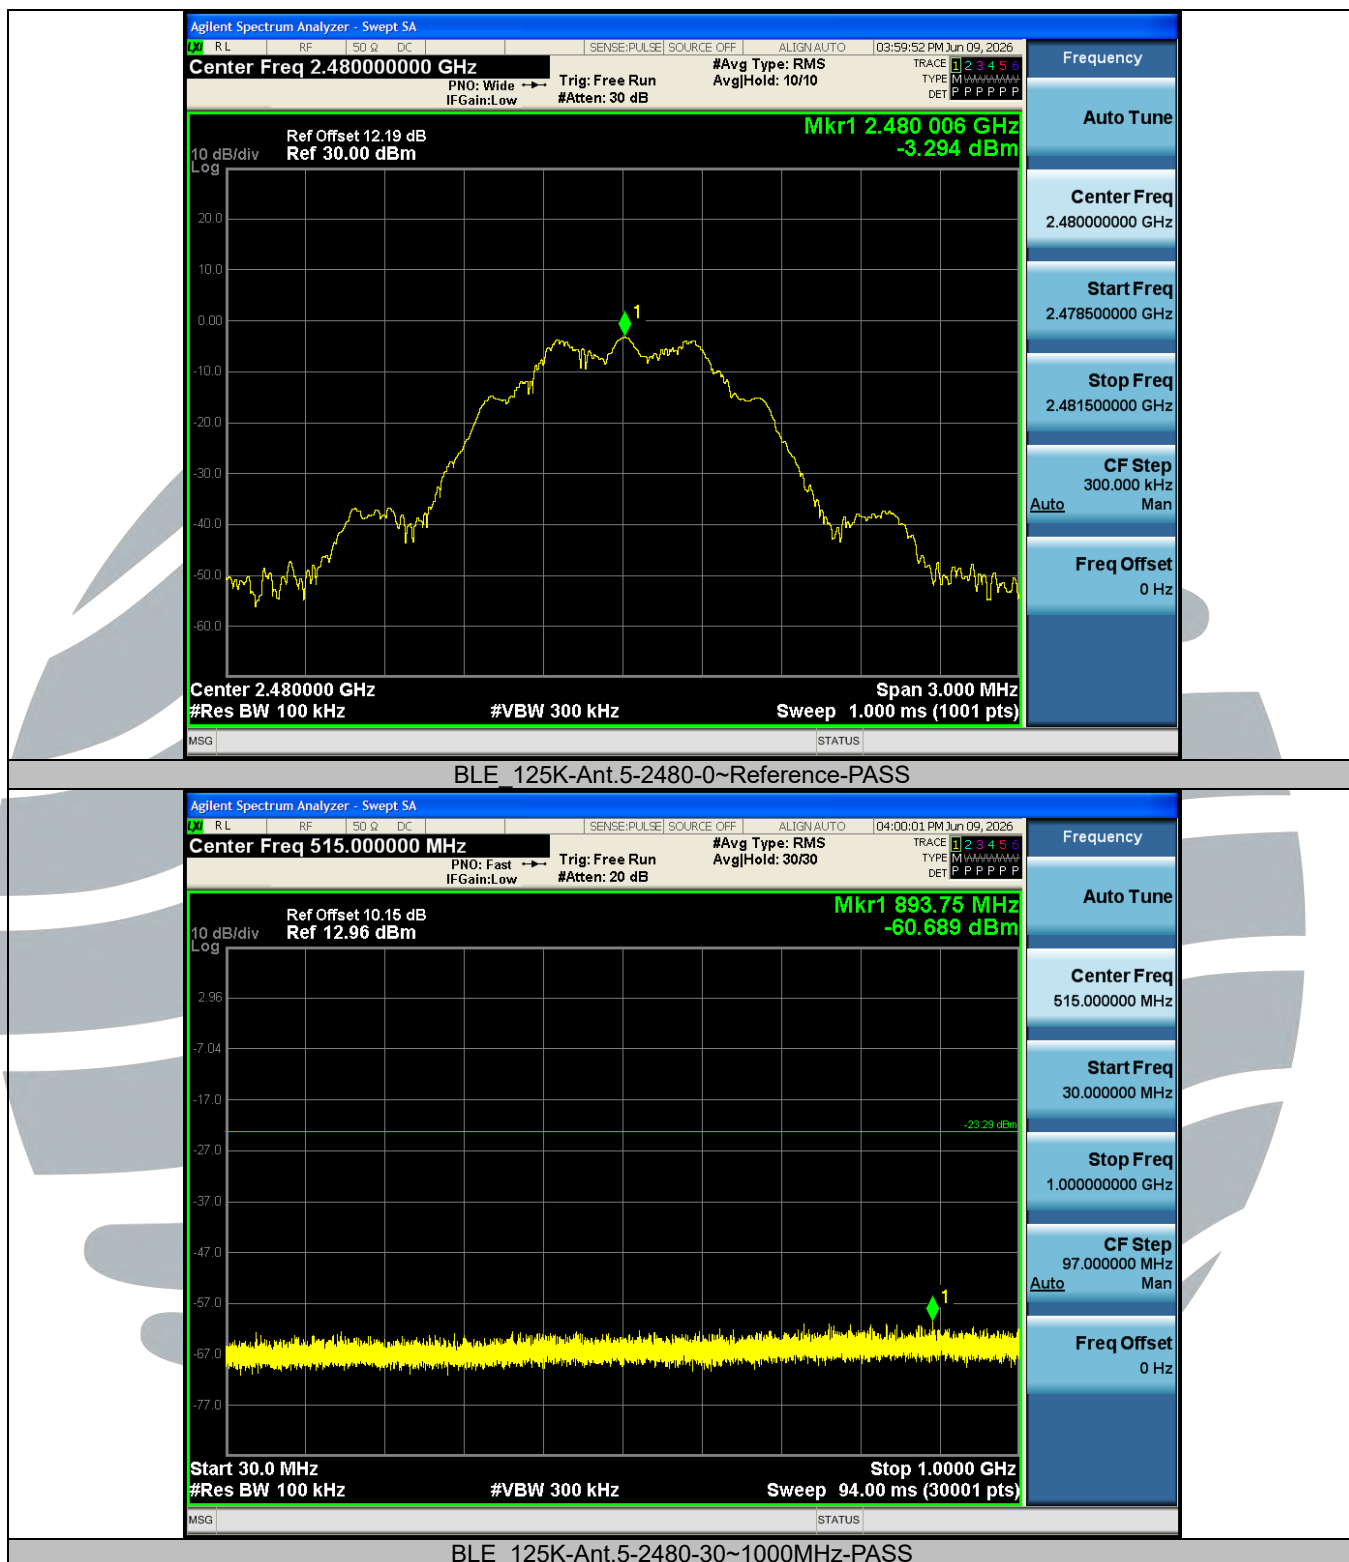

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

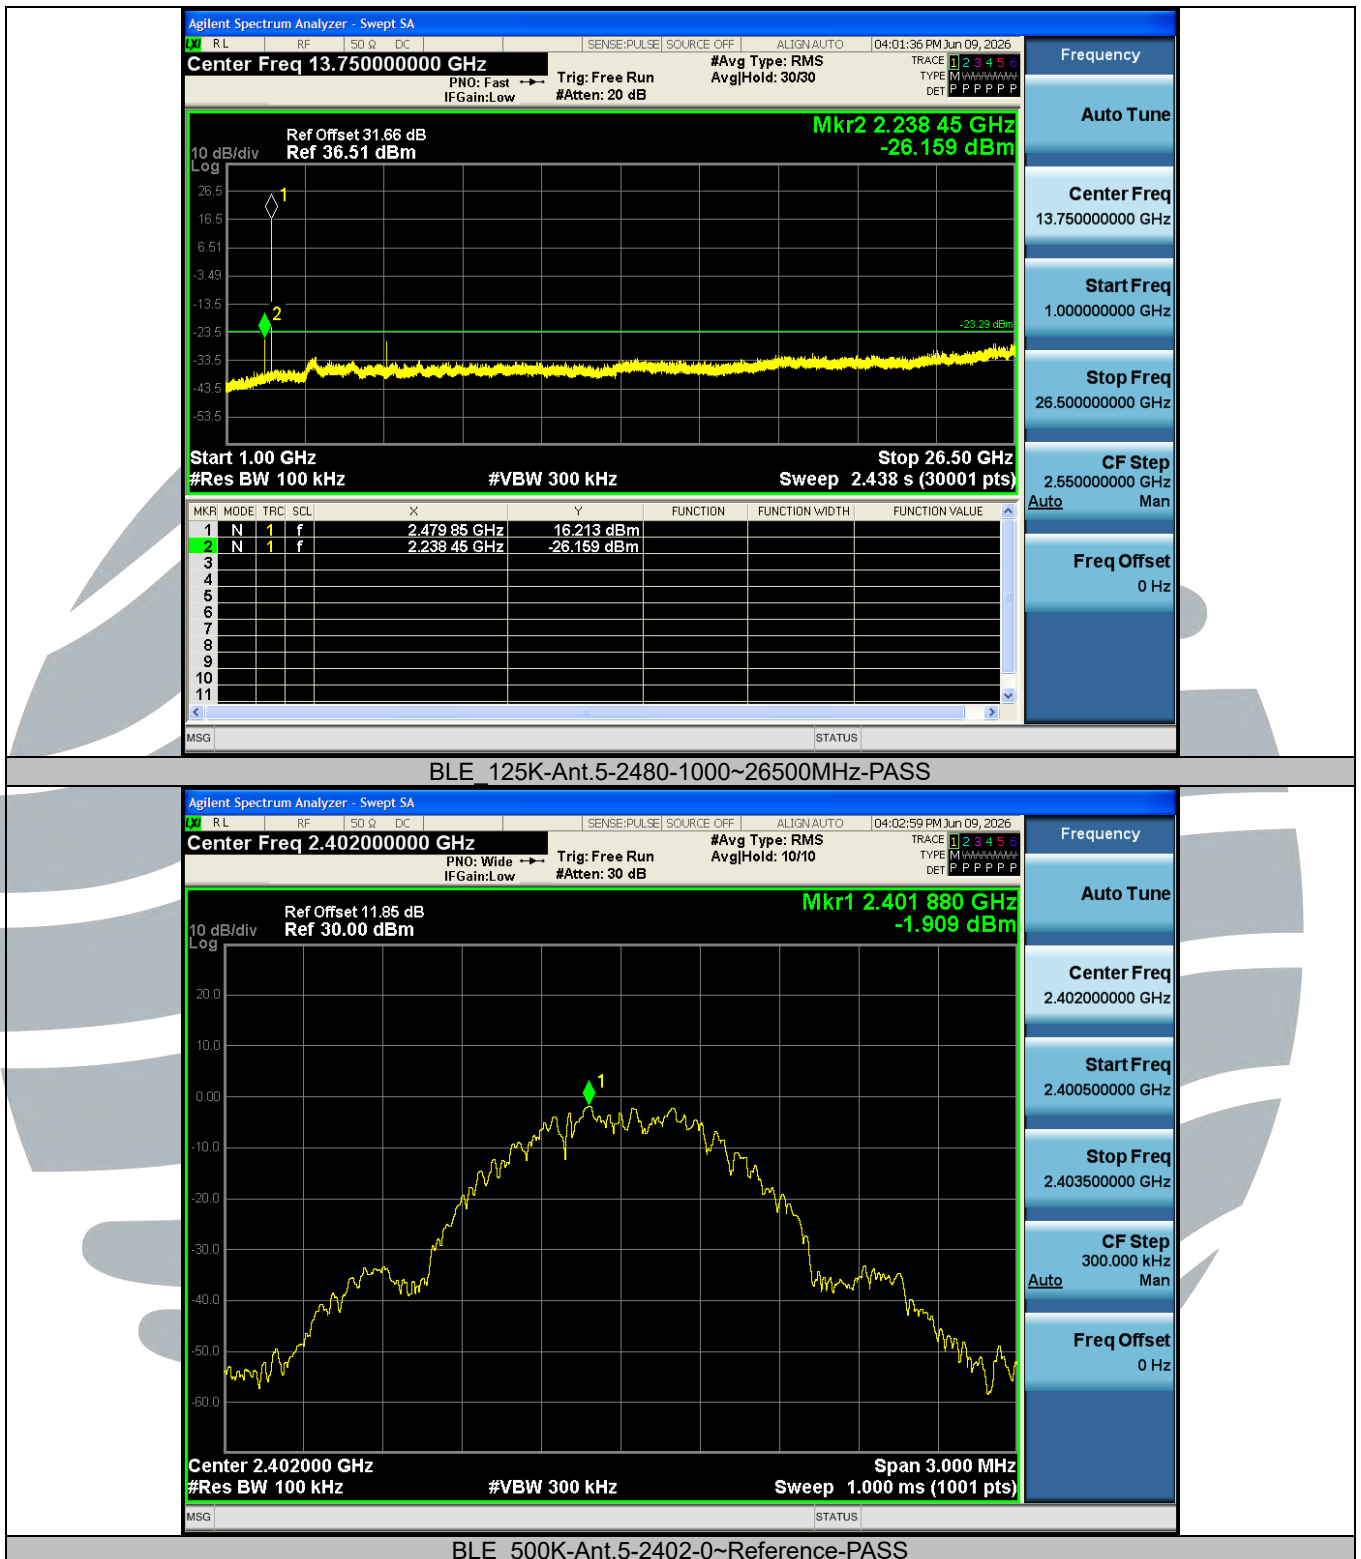

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

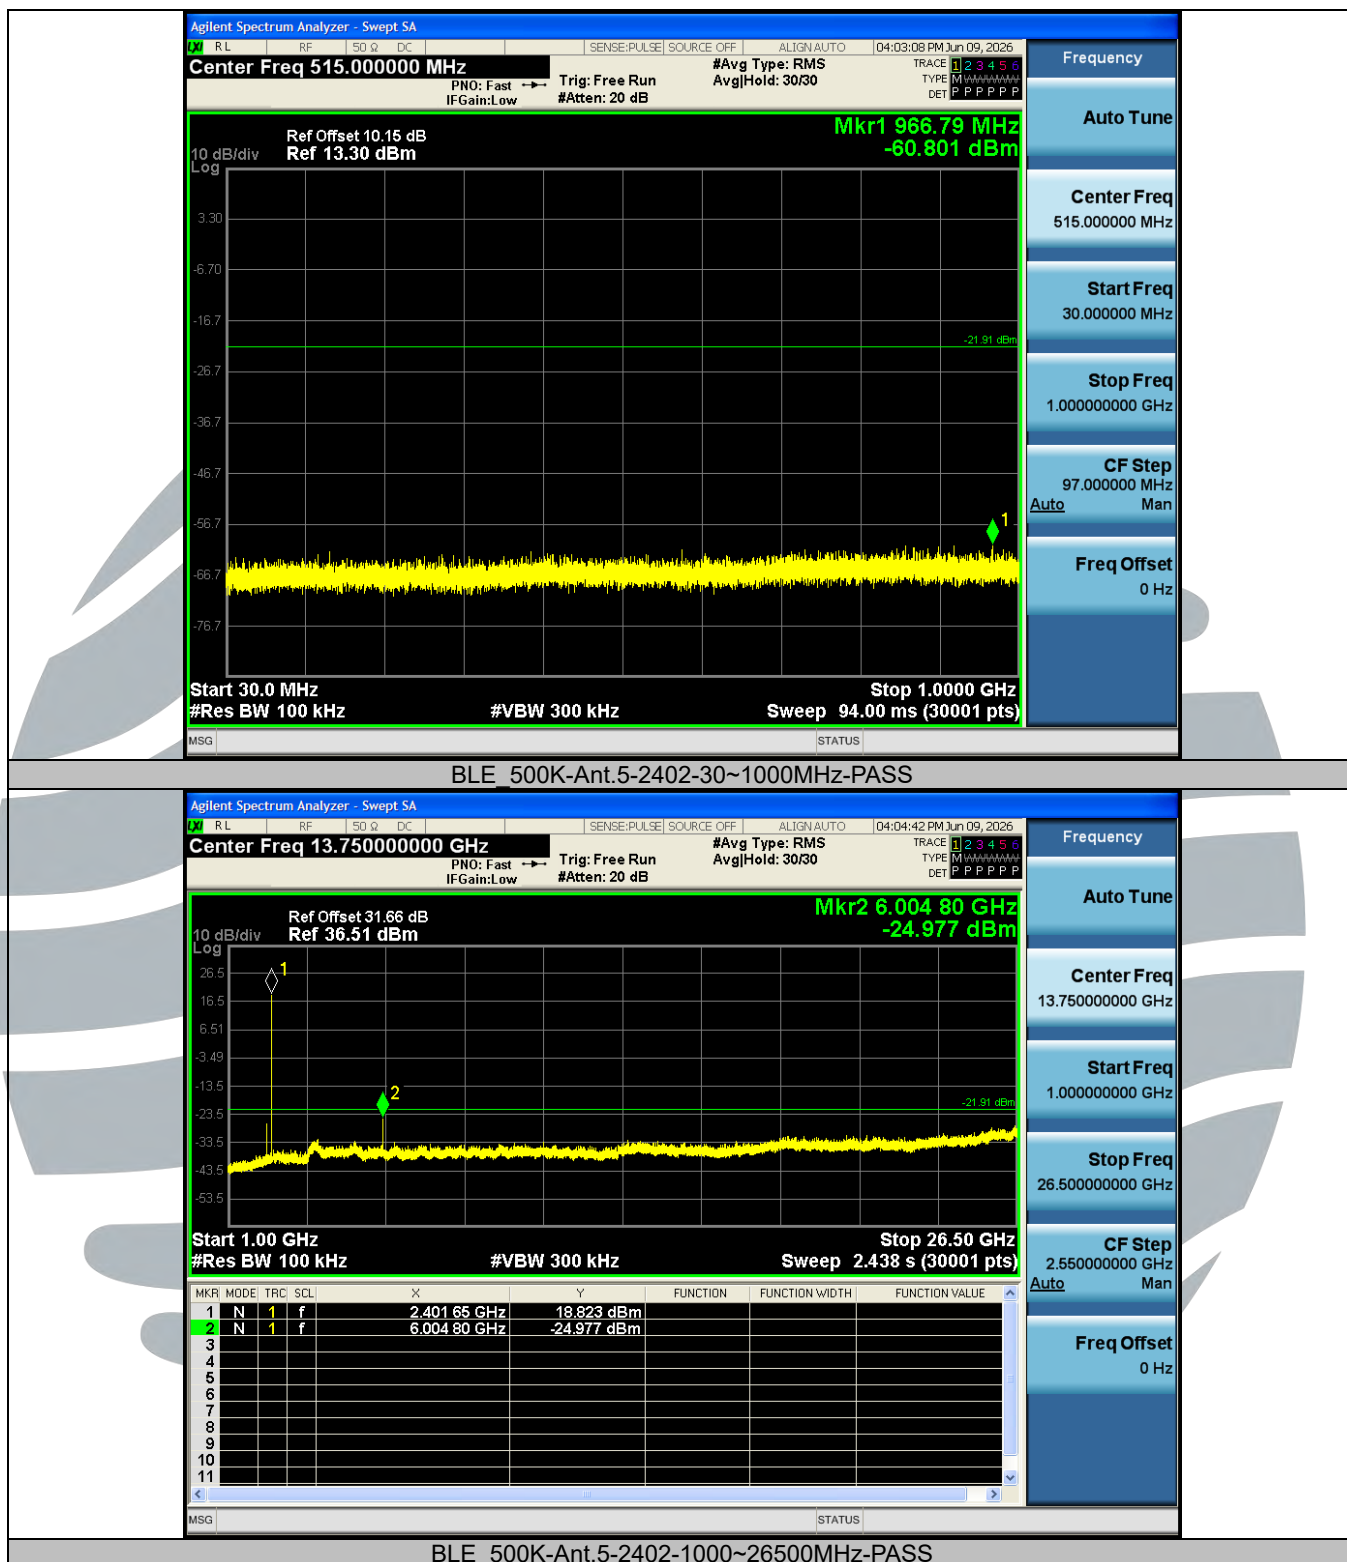

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

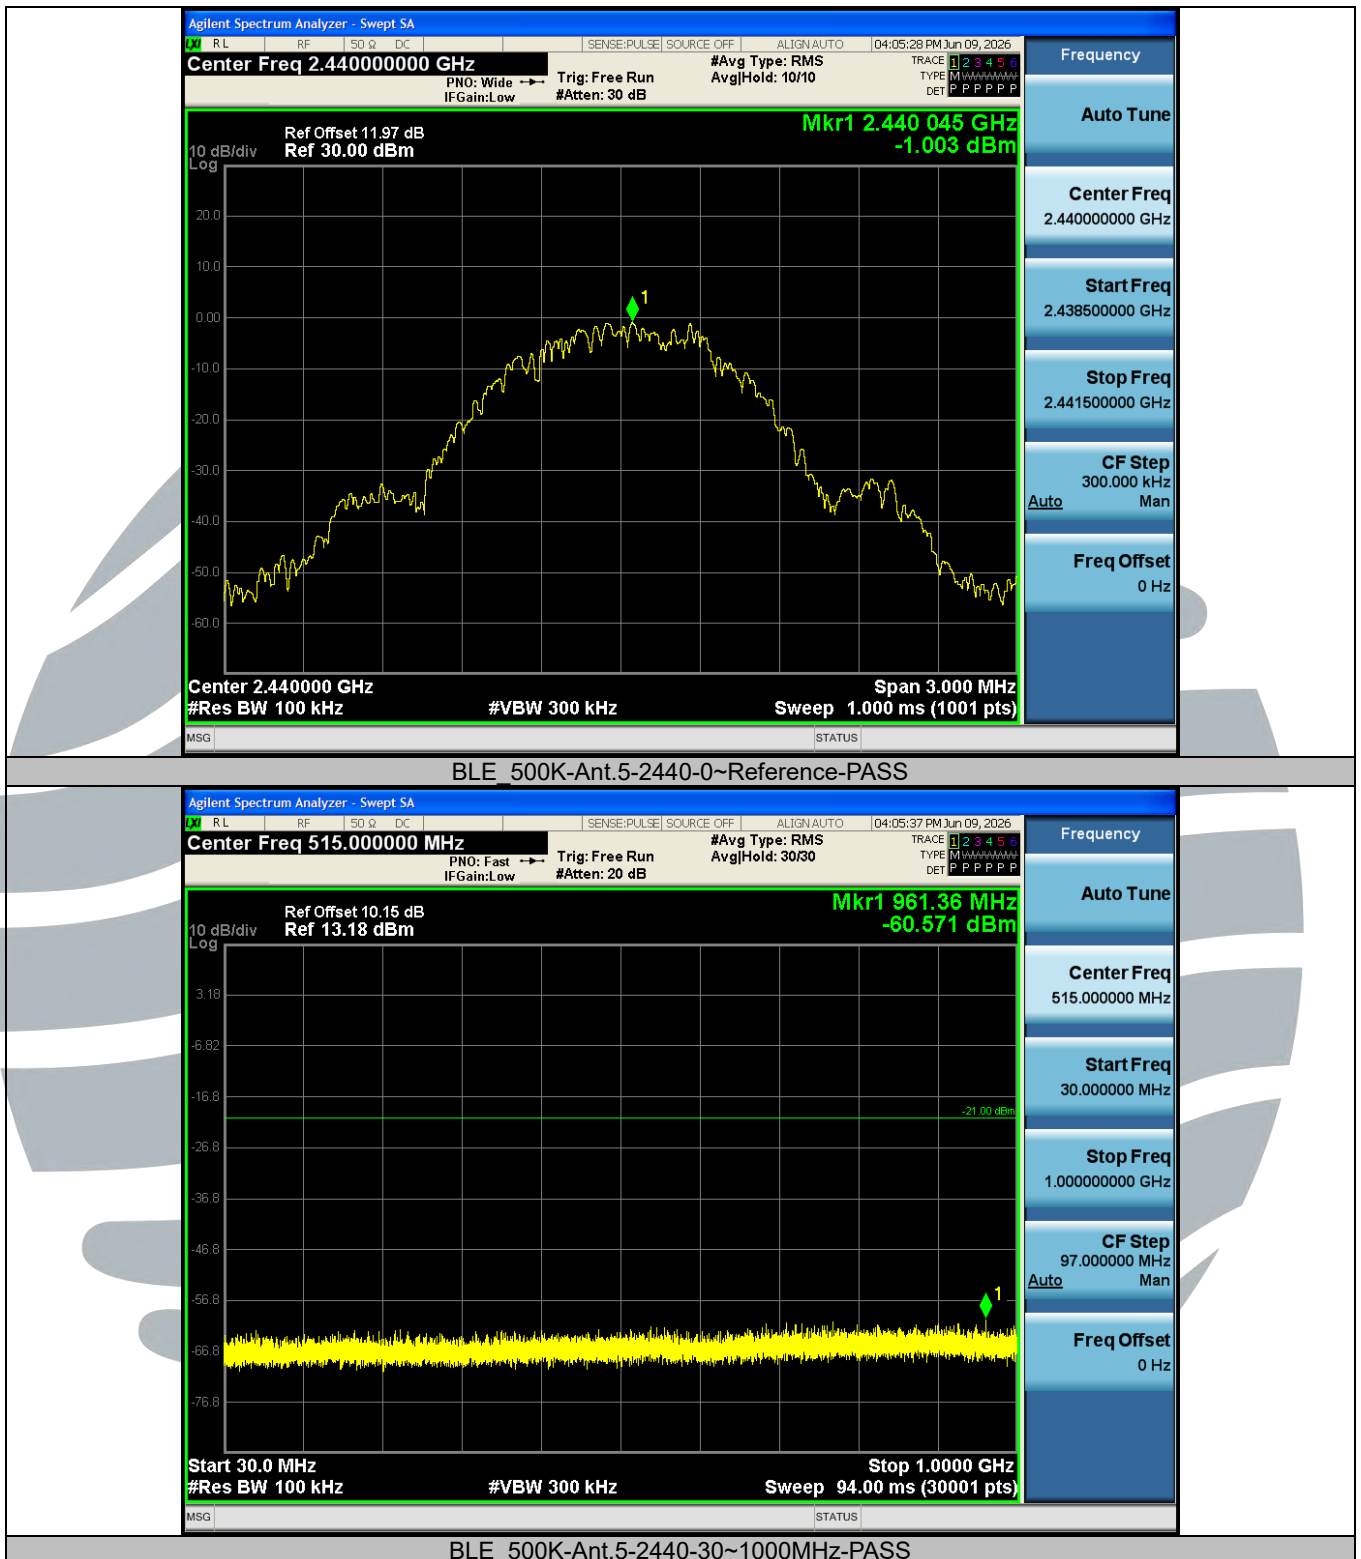

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

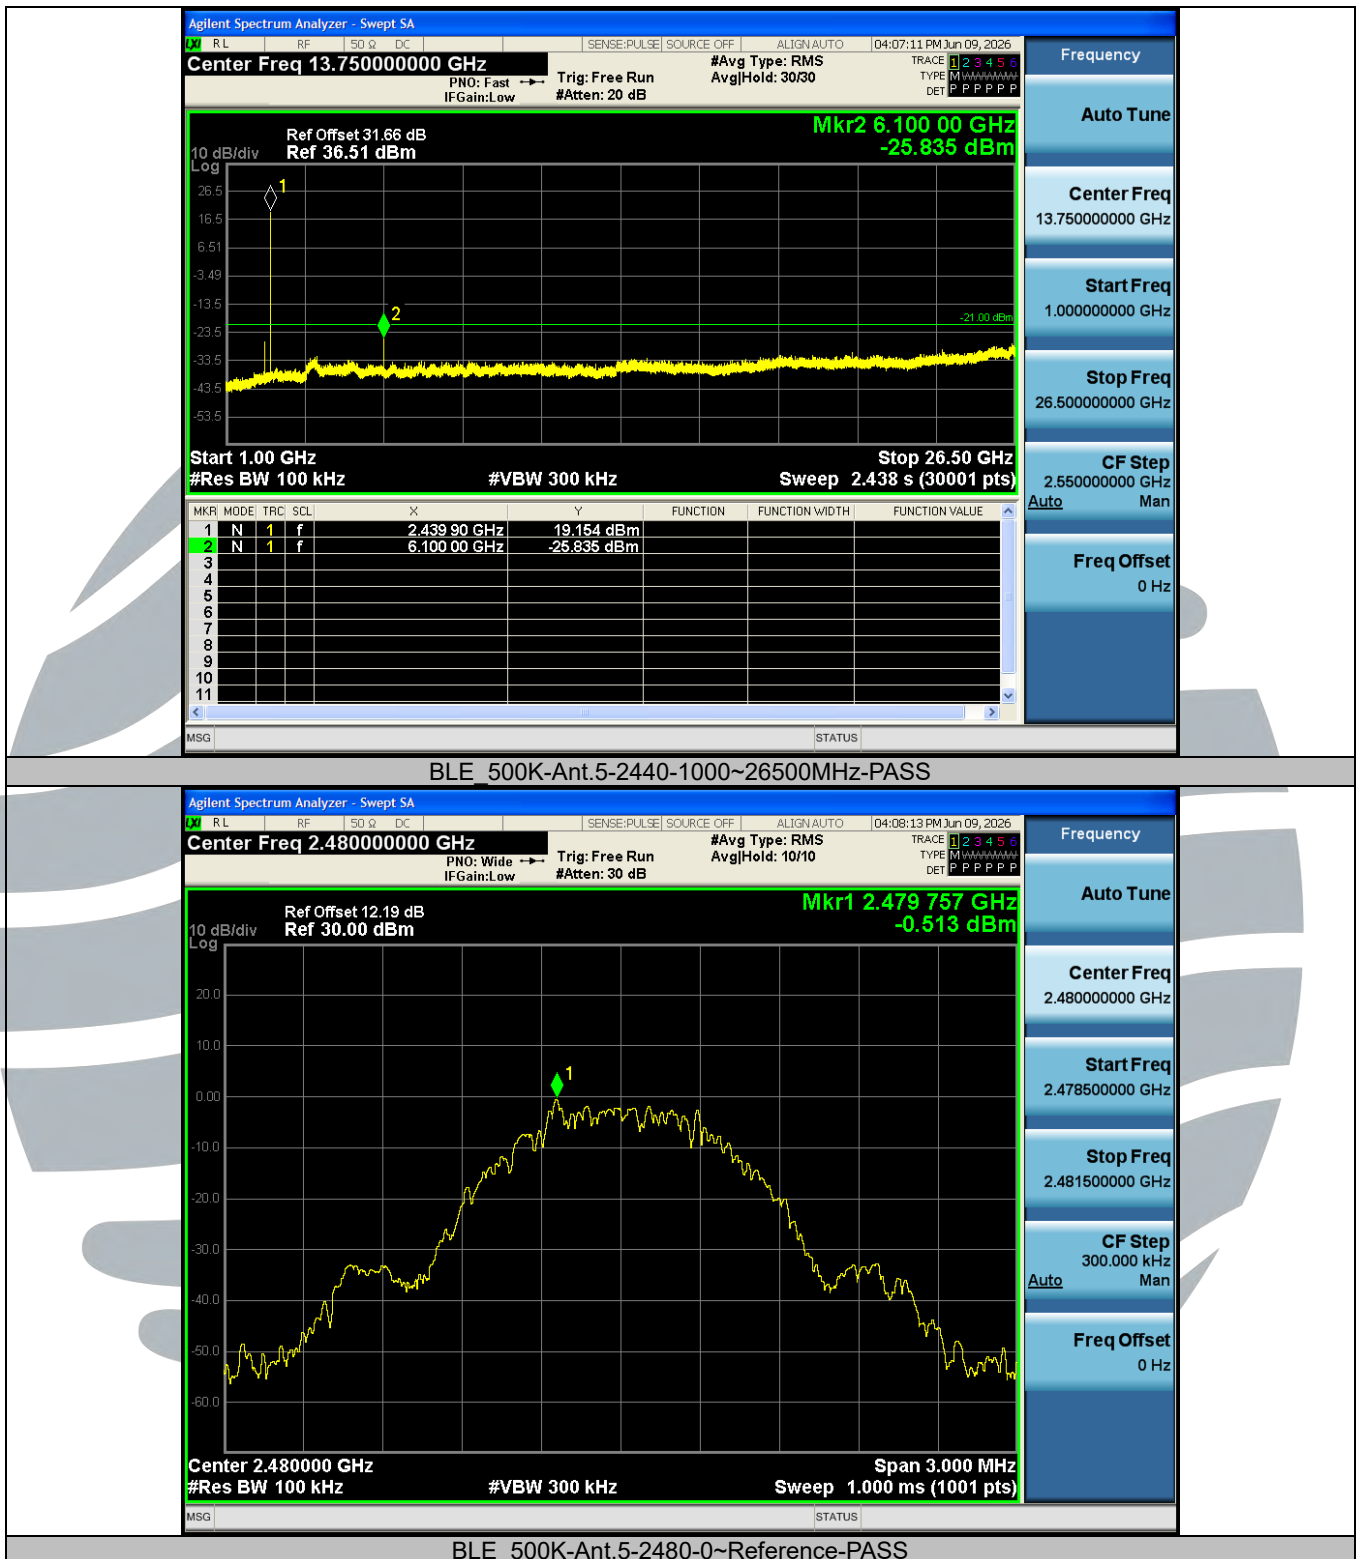

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

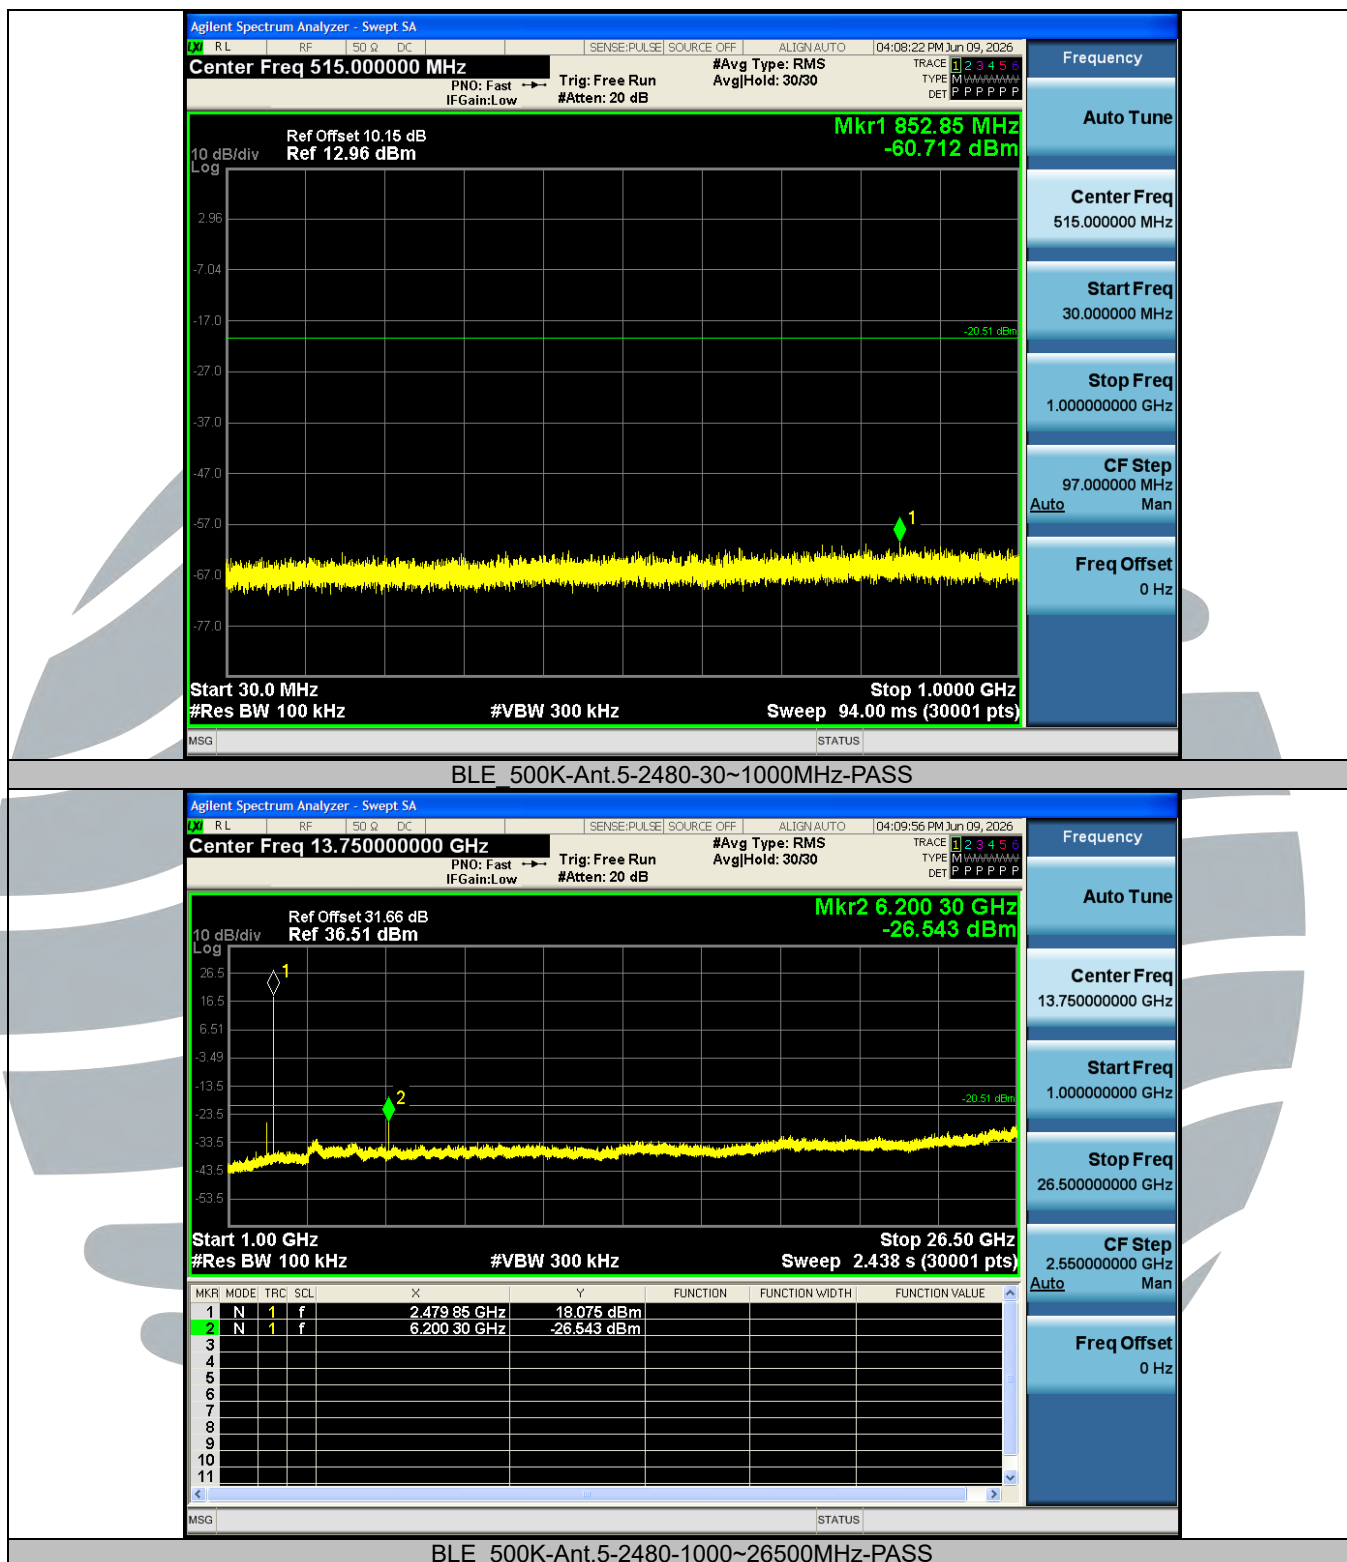

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

OOBE

Test Mode	Antenna	Ch.	Frequency [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant.5	Low	2402	-1.25	-47.63	≤-21.25	PASS
BLE_1M	Ant.5	High	2480	-0.70	-46.68	≤-20.7	PASS
BLE_2M	Ant.5	Low	2404	-2.47	-47.72	≤-22.47	PASS
BLE_2M	Ant.5	High	2478	-0.93	-46.82	≤-20.93	PASS
BLE_125K	Ant.5	Low	2402	-3.43	-47.39	≤-23.43	PASS
BLE_125K	Ant.5	High	2480	-3.24	-47.33	≤-23.24	PASS
BLE_500K	Ant.5	Low	2402	-0.54	-47.8	≤-20.54	PASS
BLE_500K	Ant.5	High	2480	-0.55	-46.79	≤-20.55	PASS

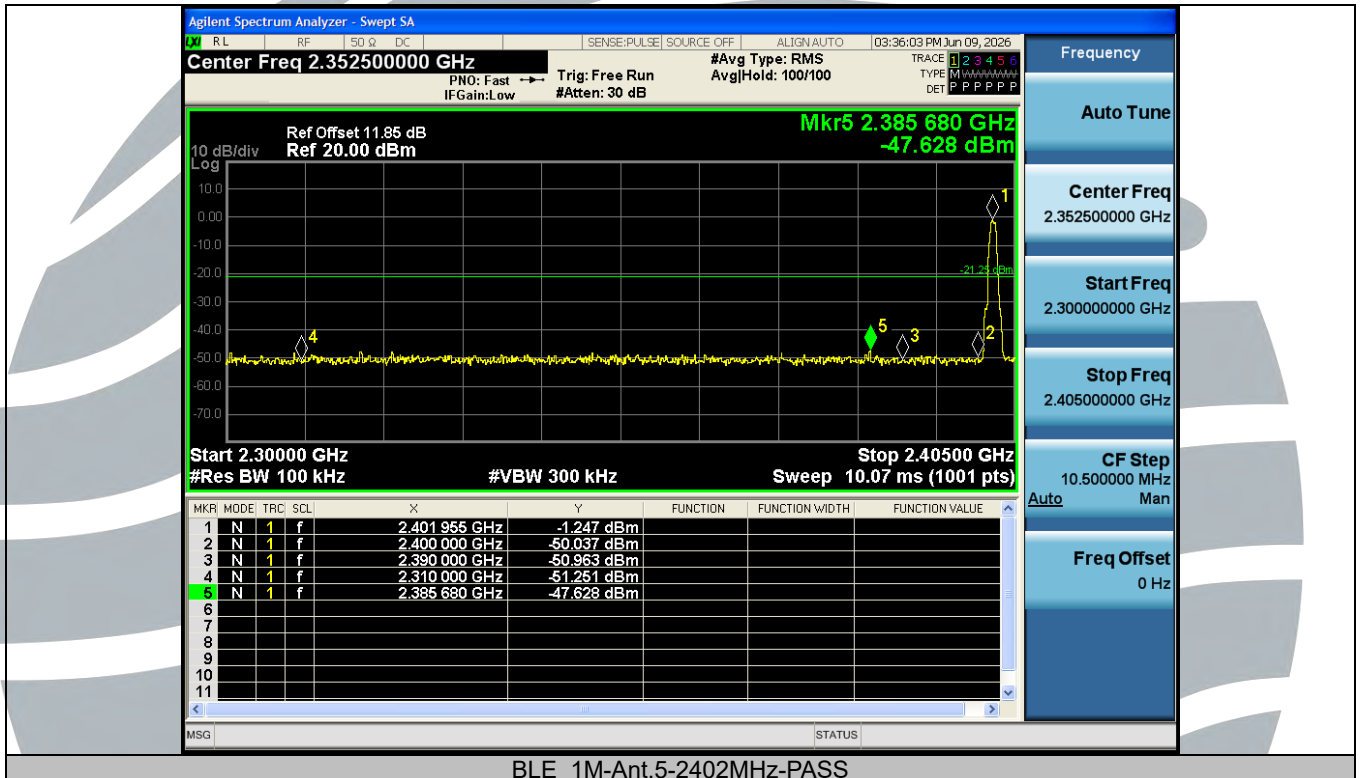

BLE_1M-Ant.5-2402MHz-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

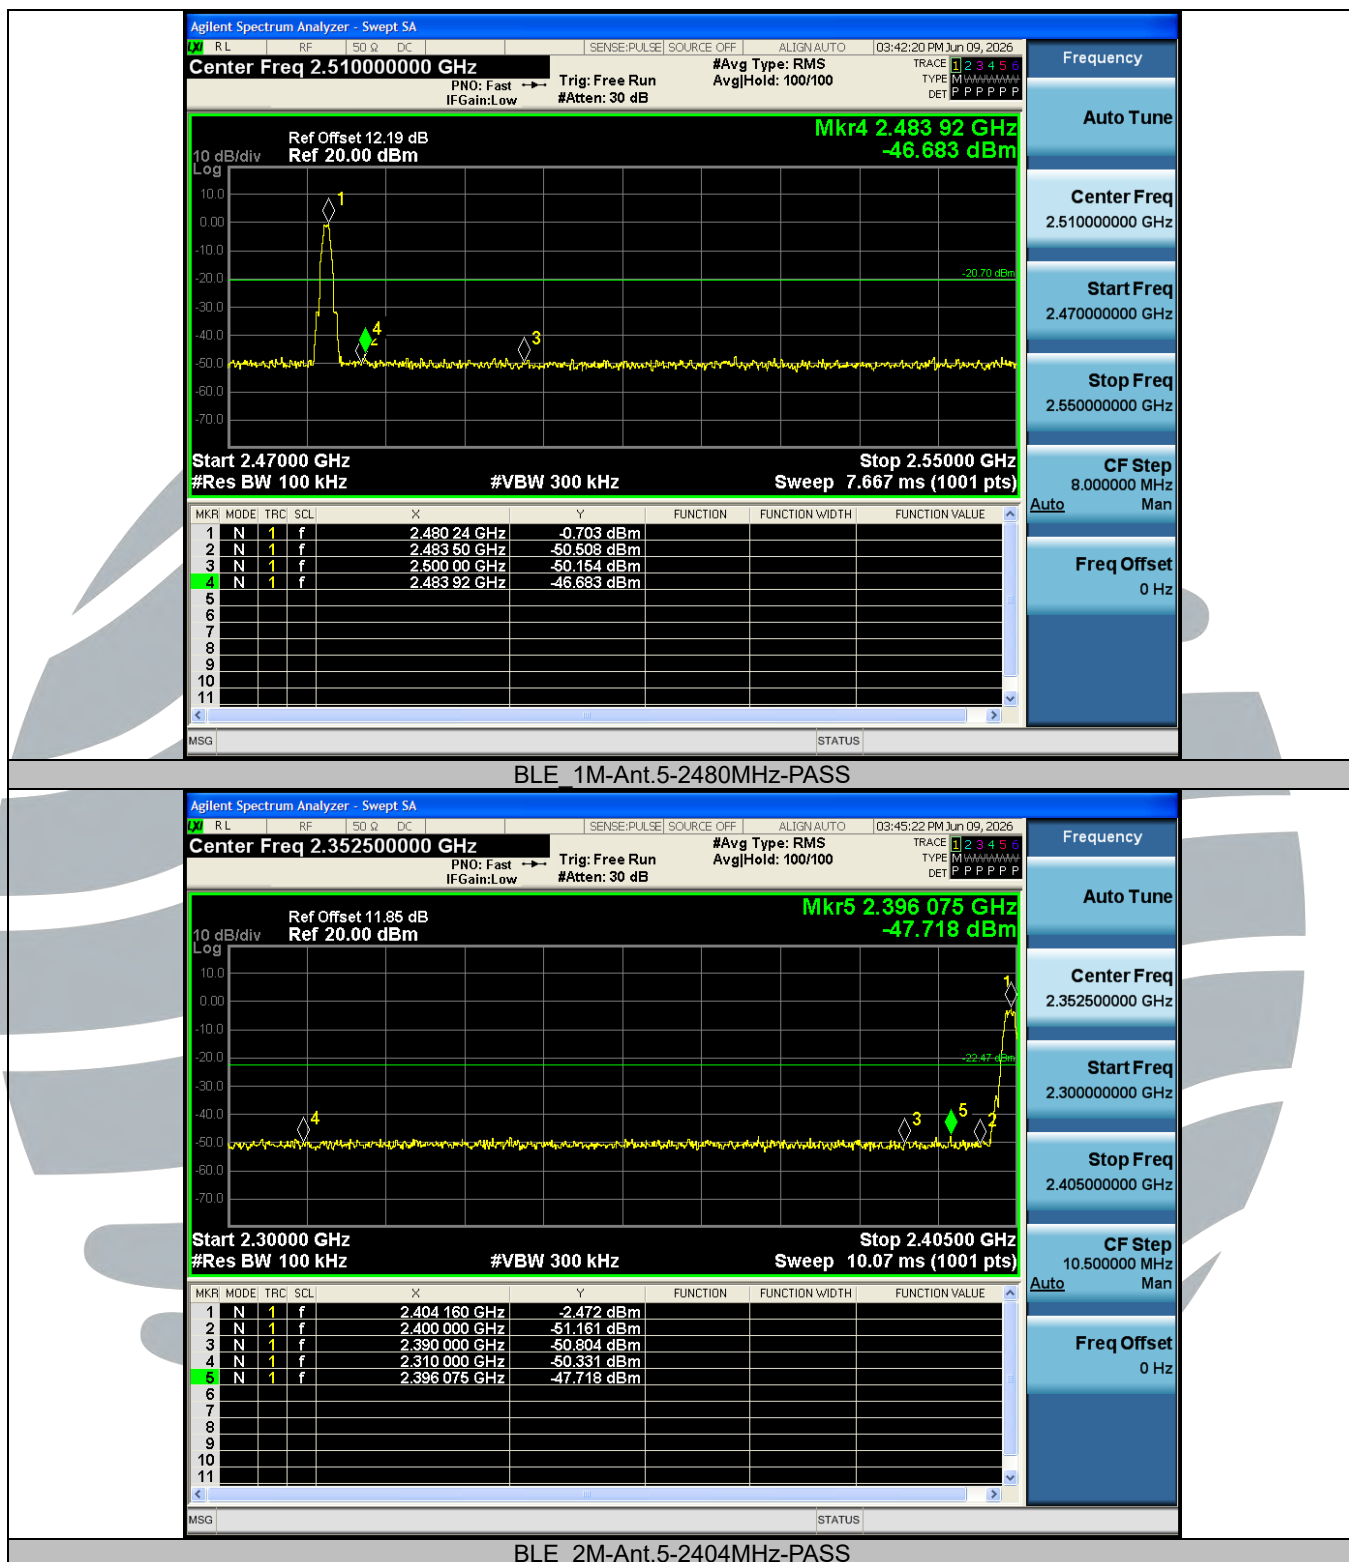

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

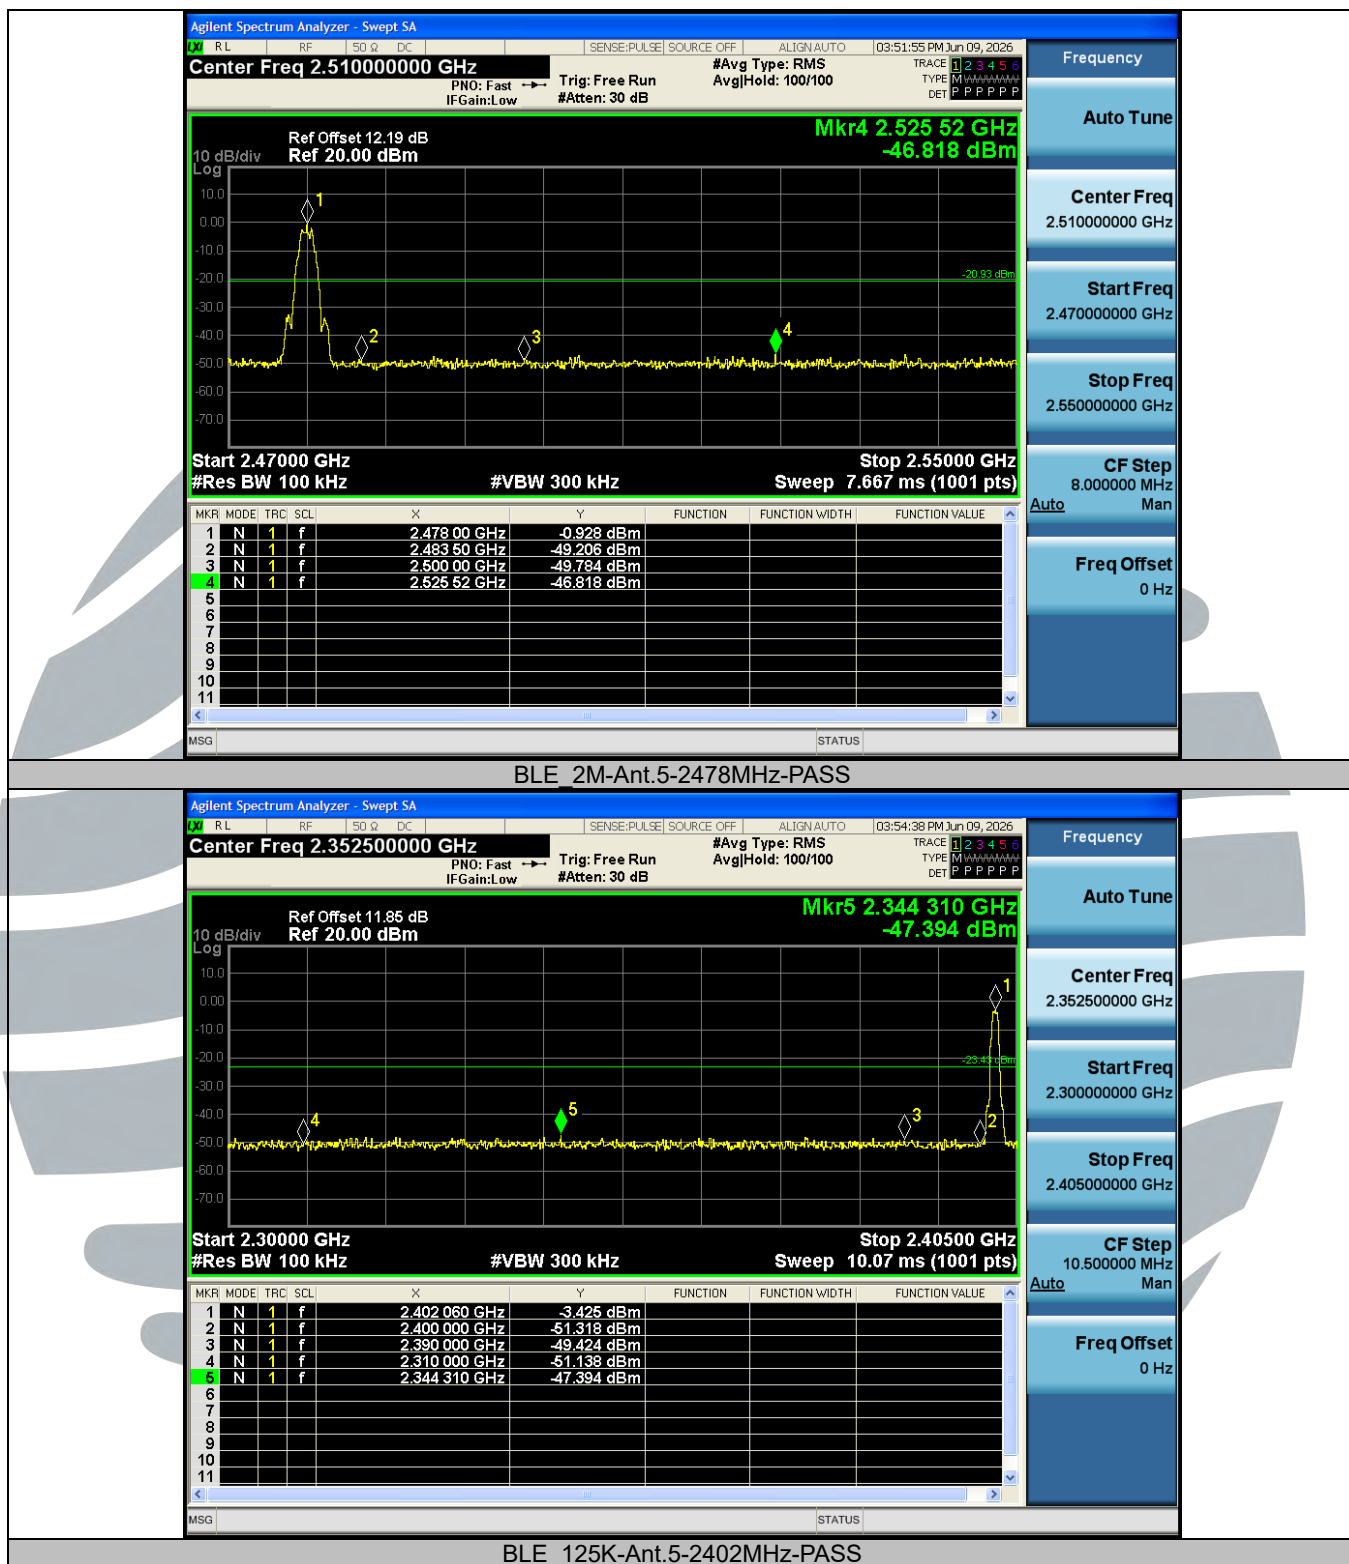

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1



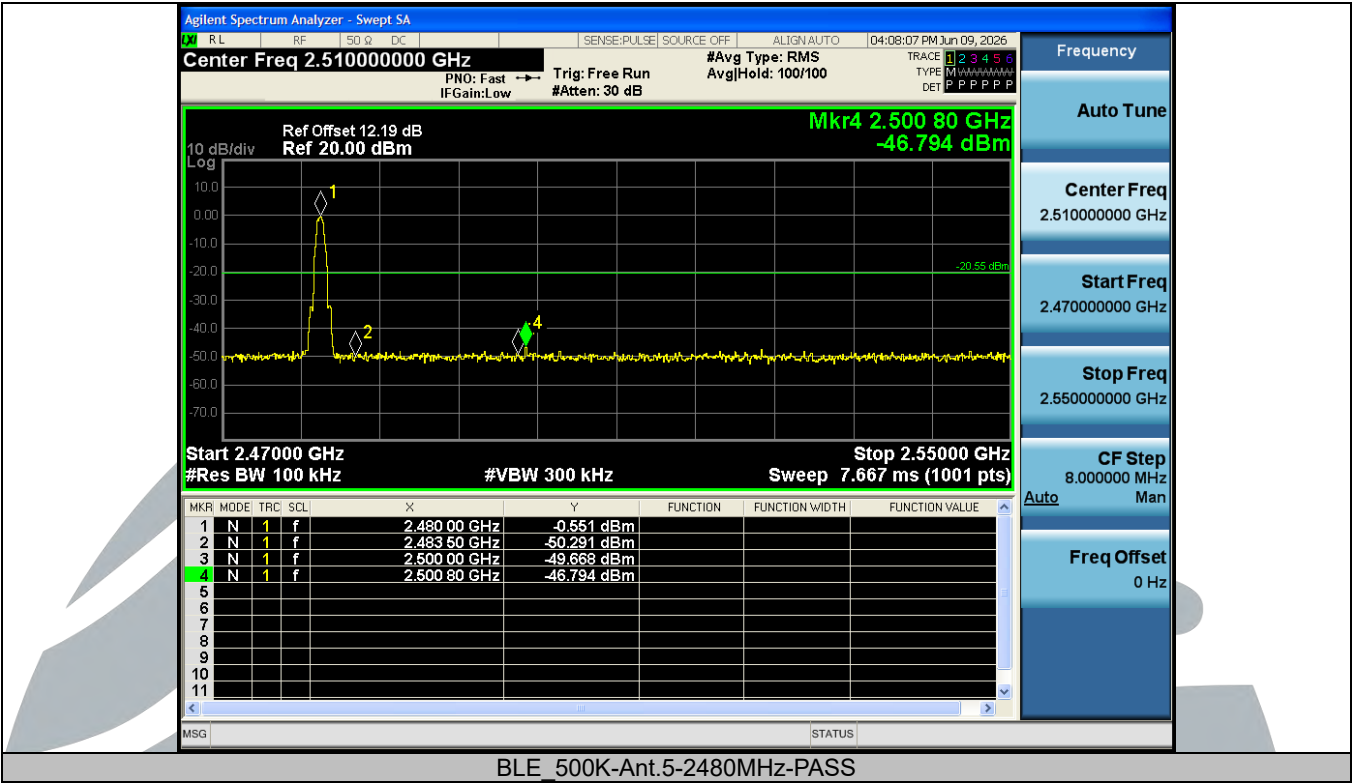

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCCPART15.247-V1.1

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2020 Clause 11.11 & Clause 11.12

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBμV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
 - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

- 2) Test the EUT in the lowest channel, middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 kHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

Radiated Emission Test Data (30 MHz ~ 1 GHz):


Worst-Case Configuration

Horizontal

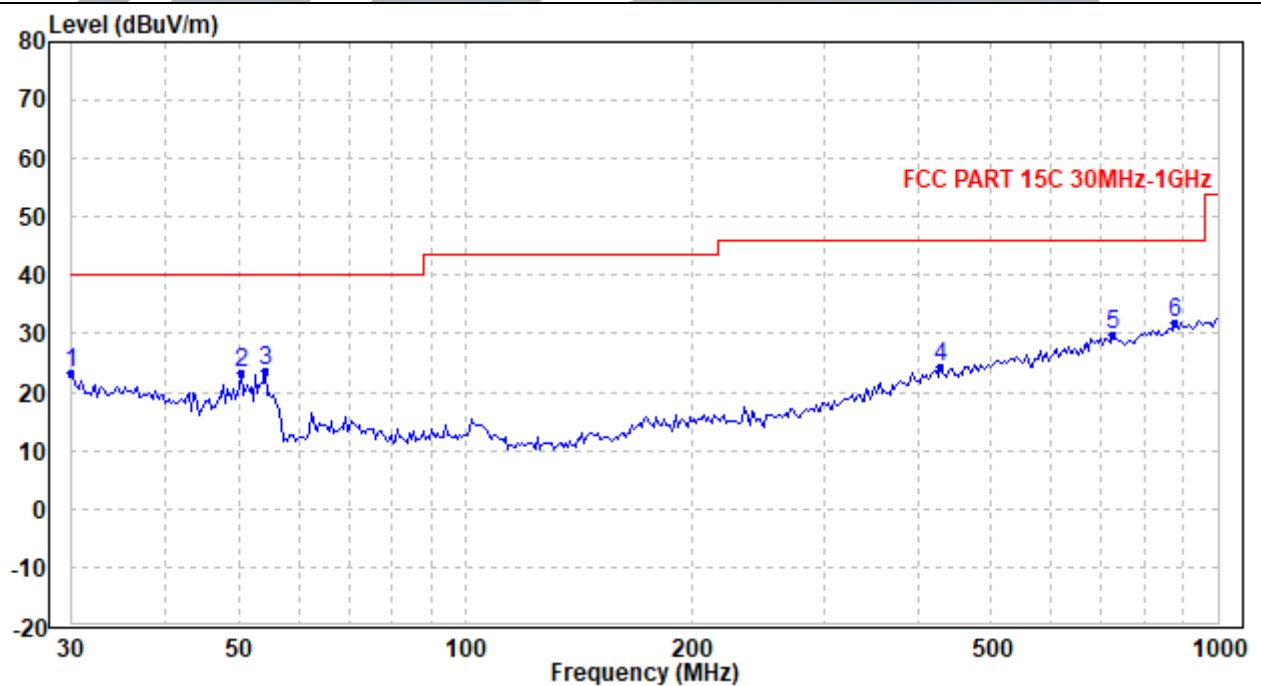

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	27.99	-4.53	23.46	40.00	-16.54	Peak
2	50.461	37.65	-14.19	23.46	40.00	-16.54	Peak
3	54.135	39.82	-16.34	23.48	40.00	-16.52	Peak
4	427.292	27.89	-3.64	24.25	46.00	-21.75	Peak
5	723.793	28.37	1.46	29.83	46.00	-16.17	Peak
6	875.013	28.02	3.82	31.84	46.00	-14.16	Peak

Vertical

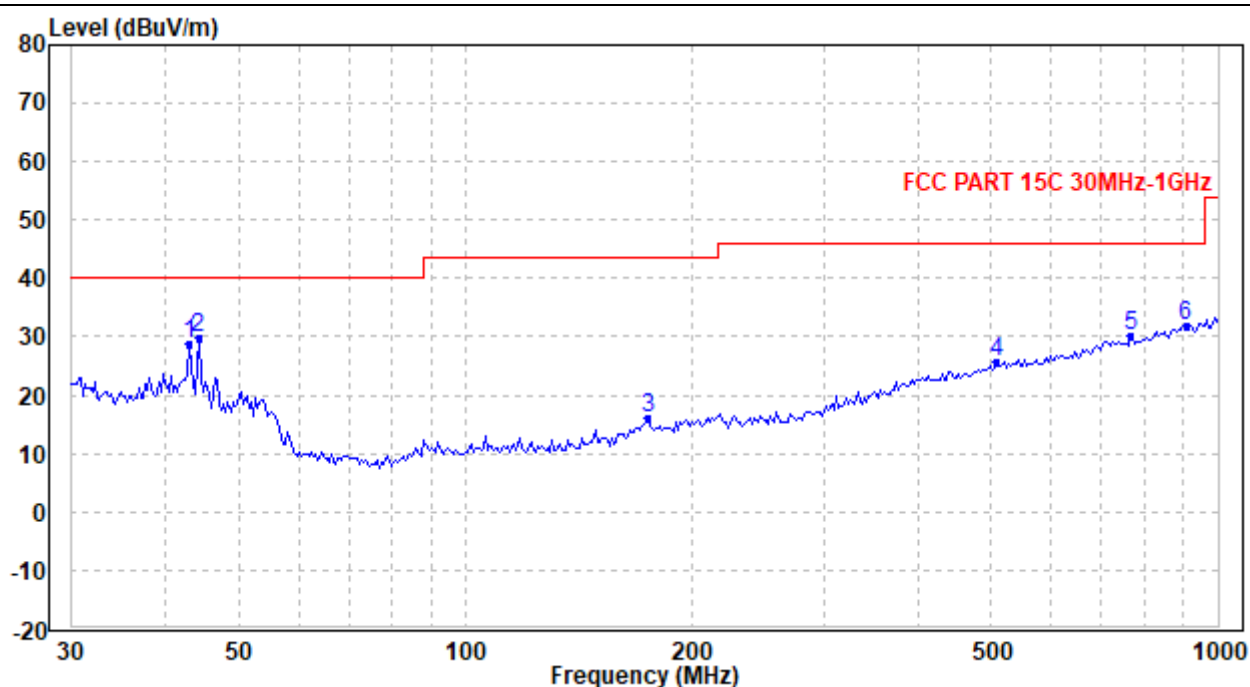

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	42.931	39.44	-10.71	28.73	40.00	-11.27	Peak
2	44.154	42.67	-12.84	29.83	40.00	-10.17	Peak
3	175.040	27.56	-11.57	15.99	43.50	-27.51	Peak
4	509.356	27.93	-2.09	25.84	46.00	-20.16	Peak
5	765.648	28.43	1.87	30.30	46.00	-15.70	Peak
6	906.304	27.16	4.63	31.79	46.00	-14.21	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (1-18 GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
LE 2402 MHz								
1	4804	38.46	-0.06	38.40	54.00	-15.60	Average	Horizontal
2	4804	51.19	-0.06	51.13	74.00	-22.87	Peak	Horizontal
3	7206	35.25	2.45	37.70	54.00	-16.30	Average	Horizontal
4	7206	46.79	2.45	49.24	74.00	-24.76	Peak	Horizontal
5	16814	32.11	7.98	40.09	54.00	-13.91	Average	Horizontal
6	16814	43.99	7.98	51.97	74.00	-22.03	Peak	Horizontal
7	4804	37.46	-0.06	37.40	54.00	-16.60	Average	Vertical
8	4804	52.25	-0.06	52.19	74.00	-21.81	Peak	Vertical
9	7206	35.17	2.45	37.62	54.00	-16.38	Average	Vertical
10	7206	46.76	2.45	49.21	74.00	-24.79	Peak	Vertical
11	16814	32.07	7.98	40.05	54.00	-13.95	Average	Vertical
12	16814	44.12	7.98	52.10	74.00	-21.90	Peak	Vertical
LE 2440 MHz								
1	4880	36.19	-0.20	35.99	54.00	-18.01	Average	Horizontal
2	4880	49.77	-0.20	49.57	74.00	-24.43	Peak	Horizontal
3	7320	33.77	2.46	36.23	54.00	-17.77	Average	Horizontal
4	7320	45.90	2.46	48.36	74.00	-25.64	Peak	Horizontal
5	17080	30.20	8.18	38.38	54.00	-15.62	Average	Horizontal
6	17080	43.51	8.18	51.69	74.00	-22.31	Peak	Horizontal
7	4880	36.27	-0.20	36.07	54.00	-17.93	Average	Vertical
8	4880	50.66	-0.20	50.46	74.00	-23.54	Peak	Vertical
9	7320	33.80	2.46	36.26	54.00	-17.74	Average	Vertical
10	7320	46.07	2.46	48.53	74.00	-25.47	Peak	Vertical
11	17080	30.06	8.18	38.24	54.00	-15.76	Average	Vertical
12	17080	43.01	8.18	51.19	74.00	-22.81	Peak	Vertical
LE 2480 MHz								
1	4960	37.39	-0.35	37.04	54.00	-16.96	Average	Horizontal
2	4960	53.38	-0.35	53.03	74.00	-20.97	Peak	Horizontal
3	7440	33.16	2.46	35.62	54.00	-18.38	Average	Horizontal
4	7440	46.42	2.46	48.88	74.00	-25.12	Peak	Horizontal
5	17360	32.82	8.73	41.55	54.00	-12.45	Average	Horizontal
6	17360	44.97	8.73	53.70	74.00	-20.30	Peak	Horizontal
7	4960	37.77	-0.35	37.42	54.00	-16.58	Average	Vertical
8	4960	54.47	-0.35	54.12	74.00	-19.88	Peak	Vertical
9	7440	33.12	2.46	35.58	54.00	-18.42	Average	Vertical
10	7440	45.88	2.46	48.34	74.00	-25.66	Peak	Vertical
11	17360	32.72	8.73	41.45	54.00	-12.55	Average	Vertical
12	17360	45.66	8.73	54.39	74.00	-19.61	Peak	Vertical
2LE 2404 MHz								
1	4808	38.47	-0.07	38.40	54.00	-15.60	Average	Horizontal
2	4808	52.01	-0.07	51.94	74.00	-22.06	Peak	Horizontal
3	7212	35.06	2.46	37.52	54.00	-16.48	Average	Horizontal
4	7212	47.97	2.46	50.43	74.00	-23.57	Peak	Horizontal
5	16828	31.99	7.99	39.98	54.00	-14.02	Average	Horizontal
6	16828	44.88	7.99	52.87	74.00	-21.13	Peak	Horizontal
7	4808	38.41	-0.07	38.34	54.00	-15.66	Average	Vertical
8	4808	51.52	-0.07	51.45	74.00	-22.55	Peak	Vertical
9	7212	35.21	2.46	37.67	54.00	-16.33	Average	Vertical
10	7212	47.27	2.46	49.73	74.00	-24.27	Peak	Vertical
11	16828	32.06	7.99	40.05	54.00	-13.95	Average	Vertical
12	16828	44.72	7.99	52.71	74.00	-21.29	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (1-18 GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
2LE_2440 MHz								
1	4880	36.23	-0.20	36.03	54.00	-17.97	Average	Horizontal
2	4880	50.80	-0.20	50.60	74.00	-23.40	Peak	Horizontal
3	7320	33.83	2.46	36.29	54.00	-17.71	Average	Horizontal
4	7320	46.20	2.46	48.66	74.00	-25.34	Peak	Horizontal
5	17080	30.24	8.18	38.42	54.00	-15.58	Average	Horizontal
6	17080	43.52	8.18	51.70	74.00	-22.30	Peak	Horizontal
7	4880	36.19	-0.20	35.99	54.00	-18.01	Average	Vertical
8	4880	48.56	-0.20	48.36	74.00	-25.64	Peak	Vertical
9	7320	33.83	2.46	36.29	54.00	-17.71	Average	Vertical
10	7320	46.44	2.46	48.90	74.00	-25.10	Peak	Vertical
11	17080	30.16	8.18	38.34	54.00	-15.66	Average	Vertical
12	17080	42.82	8.18	51.00	74.00	-23.00	Peak	Vertical
2LE_2478 MHz								
1	4956	37.37	-0.35	37.02	54.00	-16.98	Average	Horizontal
2	4956	53.66	-0.35	53.31	74.00	-20.69	Peak	Horizontal
3	7434	33.16	2.46	35.62	54.00	-18.38	Average	Horizontal
4	7434	46.70	2.46	49.16	74.00	-24.84	Peak	Horizontal
5	17346	32.85	8.70	41.55	54.00	-12.45	Average	Horizontal
6	17346	44.96	8.70	53.66	74.00	-20.34	Peak	Horizontal
7	4956	37.53	-0.35	37.18	54.00	-16.82	Average	Vertical
8	4956	51.66	-0.35	51.31	74.00	-22.69	Peak	Vertical
9	7434	33.09	2.46	35.55	54.00	-18.45	Average	Vertical
10	7434	46.37	2.46	48.83	74.00	-25.17	Peak	Vertical
11	17346	32.88	8.70	41.58	54.00	-12.42	Average	Vertical
12	17346	44.44	8.70	53.14	74.00	-20.86	Peak	Vertical
LE Code S=2_2402 MHz								
1	4804	37.34	-0.06	37.28	54.00	-16.72	Average	Horizontal
2	4804	51.90	-0.06	51.84	74.00	-22.16	Peak	Horizontal
3	7206	35.14	2.45	37.59	54.00	-16.41	Average	Horizontal
4	7206	47.09	2.45	49.54	74.00	-24.46	Peak	Horizontal
5	16814	32.03	7.98	40.01	54.00	-13.99	Average	Horizontal
6	16814	44.87	7.98	52.85	74.00	-21.15	Peak	Horizontal
7	4804	38.34	-0.06	38.28	54.00	-15.72	Average	Vertical
8	4804	50.41	-0.06	50.35	74.00	-23.65	Peak	Vertical
9	7206	35.09	2.45	37.54	54.00	-16.46	Average	Vertical
10	7206	47.13	2.45	49.58	74.00	-24.42	Peak	Vertical
11	16814	32.14	7.98	40.12	54.00	-13.88	Average	Vertical
12	16814	44.26	7.98	52.24	74.00	-21.76	Peak	Vertical
LE Code S=2_2440 MHz								
1	4880	37.23	-0.20	37.03	54.00	-16.97	Average	Horizontal
2	4880	50.11	-0.20	49.91	74.00	-24.09	Peak	Horizontal
3	7320	33.74	2.46	36.20	54.00	-17.80	Average	Horizontal
4	7320	46.01	2.46	48.47	74.00	-25.53	Peak	Horizontal
5	17080	30.16	8.18	38.34	54.00	-15.66	Average	Horizontal
6	17080	43.15	8.18	51.33	74.00	-22.67	Peak	Horizontal
7	4880	37.09	-0.20	36.89	54.00	-17.11	Average	Vertical
8	4880	51.08	-0.20	50.88	74.00	-23.12	Peak	Vertical
9	7320	33.74	2.46	36.20	54.00	-17.80	Average	Vertical
10	7320	46.04	2.46	48.50	74.00	-25.50	Peak	Vertical
11	17080	30.20	8.18	38.38	54.00	-15.62	Average	Vertical
12	17080	42.67	8.18	50.85	74.00	-23.15	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Radiated Emission Test Data (1-18 GHz):								
No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
LE Code S=2_2480 MHz								
1	4960	37.31	-0.35	36.96	54.00	-17.04	Average	Horizontal
2	4960	52.60	-0.35	52.25	74.00	-21.75	Peak	Horizontal
3	7440	33.31	2.46	35.77	54.00	-18.23	Average	Horizontal
4	7440	46.13	2.46	48.59	74.00	-25.41	Peak	Horizontal
5	17360	32.92	8.73	41.65	54.00	-12.35	Average	Horizontal
6	17360	45.22	8.73	53.95	74.00	-20.05	Peak	Horizontal
7	4960	37.34	-0.35	36.99	54.00	-17.01	Average	Vertical
8	4960	51.02	-0.35	50.67	74.00	-23.33	Peak	Vertical
9	7440	33.12	2.46	35.58	54.00	-18.42	Average	Vertical
10	7440	46.46	2.46	48.92	74.00	-25.08	Peak	Vertical
11	17360	32.85	8.73	41.58	54.00	-12.42	Average	Vertical
12	17360	45.63	8.73	54.36	74.00	-19.64	Peak	Vertical
LE Code S=8_2402 MHz								
1	4804	37.31	-0.06	37.25	54.00	-16.75	Average	Horizontal
2	4804	53.19	-0.06	53.13	74.00	-20.87	Peak	Horizontal
3	7206	35.07	2.45	37.52	54.00	-16.48	Average	Horizontal
4	7206	46.49	2.45	48.94	74.00	-25.06	Peak	Horizontal
5	16814	32.00	7.98	39.98	54.00	-14.02	Average	Horizontal
6	16814	44.15	7.98	52.13	74.00	-21.87	Peak	Horizontal
7	4804	38.28	-0.06	38.22	54.00	-15.78	Average	Vertical
8	4804	51.47	-0.06	51.41	74.00	-22.59	Peak	Vertical
9	7206	35.12	2.45	37.57	54.00	-16.43	Average	Vertical
10	7206	47.06	2.45	49.51	74.00	-24.49	Peak	Vertical
11	16814	32.00	7.98	39.98	54.00	-14.02	Average	Vertical
12	16814	44.58	7.98	52.56	74.00	-21.44	Peak	Vertical
LE Code S=8_2440 MHz								
1	4880	36.16	-0.20	35.96	54.00	-18.04	Average	Horizontal
2	4880	51.35	-0.20	51.15	74.00	-22.85	Peak	Horizontal
3	7320	33.80	2.46	36.26	54.00	-17.74	Average	Horizontal
4	7320	46.22	2.46	48.68	74.00	-25.32	Peak	Horizontal
5	17080	30.24	8.18	38.42	54.00	-15.58	Average	Horizontal
6	17080	43.07	8.18	51.25	74.00	-22.75	Peak	Horizontal
7	4880	37.16	-0.20	36.96	54.00	-17.04	Average	Vertical
8	4880	50.08	-0.20	49.88	74.00	-24.12	Peak	Vertical
9	7320	33.80	2.46	36.26	54.00	-17.74	Average	Vertical
10	7320	46.13	2.46	48.59	74.00	-25.41	Peak	Vertical
11	17080	30.20	8.18	38.38	54.00	-15.62	Average	Vertical
12	17080	42.96	8.18	51.14	74.00	-22.86	Peak	Vertical
LE Code S=8_2480 MHz								
1	4960	37.37	-0.35	37.02	54.00	-16.98	Average	Horizontal
2	4960	50.12	-0.35	49.77	74.00	-24.23	Peak	Horizontal
3	7440	33.16	2.46	35.62	54.00	-18.38	Average	Horizontal
4	7440	46.45	2.46	48.91	74.00	-25.09	Peak	Horizontal
5	17360	32.89	8.73	41.62	54.00	-12.38	Average	Horizontal
6	17360	45.13	8.73	53.86	74.00	-20.14	Peak	Horizontal
7	4960	38.39	-0.35	38.04	54.00	-15.96	Average	Vertical
8	4960	49.85	-0.35	49.50	74.00	-24.50	Peak	Vertical
9	7440	33.12	2.46	35.58	54.00	-18.42	Average	Vertical
10	7440	46.34	2.46	48.80	74.00	-25.20	Peak	Vertical
11	17360	32.92	8.73	41.65	54.00	-12.35	Average	Vertical
12	17360	45.28	8.73	54.01	74.00	-19.99	Peak	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Radiated Emission (1-18 GHz)_Worst test mode test diagram_LE Code_S=2_2480 MHz

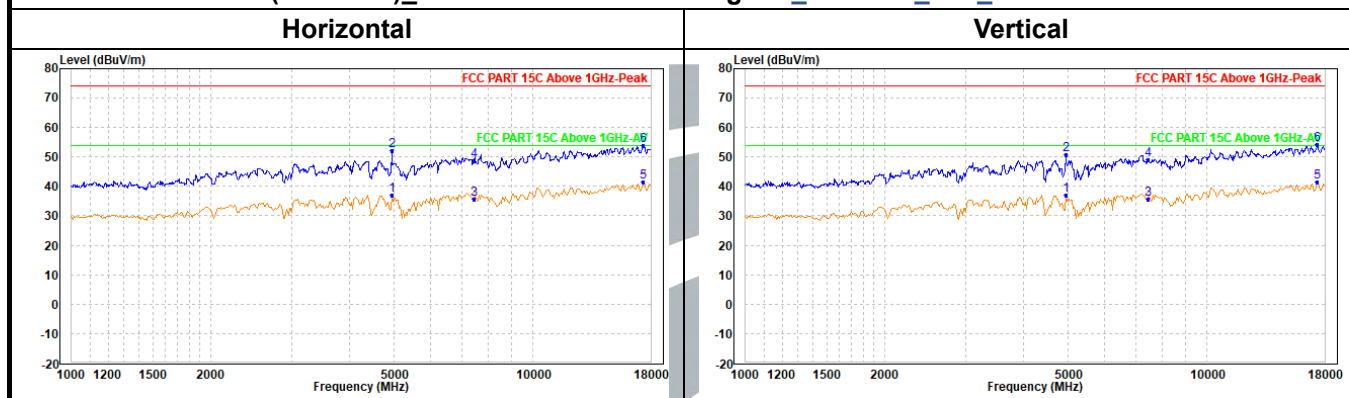

Radiated Emission Test Data (Above 18GHz):

No.	Freq. (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
LE Code_S=2_2440 MHz								
Horizontal					Vertical			
1	21960.000	31.30	0.44	31.74	54.00	-22.26	Average	Horizontal
2	21960.000	42.92	0.44	43.36	74.00	-30.64	Peak	Horizontal
3	24400.000	29.15	1.52	30.67	54.00	-23.33	Average	Horizontal
4	24400.000	40.86	1.52	42.38	74.00	-31.62	Peak	Horizontal
5	21960.000	31.32	0.44	31.76	54.00	-22.24	Average	Vertical
6	21960.000	42.75	0.44	43.19	74.00	-30.81	Peak	Vertical
7	24400.000	29.06	1.42	30.48	54.00	-23.52	Average	Vertical
8	24400.000	40.70	1.42	42.12	74.00	-31.88	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209

Test Method: ANSI C63.10-2020 Clause 11.12

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dBμV/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:



Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).

1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

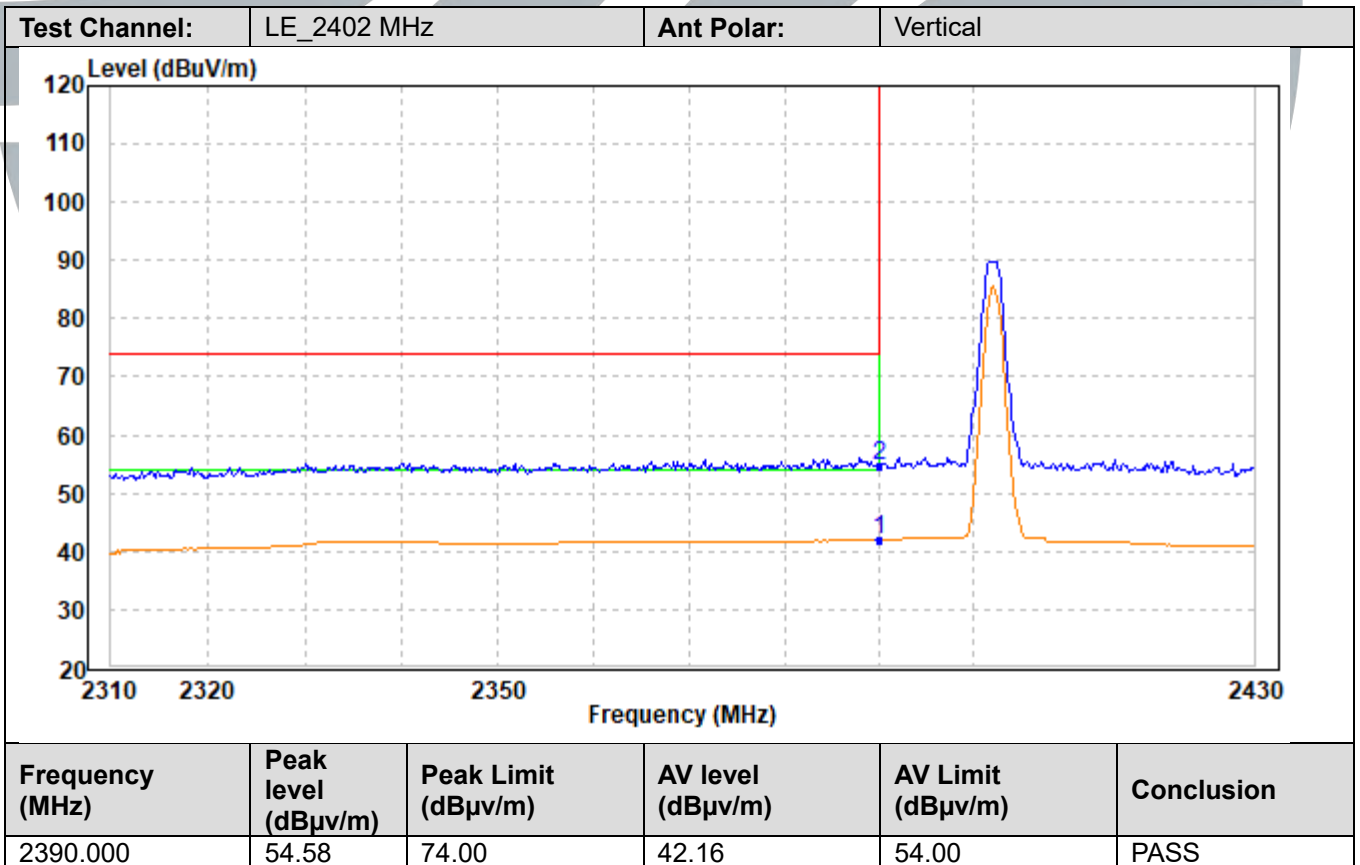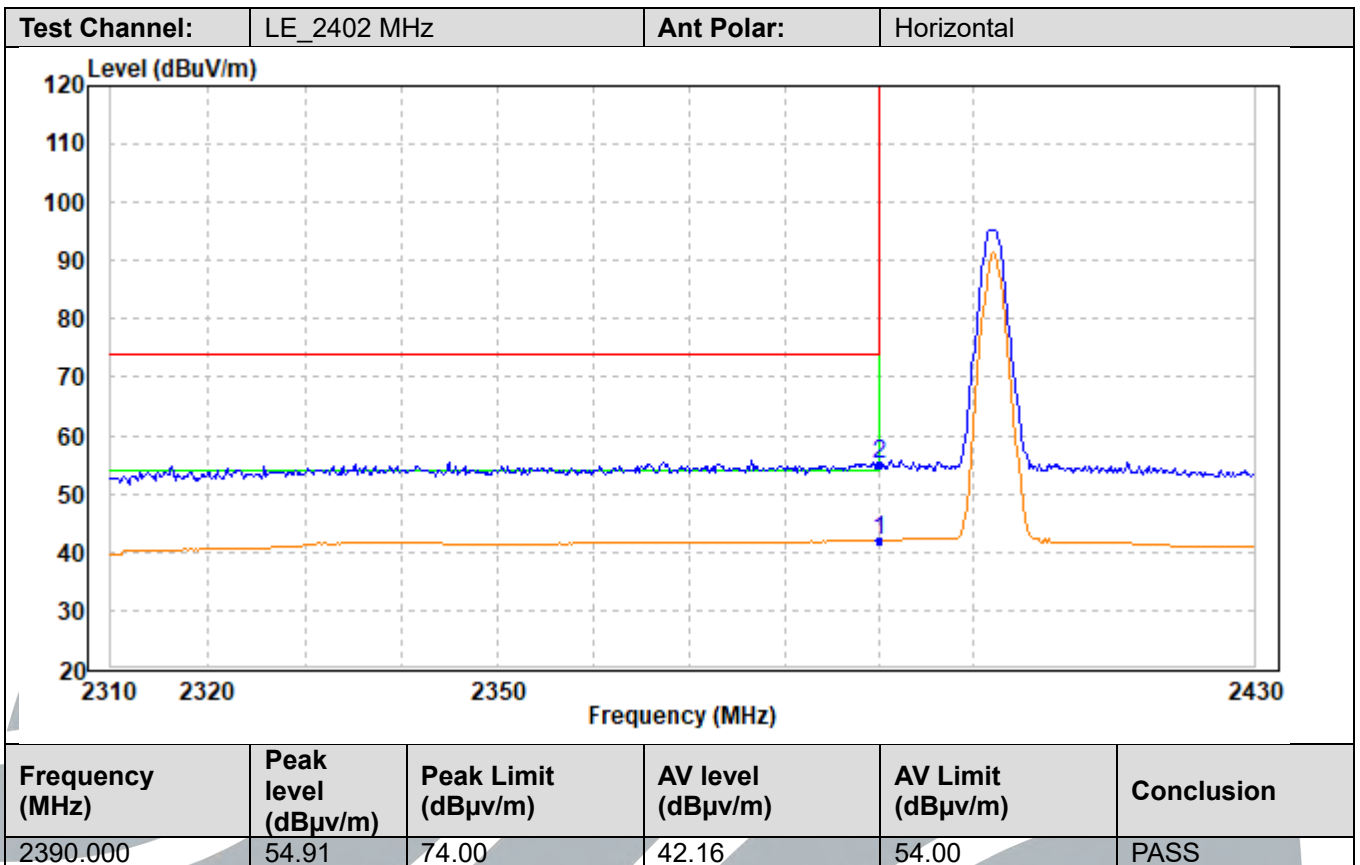

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com
<http://www.uttlab.com>


UTTR-RF-FCCPART15.247-V1.1

Test Channel:	LE_2480 MHz	Ant Polar:	Horizontal
---------------	-------------	------------	------------

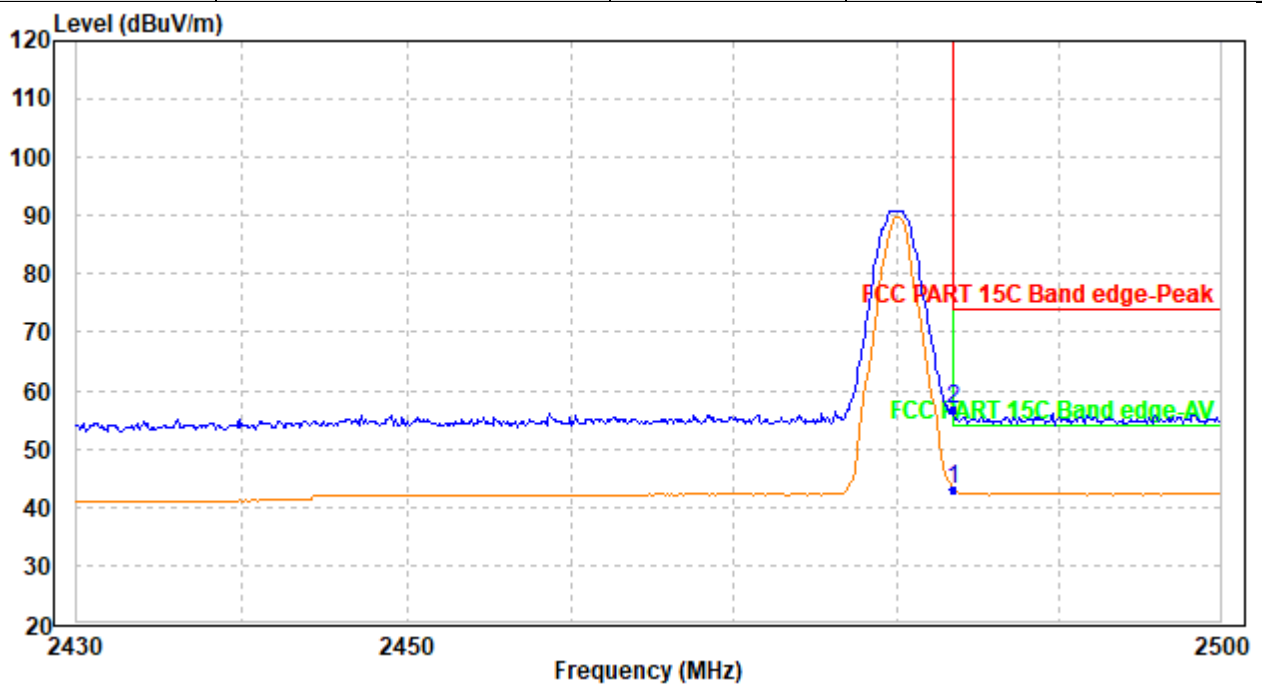

Frequency (MHz)	Peak level (dB μ v/m)	Peak Limit (dB μ v/m)	AV level (dB μ v/m)	AV Limit (dB μ v/m)	Conclusion
2483.500	56.65	74.00	43.19	54.00	PASS

Test Channel:	LE_2480 MHz	Ant Polar:	Vertical
---------------	-------------	------------	----------

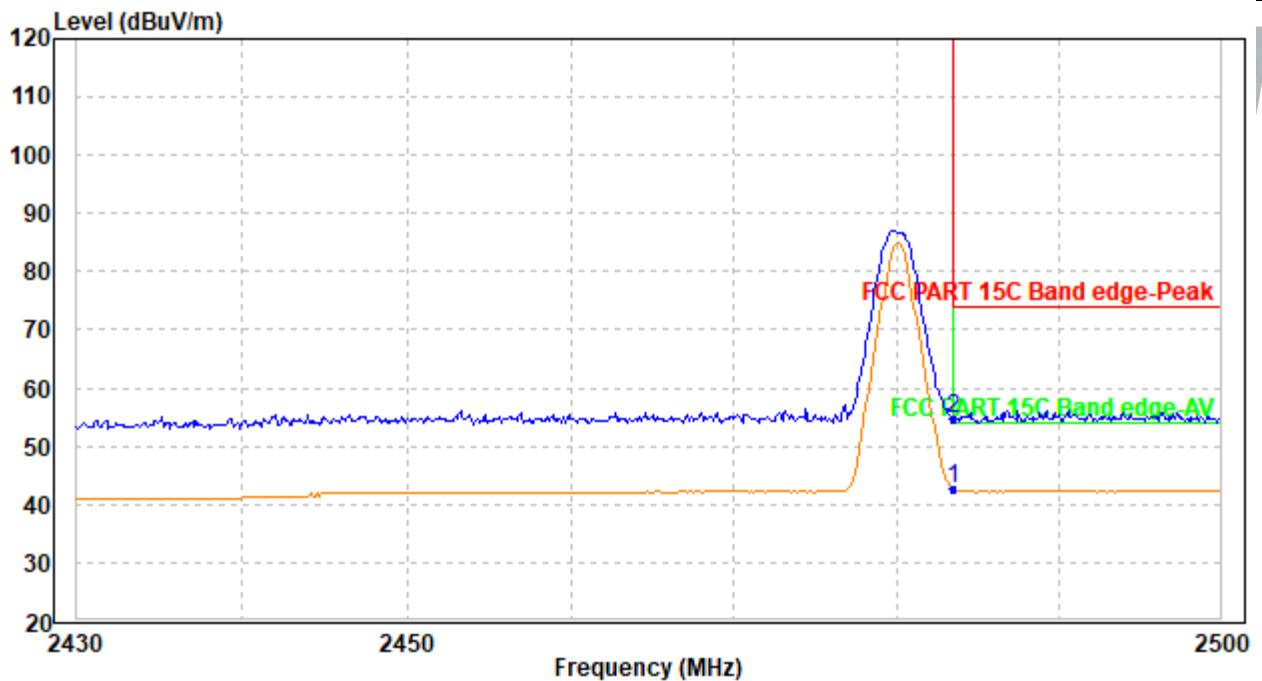

Frequency (MHz)	Peak level (dB μ v/m)	Peak Limit (dB μ v/m)	AV level (dB μ v/m)	AV Limit (dB μ v/m)	Conclusion
2483.500	54.63	74.00	42.81	54.00	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China


Tel: +86-755-28230888



Fax: +86-755-28230886


E-mail: info@uttlab.com



<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

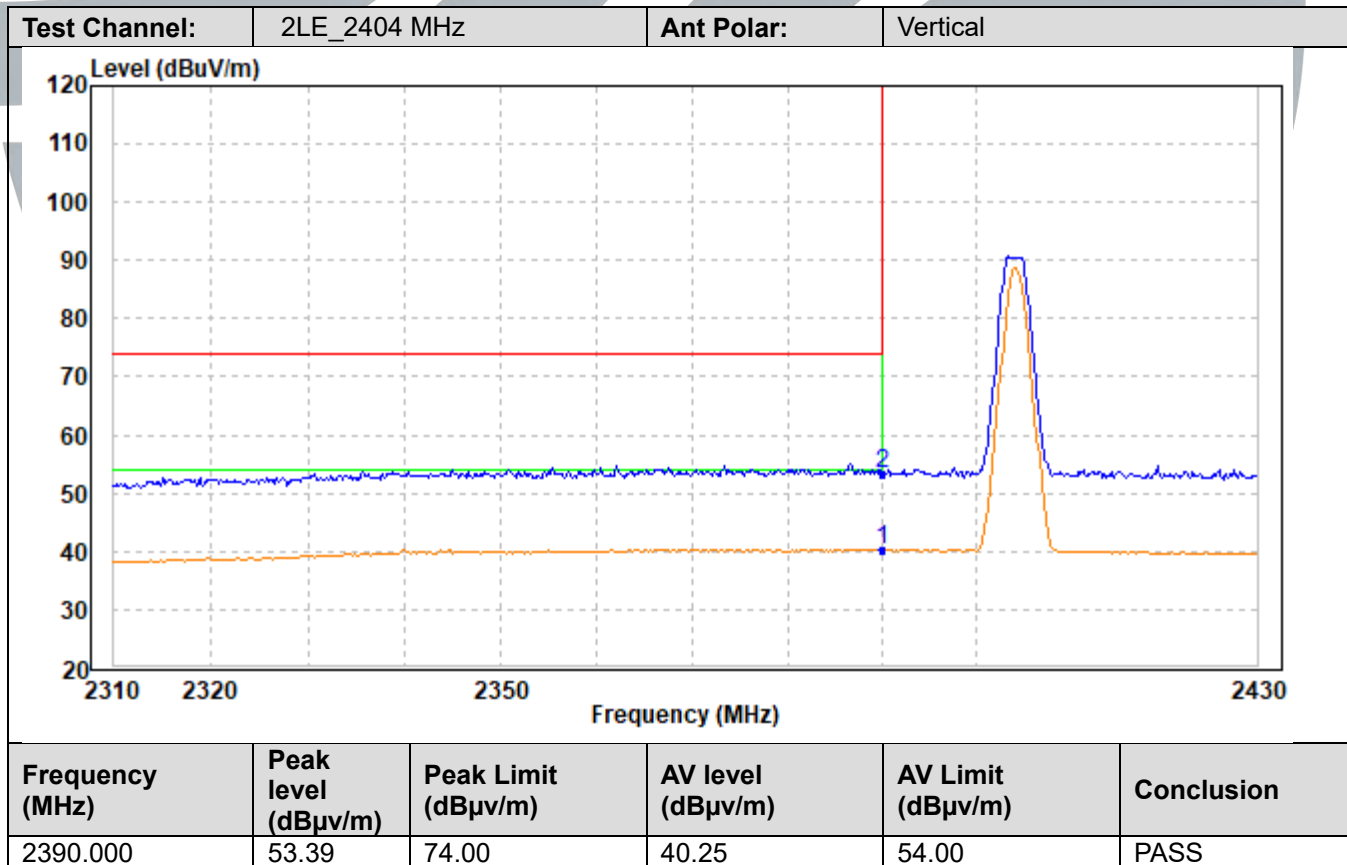


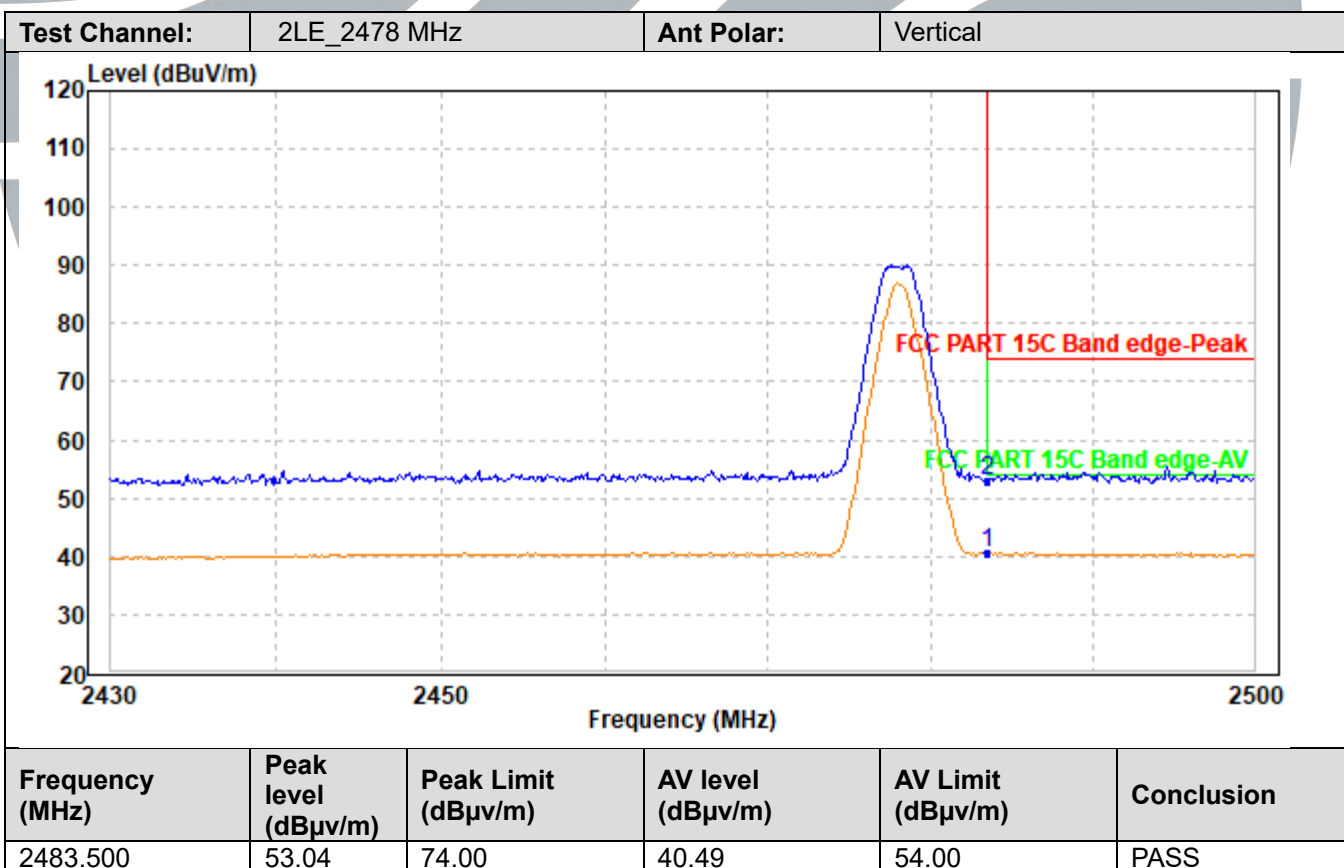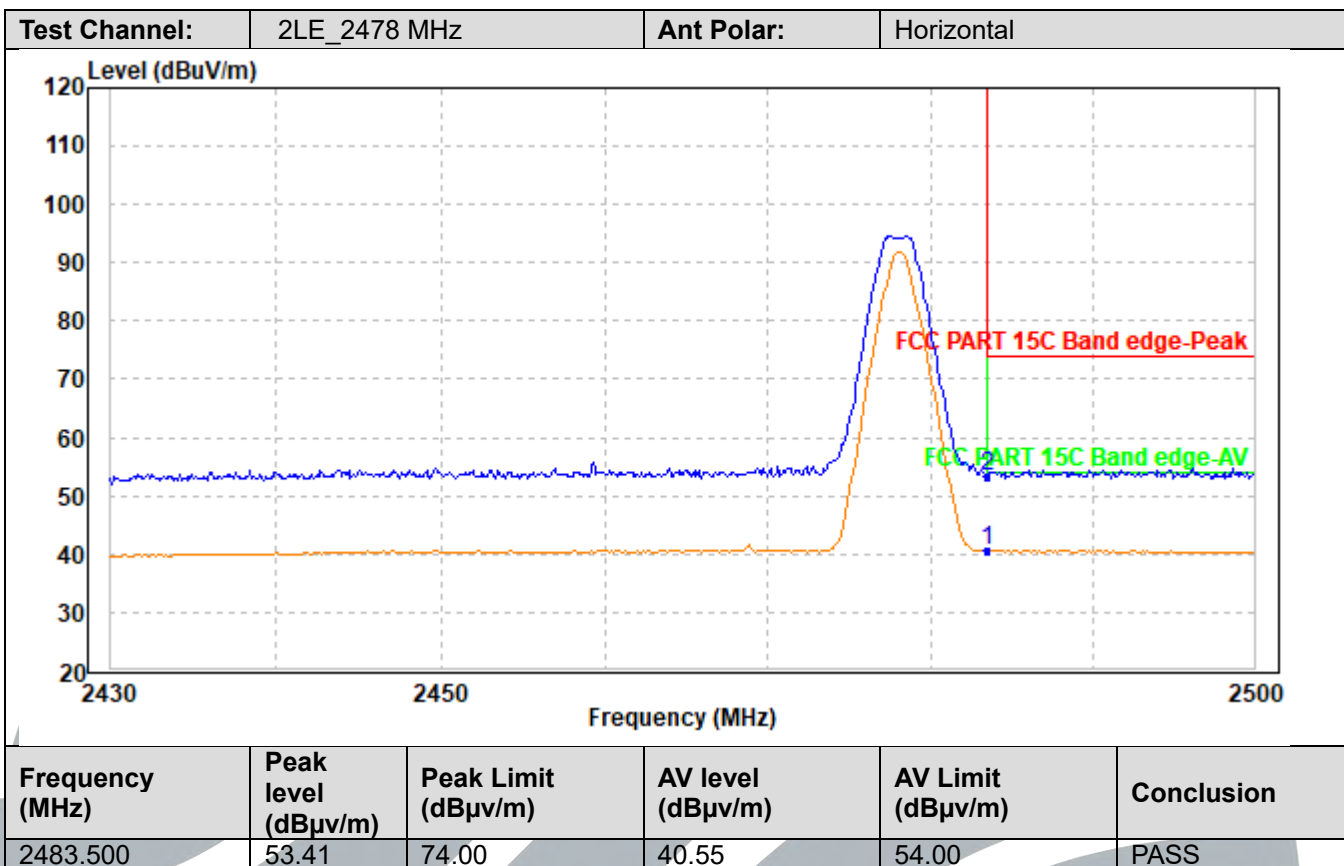

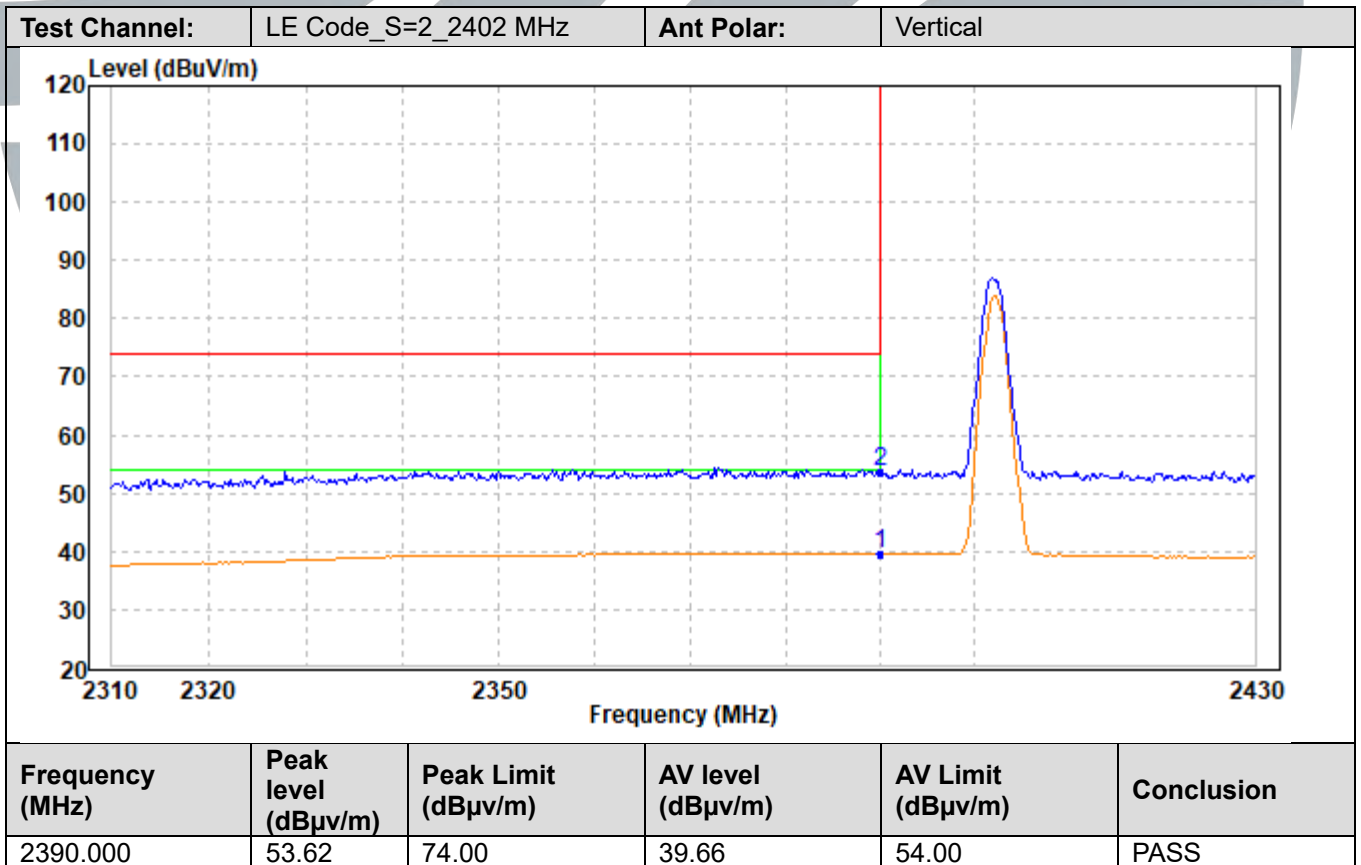

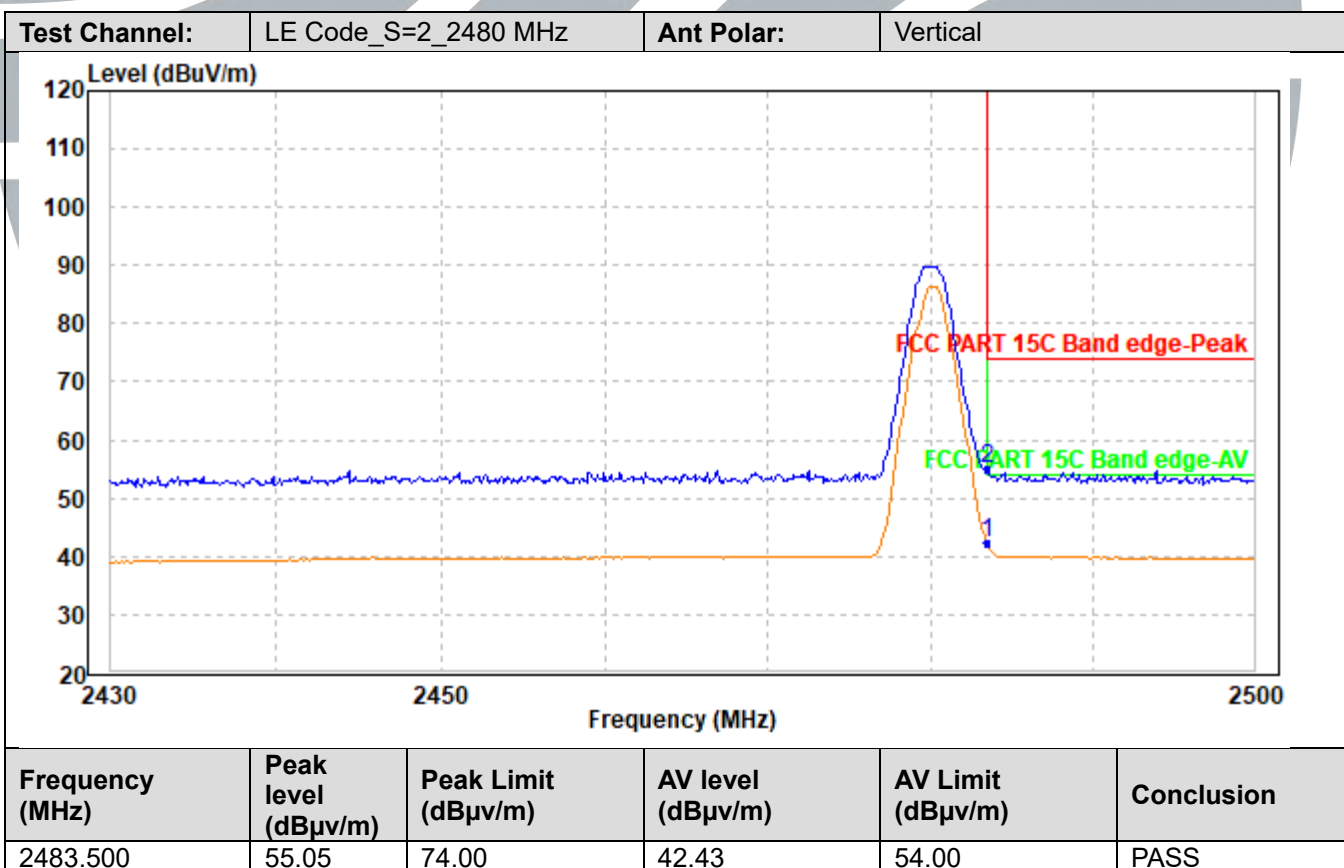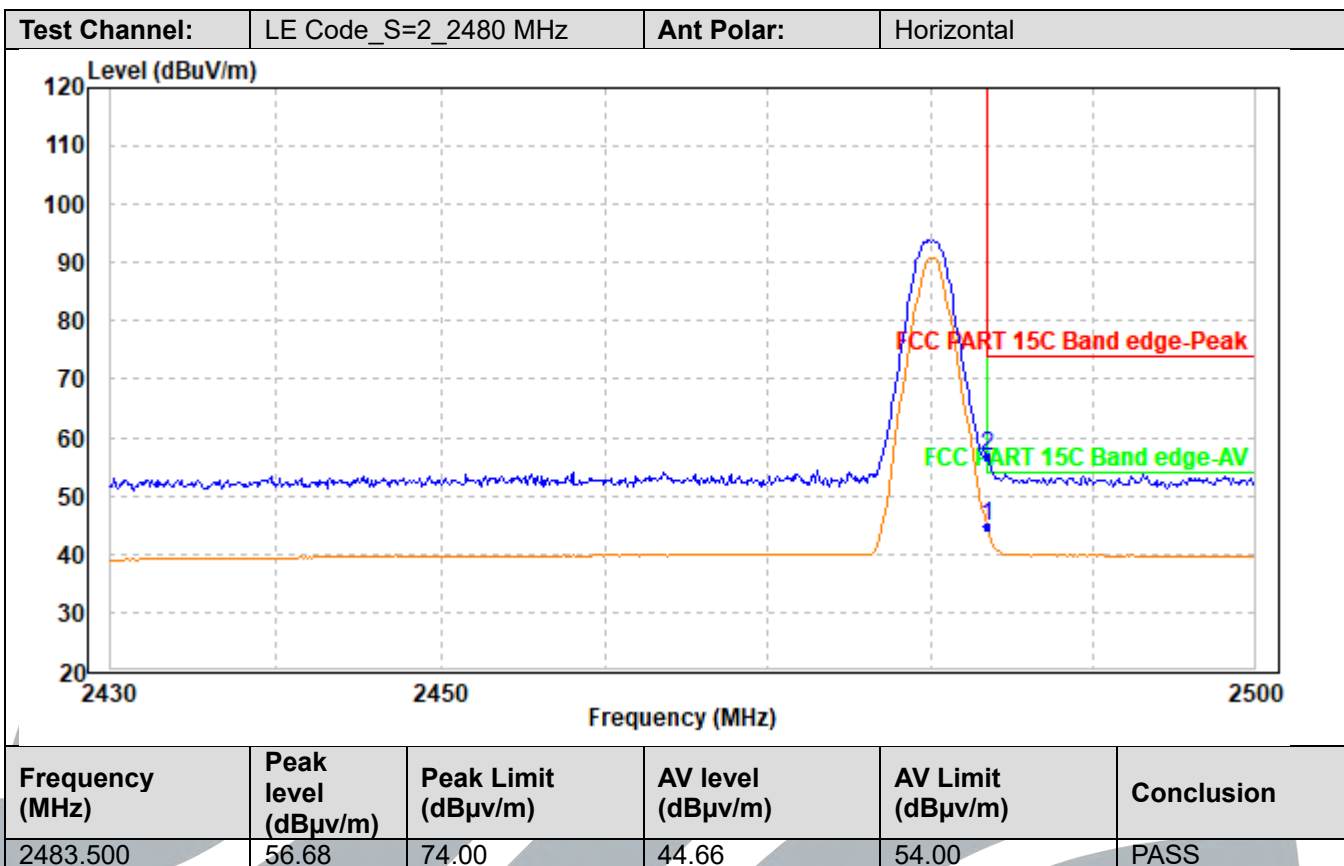


Test Channel:	LE Code_S=8_2402 MHz	Ant Polar:	Horizontal
---------------	----------------------	------------	------------

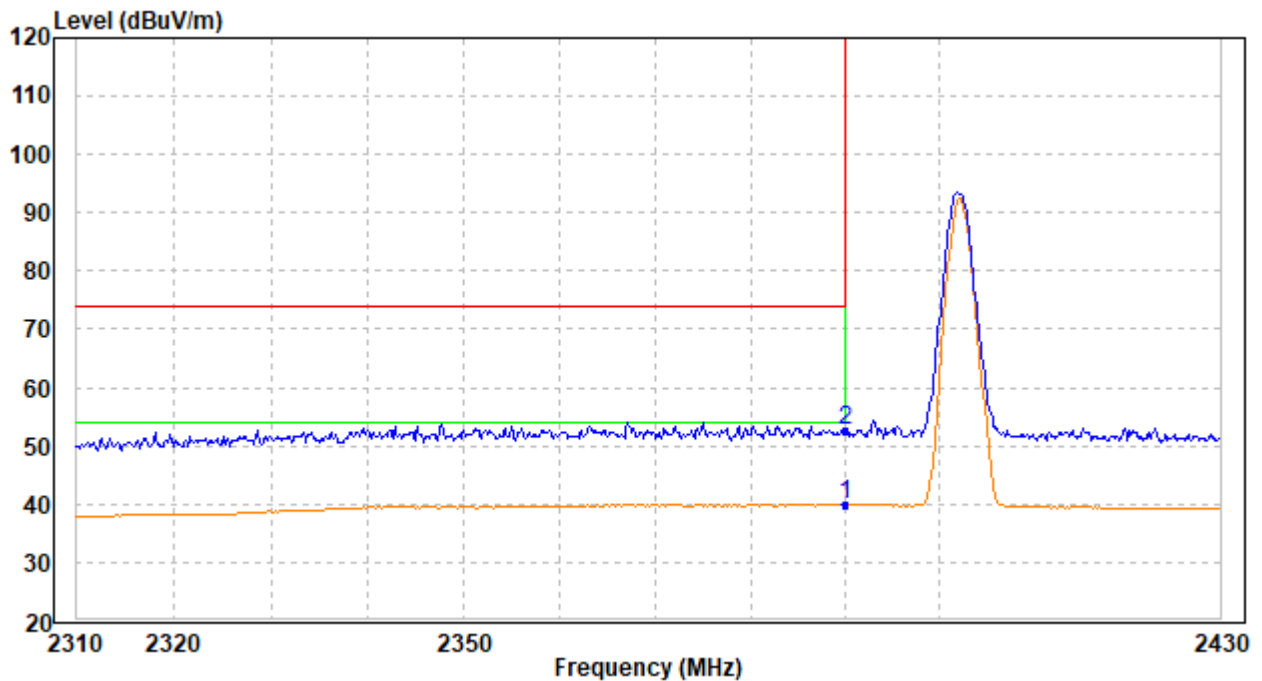

Frequency (MHz)	Peak level (dB μ v/m)	Peak Limit (dB μ v/m)	AV level (dB μ v/m)	AV Limit (dB μ v/m)	Conclusion
2390.000	52.67	74.00	39.89	54.00	PASS

Test Channel:	LE Code_S=8_2402 MHz	Ant Polar:	Vertical
---------------	----------------------	------------	----------

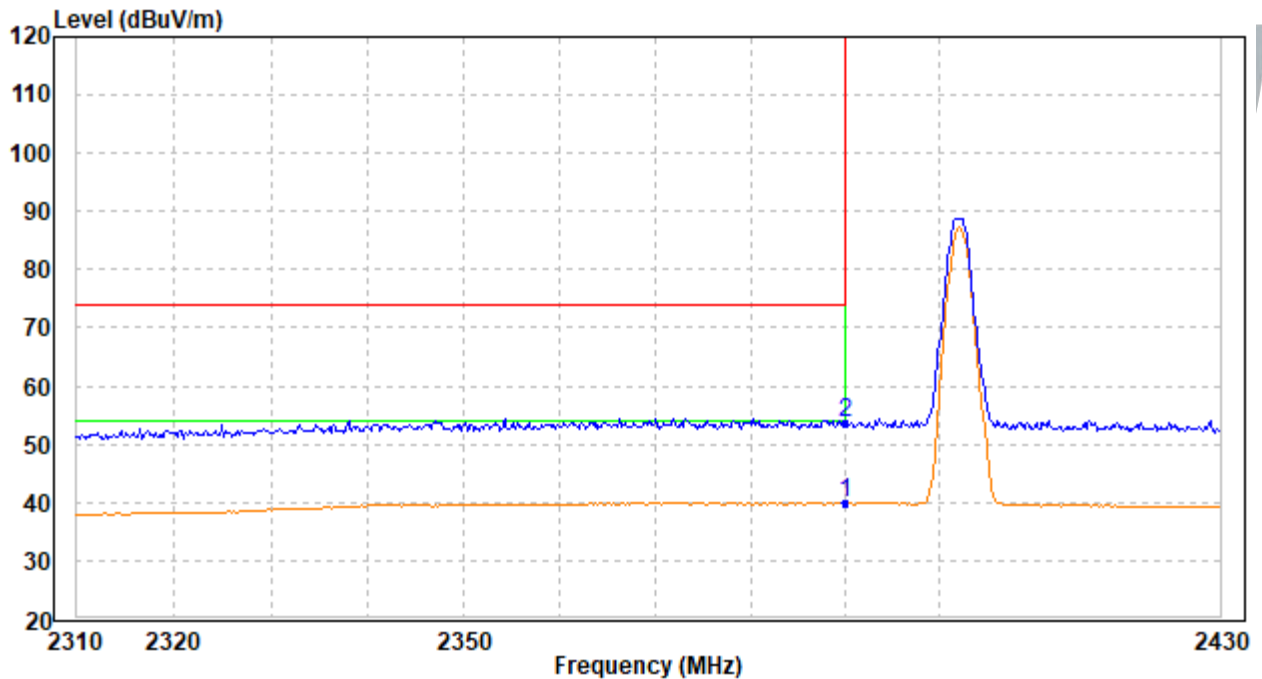

Frequency (MHz)	Peak level (dB μ v/m)	Peak Limit (dB μ v/m)	AV level (dB μ v/m)	AV Limit (dB μ v/m)	Conclusion
2390.000	53.77	74.00	39.84	54.00	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

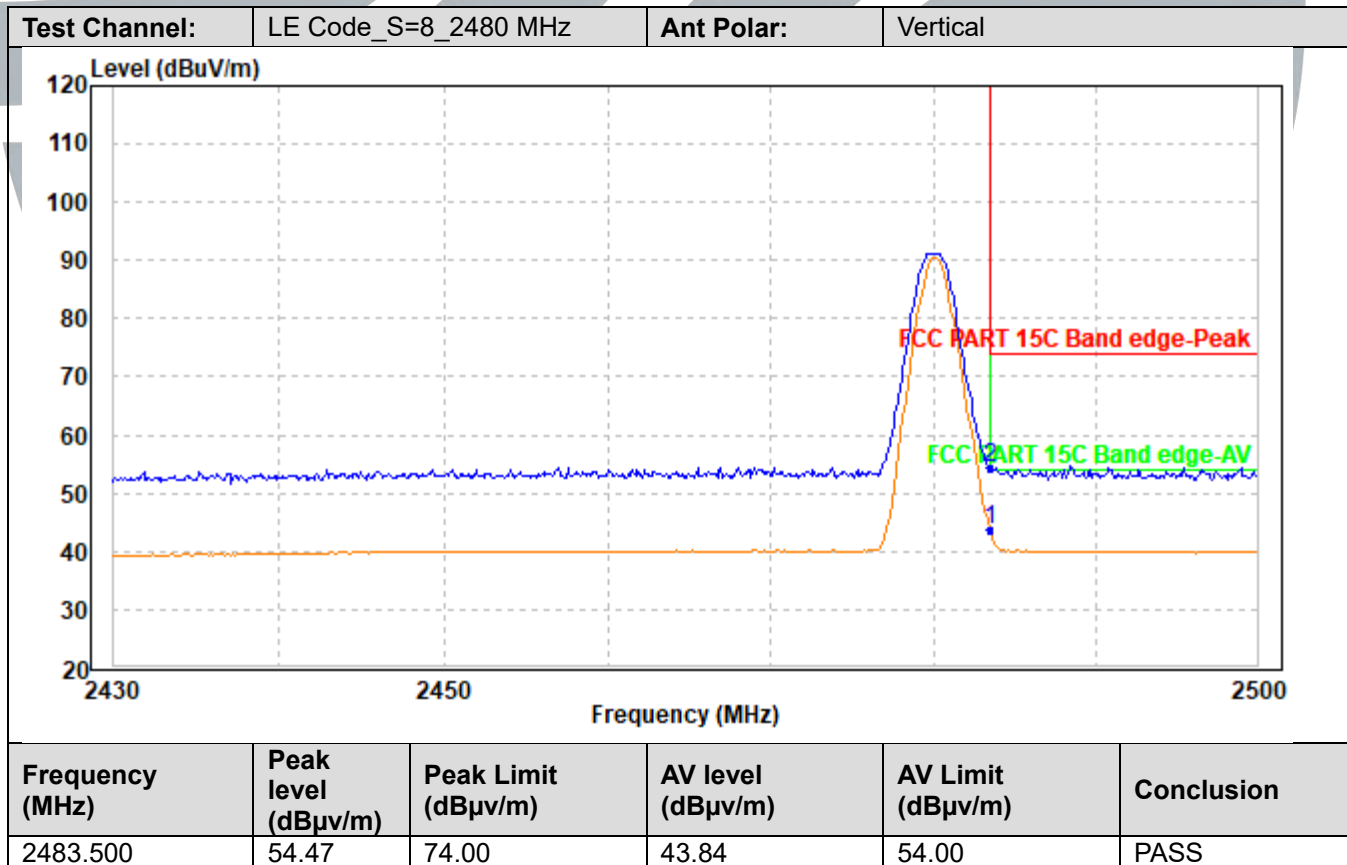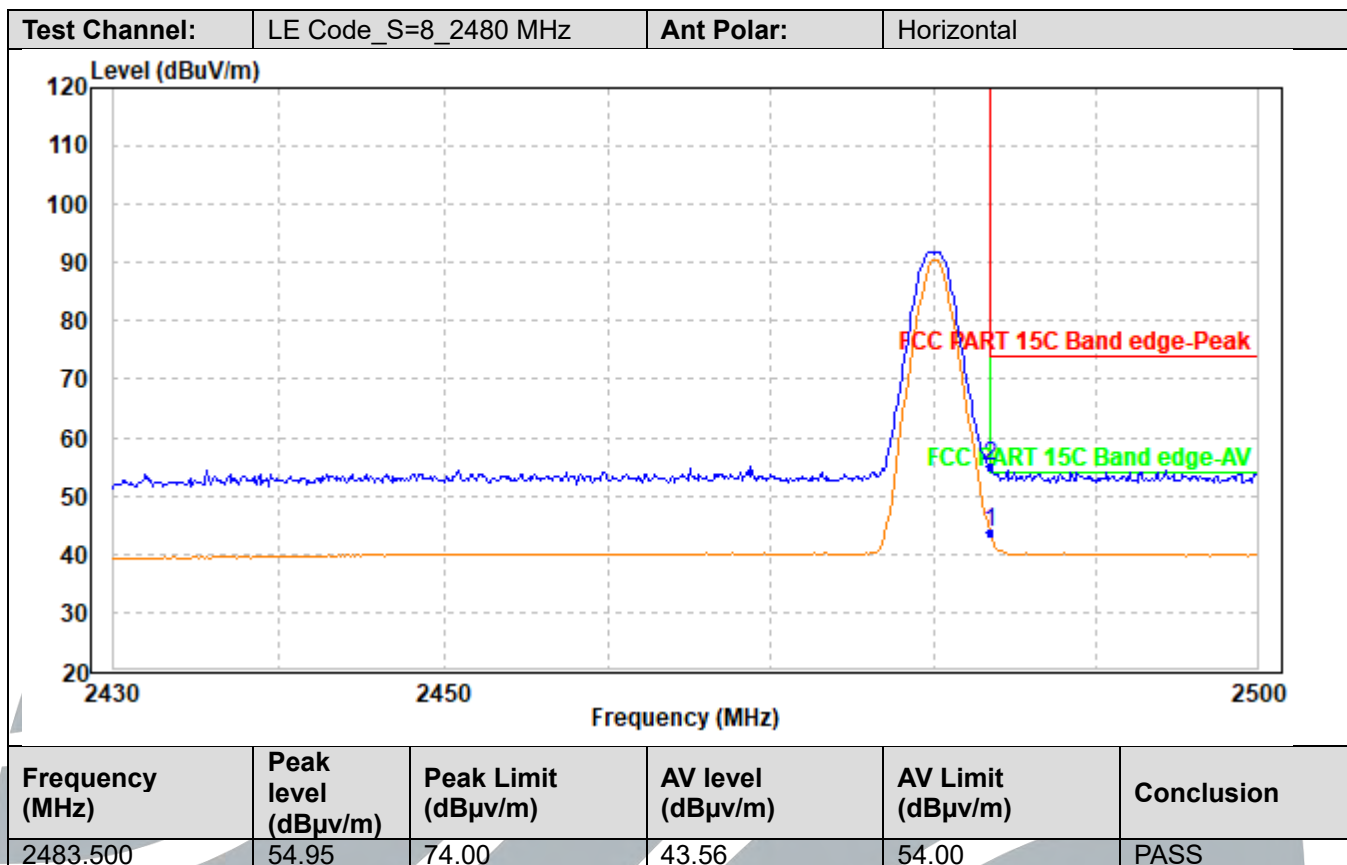

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207

Test Method: ANSI C63.10-2020 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:


Mode: BT Link

Live Line

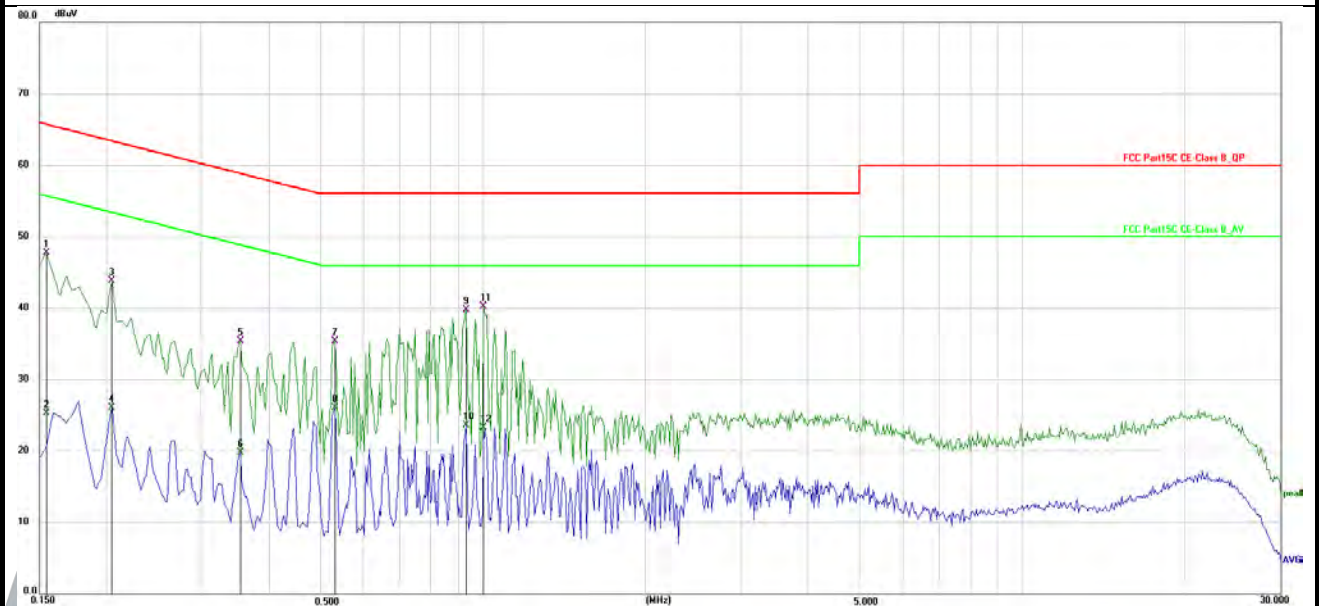

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1544	37.45	10.31	47.76	65.76	-18.00	QP
2	0.1544	15.03	10.31	25.34	55.76	-30.42	AVG
3	0.2040	33.50	10.27	43.77	63.45	-19.68	QP
4	0.2040	15.81	10.27	26.08	53.45	-27.37	AVG
5	0.3524	25.17	10.22	35.39	58.91	-23.52	QP
6	0.3524	9.59	10.22	19.81	48.91	-29.10	AVG
7	0.5280	25.24	10.20	35.44	56.00	-20.56	QP
8	0.5280	15.87	10.20	26.07	46.00	-19.93	AVG
9	0.9284	29.59	10.17	39.76	56.00	-16.24	QP
10	0.9284	13.44	10.17	23.61	46.00	-22.39	AVG
11	1.0004	30.01	10.18	40.19	56.00	-15.81	QP
12	1.0004	13.12	10.18	23.30	46.00	-22.70	AVG

Neutral Line

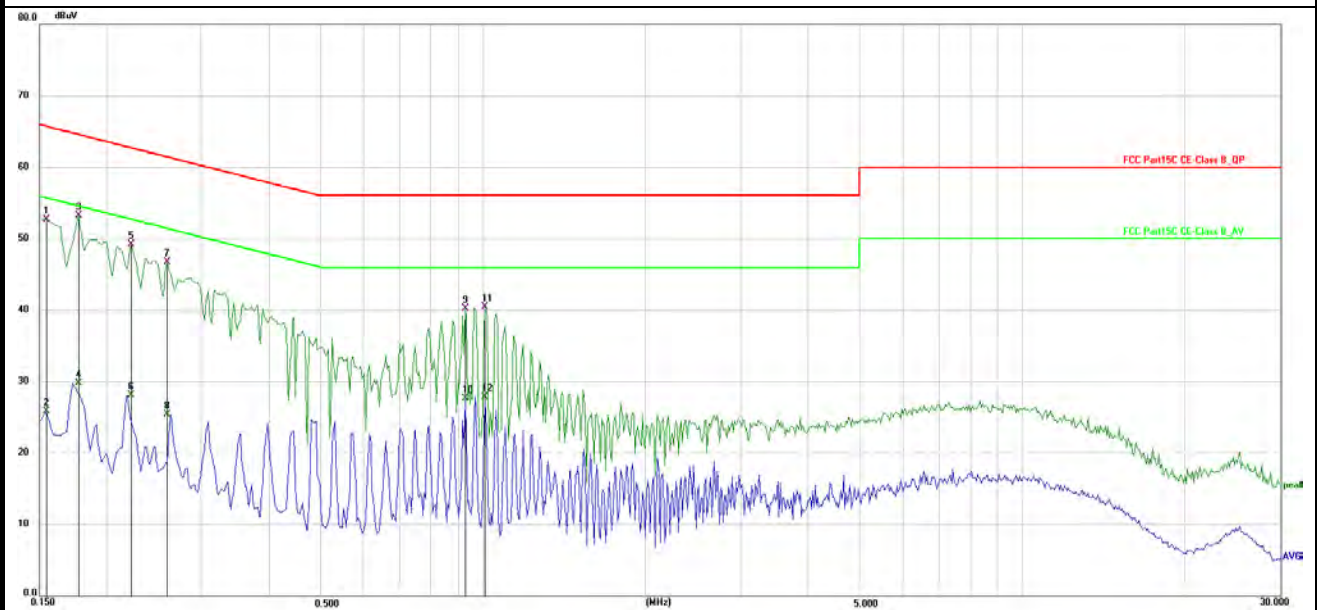

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1544	42.43	10.30	52.73	65.76	-13.03	QP
2	0.1544	15.55	10.30	25.85	55.76	-29.91	AVG
3	0.1770	42.91	10.28	53.19	64.63	-11.44	QP
4	0.1770	19.52	10.28	29.80	54.63	-24.83	AVG
5	0.2220	38.98	10.26	49.24	62.74	-13.50	QP
6	0.2220	17.90	10.26	28.16	52.74	-24.58	AVG
7	0.2580	36.44	10.24	46.68	61.50	-14.82	QP
8	0.2580	15.13	10.24	25.37	51.50	-26.13	AVG
9	0.9240	30.10	10.18	40.28	56.00	-15.72	QP
10	0.9240	17.44	10.18	27.62	46.00	-18.38	AVG
11	1.0095	30.25	10.19	40.44	56.00	-15.56	QP
12	1.0095	17.73	10.19	27.92	46.00	-18.08	AVG

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F., Block A, Building 6, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, Guangdong, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.247-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
