Technical Support

- Input voltage: 3V(CR2430)
- Transmitting frequency: 433.92MHz
- Transmitting power: 10 milliwatt
- Operating temperature: – 20°C ~ + 55°C
- Transmission distance: 200 meters open office 35 meters on two walls

Transmitter: You can choose single channel (DC305(A/G)), five channels(DC306(A/G/E)). Each indicator light means one control channel. Press "channel choose" button P1-(indicator move left side) or P1+(indicator move right side) to change the channel. On the analogy of this, loose finger when the indicator light move to suitable channel that you select effective channel. All indicator lights flash that means all channels is effective(group control state).

Transmitter: You can choose nine channels (DC307(A/G)), fifteen channels(DC313(A/G/E)). One number of LCD screen means one control channel. Press"channel choose"button P1-(number descending) or P1+(number increasing) to change the channel. On the analogy of this,loose finger when the indicator light move to suitable channel that you select effective channel. If LCD screen number show 0 that means all channels if effective(group control state).

- Notice: transmitter Do not exposed to moisture and strike, so as not to affect life. When you use transmitter, if found emission distance obviously short or less sensitive, please change another same new battery. Please have batteries for recycling.

Matchable R Tubular Motor Set up

Additional Function

Delete all the datas of the motor and the new emitter has been programmed.

Each time, the interval of pressing different buttons must within 4 seconds when you re-setting all instructions,otherwise the system will restore the original state.

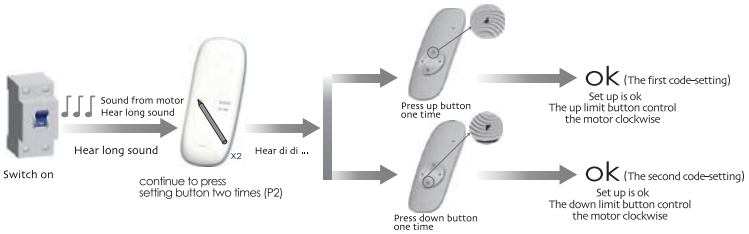

Matchable DC227/DC228 Tubular Motor Set up

Additional Function

The interval of different button must within 10 seconds for all setting, otherwise the system will restore the original state

One receiver store 20 emitters channels at most, and one channel of emitter can control 20 receivers at most.

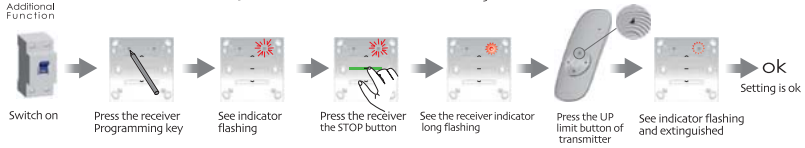

Matchable DC136 Tubular Motor Set up

Additional Function

The interval of different button must within 10 seconds for all setting, otherwise the system will restore the original state.

One receiver store 20 emitters channels at most, and one channel of emitter can control 20 receivers at most.

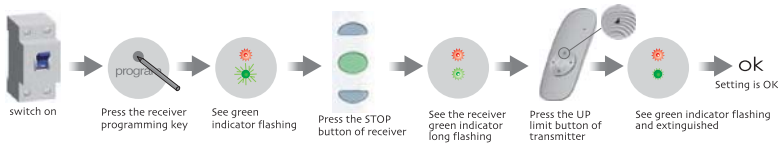

All controls support 433MHz
All controls support 3V(CR2430)
Specific parameters to the nameplate shall prevail

DC307A DC313

Emitter Specification

Version No.: A/05

Type Specification

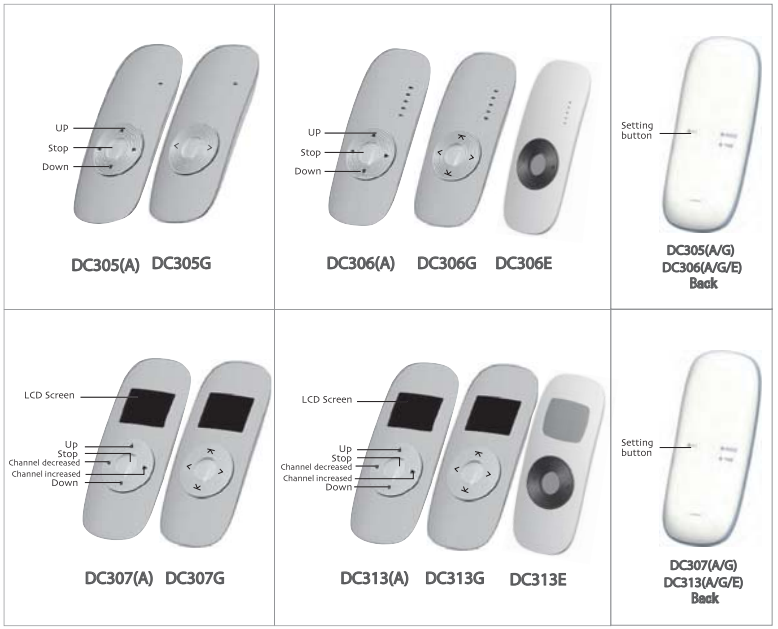

DC305G DC306G DC306E DC307G DC313G DC313E and DC305(A) DC306(A) DC307(A) DC313(A) have different button mark, but the function is the same.

Caution:

This device complies with Part 15 of the FCC. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference,

(2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.