






Power spectral density

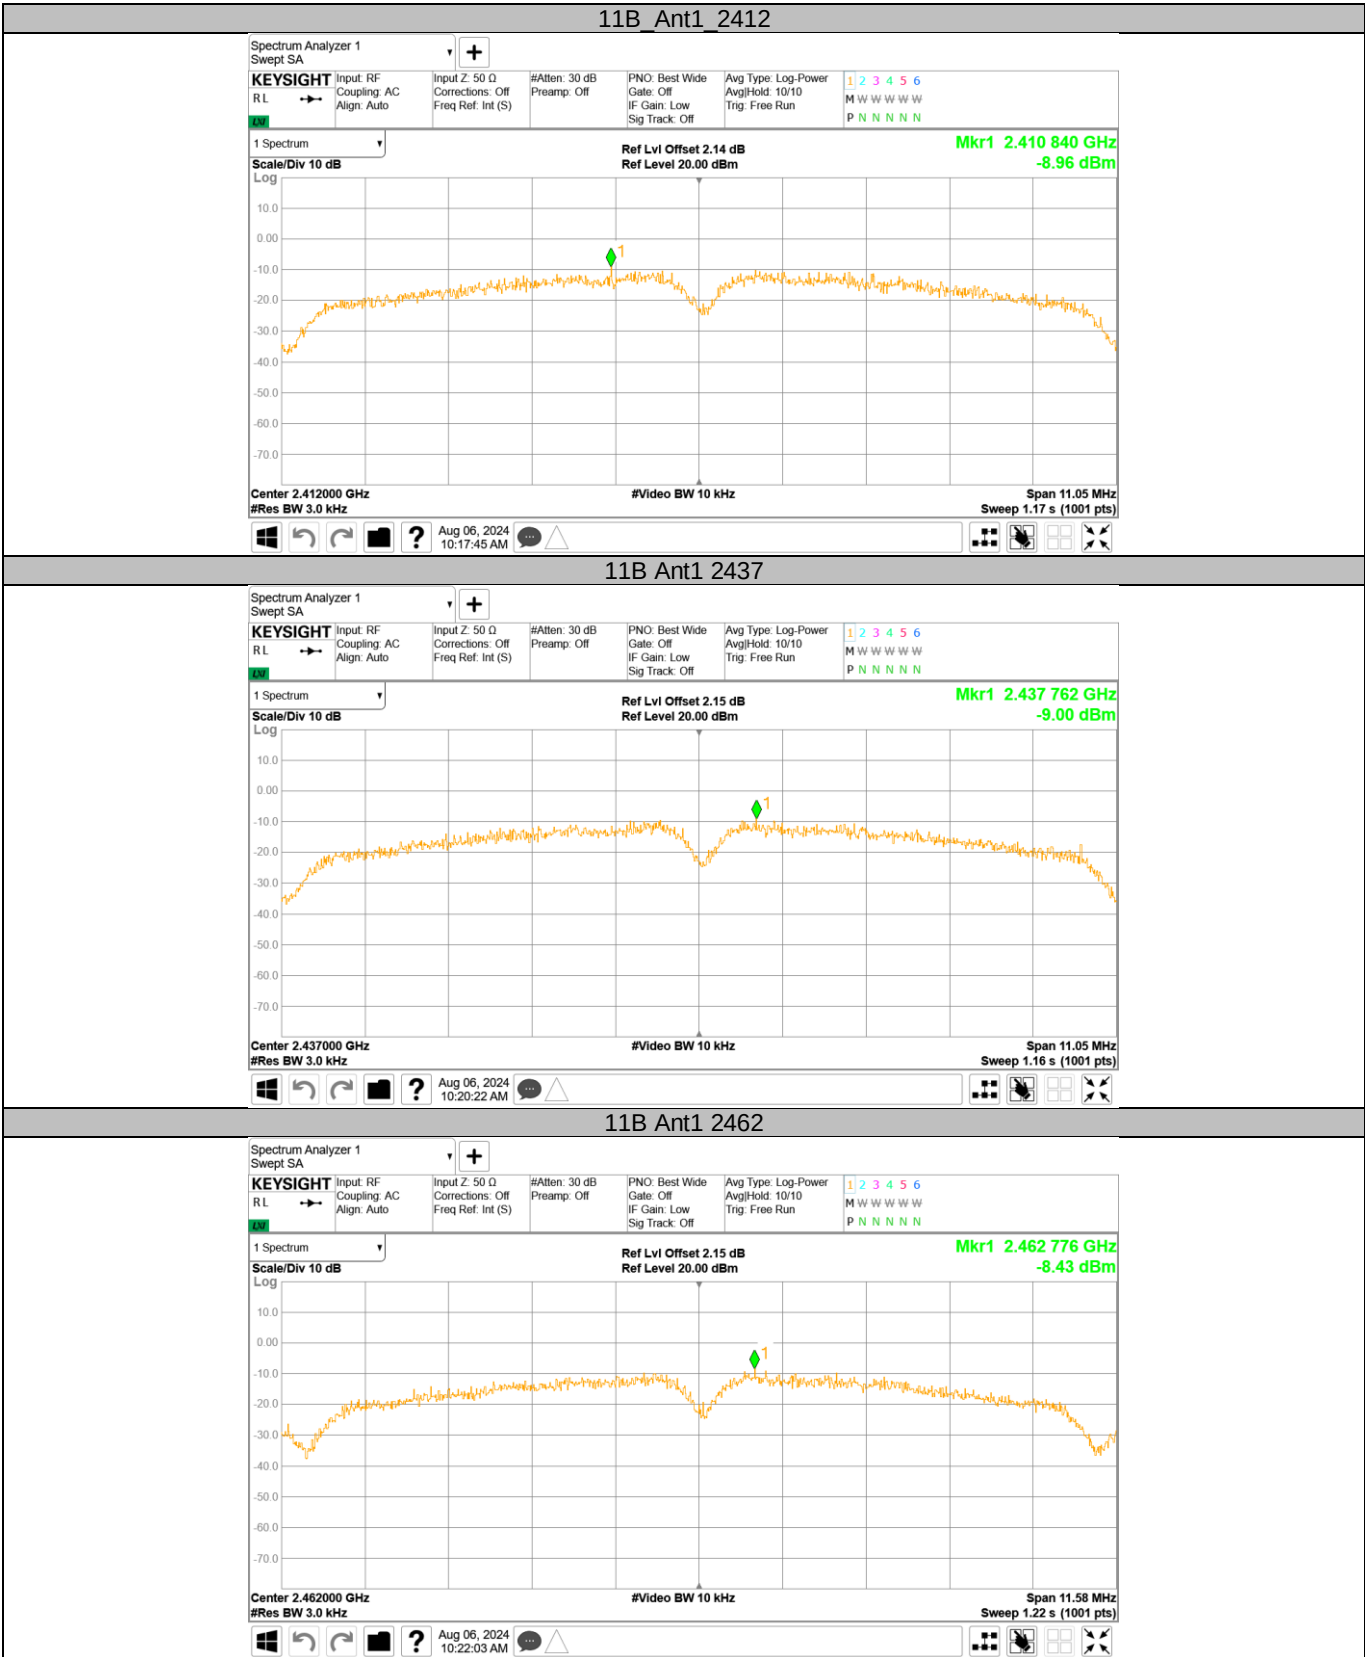

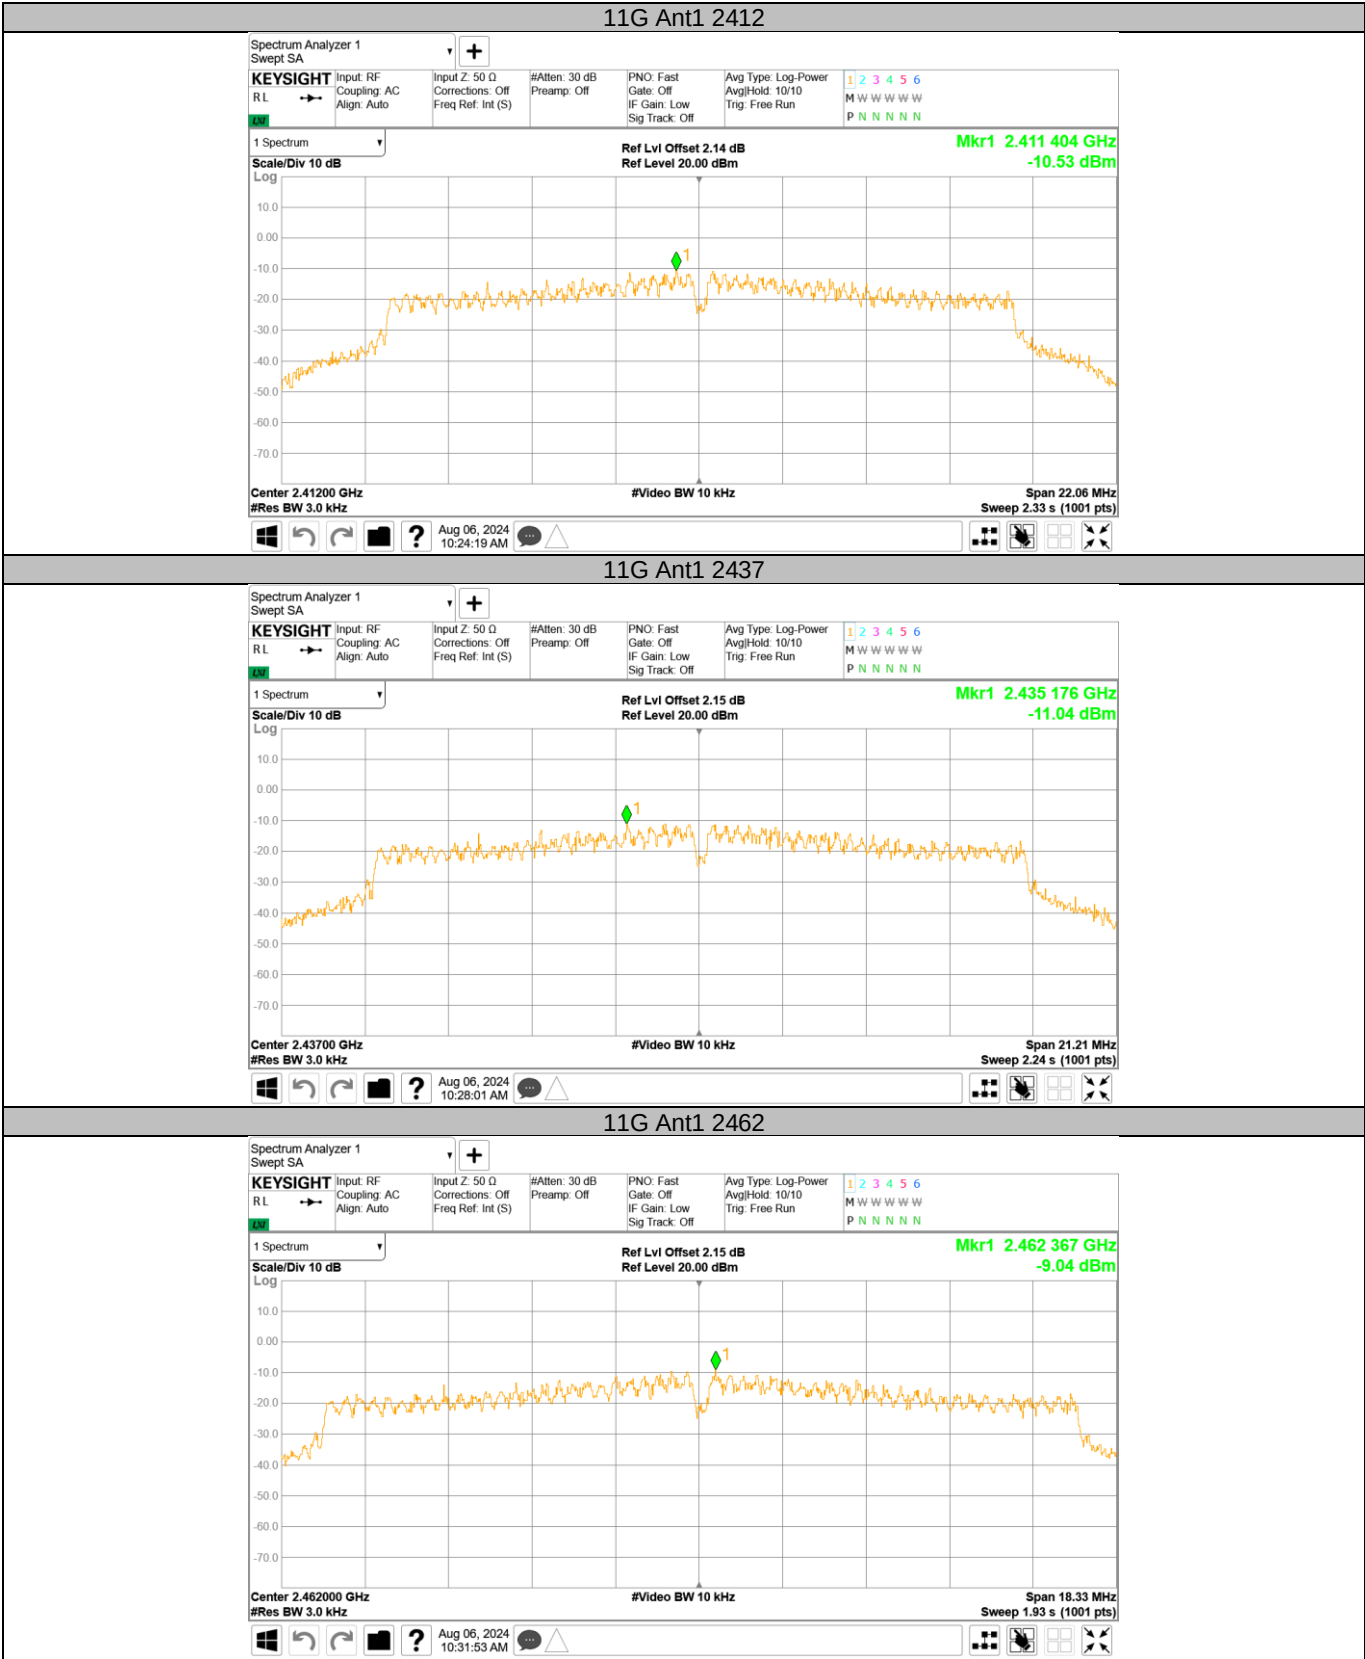

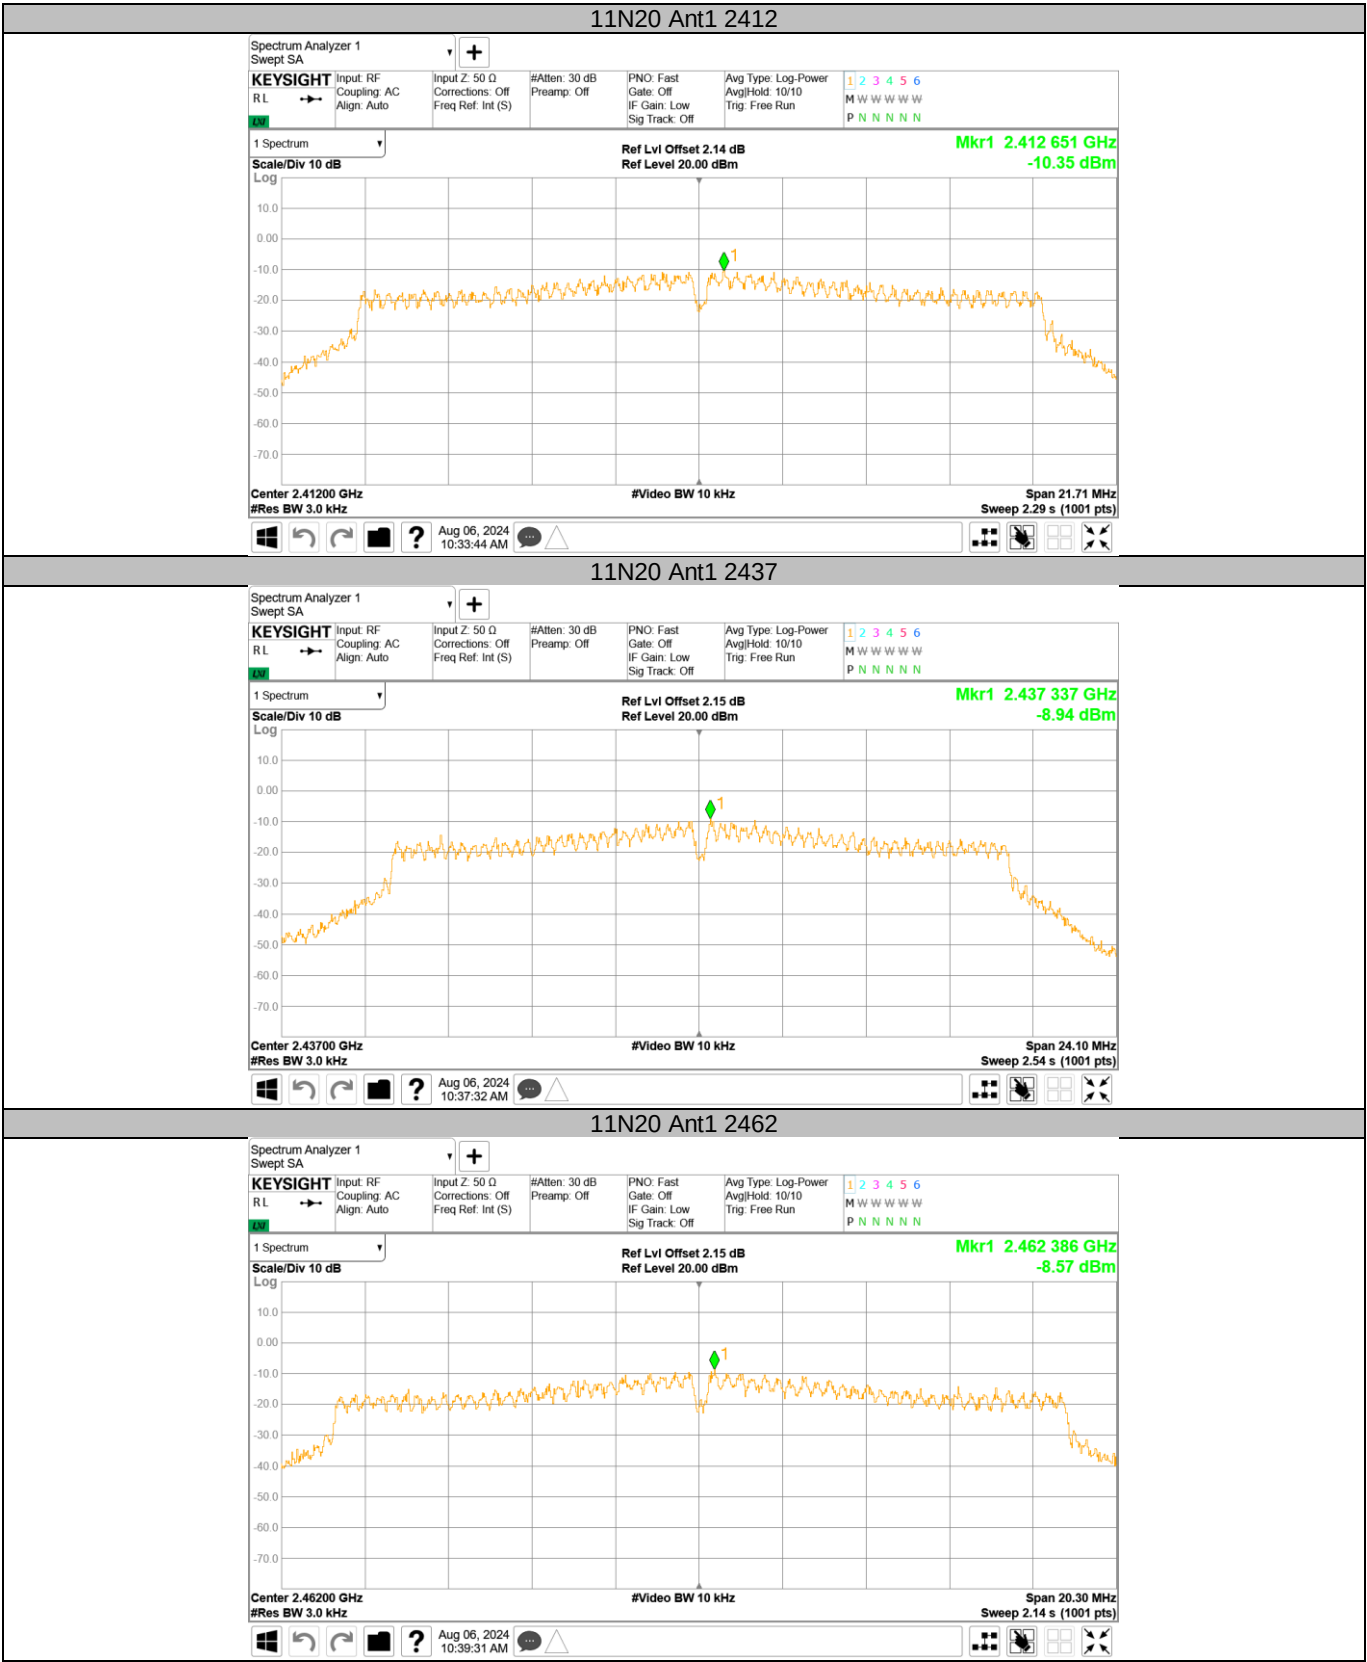



## 9.5 Spurious RF conducted emissions

### Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10<sup>th</sup> harmonic. Typically, several plots are required to cover this entire span.  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
5. The level displayed must comply with the limit specified in this Section. Submit these plots.
6. Repeat above procedures until all frequencies measured were complete.

### Limit

| Frequency Range<br>MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000               | -20         |



Spurious RF conducted emissions



802.11 B Ant1

Out-of-Band Emissions

Channel 1 (2412MHz)



Reference point

Spurious Emission (30MHz – 1GHz)

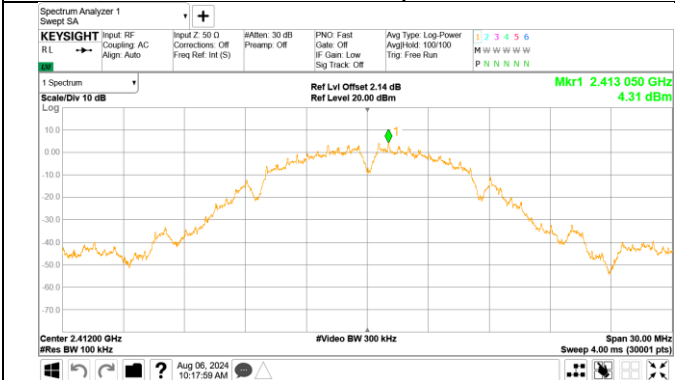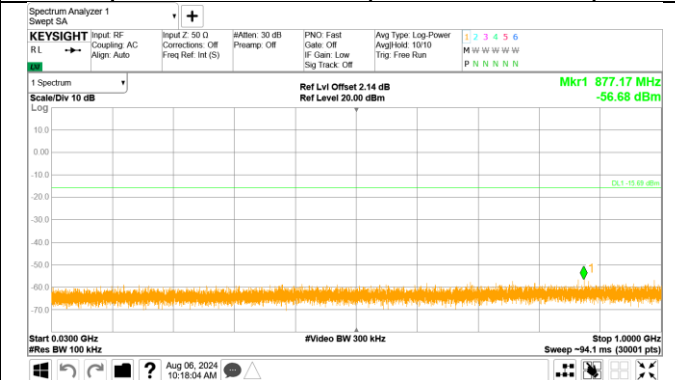

Spurious Emission (1GHz – 5GHz)


Spurious Emission (5GHz – 26.5GHz)

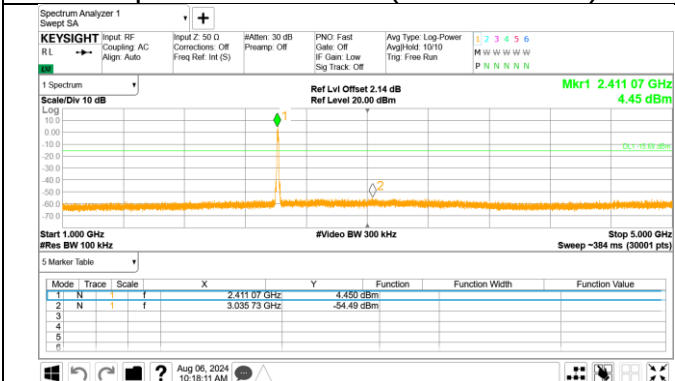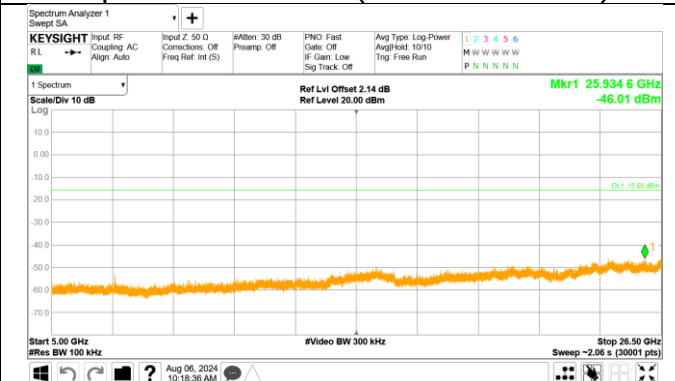

Note: The emission which exceed the limit is the fundamental.




Out-of-Band Emissions  
Channel 6 (2437MHz)

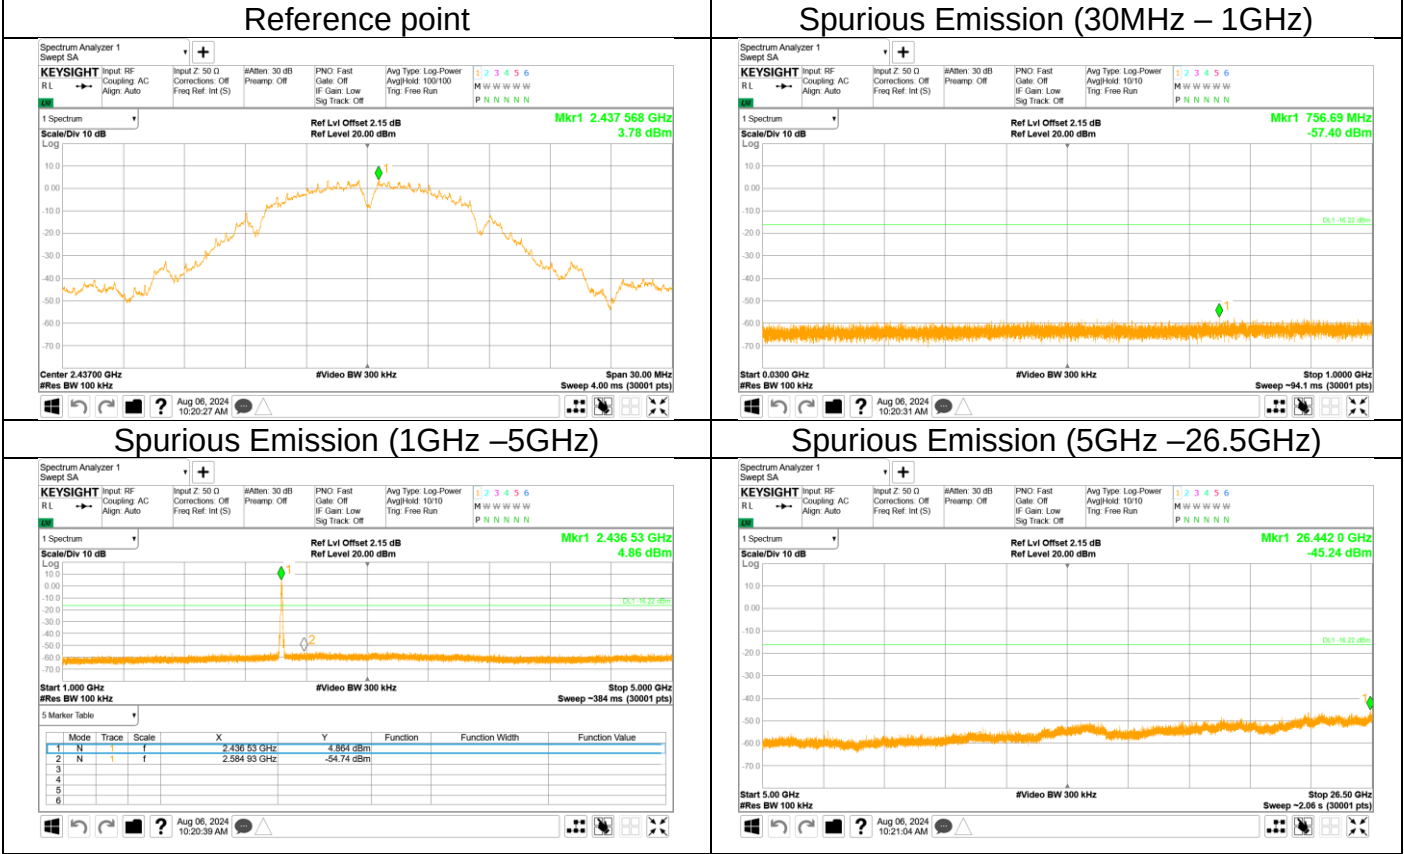

Note: The emission which exceed the limit is the fundamental.




Out-of-Band Emissions  
Channel 11 (2462MHz)

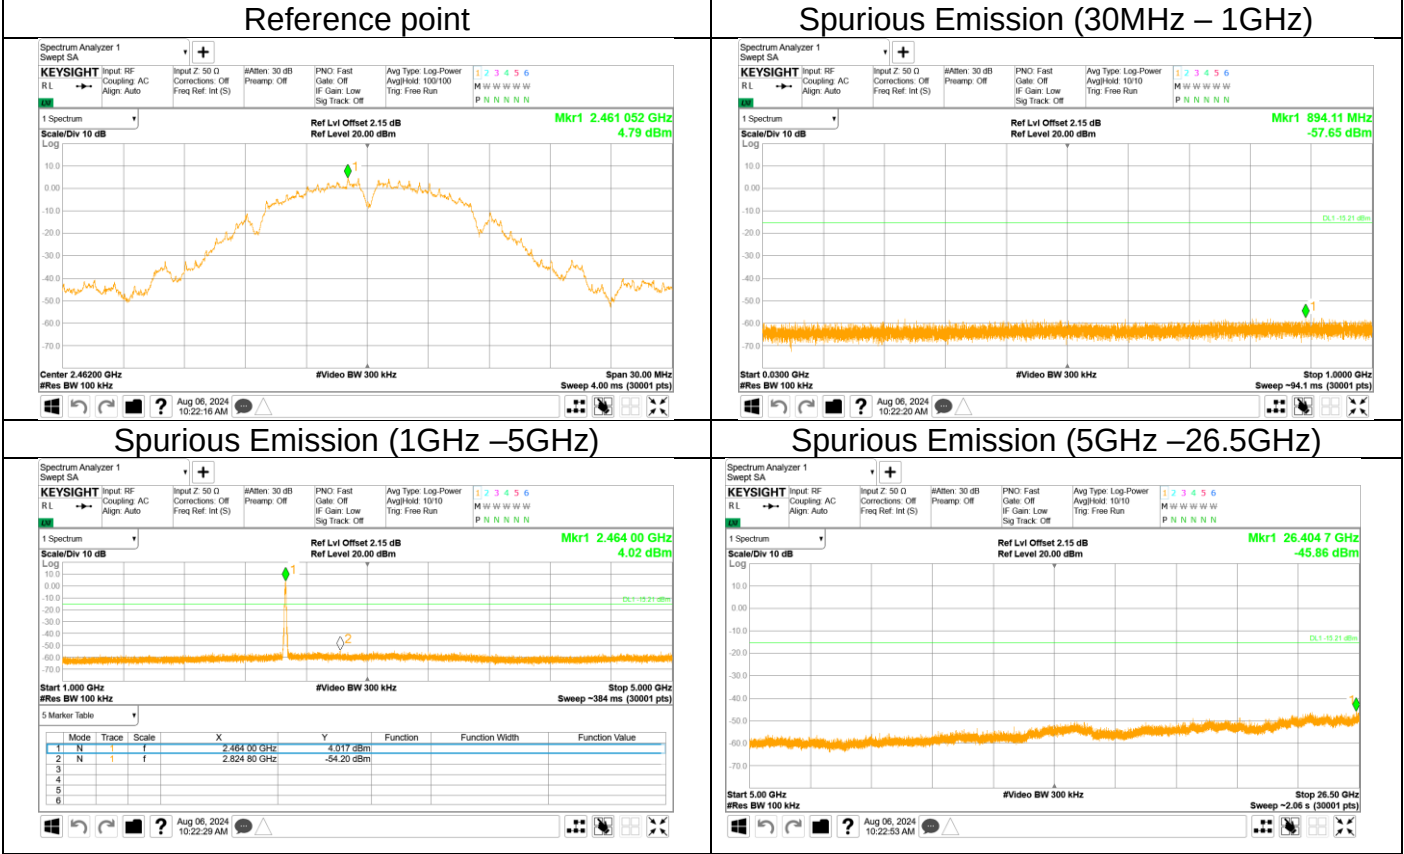

Note: The emission which exceed the limit is the fundamental.




802.11 G Ant1  
Out-of-Band Emissions  
Channel 1 (2412MHz)

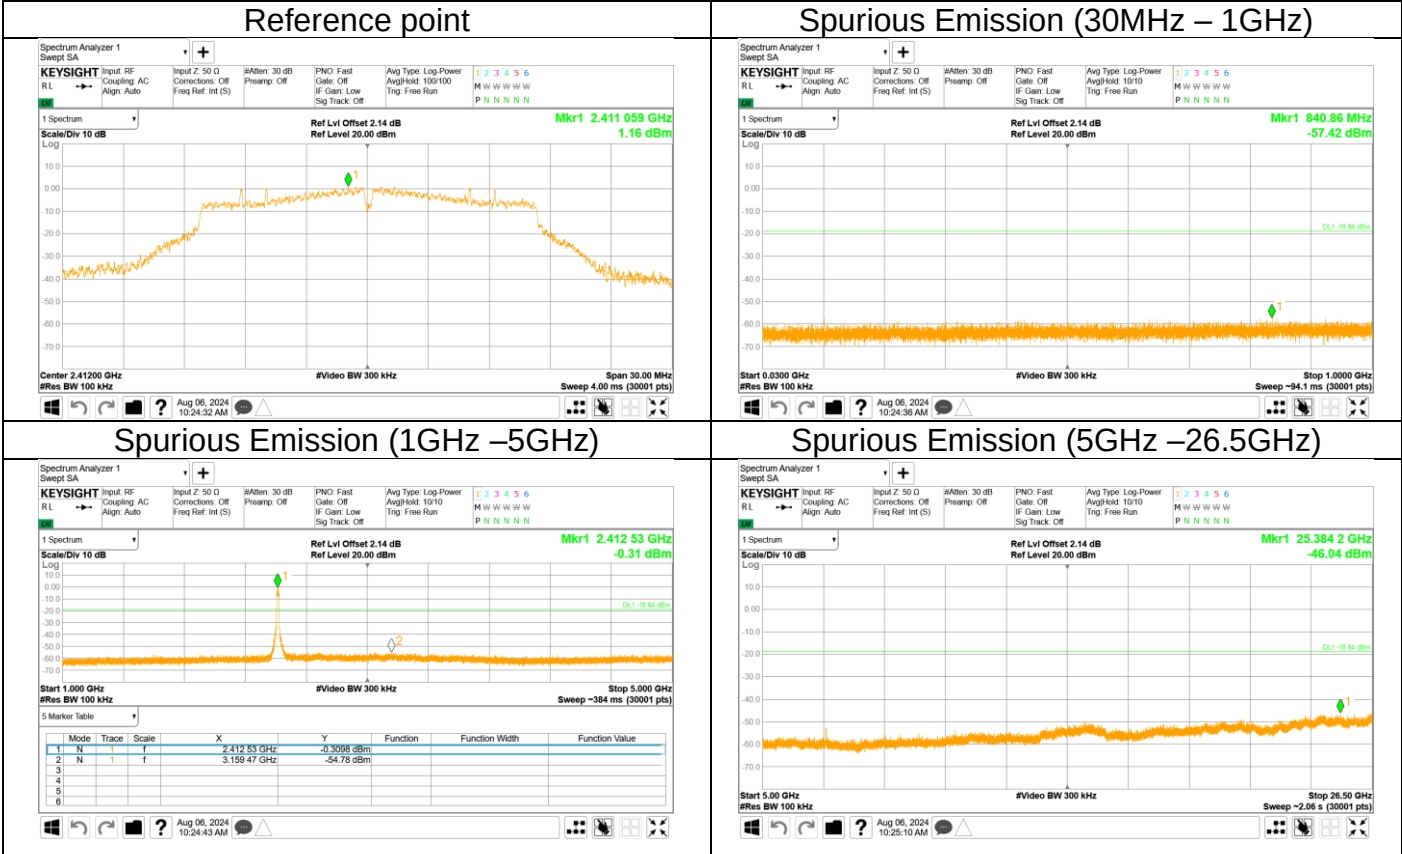

Note: The emission which exceed the limit is the fundamental.



Out-of-Band Emissions  
Channel 6 (2437MHz)

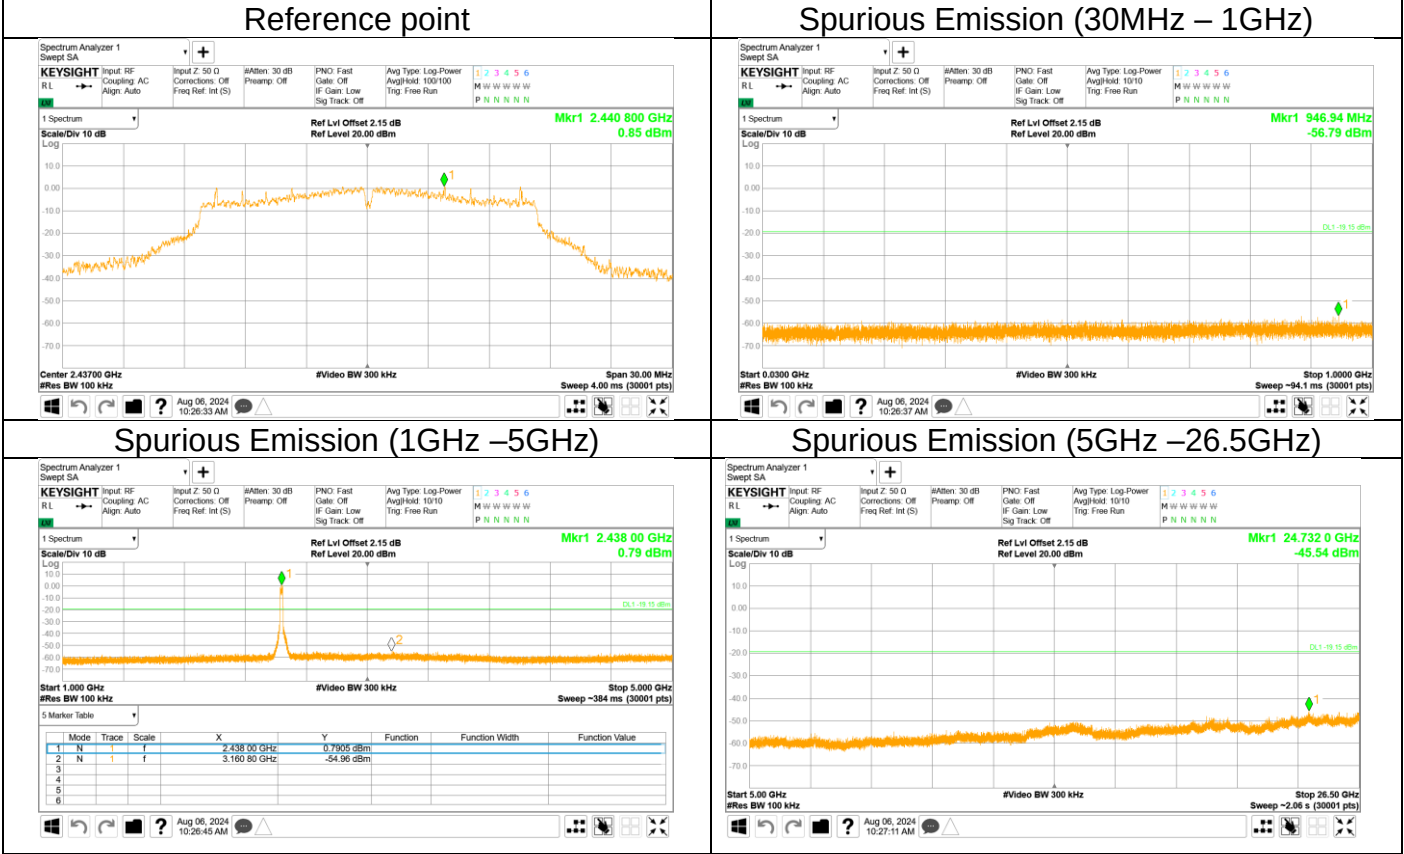


Note: The emission which exceed the limit is the fundamental.




Out-of-Band Emissions  
Channel 11 (2462MHz)


Reference point

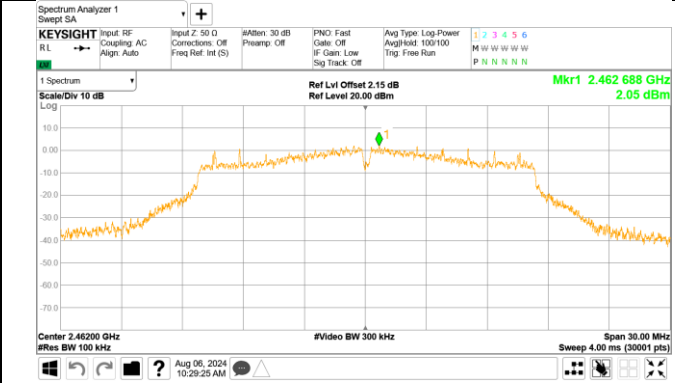


Spurious Emission (30MHz – 1GHz)

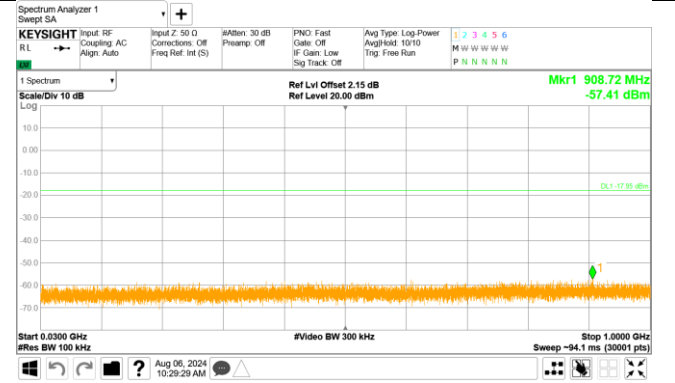

Spurious Emission (1GHz –5GHz)

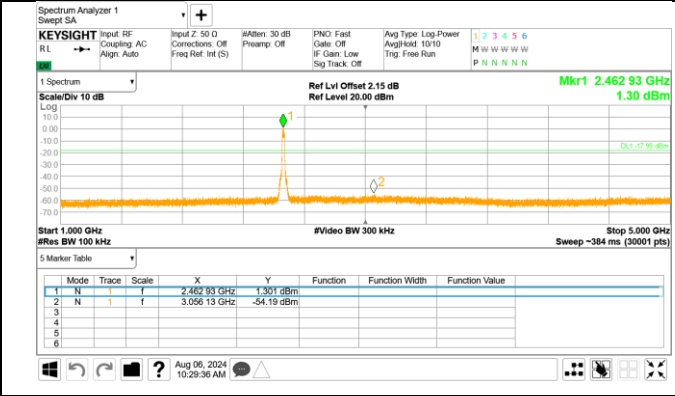


Spurious Emission (5GHz –26.5GHz)

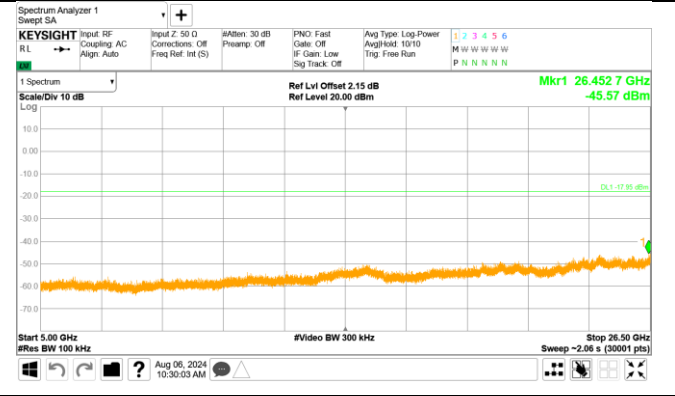

Note: The emission which exceed the limit is the fundamental.




802.11 N20 Ant1  
Out-of-Band Emissions  
Channel 1 (2412MHz)

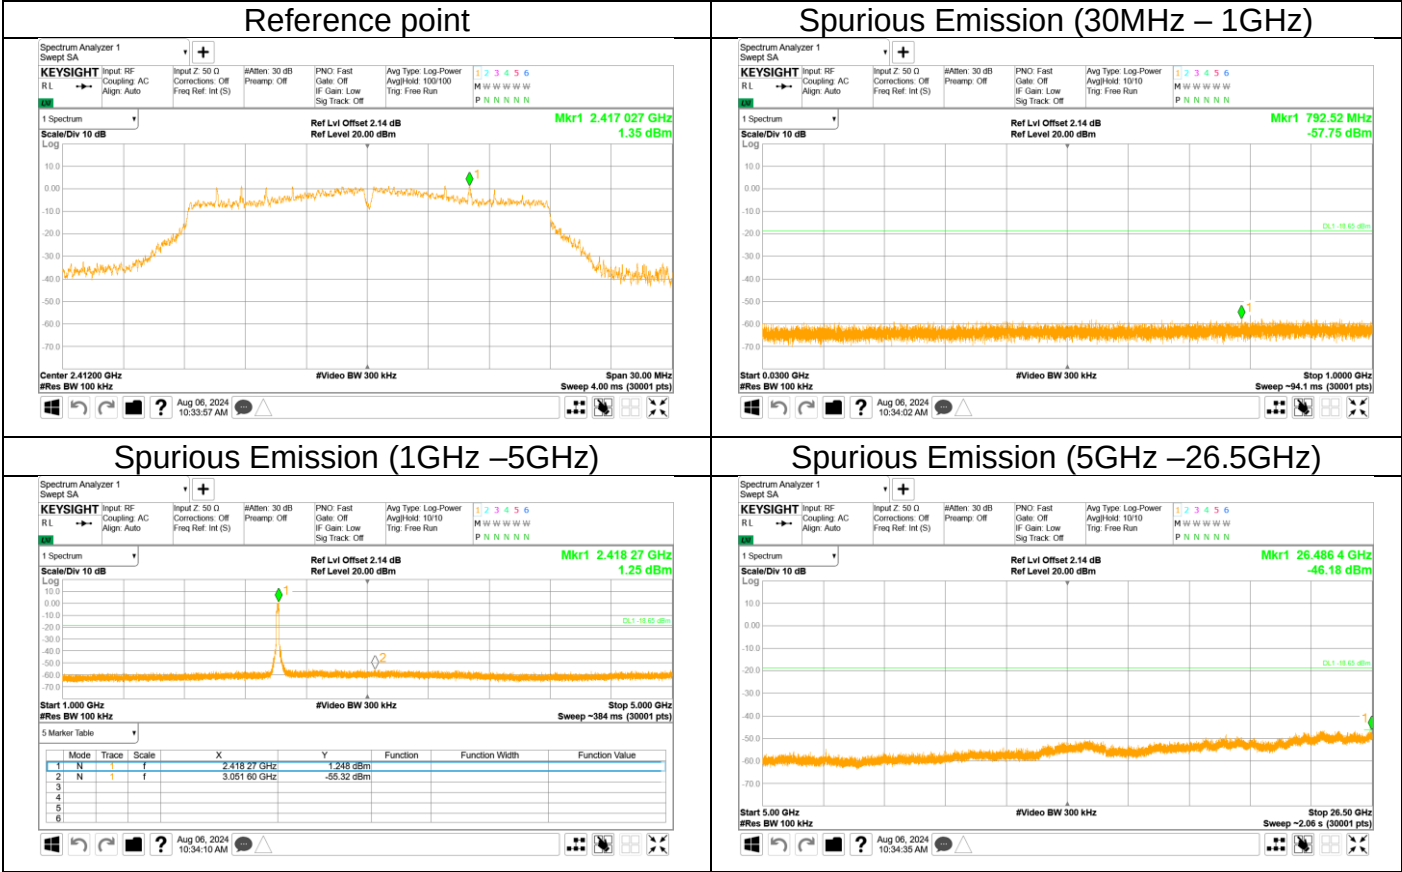

Note: The emission which exceed the limit is the fundamental.




Out-of-Band Emissions  
Channel 6 (2437MHz)

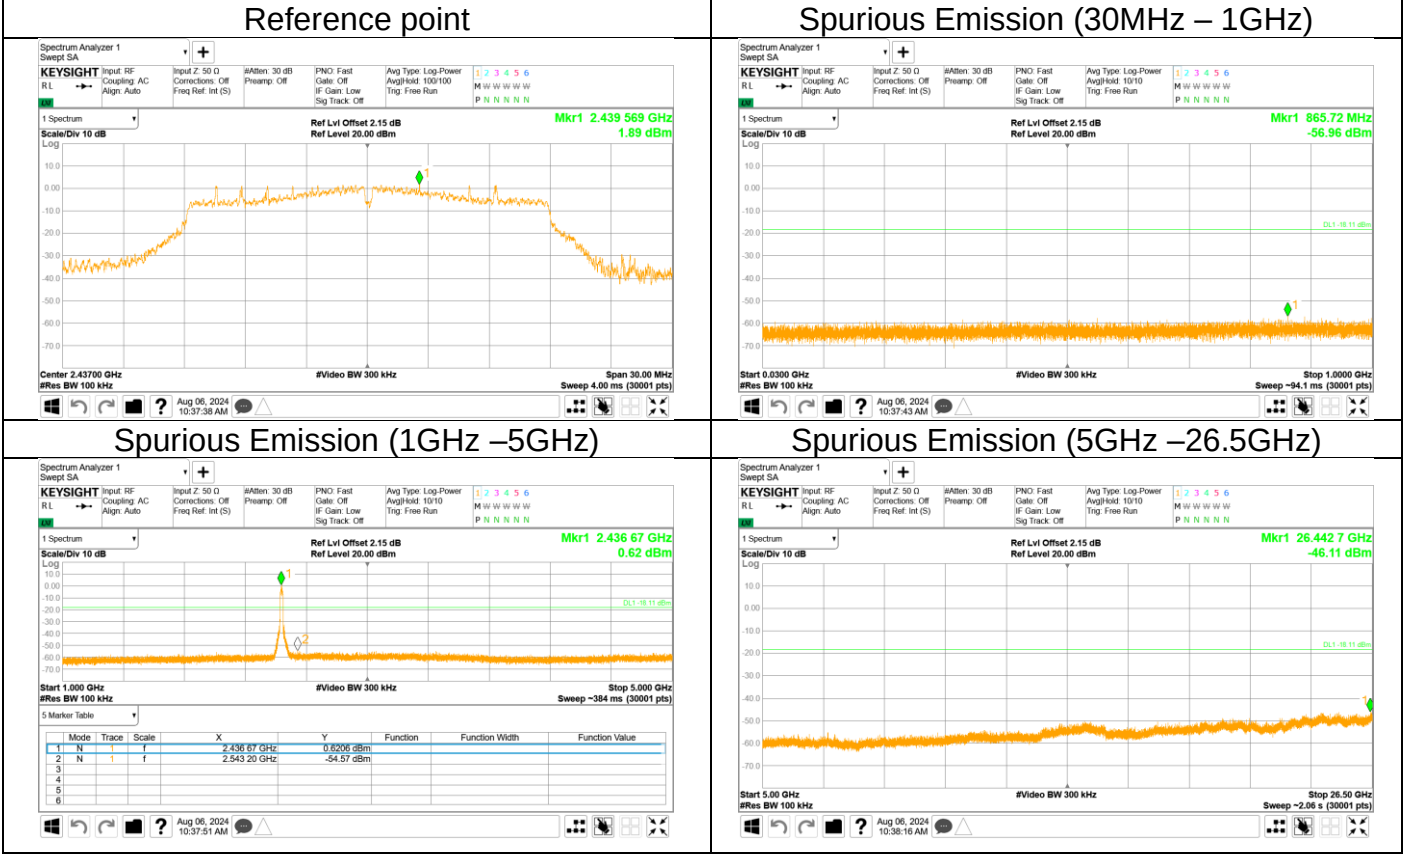


Note: The emission which exceed the limit is the fundamental.

## Spurious Emission (30MHz – 1GHz)

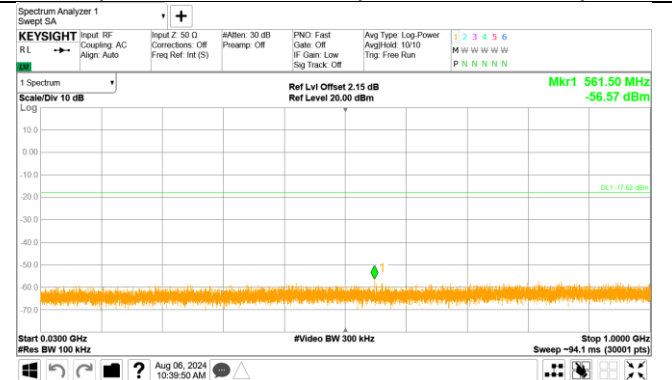

## Spurious Emission (5GHz –26.5GHz)

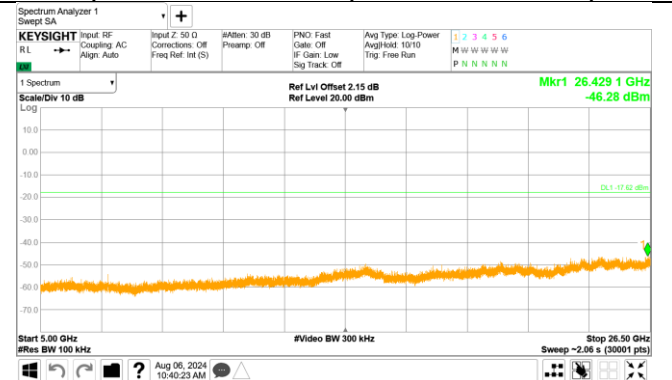Page 43 of 61  
Rev. 23.00



## 9.6 Band edge

### Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.


### Limit:


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.


| Frequency Range<br>MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000               | -20         |





Test result

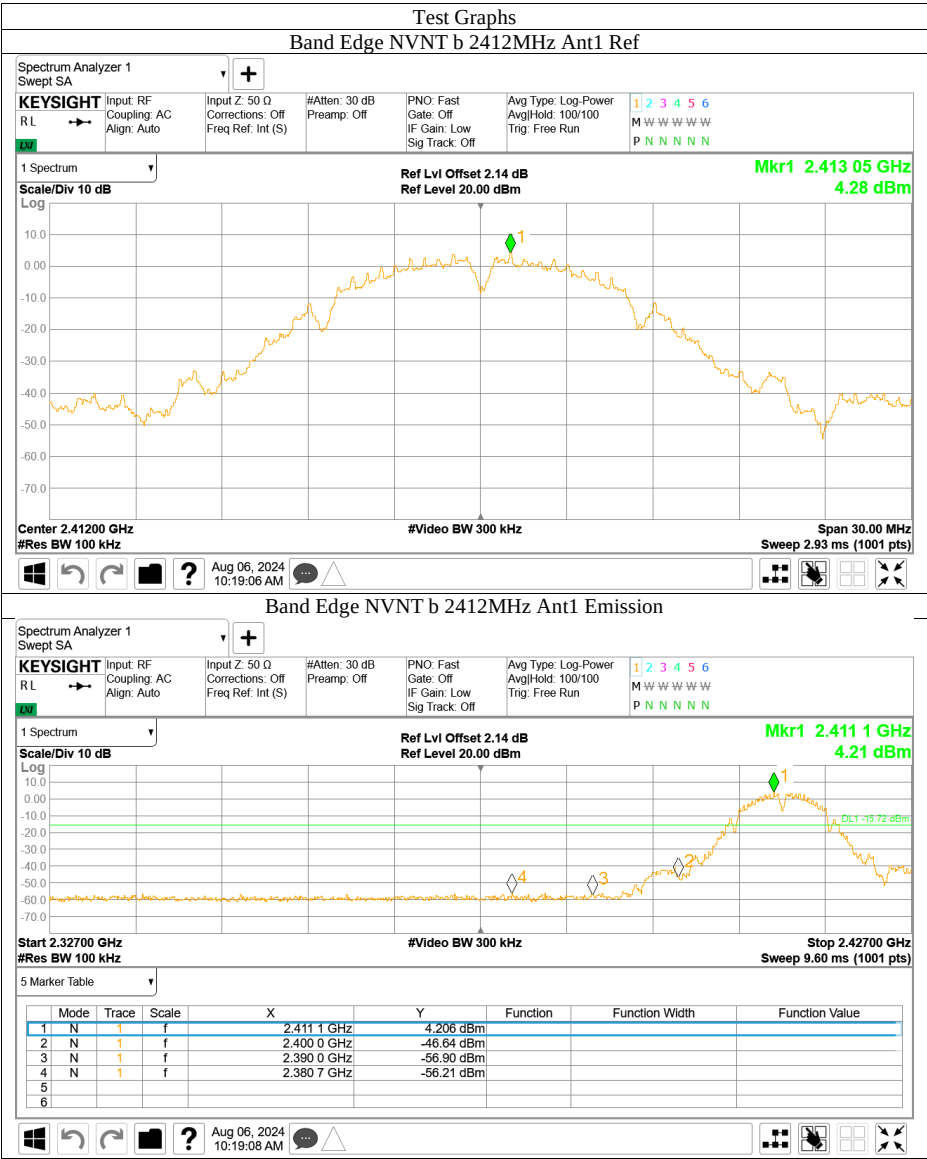


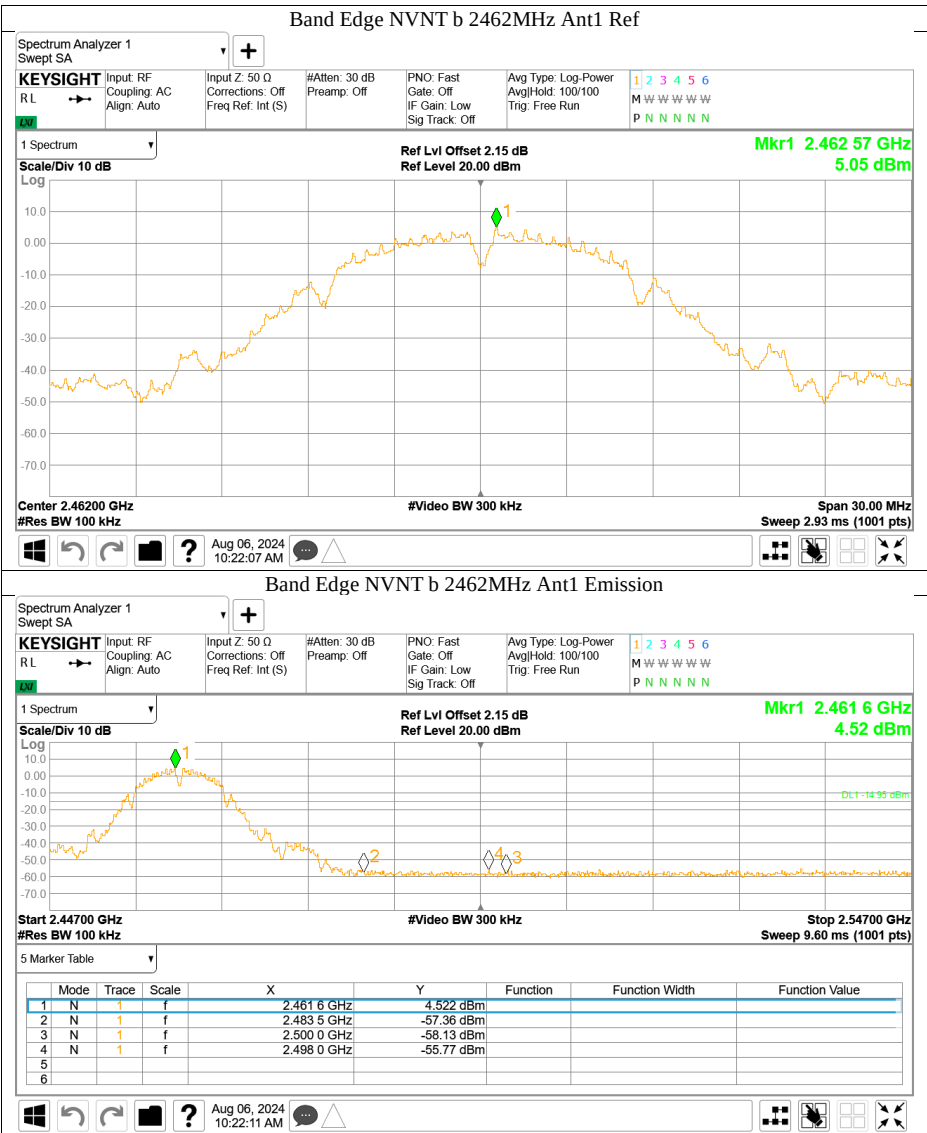

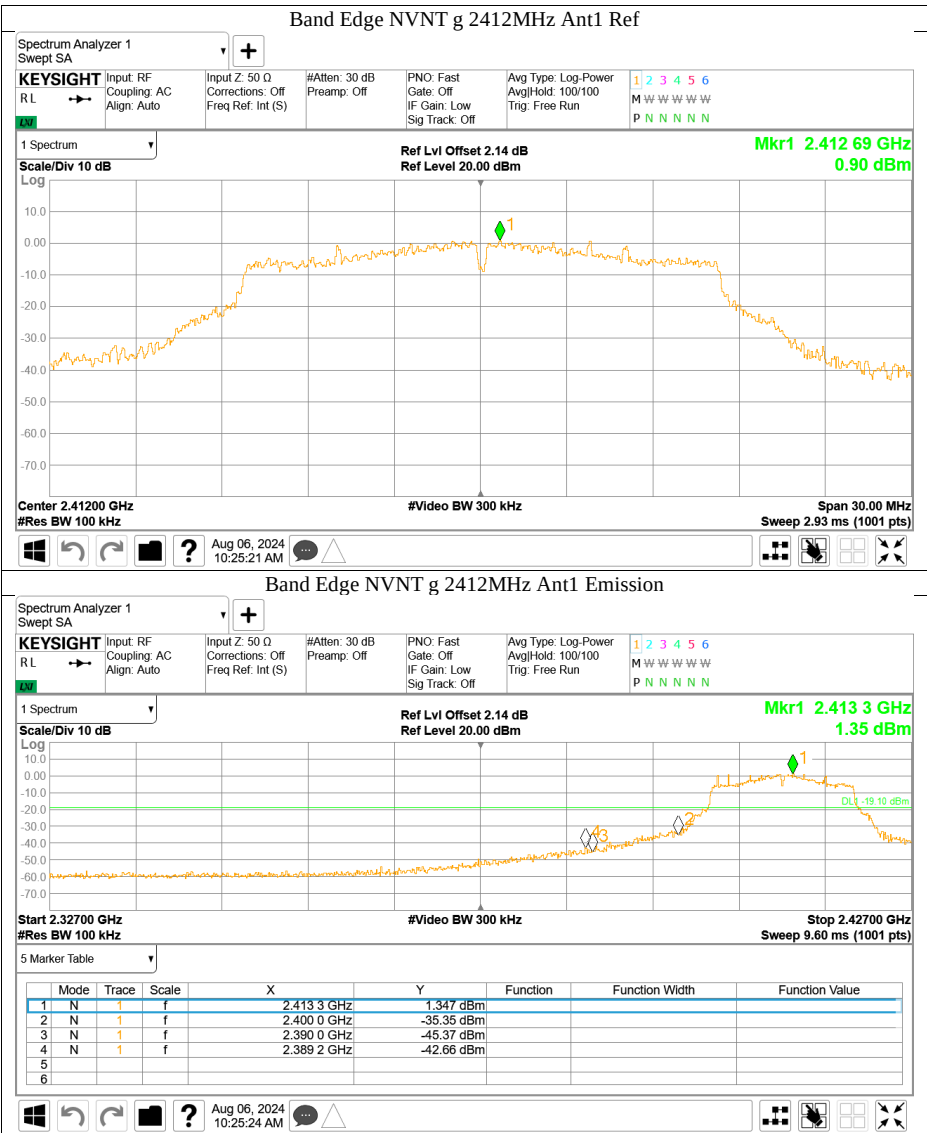

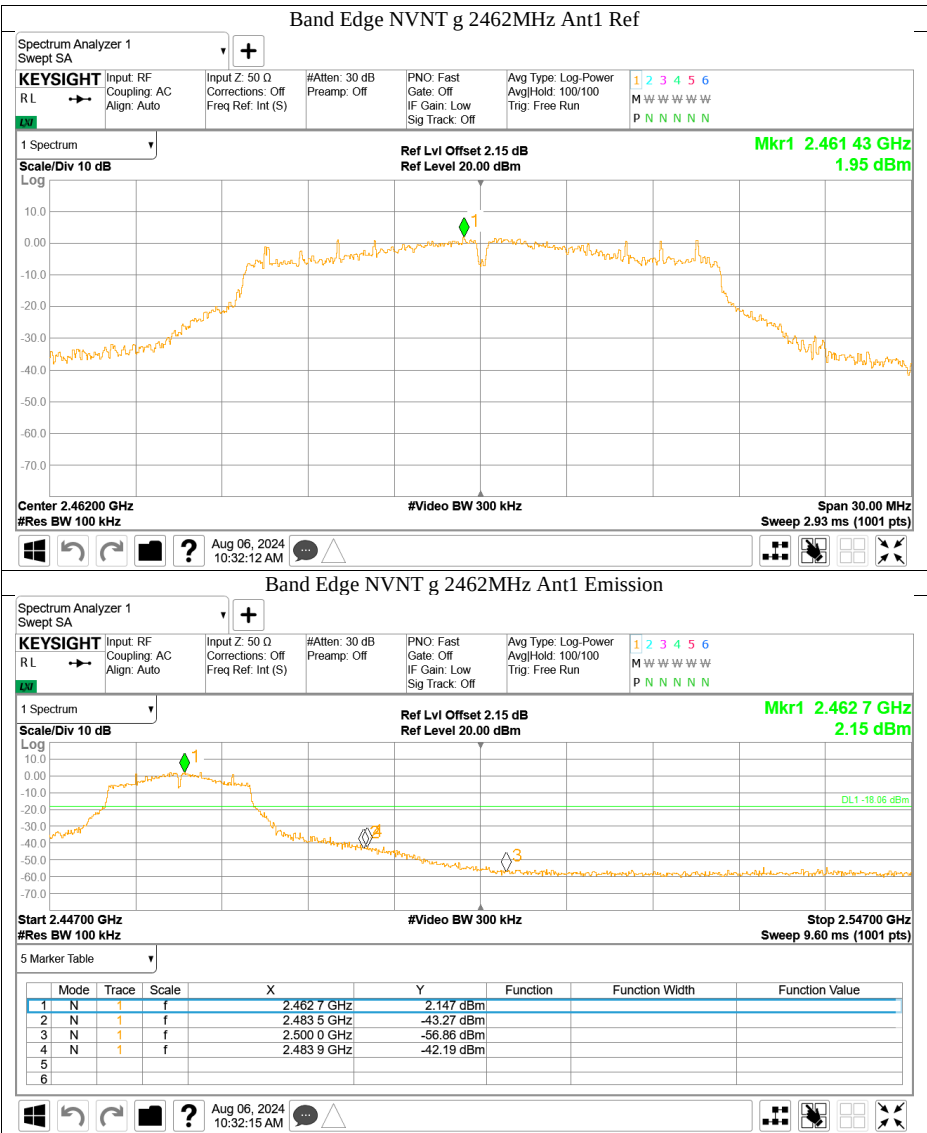

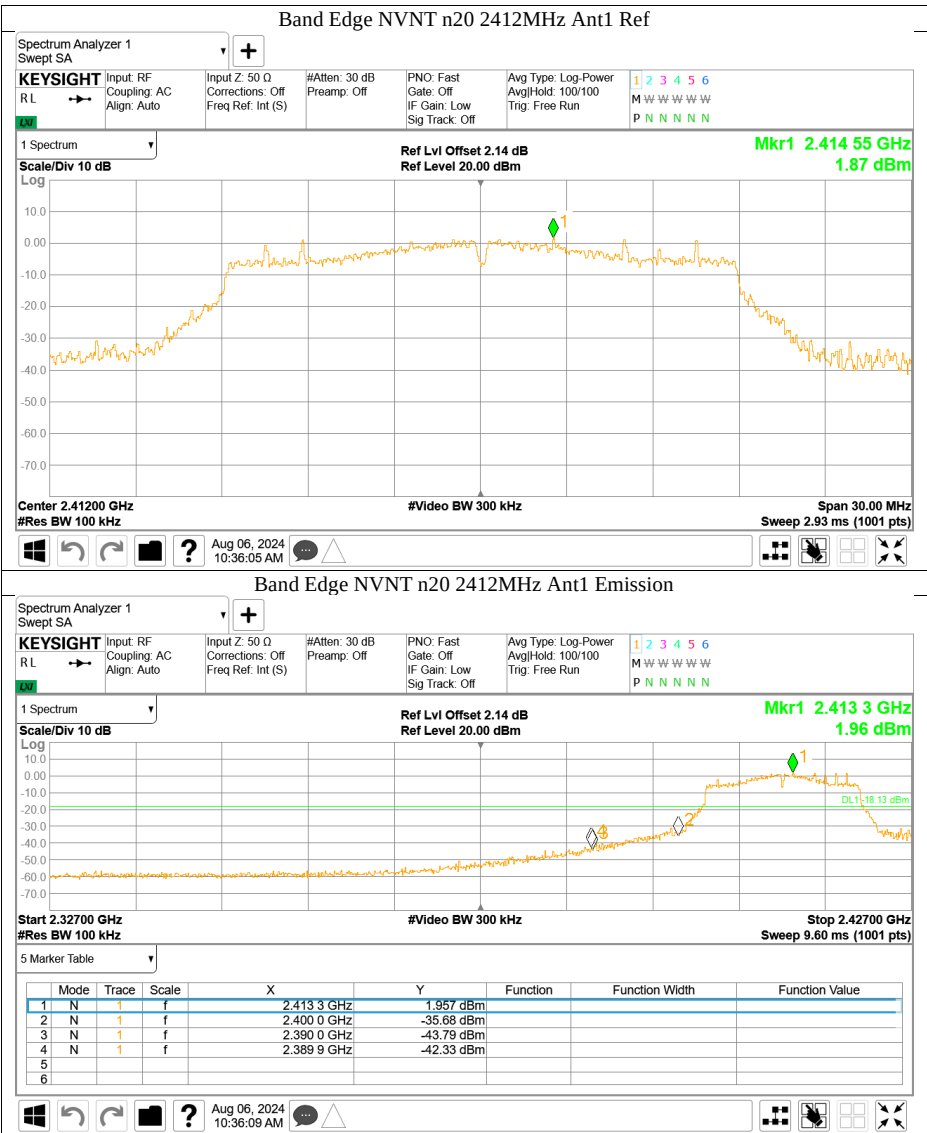

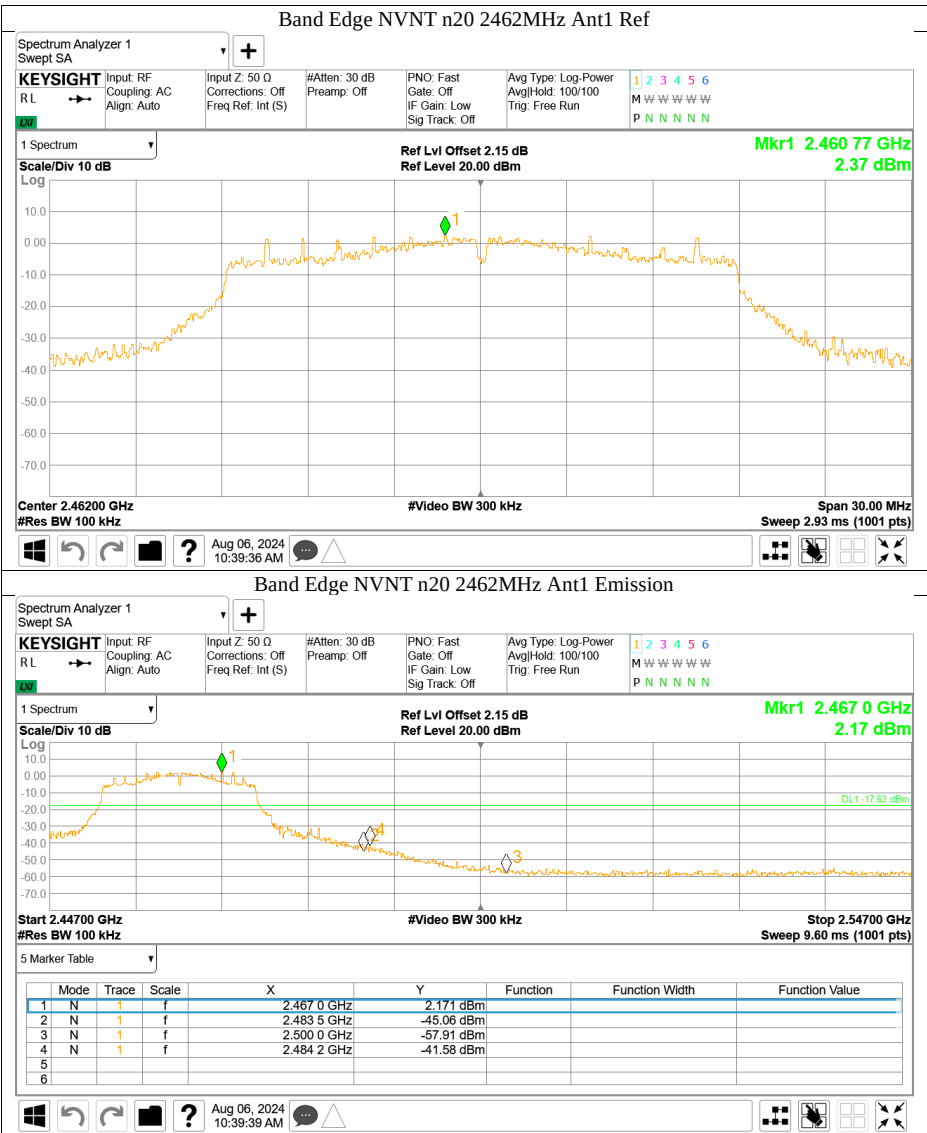



## 9.7 Spurious radiated emissions for transmitter

### Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10
  - 1) Procedure for Unwanted Emissions Measurements Below 1000 MHz  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 100 kHz to 120kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.
  - 2) For Peak unwanted emissions Above 1GHz:  
Span = wide enough to capture the peak level of the in-band emission and all spurious  
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.  
Procedures for average unwanted emissions measurements above 1GHz
    - a) RBW = 1MHz.
    - b) VBW \ [3 × RBW].
    - c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.  
Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
    - d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
    - e) Sweep time = auto.
    - f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
    - g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
      - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
      - 2) If linear voltage averaging mode was used in the preceding step e), then the correction



factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission (AV) at frequency above 1GHz.

## Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS 247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in § 15.209(a) and RSS-Gen is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a) and RSS-Gen section 8.9, must also comply with the radiated emission limits specified in § 15.209(a) and RSS-Gen section 8.10.

| Frequency<br>MHz | Field Strength<br>μV/m | Field Strength<br>dBμV/m | Detector | Measurement distance<br>meters |
|------------------|------------------------|--------------------------|----------|--------------------------------|
| 0.009-0.490      | 2400/F(kHz)            | 48.5-13.8                | AV       | 300                            |
| 0.490-1.705      | 24000/F(kHz)           | 33.8-23.0                | QP       | 30                             |
| 1.705-30         | 30                     | 29.5                     | QP       | 30                             |
| 30-88            | 100                    | 40                       | QP       | 3                              |
| 88-216           | 150                    | 43.5                     | QP       | 3                              |
| 216-960          | 200                    | 46                       | QP       | 3                              |
| 960-1000         | 500                    | 54                       | QP       | 3                              |
| Above 1000       | 500                    | 54                       | AV       | 3                              |
| Above 1000       | 5000                   | 74                       | PK       | 3                              |

Note 1: Limit 3m(dBμV/m)=Limit 300m(dBμV/m)+40Log(300m/3m) (Below 30MHz)

Note 2: Limit 3m(dBμV/m)=Limit 30m(dBμV/m)+40Log(30m/3m) (Below 30MHz)

## Spurious Radiated Emissions for Transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Data of measurement within frequency range 9kHz-30MHz is the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.



### Above 1GHz Transmitting spurious emission test result as below:

802.11 b

2412MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2382.46          | 45.85                        | -4.9                     | 40.95                       | Horizontal   | 74              | Peak     | 33.05            | pass   |
| 4823.93          | 44.22                        | -2.20                    | 42.02                       | Horizontal   | 74              | Peak     | 31.98            | pass   |
| 7236.34          | 45.94                        | 1.30                     | 47.24                       | Horizontal   | 74              | Peak     | 26.76            | pass   |
| 2385.98          | 46.35                        | -4.9                     | 41.45                       | Vertical     | 74              | Peak     | 32.55            | pass   |
| 4823.93          | 43.79                        | -2.20                    | 41.59                       | Vertical     | 74              | Peak     | 32.41            | pass   |
| 7235.28          | 45.47                        | 1.30                     | 46.77                       | Vertical     | 74              | Peak     | 27.23            | pass   |

2437MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 4874.40          | 44.92                        | -2.10                    | 42.82                       | Horizontal   | 74              | Peak     | 31.18            | pass   |
| 7310.71          | 46.65                        | 1.30                     | 47.95                       | Horizontal   | 74              | Peak     | 26.05            | pass   |
| 4876.00          | 42.89                        | -2.10                    | 40.79                       | Vertical     | 74              | Peak     | 33.21            | pass   |
| 7309.65          | 47.1                         | 1.30                     | 48.40                       | Vertical     | 74              | Peak     | 25.6             | pass   |

2462MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2483.45          | 50.97                        | -3.80                    | 47.17                       | Horizontal   | 74              | Peak     | 26.83            | pass   |
| 4923.81          | 44.64                        | -1.90                    | 42.74                       | Horizontal   | 74              | Peak     | 31.26            | pass   |
| 7387.75          | 46.21                        | 1.40                     | 47.61                       | Horizontal   | 74              | Peak     | 26.39            | pass   |
| 2483.70          | 48.07                        | -3.80                    | 44.27                       | Vertical     | 74              | Peak     | 29.73            | pass   |
| 4923.28          | 44.05                        | -1.90                    | 42.15                       | Vertical     | 74              | Peak     | 31.85            | pass   |
| 7384.56          | 46.35                        | 1.40                     | 47.75                       | Vertical     | 74              | Peak     | 26.25            | pass   |



802.11 g  
2412MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2389.86          | 67.19                        | -7.20                    | 59.99                       | Horizontal   | 74              | Peak     | 14.01            | pass   |
| 2389.86          | 52.8                         | -7.20                    | 45.60                       | Horizontal   | 54              | AV       | 8.4              | pass   |
| 4823.93          | 43.54                        | -2.20                    | 41.34                       | Horizontal   | 74              | Peak     | 32.66            | pass   |
| 7233.15          | 47.92                        | 1.3                      | 49.22                       | Horizontal   | 74              | Peak     | 24.78            | pass   |
| 2389.99          | 68.2                         | -7.20                    | 61.00                       | Vertical     | 74              | Peak     | 13               | pass   |
| 2389.99          | 54.9                         | -7.20                    | 47.70                       | Vertical     | 54              | AV       | 6.3              | pass   |
| 4825.53          | 43.28                        | -2.20                    | 41.08                       | Vertical     | 74              | Peak     | 32.92            | pass   |
| 7236.34          | 47.81                        | 1.3                      | 49.11                       | Vertical     | 74              | Peak     | 24.89            | pass   |

2437MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 4876.00          | 43.84                        | -2.10                    | 41.74                       | Horizontal   | 74              | Peak     | 32.26            | pass   |
| 7307.53          | 48.51                        | 1.30                     | 49.81                       | Horizontal   | 74              | Peak     | 24.19            | pass   |
| 4875.46          | 43.29                        | -2.10                    | 41.19                       | Vertical     | 74              | Peak     | 32.81            | pass   |
| 7311.78          | 49.81                        | 1.3                      | 51.11                       | Vertical     | 74              | Peak     | 22.89            | pass   |

2462MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBμV/m | Detector | Margin<br>dBμV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2483.58          | 69.56                        | -3.80                    | 65.76                       | Horizontal   | 74              | Peak     | 8.24             | pass   |
| 2483.58          | 55.2                         | -3.80                    | 51.40                       | Horizontal   | 54              | AV       | 2.6              | pass   |
| 4923.28          | 44.1                         | -1.90                    | 42.20                       | Horizontal   | 74              | Peak     | 31.8             | pass   |
| 7386.68          | 47.86                        | 1.4                      | 49.26                       | Horizontal   | 74              | Peak     | 24.74            | pass   |
| 2483.56          | 65.19                        | -3.80                    | 61.39                       | Vertical     | 74              | Peak     | 12.61            | pass   |
| 2483.56          | 52.7                         | -3.80                    | 48.90                       | Vertical     | 54              | AV       | 5.1              | pass   |
| 4922.75          | 43.67                        | -1.90                    | 41.77                       | Vertical     | 74              | Peak     | 32.23            | pass   |
| 7390.40          | 48.21                        | 1.4                      | 49.61                       | Vertical     | 74              | Peak     | 24.39            | pass   |



802.11 n20

2412MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBuV/m | Detector | Margin<br>dBuV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2389.80          | 68.31                        | -7.20                    | 61.11                       | Horizontal   | 74              | Peak     | 12.89            | pass   |
| 2389.80          | 52.8                         | -7.20                    | 45.60                       | Horizontal   | 54              | AV       | 8.4              | pass   |
| 4825.53          | 42.97                        | -2.20                    | 40.77                       | Horizontal   | 74              | Peak     | 33.23            | pass   |
| 7233.68          | 48.92                        | 1.30                     | 50.22                       | Horizontal   | 74              | Peak     | 23.78            | pass   |
| 2389.26          | 71.49                        | -7.20                    | 64.29                       | Vertical     | 74              | Peak     | 9.71             | pass   |
| 2389.26          | 54.2                         | -7.20                    | 47.00                       | Vertical     | 54              | AV       | 7                | pass   |
| 4822.34          | 44.36                        | -2.20                    | 42.16                       | Vertical     | 74              | Peak     | 31.84            | pass   |
| 7231.56          | 47.56                        | 1.30                     | 48.86                       | Vertical     | 74              | Peak     | 25.14            | pass   |

2437MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBuV/m | Detector | Margin<br>dBuV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 4874.40          | 43.82                        | -2.10                    | 41.72                       | Horizontal   | 74              | Peak     | 32.28            | pass   |
| 7311.25          | 47.21                        | 1.30                     | 48.51                       | Horizontal   | 74              | Peak     | 25.49            | pass   |
| 4874.93          | 43.57                        | -2.10                    | 41.47                       | Vertical     | 74              | Peak     | 32.53            | pass   |
| 7318.68          | 50                           | 1.30                     | 51.30                       | Vertical     | 74              | Peak     | 22.7             | pass   |

2462MHz

| Frequency<br>MHz | Original<br>Receiver<br>dBuV | Correct<br>Facto<br>dB/m | Emission<br>Level<br>dBuV/m | Polarization | Limit<br>dBuV/m | Detector | Margin<br>dBuV/m | Result |
|------------------|------------------------------|--------------------------|-----------------------------|--------------|-----------------|----------|------------------|--------|
| 2483.69          | 70.79                        | -3.80                    | 66.99                       | Horizontal   | 74              | Peak     | 7.01             | pass   |
| 2483.69          | 53.7                         | -3.80                    | 49.90                       | Horizontal   | 54              | AV       | 4.1              | pass   |
| 4923.81          | 44.29                        | -1.90                    | 42.39                       | Horizontal   | 74              | Peak     | 31.61            | pass   |
| 7386.15          | 48.53                        | 1.40                     | 49.93                       | Horizontal   | 74              | Peak     | 24.07            | pass   |
| 2483.52          | 69.09                        | -3.80                    | 65.29                       | Vertical     | 74              | Peak     | 8.71             | pass   |
| 2483.52          | 53.5                         | -3.80                    | 49.70                       | Vertical     | 54              | AV       | 4.3              | pass   |
| 4923.28          | 44.72                        | -1.90                    | 42.82                       | Vertical     | 74              | Peak     | 31.18            | pass   |
| 7378.18          | 49.21                        | 1.40                     | 50.61                       | Vertical     | 74              | Peak     | 23.39            | pass   |

Remark:


- (1) Emission level= Original Receiver Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss -Amplifier gain
- (3) Margin = limit – Corrected Reading



# The worst case of Radiated Emission below 1GHz:

|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: 3 meter chamber                                             | Time: 2024/08/01 - 09:03 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Wenqiang LU    |
| Probe: VULB9168                                                   | Polarity: Horizontal     |
| EUT: Thermal Monocular,<br>Model no: FL335                        | Power: DC 5V             |
| Note: Transmit by at channel 2462MHz for 802.11HT20 (worst case). |                          |

RE\_VULB9168\_pre\_Cont\_30-1000

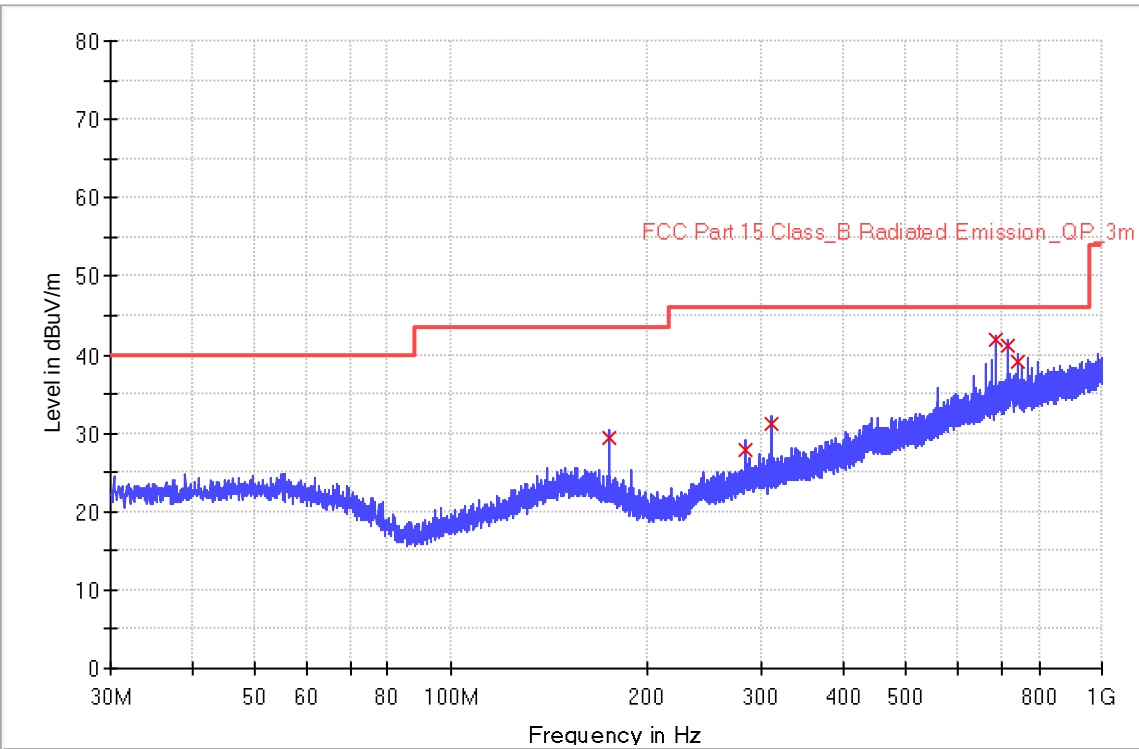

## Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 175.480000      | 29.3               | 1000.0          | 120.000         | 139.0       | H   | 206.0         | 19.8       | 14.2              | 43.5                 |
| 283.520000      | 27.8               | 1000.0          | 120.000         | 142.0       | H   | 111.0         | 21.1       | 18.2              | 46.0                 |
| 310.480000      | 31.2               | 1000.0          | 120.000         | 129.0       | H   | 98.0          | 21.8       | 14.8              | 46.0                 |
| 688.480000      | 42.0               | 1000.0          | 120.000         | 103.0       | H   | 36.0          | 30.2       | 4.0               | 46.0                 |
| 715.480000      | 41.2               | 1000.0          | 120.000         | 156.0       | H   | 105.0         | 30.8       | 4.8               | 46.0                 |
| 742.520000      | 39.0               | 1000.0          | 120.000         | 185.0       | H   | 41.0          | 31.8       | 7.0               | 46.0                 |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)


Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report



|                                                                   |                          |
|-------------------------------------------------------------------|--------------------------|
| Site: 3 meter chamber                                             | Time: 2024/08/01 - 10:12 |
| Limit: FCC_Part15.209_RE(3m)                                      | Engineer: Wenqiang LU    |
| Probe: VULB9168                                                   | Polarity: Vertical       |
| EUT: Thermal Monocular,<br>Model no: FL335                        | Power: DC 5V             |
| Note: Transmit by at channel 2462MHz for 802.11HT20 (worst case). |                          |

RE\_VULB9168\_pre\_Cont\_30-1000

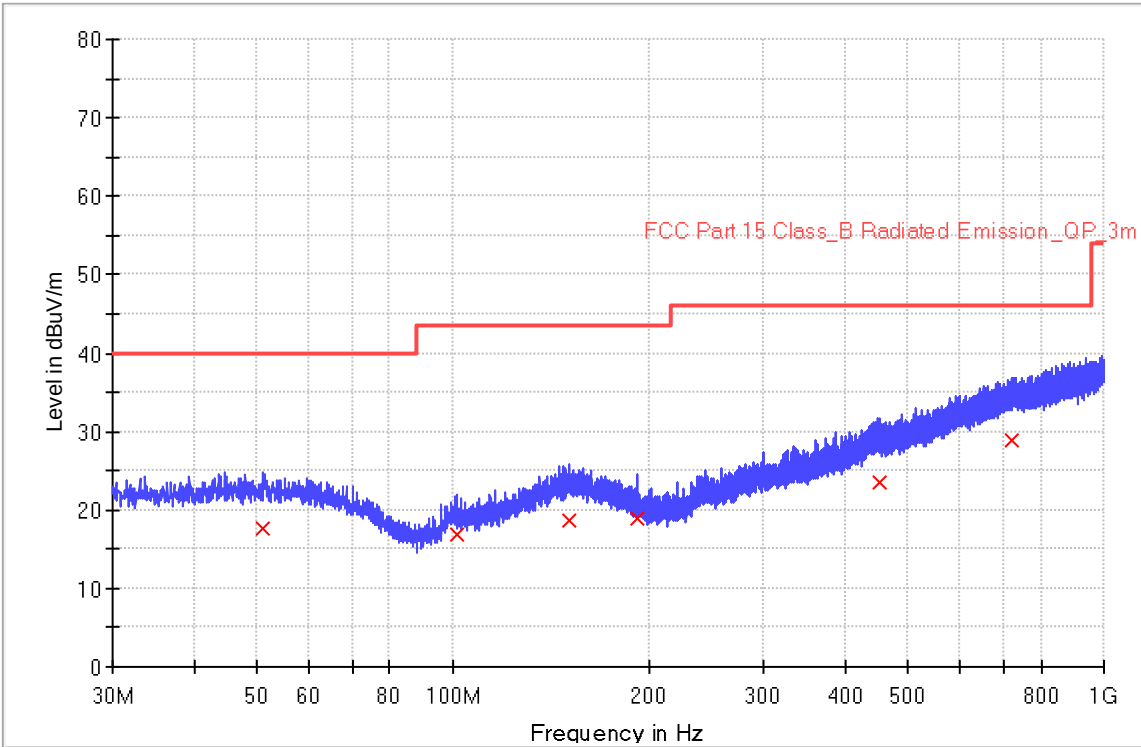

### Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 50.960000       | 17.6               | 1000.0          | 120.000         | 105.0       | V   | 315.0         | 20.6       | 22.4              | 40.0                 |
| 101.120000      | 17.0               | 1000.0          | 120.000         | 103.0       | V   | 18.0          | 16.2       | 26.5              | 43.5                 |
| 150.800000      | 18.6               | 1000.0          | 120.000         | 112.0       | V   | 203.0         | 20.9       | 24.9              | 43.5                 |
| 192.120000      | 18.9               | 1000.0          | 120.000         | 100.0       | V   | 65.0          | 18.3       | 24.6              | 43.5                 |
| 450.720000      | 23.6               | 1000.0          | 120.000         | 132.0       | V   | 29.0          | 25.9       | 22.4              | 46.0                 |
| 721.800000      | 28.9               | 1000.0          | 120.000         | 109.0       | V   | 110.0         | 31.1       | 17.1              | 46.0                 |

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.



## 10 Test Equipment List

List of Test Instruments  
Test Site1

|    | DESCRIPTION                          | MANUFACTURER       | MODEL NO.  | SERIAL NO. | CAL. DATE | CAL. DUE DATE |
|----|--------------------------------------|--------------------|------------|------------|-----------|---------------|
| C  | Signal spectrum analyzer             | Agilent            | N9020B     | MY59050168 | 2024-2-19 | 2025-2-18     |
|    | Wideband power sensor                | Rohde & Schwarz    | NRP-Z81    | 105903     | 2024-2-19 | 2025-2-18     |
|    | 10dB Attenuator                      | Aeroflex Weinschel | CG-4689    | 93459      | 2024-2-19 | 2025-2-18     |
| RE | EMI Test Receiver                    | Rohde & Schwarz    | ESR3       | 101906     | 2024-8-1  | 2025-7-31     |
|    | Signal Analyzer                      | Rohde & Schwarz    | FSV40      | 101091     | 2024-8-1  | 2025-7-31     |
|    | Trilog Super Broadband Test Antenna  | Schwarzbeck        | VULB 9168  | 961        | 2021-9-23 | 2024-9-22     |
|    | Double-ridged waveguide horn antenna | Rohde & Schwarz    | HF907      | 102393     | 2024-4-14 | 2027-4-13     |
|    | Pre-amplifier                        | Shenzhen HzEMC     | HPA-081843 | HYP A23026 | 2024-4-16 | 2025-4-15     |
|    | Loop antenna                         | Rohde & Schwarz    | HFH2-Z2    | 100443     | 2024-6-26 | 2025-6-25     |
|    | Double Ridged Horn Antenna           | ETS-Lindgren       | 3116C      | 00246076   | 2023-7-7  | 2026-7-6      |
|    | 3m Semi-anechoic chamber             | TDK                | 9X6X6      | ----       | 2024-5-8  | 2027-5-7      |
| CE | EMI Test Receiver                    | Rohde & Schwarz    | ESR3       | 101907     | 2024-8-1  | 2025-7-31     |
|    | LISN                                 | Rohde & Schwarz    | ENV216     | 101924     | 2024-8-1  | 2025-7-31     |

| Measurement Software Information |              |                 |           |
|----------------------------------|--------------|-----------------|-----------|
| Test Item                        | Software     | Manufacturer    | Version   |
| C                                | MTS 8310     | MWRFtest        | 3.0.0.0   |
|                                  | Power Viewer | Rohde & Schwarz | V 11.0    |
| RE                               | EMC 32       | Rohde & Schwarz | V10.50.40 |
| CE                               | EMC 32       | Rohde & Schwarz | V9.15.03  |

### C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth and 99% Occupied Bandwidth
- Power spectral density\*
- Spurious RF conducted emissions
- Band edge



# 11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| Items                                    | Extended Uncertainty                                                                                                                |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Conducted Disturbance at Mains Terminals | 150kHz to 30MHz, LISN, 3.16dB                                                                                                       |
| Radiated Disturbance                     | 9kHz to 30MHz, 3.52dB<br>30MHz to 1GHz, 5.03dB (Horizontal)<br>5.12dB (Vertical)<br>1GHz to 18GHz, 5.49dB<br>18GHz to 40GHz, 5.63dB |
| RF Conducted Measurement                 | Power related: 1.16dB<br>Frequency related: $6.00 \times 10^{-8}$                                                                   |

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.



## 12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



## 13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

-----End of Test Report-----