


Inverted F Antenna Specification

Summary

ITEM	ANT SPEC					
Model Name	2.4G ANT					
Center Frequency	Horizontal			Vertical		
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz
	-1.26	-0.76	-0.58	-5.25	-2.46	-1.86
MAX. Gain	-0.58dB					
Polarization	Horizontal and Vertical					

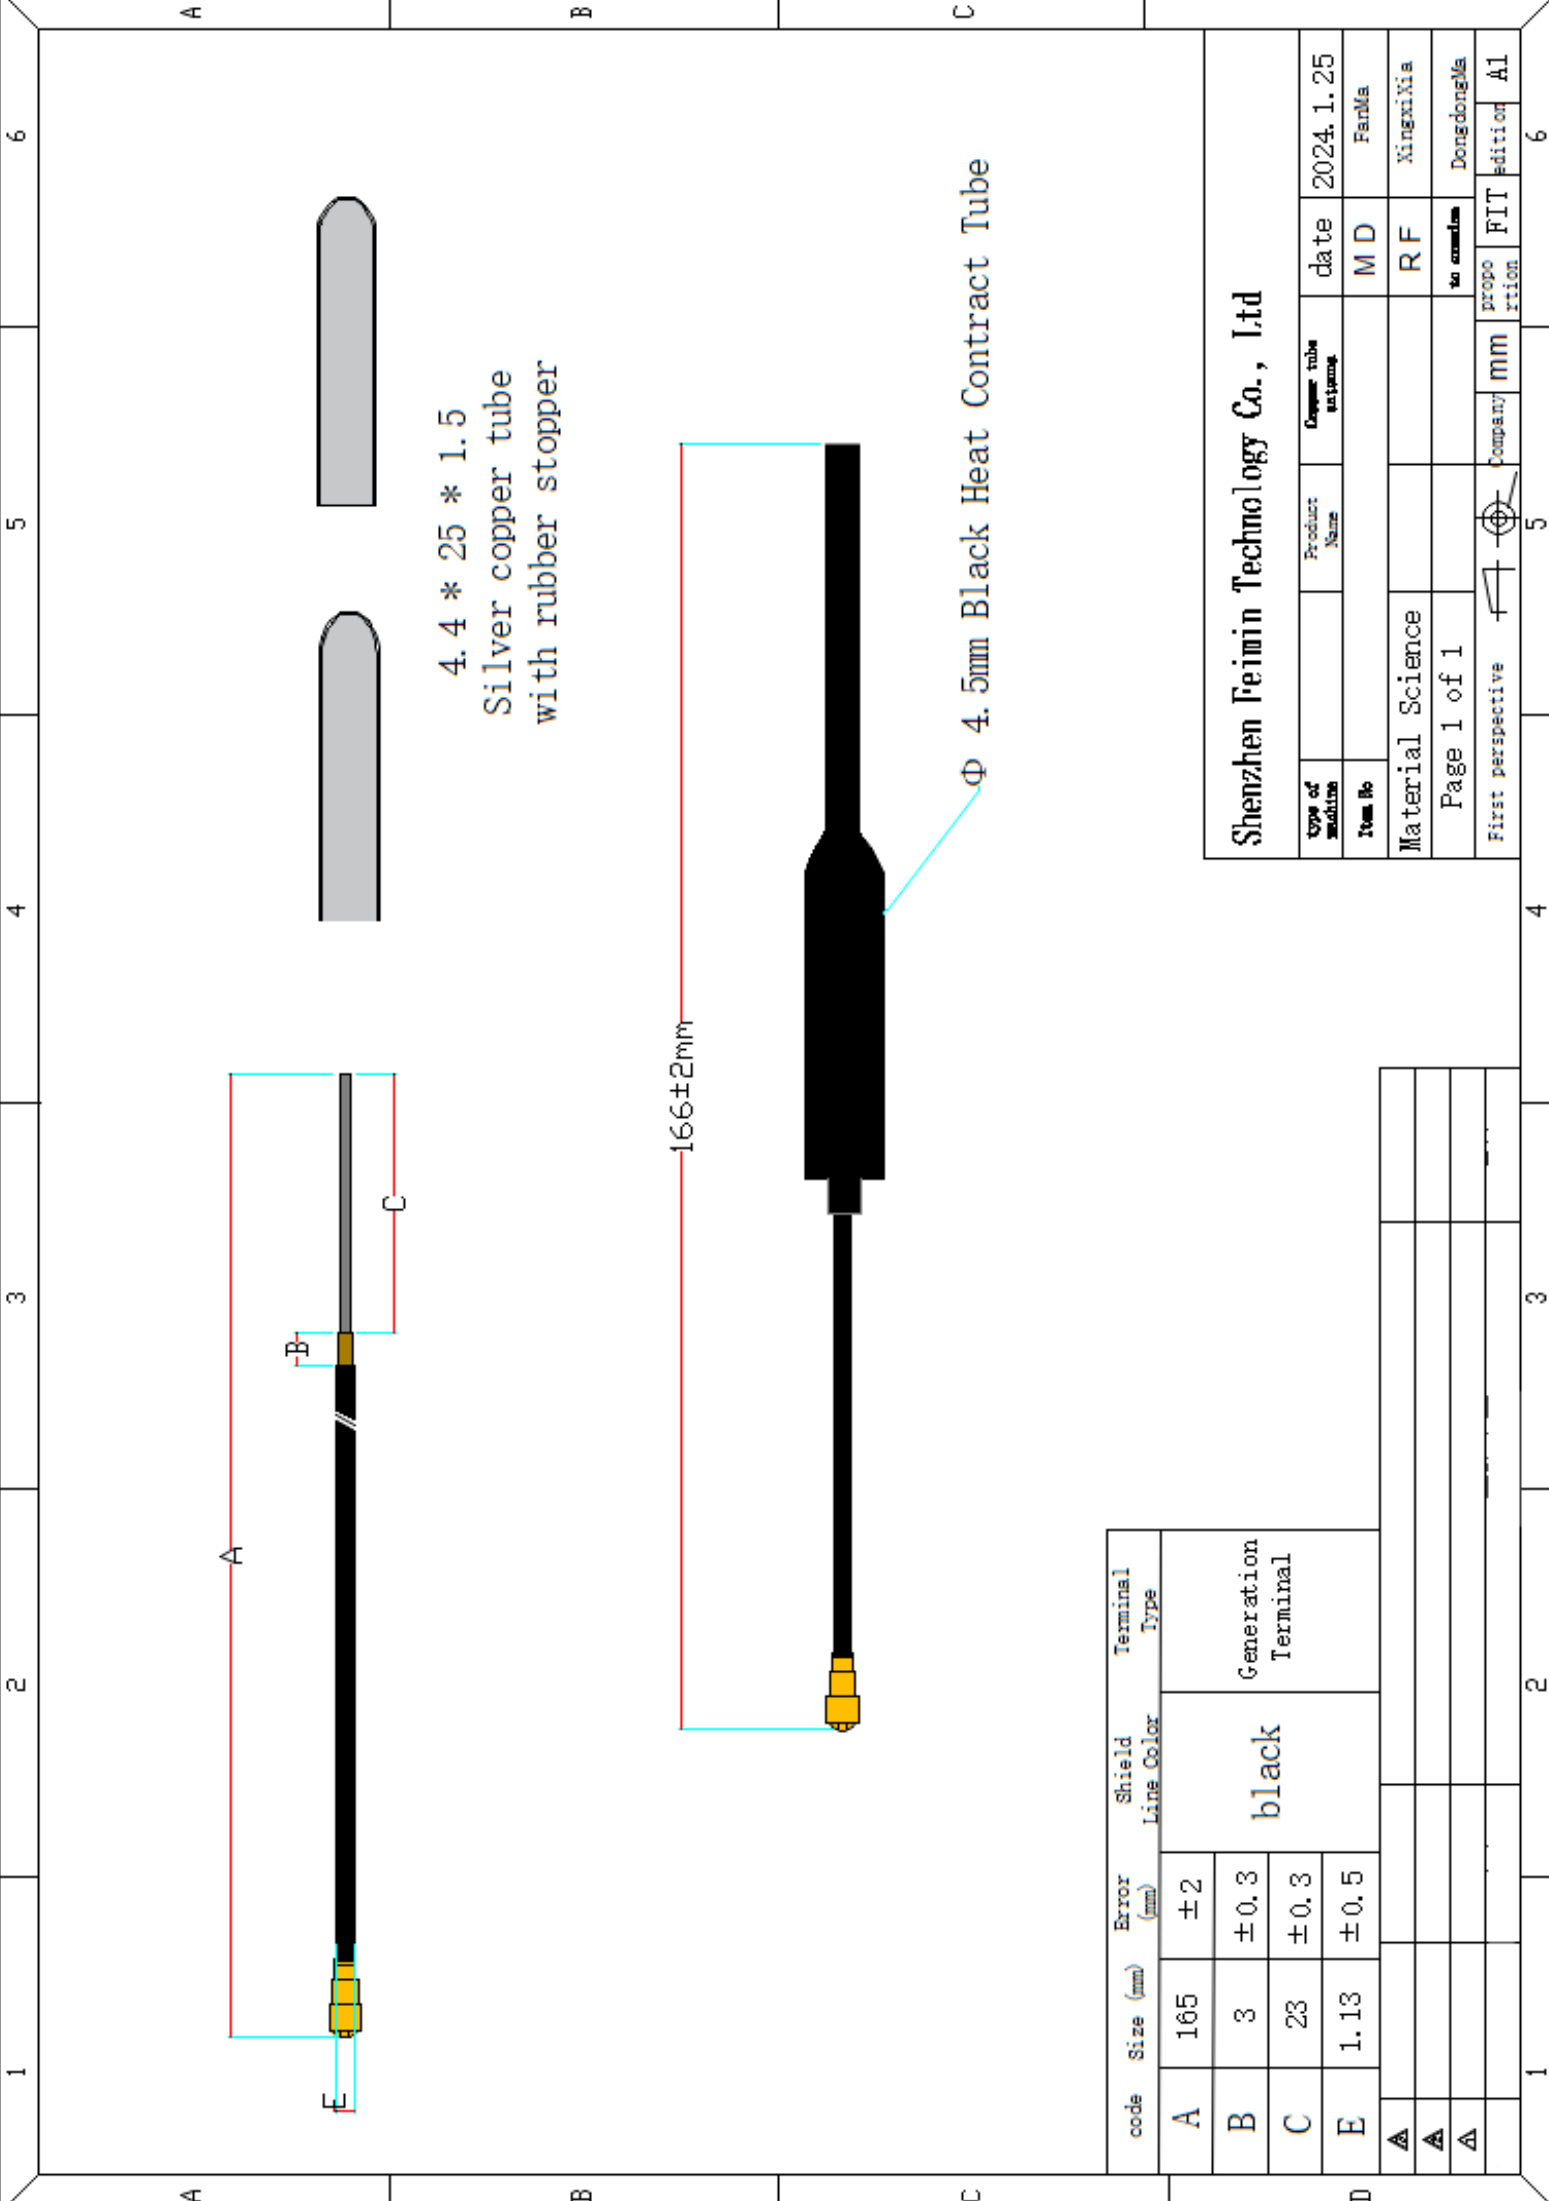

4.4 * 25 * 1.5
Silver copper tube
with rubber stopper

166±2mm

Φ 4.5mm Black Heat Contract Tube

code	Size (mm)	Error (mm)	Shield Line Color	Terminal Type
A	165	±2	black	Generation Terminal
B	3	±0.3		
C	23	±0.3		
E	1.13	±0.5		
Δ				
Δ				
Δ				


Shenzhen Feimin Technology Co., Ltd

type of machine	Product Name	Design tube antenna	date	2024.1.25
Item No			MD	FanMa
Material Science			RF	Xingxia
Page 1 of 1			to standard	DongdongMa
First perspective			Company	mm
			propo rition	FIT edition A1

Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -40 Scale: 5/div

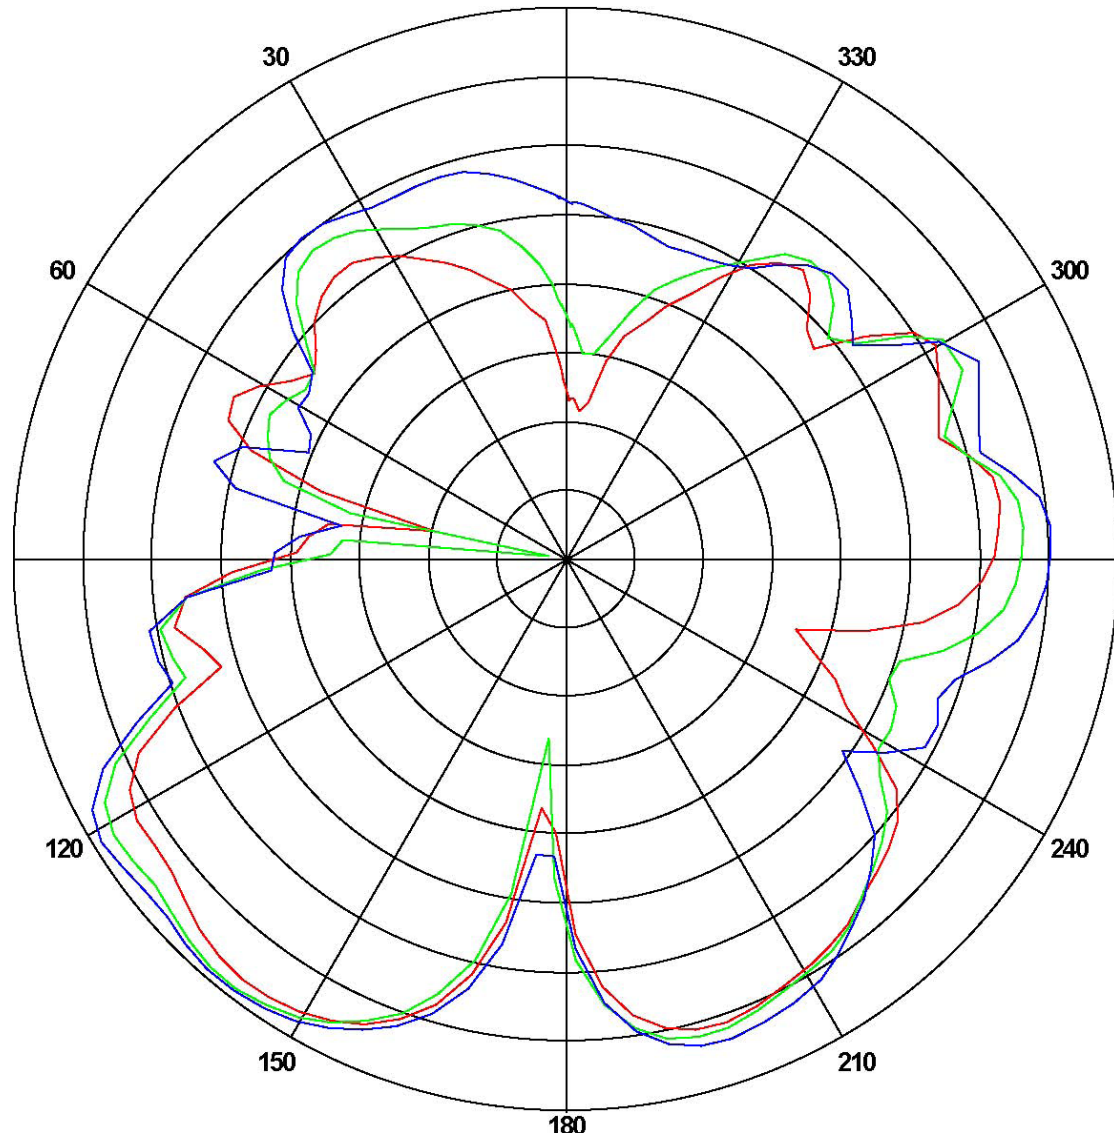


Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-1.26174	-30.0801	-7.18716
2450	-0.765802	-36.5604	-7.48023
2500	-0.585582	-22.0315	-6.59127

Vertical: 2400 MHz 2450 MHz 2500 MHz

Power (dBm)

Max: 0 Min: -30 Scale: 5/div

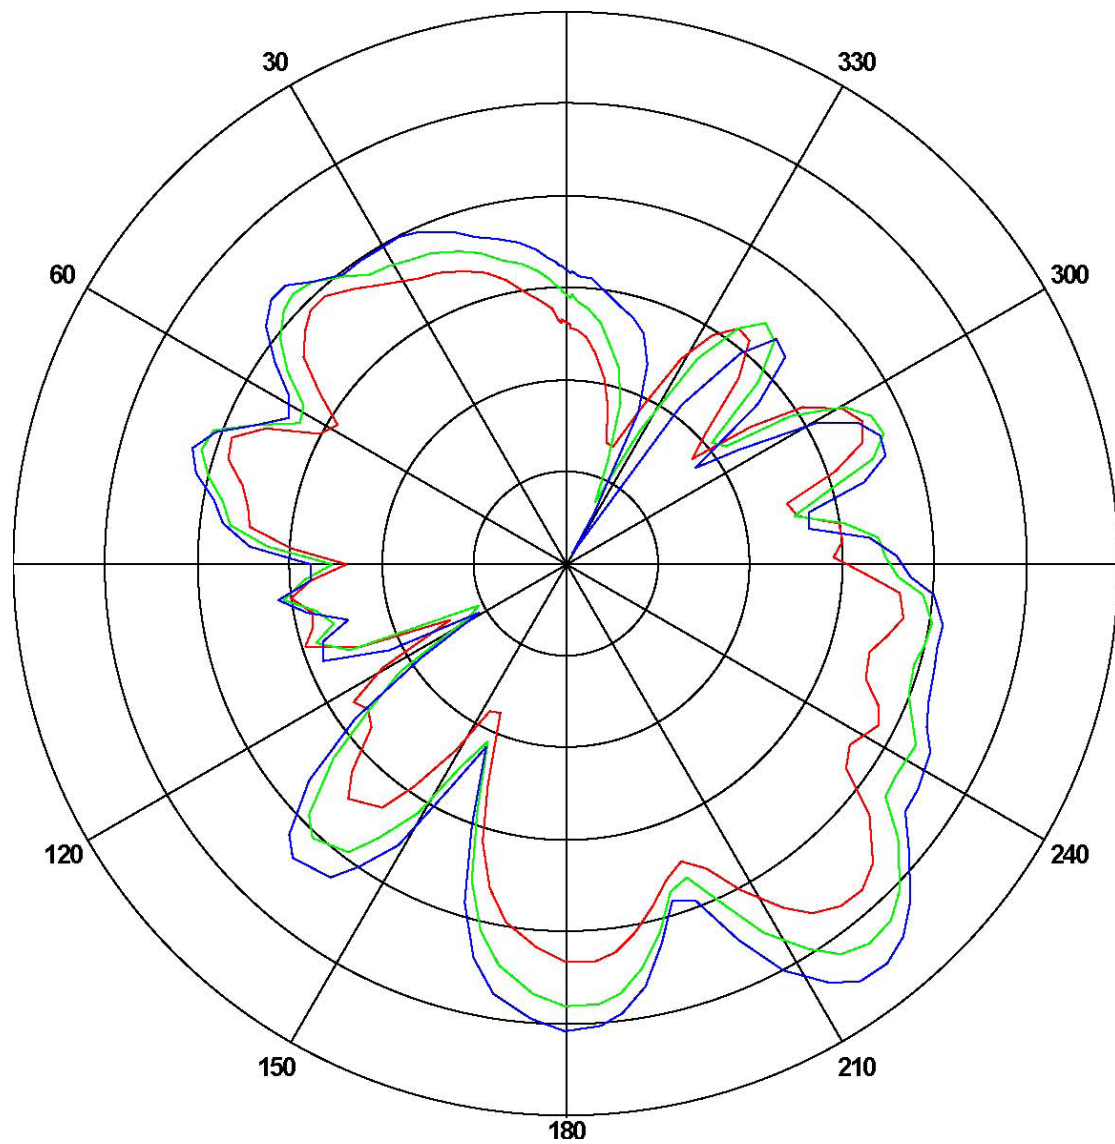

Frequency (MHz)	Gain(dB)		
	Max	Min	Avg
2400	-5.2537	-22.1424	-12.4294
2450	-2.4652	-24.5837	-10.4702
2500	-1.86120	-29.5214	-9.20432

ANT Test Labs: Attestation of Global Compliance Co., Ltd.