



Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,
Fenghuang Street, Guangming District, Shenzhen, China

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15 SUBPART E 15.407

Report Reference No......: **GRCTR251002013-02**

FCC ID.....: **2BE7Z-T10**

Compiled by

(position+printed name+signature)..: Testing Engineer Jimmy Wang

Supervised by

(position+printed name+signature)..: Project Engineer Kelley Zhang

Approved by

(position+printed name+signature)..: Manager Sam Wang

Date of issue.....: Jan. 12, 2026

Testing Laboratory Name.....: **Shenzhen GUOREN Certification Technology Service Co., Ltd.**

Address.....: 101#, Building K & Building T, The Second Industrial Zone,
Jiazitang Community, Fenghuang Street, Guangming District,
Shenzhen, China

Applicant's name.....: **Shenzhen Cylan Technology Co., Ltd.**

Address.....: 211-212, Shenzhen Folk Culture Industrial Park, No. 1, Qunli 2nd
Road, Xingdong Community, Xin'an Sub-district, Bao'an District,
Shenzhen City, Guangdong Province, China

Test specification.....:

Standard.....: **FCC Part 15 Subpart E 15.407**

Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **Intelligent desktop dual-screen translation machine**

Trade Mark.....: /

Manufacturer.....: Jiangxi Small Walrus Intelligent Technology Co.,LTD

Model/Type reference.....: T10

Listed Models: T10 MAX,T10 PRO,XHX-F80-N,XHX-F81-N

Firmware Version.....: V1.0

Hardware Version.....: V1.0

Modulation: OFDM

Frequency.....: From 5745MHz-5825MHz

Ratings.....: DC 12V Powered by adapter

Result.....: **PASS**



TEST REPORT

Equipment under Test : Intelligent desktop dual-screen translation machine

Model /Type : T10

Listed Models : T10 MAX,T10 PRO,XHX-F80-N,XHX-F81-N

Applicant : **Shenzhen Cylan Technology Co., Ltd.**

Address : 211-212, Shenzhen Folk Culture Industrial Park, No. 1, Qunli 2nd Road, Xingdong Community, Xin'an Sub-district, Bao'an District, Shenzhen City, Guangdong Province, China

Manufacturer : **Jiangxi Small Walrus Intelligent Technology Co.,LTD**

Address : No.1 workshop, Small and Micro Enterprise Pioneer Park, Hengsi Road, Qianping Industrial Zone, Le'an County Fuzhou, Jiangxi Province, China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	4
2 SUMMARY	5
2.1 General Remarks	5
2.2 Product Description	5
2.3 Equipment Under Test	5
2.4 Short description of the Equipment under Test (EUT)	5
2.5 EUT configuration	6
2.6 EUT operation mode	6
2.7 Block Diagram of Test Setup	6
2.8 Related Submittal(s) / Grant (s)	6
2.9 Modifications	7
3 TEST ENVIRONMENT	7
3.1 Address of the test laboratory	7
3.2 Test Facility	7
3.3 Environmental conditions	7
3.4 Test Description	7
3.5 Statement of the measurement uncertainty	8
3.6 Equipments Used during the Test	9
4 TEST CONDITIONS AND RESULTS	10
4.1 AC Power Conducted Emission	10
4.2 Radiated Emissions	13
4.3 Duty Cycle	19
4.4 Maximum Conducted Average Output Power	23
4.5 Power Spectral Density	25
4.6 Emission Bandwidth (26dB Bandwidth)	30
4.7 Minimum Emission Bandwidth (6dB Bandwidth)	31
4.8 Frequency Stability	35
4.9 Automatically Discontinue Transmission	37
4.10 Band edge for RF Conducted Emissions	38
5 TEST SETUP PHOTOS OF THE EUT	42
6 PHOTOS OF THE EUT	43

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.407](#): UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE DEVICES.

[ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 789033 D02](#): GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

2 SUMMARY

2.1 General Remarks

Date of receipt of test sample	:	Oct. 13, 2025
Testing commenced on	:	Oct. 13, 2025
Testing concluded on	:	Jan. 12, 2026

2.2 Product Description

Product Name:	Intelligent desktop dual-screen translation machine			
Model/Type reference:	T10			
Listed Models:	T10 MAX,T10 PRO,XHX-F80-N,XHX-F81-N(The products are identical in interior structure, electrical circuits and components, just model names is different.)			
Power supply:	DC 12V Powered by adapter			
Adapter Information:	M/N:KD24D-1202000US Input:100-240V 50/60Hz 0.65A Max Output:12V $\overline{\sim}$ 2000mA			
Sample ID:	GRCTR251002013-1# (Engineer sample), GRCTR251002013-2# (Normal sample)			
WIFI 5G				
Supported type:	20MHz system	40MHz system	80MHz system	160MHz system
	802.11a 802.11n	802.11n	N/A	N/A
Operation frequency:	5745MHz-5825MHz	5755MHz-5795MHz	N/A	N/A
Modulation:	OFDM	OFDM	N/A	N/A
Channel number:	9	4	N/A	N/A
Channel separation:	20MHz	40MHz	N/A	N/A
Antenna type:	FPC antenna			
Antenna gain:	3.04 dBi			
Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility				

2.3 Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☐ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☒ Other (specified in blank below)	

DC 12V Powered by adapter

2.4 Short description of the Equipment under Test (EUT)

This is a Intelligent desktop dual-screen translation machine.

For more details, refer to the user's manual of the EUT.

2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

○ /	M/N: /
	Manufacturer: /

2.6 EUT operation mode

The Applicant provides communication tools software(SecureCRT Version 7.0.0) to control the EUT for staying in continuous transmitting for testing meet KDB558074 test requirement.


Operation Frequency List WIFI on 5G Band:

Operating band	20MHz		40MHz	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII 3 (5725MHz-5850MHz)	149	5745	151	5755
	153	5765		
	157	5785	159	5795
	161	5805		
	165	5825	--	--


Note: The line display in gray is those Channels/Frequencies select to test in this report for each operation mode.

2.7 Block Diagram of Test Setup

AC Power Conducted Emission & Radiated Emissions(below 1GHz&above1GHz)&Band Edge(Radiated)

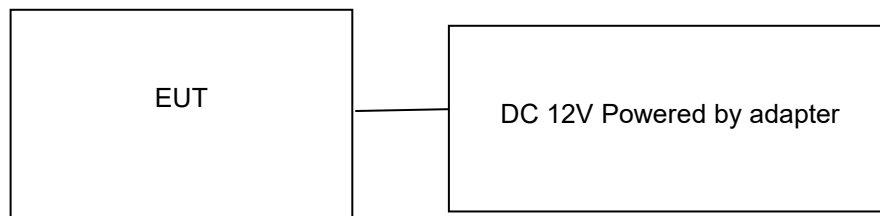

RF Measurement

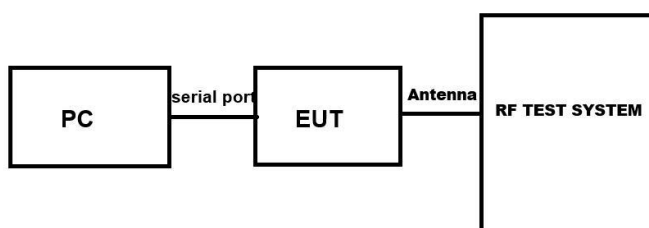

2.8 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.

2.9 Modifications

No modifications were implemented to meet testing criteria.

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

Shenzhen GUOREN Certification Technology Service Co., Ltd.

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 920798 Designation Number: CN1304

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6202.01

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27264 CAB identifier: CN0115

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

CNAS-Lab Code: L15631

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature	15-35 °C
Relative Humidity	30-60 %
Air Pressure	950-1050mbar

3.4 Test Description

FCC Requirement		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.407(a)	Emission Bandwidth(26dBm Bandwidth)	PASS ^{Note1}
FCC Part 15.407(e)	Minimum Emission Bandwidth(6dBm Bandwidth)	PASS ^{Note2}

FCC Part 15.407(a)	Maximum Conducted Output Power	PASS
FCC Part 15.407(a)	Peak Power Spectral Density	PASS
FCC Part 15.407(g)	Frequency Stability	PASS
FCC Part 15.407(b)	Undesirable emission	PASS
FCC Part 15.407(b)/15.205/15.209	Radiated Emissions	PASS
FCC Part 15.407(h)	Dynamic Frequency Selection	N/A Note 3
FCC Part 15.203/15.247(b)	Antenna Requirement	PASS
FCC Part 15.407(c)	Automatically Discontinue Transmission	PASS

Note 1: Apply to U-NII 1, U-NII 2A, and U-NII 2C band.

Note 2: Apply to U-NII 3 band only.

Note 3: This device not work in DFS band.

Note 4: N/A means “not applicable”.

Data Rate Used:

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Conducted Output Power Power Spectral Density Emission Bandwidth(26dBm Bandwidth) Minimum Emission Bandwidth(6dBm Bandwidth) Undesirable emission Frequency Stability	11a/OFDM	6 Mbps
	11n(20MHz)/OFDM	7.2 Mbps
	11n(40MHz)/OFDM	15.0Mbps

3.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1” and TR-100028-02 “Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 “ and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd.quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.06 dB	(1)
Radiated Emission	1~18GHz	5.14 dB	(1)
Radiated Emission	18-40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.14 dB	(1)
Max output power	30MHz~18GHz	0.54 dB	(1)
Power spectral density	/	0.56 dB	(1)
Spectrum bandwidth	/	1.2%	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


3.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Equipment No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	GRCTEE009	2025/09/11	2026/09/10
LISN	R&S	ENV216	GRCTEE010	2025/09/11	2026/09/10
EMI Test Receiver	R&S	ESPI	GRCTEE017	2025/09/11	2026/09/10
EMI Test Receiver	R&S	ESCI	GRCTEE008	2025/09/11	2026/09/10
Spectrum Analyzer	Agilent	N9020A	GRCTEE002	2025/09/11	2026/09/10
Spectrum Analyzer	R&S	FSP	GRCTEE003	2025/09/12	2026/09/11
Vector Signal generator	Agilent	N5181A	GRCTEE007	2025/09/11	2026/09/10
Analog Signal Generator	R&S	SML03	GRCTEE006	2025/09/11	2026/09/10
Climate Chamber	QIYA	LCD-9530	GRCTES016	2025/09/11	2026/09/10
Ultra-Broadband Antenna	Schwarzbeck	VULB9163	GRCTEE018	2023/09/28	2026/09/27
Horn Antenna	Schwarzbeck	BBHA 9120D	GRCTEE019	2023/09/28	2026/09/27
Loop Antenna	Zhinan	ZN30900C	GRCTEE020	2023/10/15	2026/10/14
Horn Antenna	Beijing Hangwei Dayang	OBH100400	GRCTEE049	2023/09/28	2026/09/27
Amplifier	Schwarzbeck	BBV 9745	GRCTEE021	2025/09/11	2026/09/10
Amplifier	Taiwan chengyi	EMC051845B	GRCTEE022	2025/09/11	2026/09/10
Temperature/Humidity Meter	Huaguan	HG-308	GRCTES037	2025/09/11	2026/09/10
Directional coupler	NARDA	4226-10	GRCTEE004	2025/09/11	2026/09/10
High-Pass Filter	XingBo	XBLBQ-GTA18	GRCTEE053	2025/09/11	2026/09/10
High-Pass Filter	XingBo	XBLBQ-GTA27	GRCTEE054	2025/09/11	2026/09/10
Automated filter bank	Tonscend	JS0806-F	GRCTEE055	2025/09/11	2026/09/10
Power Sensor	Agilent	U2021XA	GRCTEE070	2025/09/11	2026/09/10
Cable	Times	Cable-CE	GRCTEE086	2025/09/11	2026/09/10
Cable	Times	Cable-RE-1	GRCTEE087	2025/09/11	2026/09/10
Cable	Times	Cable-RE-2	GRCTEE088	2025/09/11	2026/09/10
EMI Test Software	ROHDE & SCHWARZ	ESK1-V1.71	GRCTEE060	N/A	N/A
EMI Test Software	Fera	EZ-EMC	GRCTEE061	N/A	N/A

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

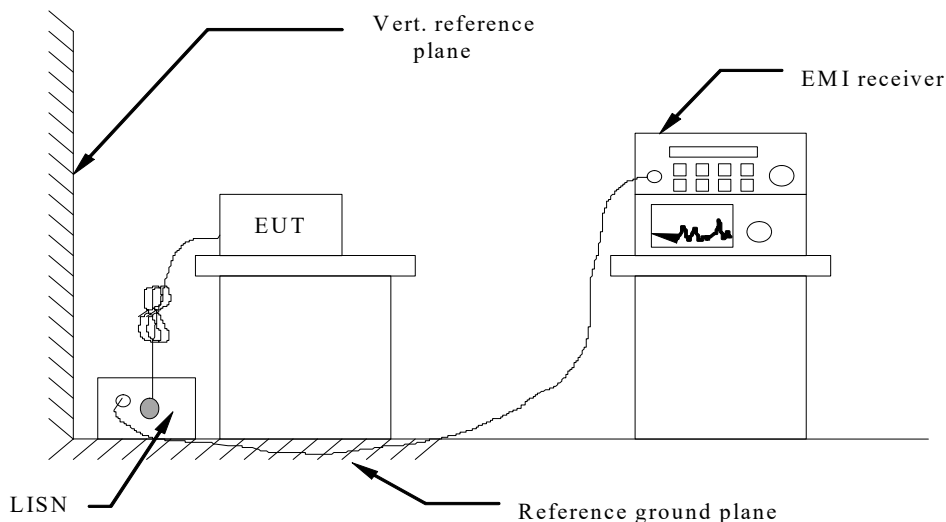

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2020+COR. 1-2023+C63.10A-2024 + ERRATA TO C63.10A-2024.
- 4 The EUT received power from variable frequency power supply, the AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark:

1. All modes of 802.11a/ 802.11n (HT20)/ 802.11n (HT40) were tested at Low, Middle, and High channel; only the worst result of 802.11n (HT20) Low channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

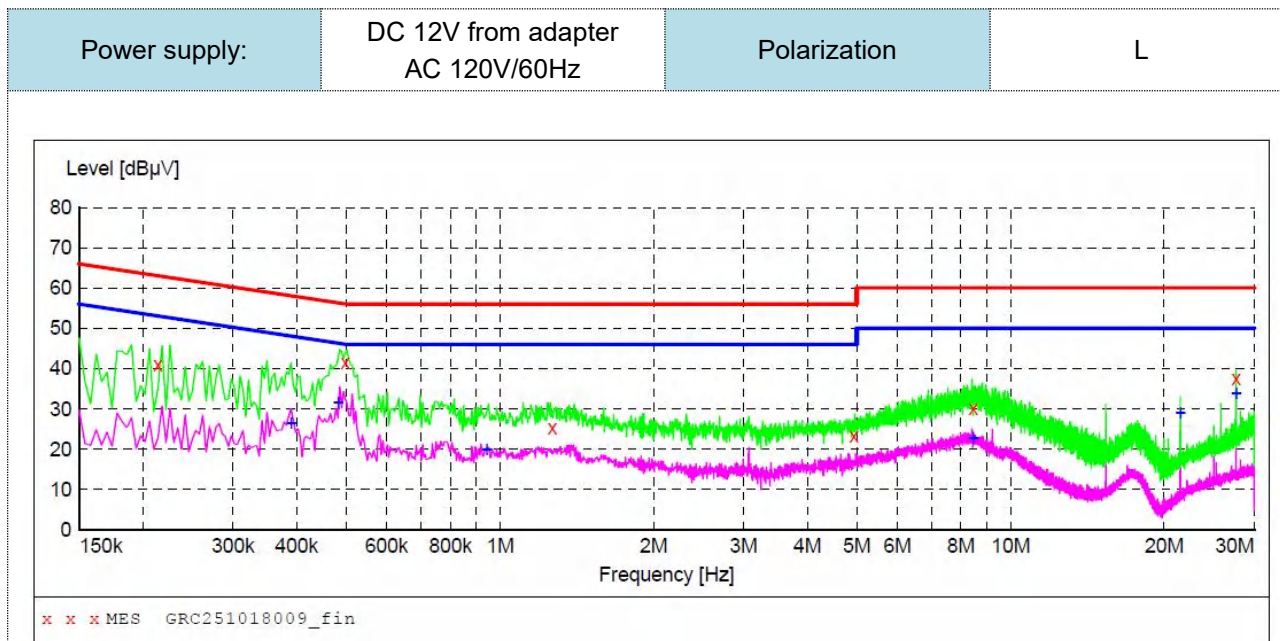

MEASUREMENT RESULT: "GRC251018009_fin"

10/18/2025 1:54PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.214000	41.10	10.4	63	21.9	QP	L1	GND
0.498000	41.60	10.2	56	14.4	QP	L1	GND
1.266000	25.40	10.5	56	30.6	QP	L1	GND
4.938000	23.20	10.2	56	32.8	QP	L1	GND
8.450000	30.10	10.6	60	29.9	QP	L1	GND
27.650000	37.60	10.8	60	22.4	QP	L1	GND

MEASUREMENT RESULT: "GRC251018009_fin2"

10/18/2025 1:54PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.390000	26.50	10.3	48	21.6	AV	L1	GND
0.482000	31.60	10.2	46	14.7	AV	L1	GND
0.942000	19.90	10.3	46	26.1	AV	L1	GND
8.438000	22.80	10.6	50	27.2	AV	L1	GND
21.506000	28.90	10.6	50	21.1	AV	L1	GND
27.650000	33.80	10.8	50	16.2	AV	L1	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)


3). Margin(dB) = Limit (dBμV) - Level (dBμV)

Power supply:

DC 12V from adapter
AC 120V/60Hz

Polarization

N

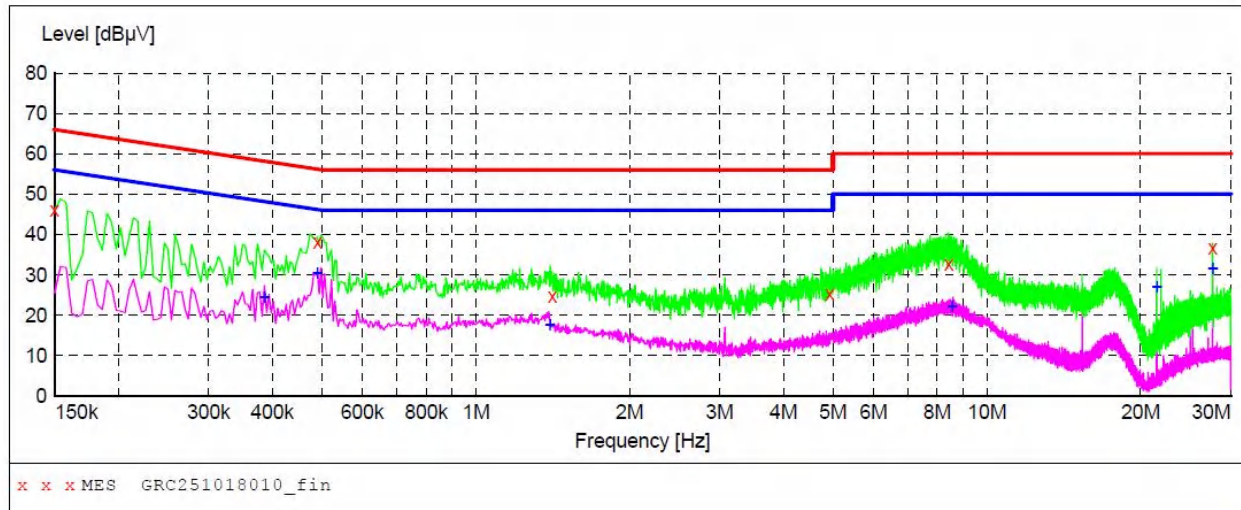**MEASUREMENT RESULT: "GRC251018010_fin"**

10/18/2025 1:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	46.10	10.1	66	19.9	QP	N	GND
0.490000	38.20	10.2	56	18.0	QP	N	GND
1.414000	24.60	10.4	56	31.4	QP	N	GND
4.922000	25.40	10.2	56	30.6	QP	N	GND
8.418000	32.60	10.6	60	27.4	QP	N	GND
27.650000	36.70	10.8	60	23.3	QP	N	GND

MEASUREMENT RESULT: "GRC251018010_fin2"

10/18/2025 1:58PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.386000	24.50	10.4	48	23.6	AV	N	GND
0.490000	30.50	10.2	46	15.7	AV	N	GND
1.394000	17.70	10.4	46	28.3	AV	N	GND
8.542000	22.20	10.6	50	27.8	AV	N	GND
21.506000	26.90	10.6	50	23.1	AV	N	GND
27.650000	31.50	10.8	50	18.5	AV	N	GND

Note:1).Level (dBμV)= Reading (dBμV)+ Transducer (dB)

2). Transducer (dB)=insertion loss of LISN (dB) + Cable loss (dB)

3). Margin(dB) = Limit (dBμV) - Level (dBμV)

4.2 Radiated Emissions

Limit

The maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Undesirable emission limits

Requirement	Limit(EIRP)	Limit (Field strength at 3m) ^{Note1}
15.407(b)(1)	PK:-27(dBm/MHz)	PK:68.2(dBμV/m)
15.407(b)(2)		
15.407(b)(3)		
15.407(b)(4)		

Note1: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$


- (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209
- (6) In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

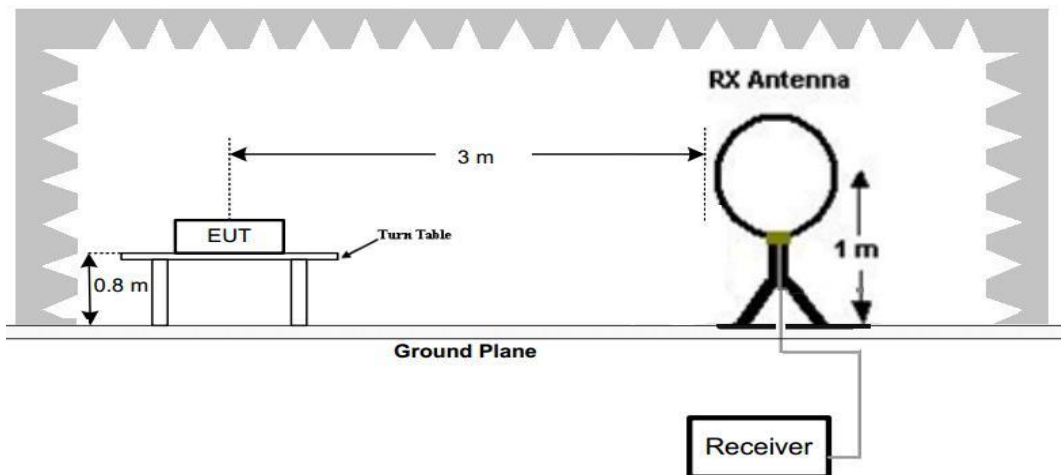

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

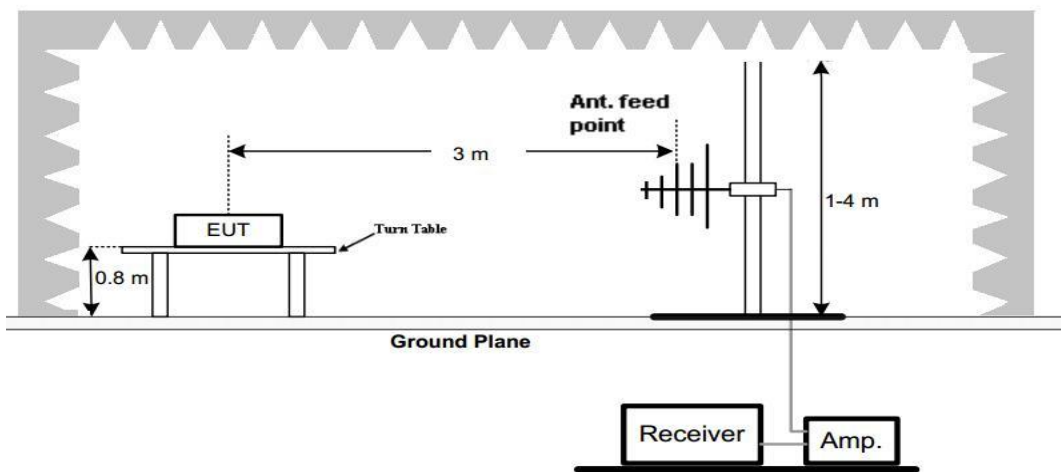

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

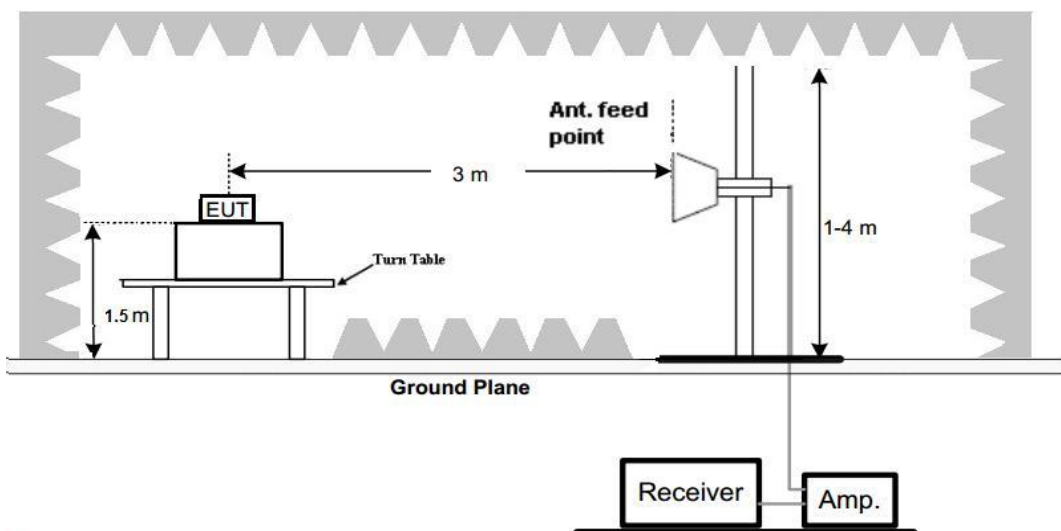

Test Procedure

- Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
- Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
- And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- Repeat above procedures until all frequency measurements have been completed.
- Radiated emission test frequency band from 9KHz to 40GHz.
- The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Bilog Antenna	3
1GHz-18GHz	Horn Antenna	3
18GHz-40GHz	Horn Antenna	1

- Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

TEST RESULTS


Remark:

- This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
- All 802.11a/ 802.11n (HT20)/ 802.11n (HT40) modes have been tested for below 1GHz test, only the worst case 802.11n (HT20) low channel of U-NII 3 band was recorded.
- All 802.11a/ 802.11n (HT20)/ 802.11n (HT40) modes have been tested for above 1GHz test, only the worst case 802.11n (HT20) was recorded.
- Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

Radiated Emission Measurement

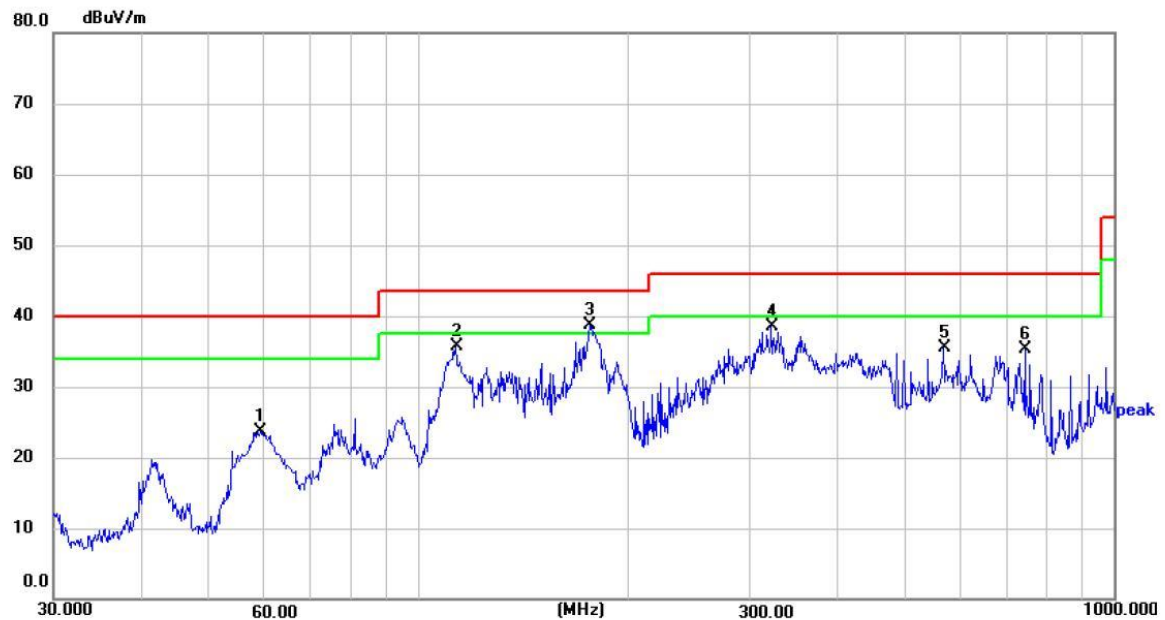

Site LAB

Polarization: *Horizontal*

Temperature: 23.0(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	59.4405	42.41	-18.80	23.61	40.00	-16.39	peak	300	340	P	
2	113.6645	55.41	-19.67	35.74	43.50	-7.76	peak	300	353	P	
3 *	176.8878	59.56	-20.91	38.65	43.50	-4.85	peak	199	88	P	
4	322.1886	55.31	-16.79	38.52	46.00	-7.48	peak	199	5	P	
5	568.6127	48.48	-12.98	35.50	46.00	-10.50	peak	100	53	P	
6	744.8661	45.36	-10.13	35.23	46.00	-10.77	peak	100	62	P	


Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

Vertical

Radiated Emission Measurement

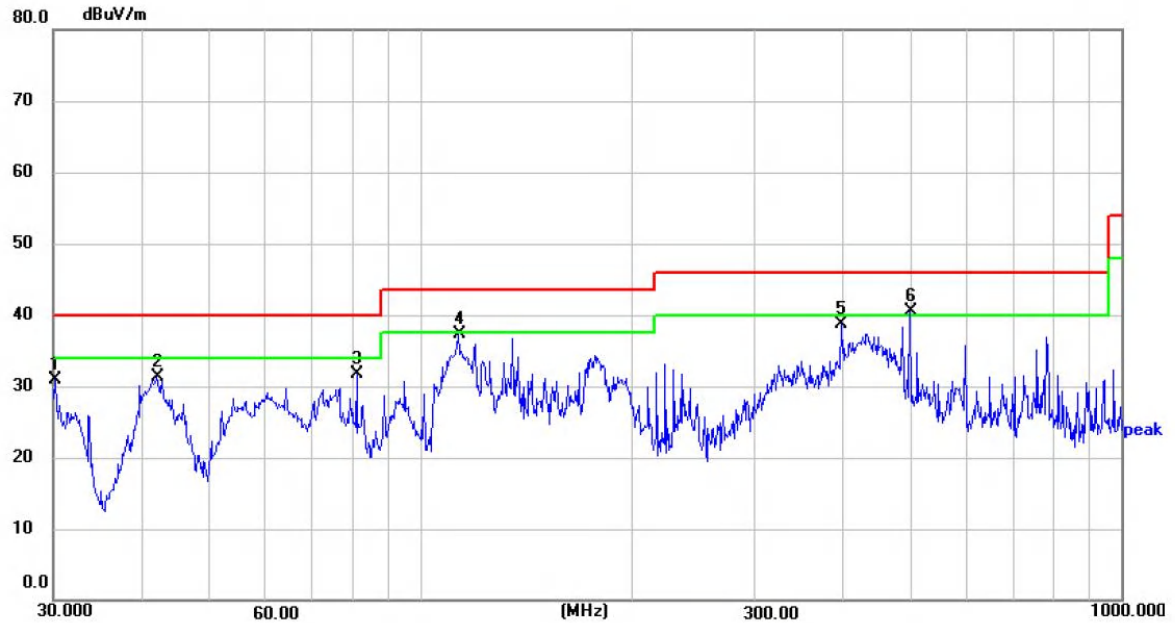

Site: LAB

Polarization: **Vertical**

Temperature: 23.0(C)

Limit: FCC Part15 RE-Class B_30-1000MHz

Power: AC120V/60Hz

Humidity: 51 %

EUT:

Distance: 3m

M/N:

Mode:

Note:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.2111	50.79	-19.89	30.90	40.00	-9.10	peak	100	96	P	
2	42.1542	49.01	-17.74	31.27	40.00	-8.73	peak	100	1	P	
3	81.2117	54.11	-22.43	31.68	40.00	-8.32	peak	100	142	P	
4	113.3163	57.00	-19.65	37.35	43.50	-6.15	peak	100	224	P	
5	399.0302	54.48	-15.72	38.76	46.00	-7.24	peak	100	51	P	
6 *	499.4247	54.92	-14.34	40.58	46.00	-5.42	peak	100	160	P	

Note:1).Level (dBuV/m)= Reading (dBuV)+ Factor (dB/m)

2). Factor(dB/m)=Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)

3). Margin(dB) = Level (dBuV/m) - Limit (dBuV/m)

For 1GHz to 40GHz

U-NII 3 & 802.11n (HT20) Mode (above 1GHz)

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	50.26	PK	H	68.30	18.04	68.62	30.54	5.74	54.64	-18.36
	5700.00	80.47	PK	H	105.30	24.83	98.69	30.61	5.83	54.66	-18.22
149.00	5720.00	82.94	PK	H	110.90	27.96	100.81	30.82	6.02	54.71	-17.87
	5725.00	89.26	PK	H	122.30	33.04	107.11	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	51.28	PK	H	68.20	16.92	56.03	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	50.49	PK	H	68.20	17.71	54.94	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	87.35	PK	H	122.30	34.95	105.07	30.85	6.08	54.65	-17.72
165.00	5855.00	86.14	PK	H	110.90	24.76	103.85	30.87	6.10	54.68	-17.71
	5875.00	85.42	PK	H	105.30	19.88	103.11	30.90	6.13	54.72	-17.69
	5925.00	50.32	PK	H	68.30	17.98	67.86	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	50.66	PK	H	68.20	17.54	54.37	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

Tested	Frequency	Emission	Detector	ANT	Limit	Margin	Raw	Antenna	Cable	Pre	Correction
Channel	(MHz)	Level	Mode	Pol	(dBuV/m)	(dB)	Value	Factor	Factor	amplifier	Factor
		(dBuV/m)					(dBuV)	(dB/m)	(dB)	(dB)	(dB/m)
	5650.00	51.23	PK	V	68.30	17.07	69.59	30.54	5.74	54.64	-18.36
	5700.00	54.08	PK	V	105.30	51.22	72.30	30.61	5.83	54.66	-18.22
149.00	5720.00	88.15	PK	V	110.90	22.75	106.02	30.82	6.02	54.71	-17.87
	5725.00	87.65	PK	V	122.30	34.65	105.50	30.83	6.05	54.73	-17.85
(5745MHz)	11490.00	51.76	PK	V	68.20	16.44	56.51	39.23	10.83	54.81	-4.75
	--	--	--	--	--	--	--	--	--	--	--
157.00	11570.00	51.92	PK	V	68.20	16.28	56.37	39.34	10.96	54.75	-4.45
(5785MHz)	--	--	--	--	--	--	--	--	--	--	--
	5850.00	88.68	PK	V	122.30	33.62	106.40	30.85	6.08	54.65	-17.72
165.00	5855.00	86.02	PK	V	110.90	24.88	103.73	30.87	6.10	54.68	-17.71
	5875.00	55.27	PK	V	105.30	50.03	72.96	30.90	6.13	54.72	-17.69
	5925.00	51.39	PK	V	68.20	16.81	68.93	30.94	6.15	54.63	-17.54
(5825MHz)	11650.00	50.41	PK	V	68.20	17.79	54.12	39.42	11.15	54.28	-3.71
	--	--	--	--	--	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the other emission levels were very low against the limit.
5. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
6. Worst case data at 6Mbps at IEEE 802.11a, MCS0 at IEEE 802.11n HT20, IEEE 802.11n HT40.

4.3 Duty Cycle

TEST CONFIGURATION



TEST PROCEDURE


According to KDB789033 D02 General UNII Test Procedures New Rules v01 B Duty Cycle (x), Transmission Duration (T):

- a. A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on and off times of the transmitted signal
- b. The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zeron span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)


TEST RESULTS

Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5745	1.38	6.89	20.03
11A	Ant1	5785	1.38	6.89	20.03
11A	Ant1	5825	1.39	6.90	20.14
11N20SISO	Ant1	5745	1.30	6.46	20.12
11N20SISO	Ant1	5785	1.30	6.45	20.16
11N20SISO	Ant1	5825	1.30	6.46	20.12
11N40SISO	Ant1	5755	2.47	5.14	48.05
11N40SISO	Ant1	5795	2.47	5.14	48.05


Test Graphs

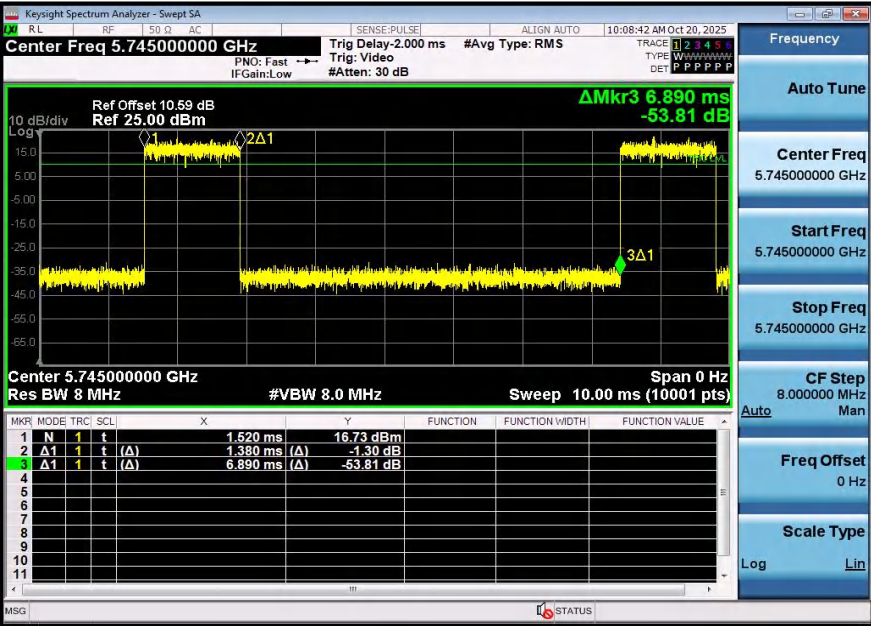


11A-5745

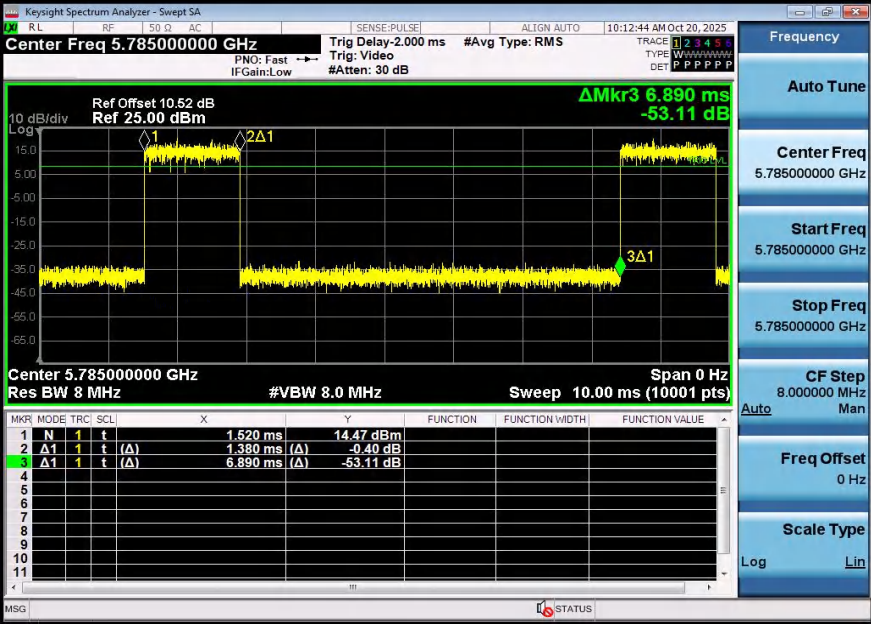


11A-5785

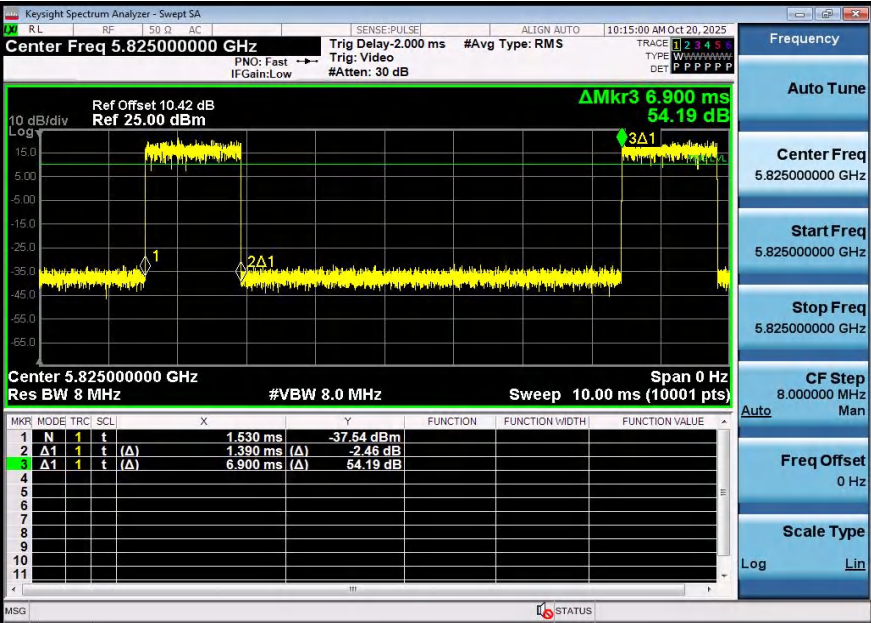


11A-5825

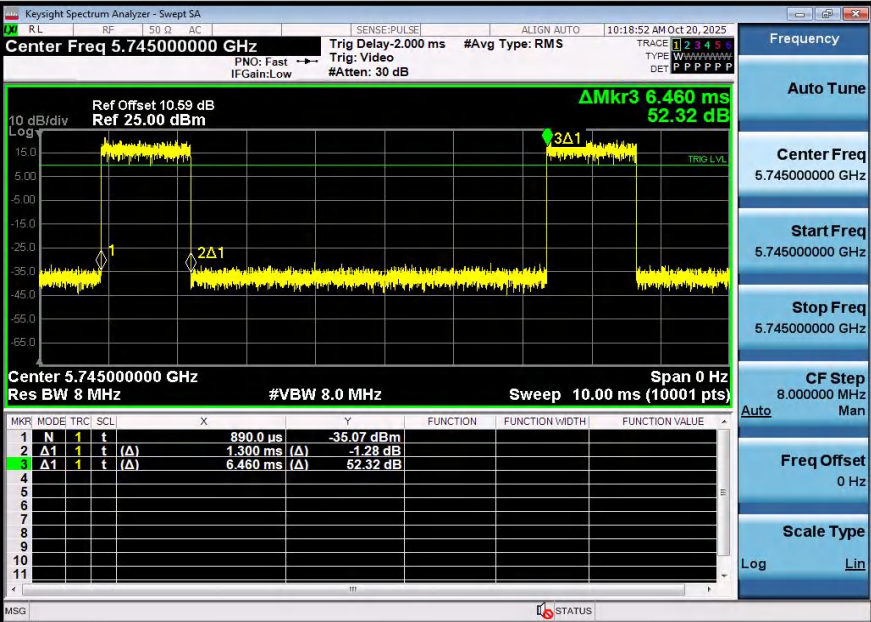


11N20SISO-5745

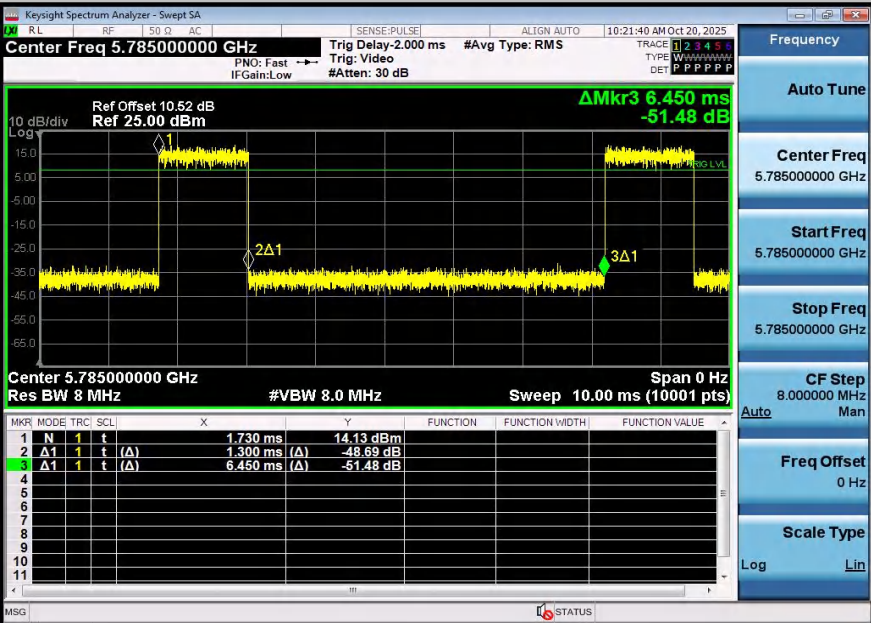


11N20SISO-5785

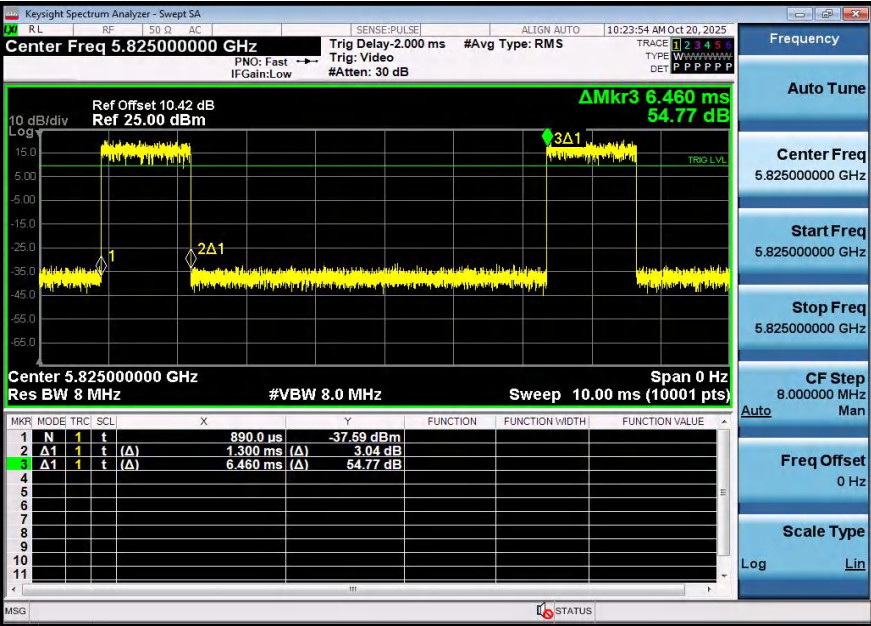

11N20SISO-5825

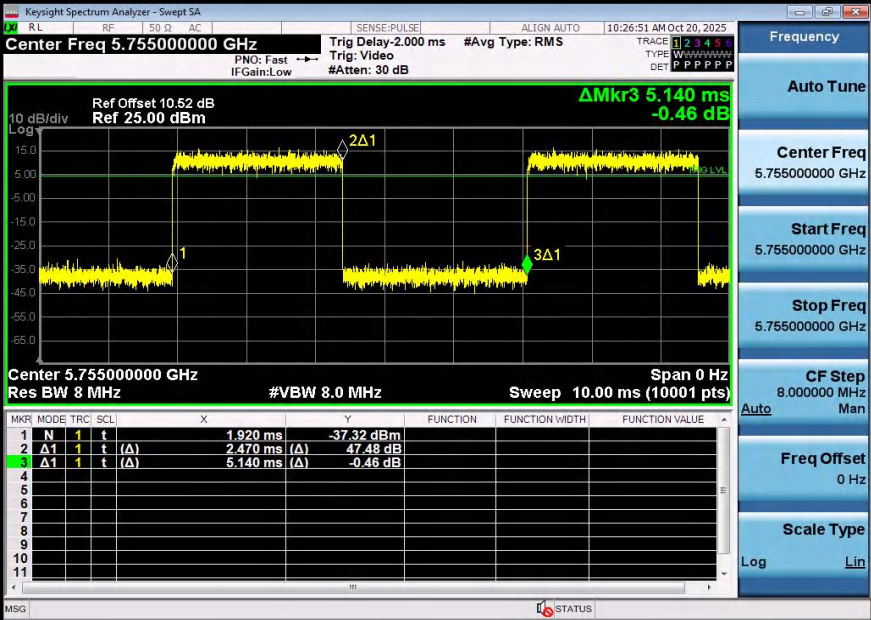

11N40SISO-5755

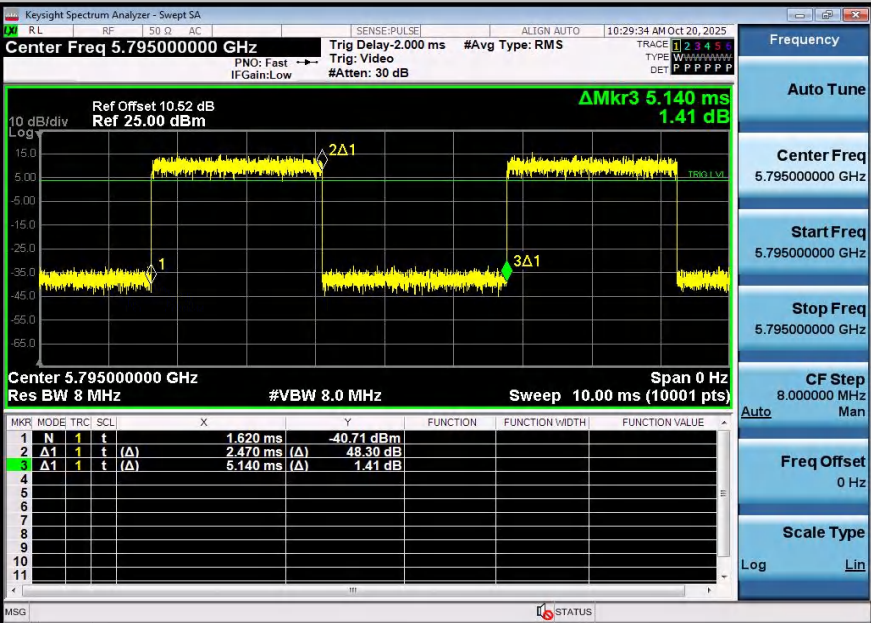

11N40SISO-5795

4.4 Maximum Conducted Average Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 Section E3 Measurement using a Power Meter (PM):

- a. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied
 1. The EUT is configured to transmit continuously or to transmit with a constant duty cycle
 2. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- b. If the transmitter does not transmit continuously, measure the duty cycle, x , of the transmitter output signal as described in section II.B
- c. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:

Frequency Range (MHz)	Limit
5150-5250	Fixed: 1 Watt (30dBm) Mobile and portable: 250mW (23.98dBm)
5250-5350	250mW (23.98dBm)
5470-5725	250mW (23.98dBm)
5725-5850	1 Watt (30dBm)

Note: The maximum e.i.r.p at any elevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)

Test Results

Type	Channel	Channel Power [dBm]	DC Factor [dBm]	Result [dBm]	Limit (dBm)	Result
802.11a	149	7.69	6.98	14.67	30	Pass
	157	5.94	6.98	12.92		
	165	7.75	6.96	14.71		
802.11n(HT20)	149	6.77	6.96	13.73	30	Pass
	157	5.67	6.96	12.63		
	165	7.93	6.96	14.89		
802.11n(HT40)	151	9.62	3.18	12.80	30	Pass
	159	9.11	3.18	12.29		

4.5 Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 789033 D02 General UNII Test Procedures New Rules v01 F: The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission

- a. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
- b. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- c. Make the following adjustments to the peak value of the spectrum, if applicable:
 1. If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.
 2.) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
- d. The result is the Maximum PSD over 1 MHz reference bandwidth.
- e. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
 1. Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
 2. Set $VBW \geq 3$ RBW.
 3. If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 4. If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 5. Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

- f. Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10 \log(1/0.25)$ if the duty cycle is 25 percent).

LIMIT

According to §15.407(a): The maximum output power should be not exceed follow:


Frequency Range (MHz)	Limit
5150-5250	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz
5250-5350	11dBm/MHz
5470-5725	11dBm/MHz
5725-5850	30dBm/500kHz

Test Results


Type	Channel	Power Spectral Density (dBm/500KHz)	Limit (dBm/500KHz)	Result
802.11a	149	0.90	30	Pass
	157	-0.35		
	165	2.07		
802.11n (HT20)	149	0.15		
	157	0.14		
	165	2.68		
802.11n (HT40)	151	-3.01		
	159	-4.86		

Remark: The Duty Cycle Factor and RBW Factor is compensated in the graph.


Test plot as follows

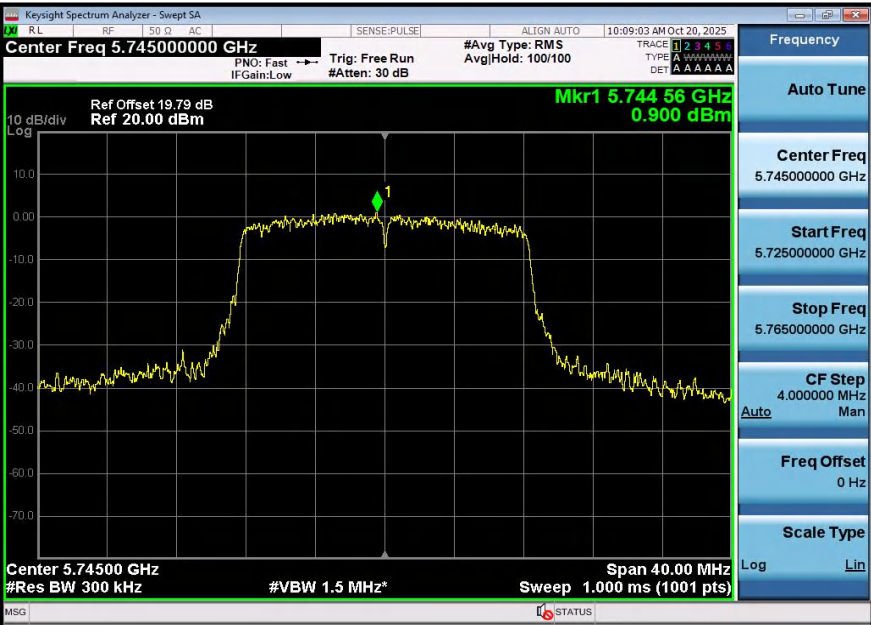


11A-Ant1-5745

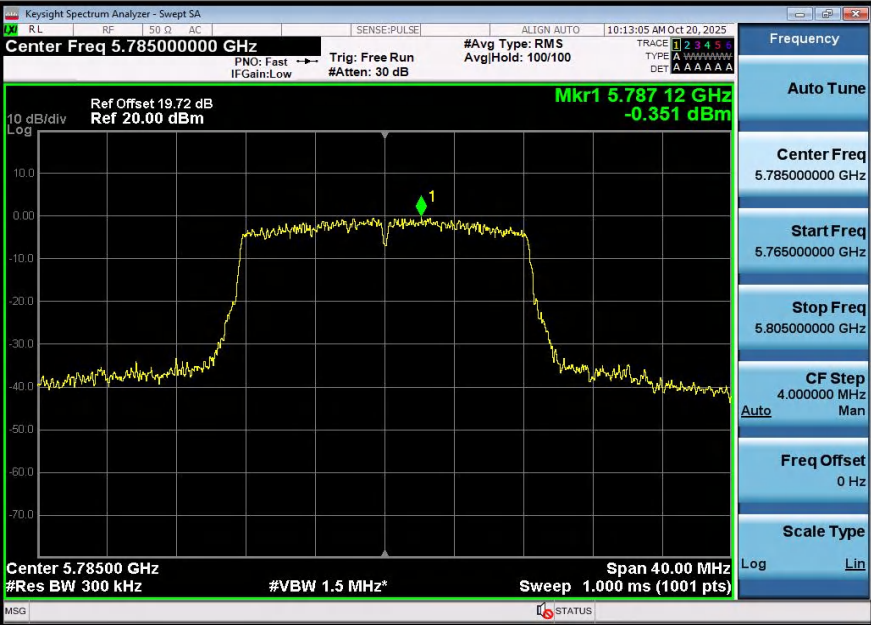


11A-Ant1-5785

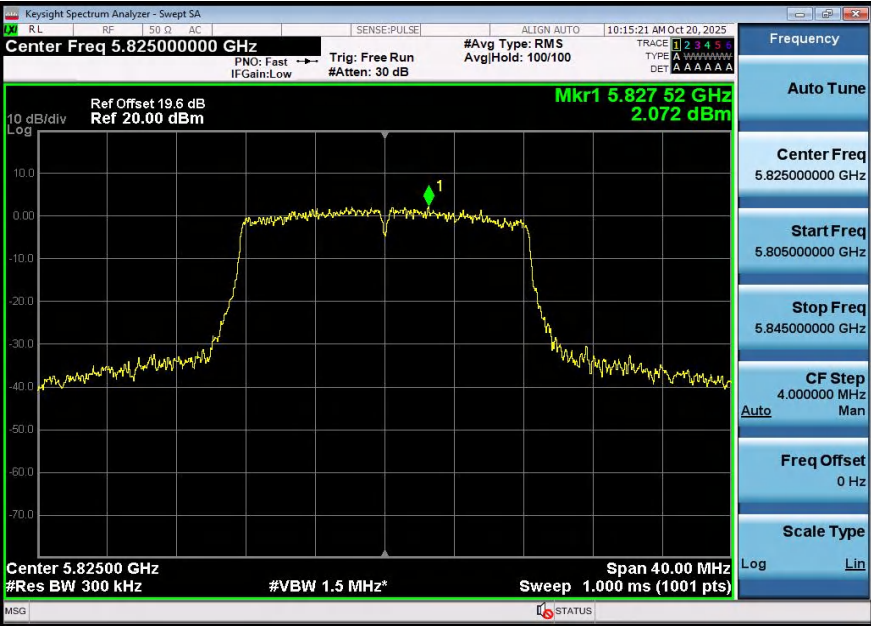


11A-Ant1-5825

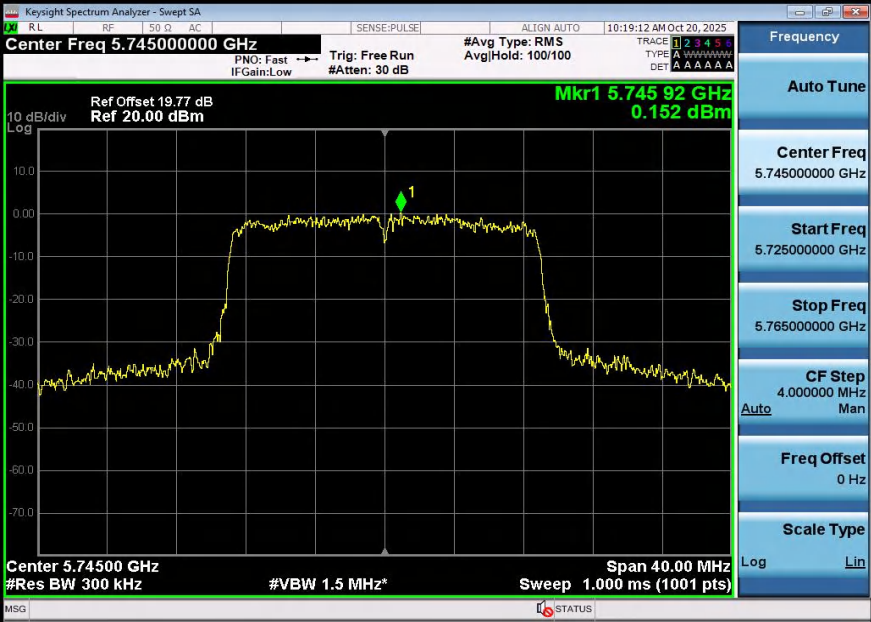


11N20SISO-Ant1-5745

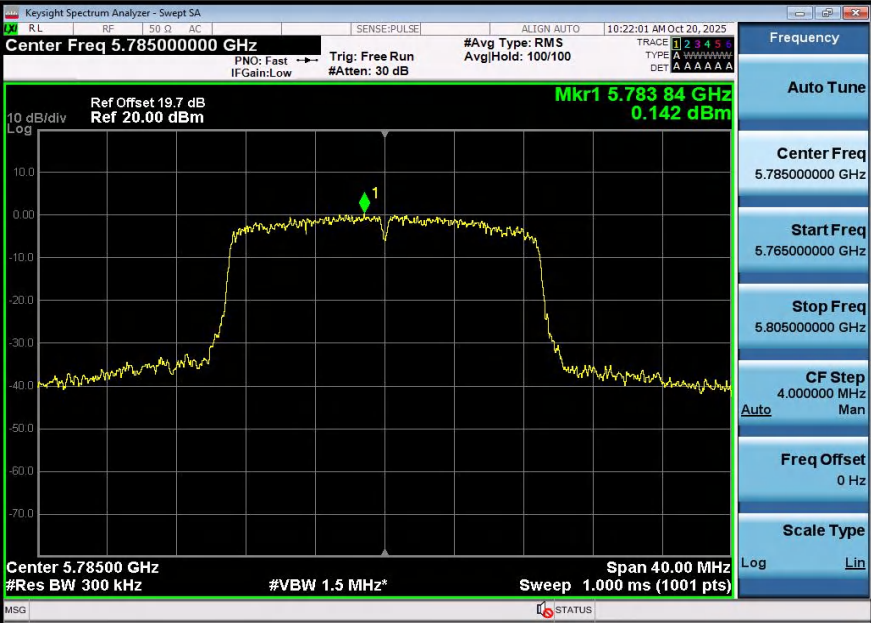


11N20SISO-Ant1-5785

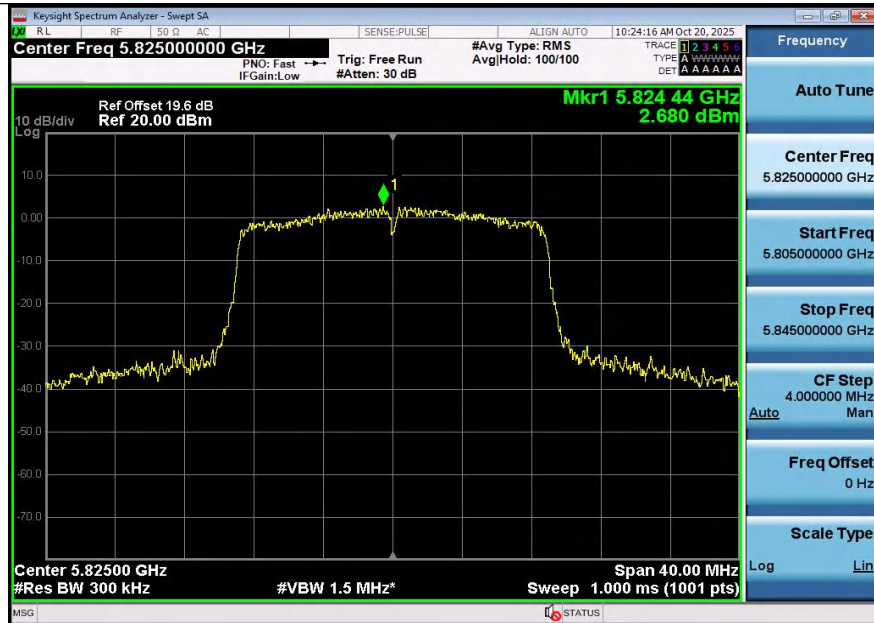

11N20SISO-Ant1-5825

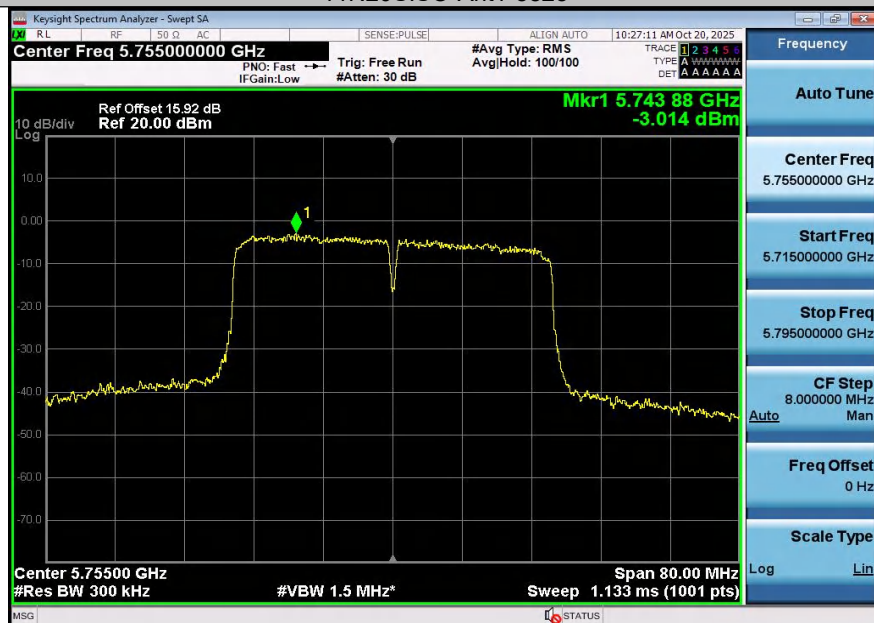

11N40SISO-Ant1-5755

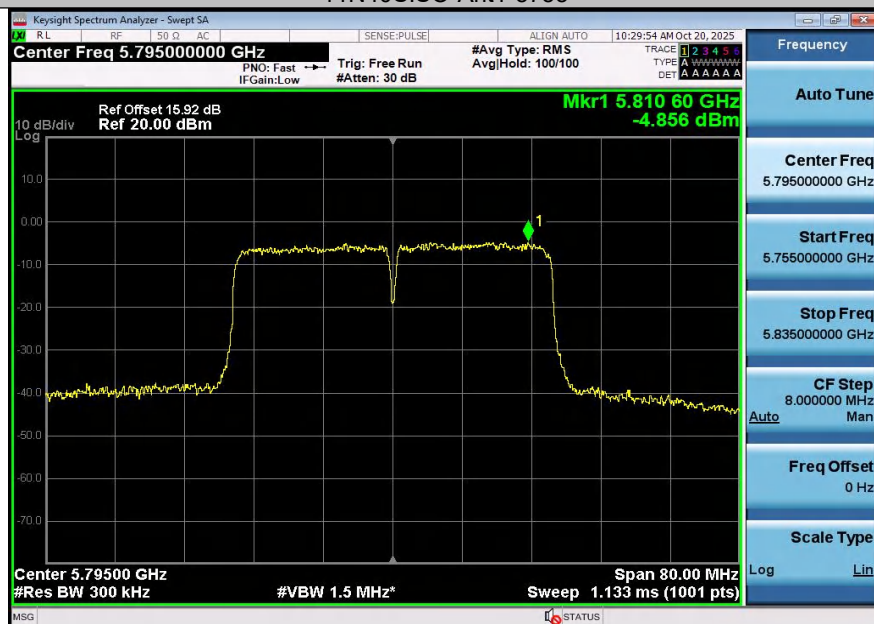

11N40SISO-Ant1-5795

4.6 Emission Bandwidth (26dB Bandwidth)

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 for one of the following procedures may be used for Emission Bandwidth (EBW) measurement:

- a. Set RBW: 1%-5% of the EBW.
- b. Set VBW = $>3 \times \text{RBW}$
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize
- g. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

LIMIT

No Limits for 26dBc Bandwidth

Test Results

The EUT doesn't have the 5.18-5.25 GHz band, So this test item is not applicable for the EUT.

4.7 Minimum Emission Bandwidth (6dB Bandwidth)

TEST CONFIGURATION



TEST PROCEDURE

According to KDB789033 D02 General UNII Test Procedures New Rules v01 for one of the following procedures may be used for section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.


LIMIT

For Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz


Test Results

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11a	149	14.720	$\geq 500\text{KHz}$	Pass
	157	15.080		
	165	15.400		
802.11n(HT20)	149	15.640		
	157	16.800		
	165	14.400		
802.11n(HT40)	151	32.800		
	159	35.840		


Test plot as follows:

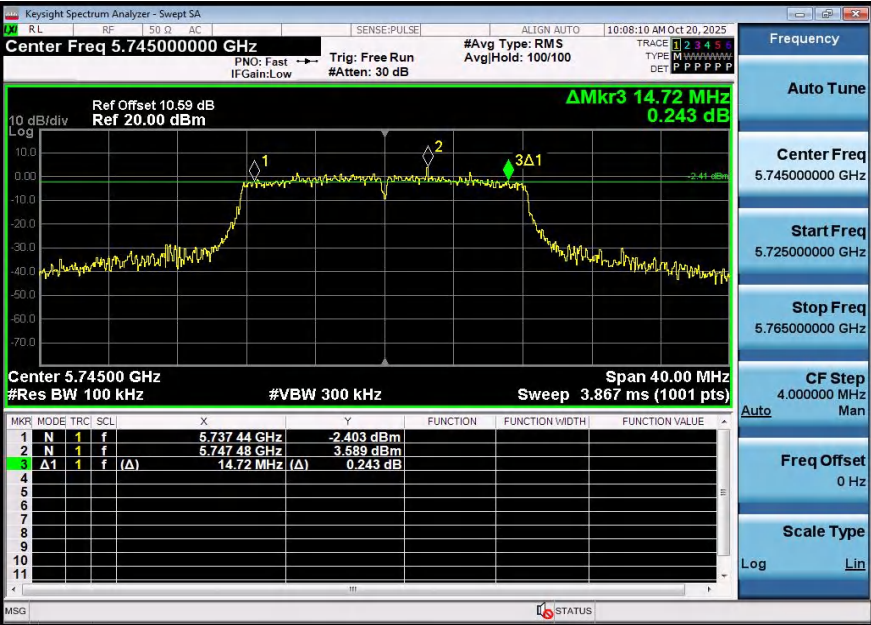


11A-Ant1-5745

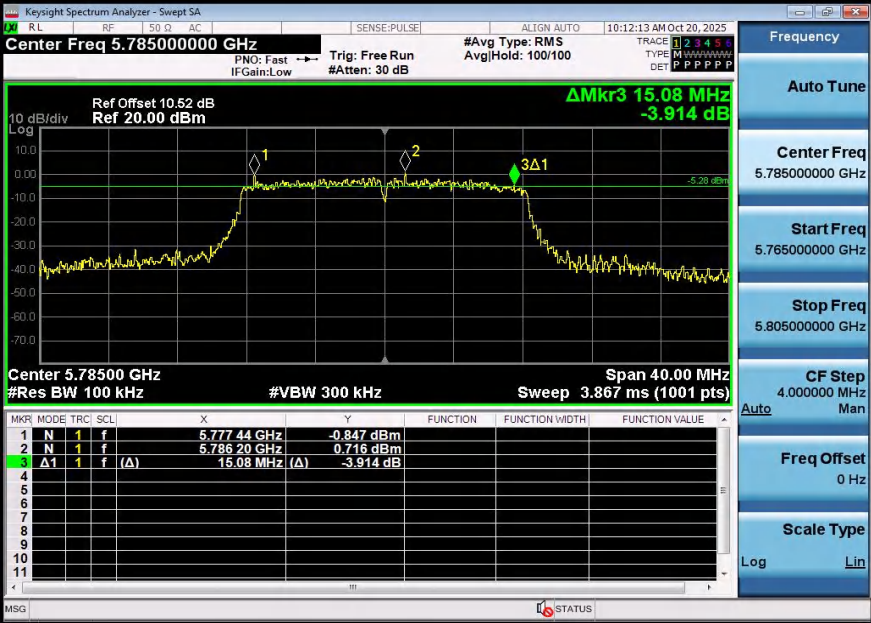


11A-Ant1-5785

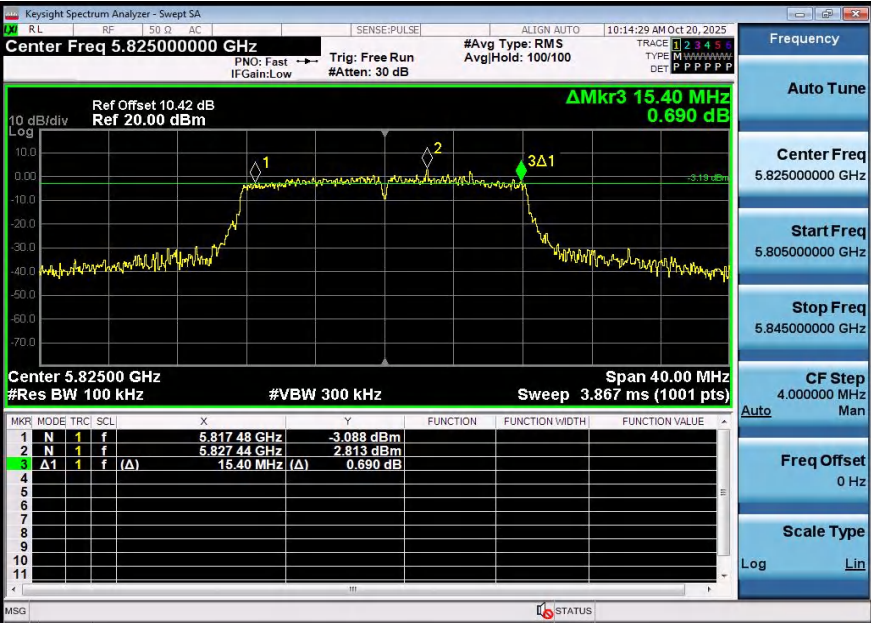


11A-Ant1-5825

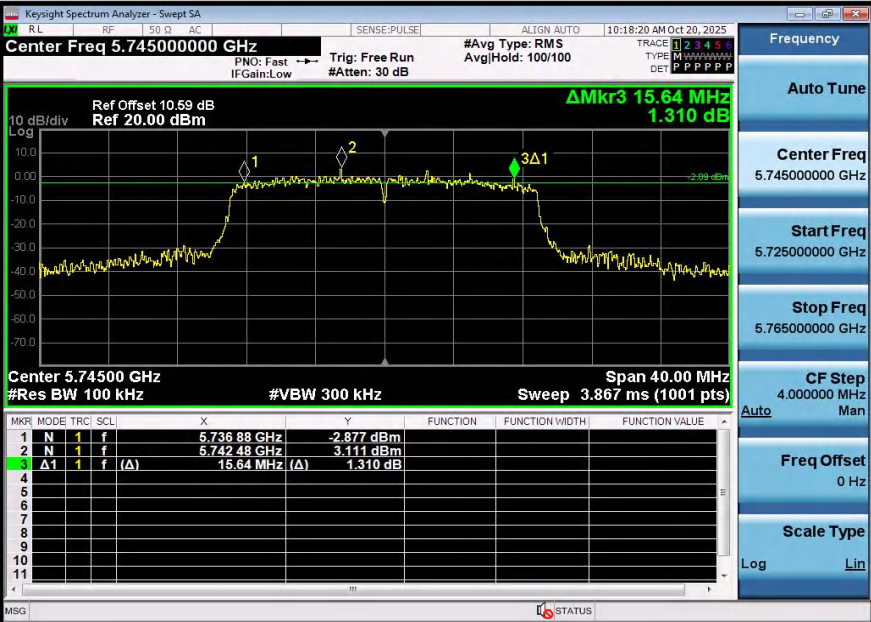


11N20SISO-Ant1-5745

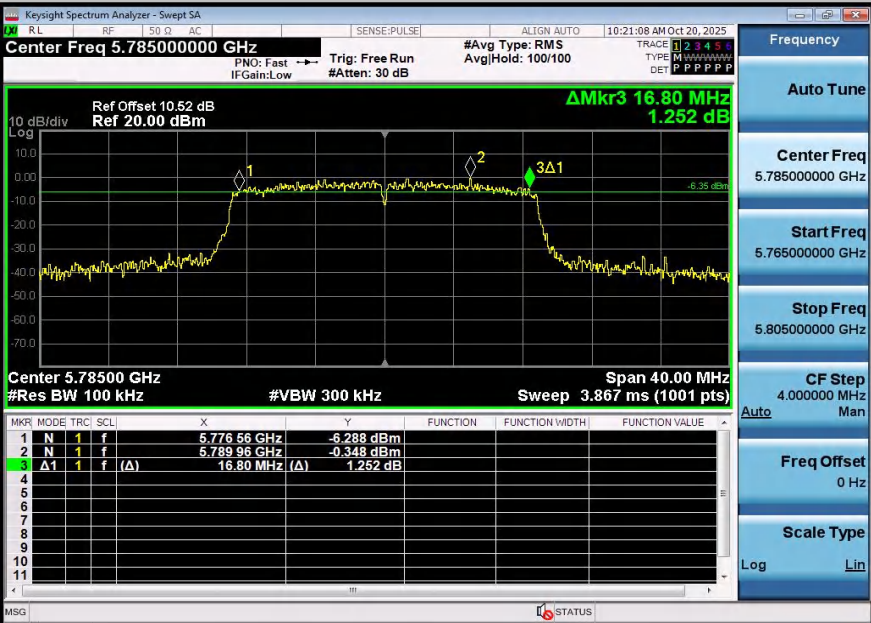


11N20SISO-Ant1-5785

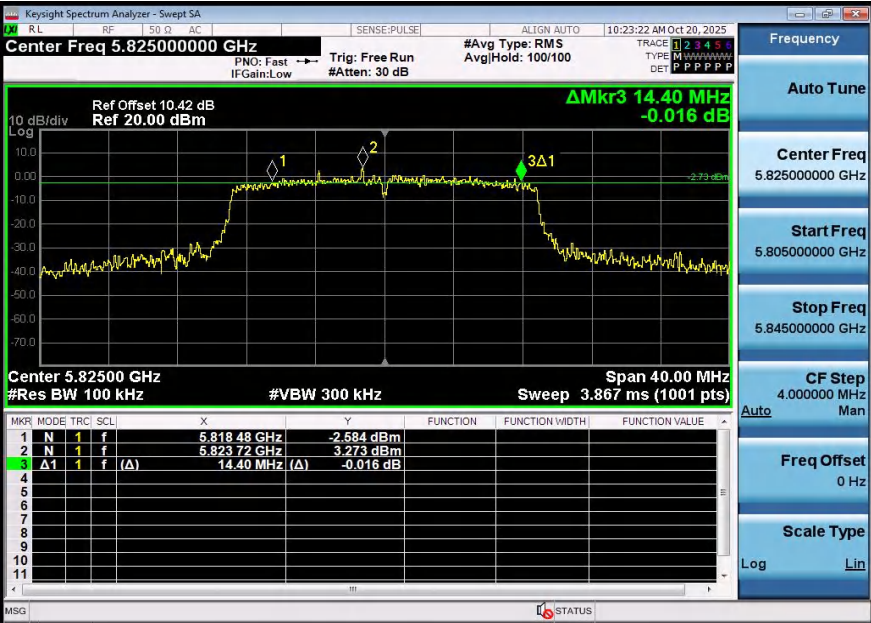

11N20SISO-Ant1-5825

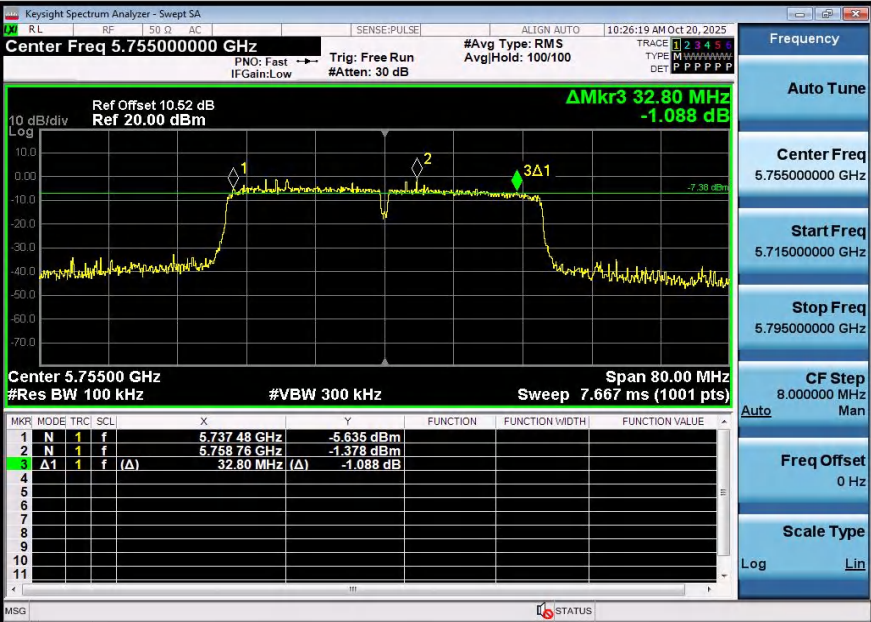

11N40SISO-Ant1-5755

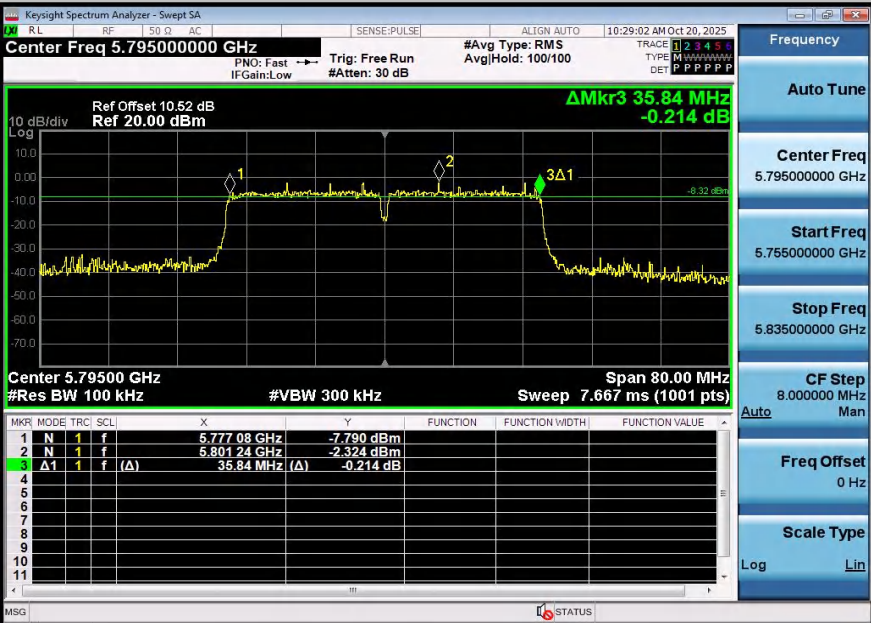


11N40SISO-Ant1-5795

4.8 Frequency Stability

LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

TEST CONFIGURATION

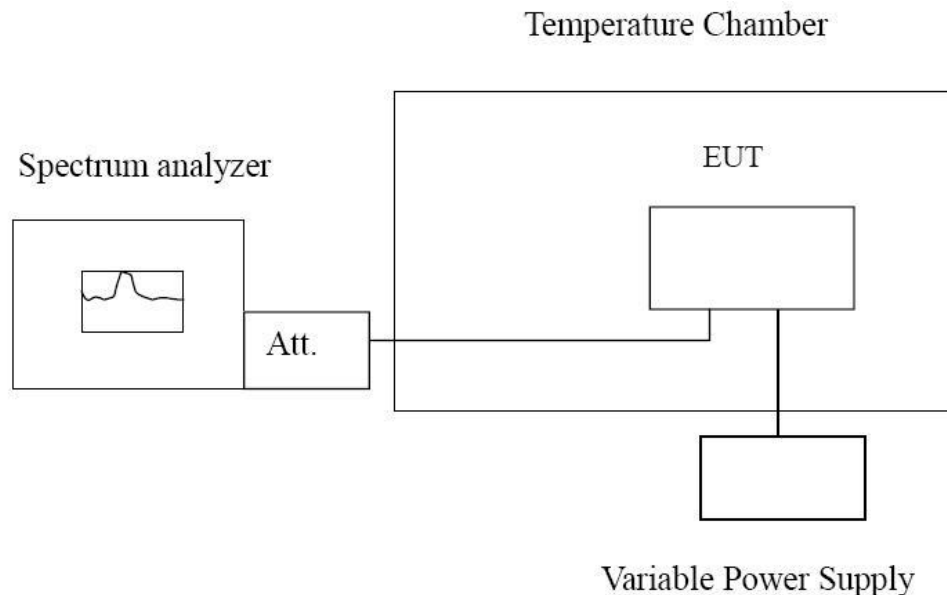

TEST PROCEDURE

Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

TEST RESULTS

Record worst case as below:

Reference Frequency: 802.11ac channel=149 frequency=5745MHz					
Voltage (V)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
12.0	-30	147.57	0.02569	Within the band of operation	Pass
	-20	169.92	0.02958		
	-10	153.70	0.02675		
	0	116.53	0.02028		
	10	176.04	0.03064		
	20	119.65	0.02083		
	30	179.62	0.03127		
	40	122.24	0.02128		
	50	139.96	0.02436		
13.2	25	135.21	0.02354	Within the band of operation	Pass
10.8	25	152.74	0.02659		

4.9 Automatically Discontinue Transmission

Standard Applicable

FCC CFR Title 47 Part 15 Subpart C Section 15.407(c):

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

Test Result:

Declared by applicants that the device will automatically discontinue transmission in case of either absence of information to transmit or operational failure.

4.10 Band edge for RF Conducted Emissions

Limit

1) For transmitters operating in the 5.15 – 5.25 GHz band: All emissions outside of the 5.15 – 5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

2) For transmitters operating solely in the 5.725 – 5.850 GHz band.

All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=1MHz, VBW= 1MHz, peak detector , and max hold.

Test Configuration



Test Results

Test plot as follows:



11A-Ant1-5745



11A-Ant1-5825



11N20SISO-Ant1-5745



11N20SISO-Ant1-5825





11N40SISO-Ant1-5755



11N40SISO-Ant1-5795

5 Test Setup Photos of the EUT

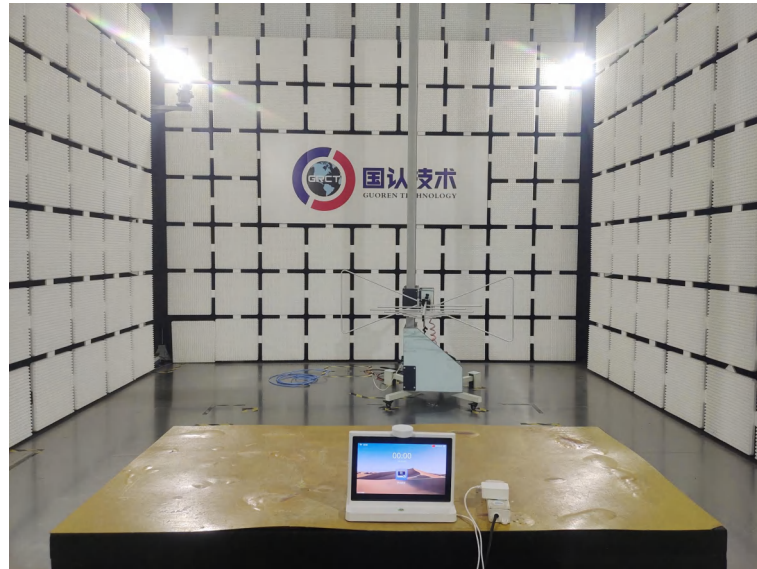

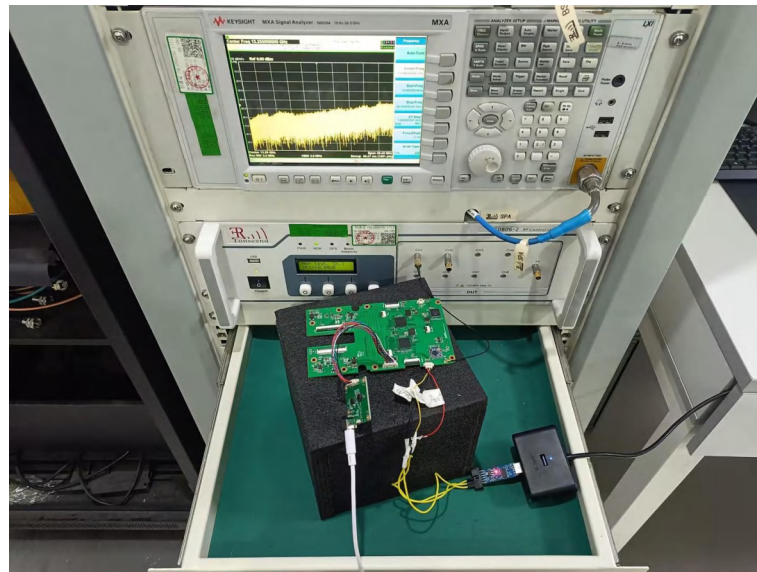

6 Photos of the EUT

Reference to the test report No. GRCTR251002013-02.

***** End of Report *****