

材质：70G双胶纸
折叠尺寸：96*96mm
风琴折



折叠后此面为封面

- 刀模线
- 折痕线

USER GUIDE 用户指南

型号: ATK U2 PRO MAX
额定/Rating: 5V=500mA
深圳意义之塔科技有限公司

烈空 U2 PRO MAX

ATK GEAR

QUICK START


01 按键和配件说明 / Introduction / 紹介 / 소개

1 Type-C口
Type-C Port
Type-C インタフェース
Type-C 인터페이스

2 鼠标左键
Left Mouse Button
マウスの左ボタン
마우스 왼쪽 버튼

3 鼠标右键
Right Mouse Button
マウスの右ボタン
마우스 오른쪽 버튼


4 滚轮
Scroll Wheel
マウスホイール
마우스 휠

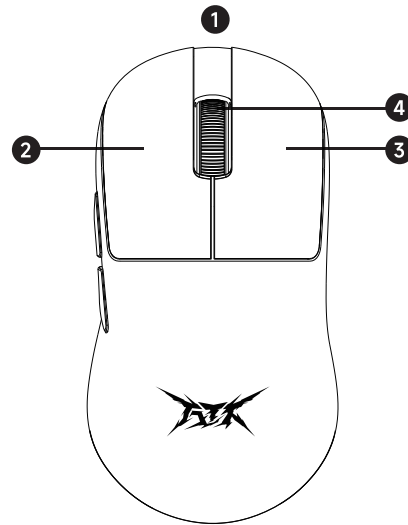

5 LED 指示灯
LED Indicato
LED インジケータ
LED 표시등

6 前进侧键
Forward Button
前進側キー
전진 측면 키

7 后退侧键
Back Button
後退側キー
뒤로 측면 키

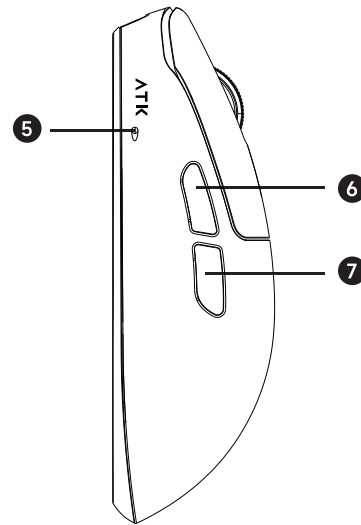


8 脚贴区
Feet
フィート
피트

9 光学传感器
Optical Sensor
光センサ
광학 센서

10 DPI切换键
DPI Button
DPIボタン
DPI 버튼

11 无线开关
Power Switch
電源スイッチ
전원 스위치

12 数据线
Cable
データ線
데이터 케이블

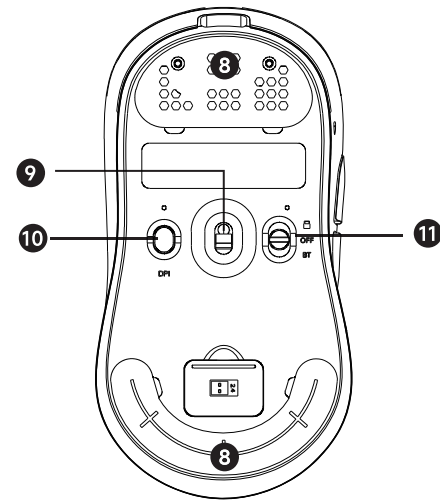


13 8K NANO 接收器
8K NANO Dongle
8K NANO ドングル
8K NANO 수신기




02 快速开始 / Quick Start / クイックスタート 빠른 시작

1. 充电/有线使用 Charge / Wired Mode 充電/有線モード 충전 / 유선 모드




2. 无线使用 / Wireless Mode / ワイヤレスモード / 무선 모드

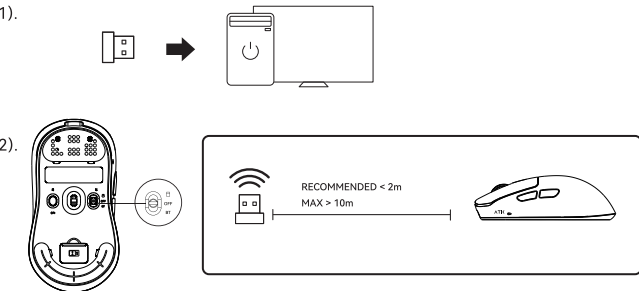

03 DPI调节 / DPI Set / DPI設定 / DPI 튜닝

按击底部DPI切换键可以快速切换DPI, 免驱提供以下DPI档位和状态指示 / Press the DPI button to quickly switch the DPI. The free drive provides the following DPI set and status indications / DPI 버튼을 누르면, DPI를 수월하게 변경할 수 있습니다. / DPI 버튼을 눌러 DPI를 빠르게 전환합니다.무선 드라이브는 다음과 같은 DPI 설정 및 상태 지시를 제공합니다

红灯 / Red / 赤 / 빨강	400DPI
绿灯 / Green / 그린 / 그린	800DPI
蓝灯 / Blue / 青 / 파란색	1600DPI
紫灯 / Purple / 퍼플 / 보라색	3200DPI



更多DPI设置需要使用驱动修改, 支持 100~30000DPI之间的设置 / The DPI can be set between 100 to 30000 DPI by software. / DPI는 소프트웨어를介して100 ~30000DPI의 間に設定することができる / DPI는 소프트웨어를 통해 100에서 30000 DPI 사이를 설정할 수 있습니다

04 回报率设置 / Polling Rate Set / ポーリングレート 設定 / 수익률 설정

可通过驱动直接修改回报率 / Set the rate by software / 소프트웨어를 사용하여 속도를 설정합니다 / 소프트웨어를 통해 속도를 설정합니다

05 电量状态指示 / Battery Indication / 電力量狀態指示 / 전력 상태 표시

- 指示灯红灯闪烁: 电量小于20%, 请充电 / Blinking In Red: 20%Battery, please charge / 赤色点滅: 20% 배터리, 충전하십시오 / 빨간색 깜빡임: 20% 배터리 충전
- 指示灯橙灯闪烁: 充电中 / Blinking In Orange: Charging / 橙色点滅: 充電 / 상태 표시등 주황색 깜빡임
- 指示灯常亮: 充电完成, 恢复至绿色 / Staying in Green: Charging completed / 緑のまま: 充電完了 / 녹색 유지: 충전 완료

FCC Warning

15.19 Labeling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

15.21 Information to user.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure Statement:

- This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
- This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 5mm between the radiator and your body.

- 本产品2.4G功能符合“微功率短距离无线电发射设备目录和技术要求”的通用微功率设备F类设备要求, 使用频率: 2400~2483.5MHz, 发射功率限值: 10mW(e.i.r.p), 频率容限: 75kHz, 天线类型为板载天线。设备开机后通过硬件开关选择进入微功率模式, 若要退出微功率模式, 则相应地通过硬件关闭开关操作, 进入其他模式;
- 不得擅自改变使用场景或使用条件、扩大发射频率范围、加大发射功率(包括额外加装射频功率放大器), 不得擅自更改发射天线;
- 不得对其他合法的无线电台(站)产生有害干扰, 也不得提出免受有害干扰保护;
- 应当承受辐射射频能量的工业、科学及医疗(ISM)应用设备的干扰或其他合法的无线电台(站)干扰;
- 如对其他合法的无线电台(站)产生有害干扰时, 应立即停止使用, 并采取措施消除干扰后方可继续使用;
- 在航空器内和依据法律法规、国家有关规定、标准划设的射电天文台、气象雷达站、卫星地球站(含测控、测距、接收、导航站)等军民用无线电台(站)、机场等的电磁环境保护区域内使用微功率设备, 应当遵守电磁环境保护及相关行业主管部门的规定;
- 禁止在以机场跑道中心点为圆心、半径5000米的区域内使用各类模型遥控器;
- 微功率设备使用时满足温度(25摄氏度)和电压(DC: 5V)的环境条件。



驱动下载
Software Download
ソフトウェアのダウンロード
소프트웨어 다운로드
WWW.ATK.PRO



Removal Instruction for Battery Recycling

本说明书仅供参考, 产品信息可能因更新、技术进步等原因发生变化。用户可通过官网或电子说明书等渠道获取最新信息并按其操作。本说明书旨在为用户提供操作指南, 如有疑问, 请联系客户服务。因操作不当或未按要求进行维护保养导致的产品损坏, 本公司不承担责任。最终解释权归公司所有 / This manual is for reference only. Product information may change due to updates or technology improvements. Please refer to the official website or electronic manual for the latest information. For any questions, contact customer service. The company is not responsible for damage caused by improper use or lack of maintenance. The company reserves the right of final interpretation / 本マニュアルは参考用です。製品情報は、更新や技術進歩により変更されることがあります。最新情報は公式ウェブサイトまたは電子マニュアルで確認し、指示に従って操作してください。本マニュアルは使用ガイドとして提供されています。質問があれば、カスタマーサポートにお問い合わせください。誤った操作や必要なメンテナンスを行わないことによる製品の損傷については、当社は責任を負いません。最終的な解釈権は当社に帰属します / 이 매뉴얼은 참고용입니다. 제품 정보는 업데이트나 기술 발전에 따라 변경될 수 있습니다. 최신 정보는 공식 웹사이트나 전자 매뉴얼을 통해 확인하고 제공된 지침에 따라 사용하십시오. 이 매뉴얼은 사용을 안내하는 목적으로 제공됩니다. 질문이 있으면 고객 서비스에 문의하십시오. 부적절한 사용이나 요구된 유지보수를 하지 않아 발생한 제품 손상에 대해서는 회사가 책임지지 않습니다. 최종 해석권은 회사에 있습니다.