2.4GWIFI

DUT: Tablet

Communication System:802.11b; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: H2450 Medium parameters used: f = 2437 MHz; σ = 1.77 S/m; ε_r = 40.02; ρ = 1000 kg/m^3
Ambient Temperature：22.7 ℃; Liquid Temperature：22.5℃

DASY5 Configuration:
Ambient Temperature：22.7 ℃; Liquid Temperature：22.5℃
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANT1/Area Scan (6x12x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.296 W/kg

Bottom-ANT1/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.554 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.477 W/kg
SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.115 W/kg
Maximum value of SAR (measured) = 0.253 W/kg

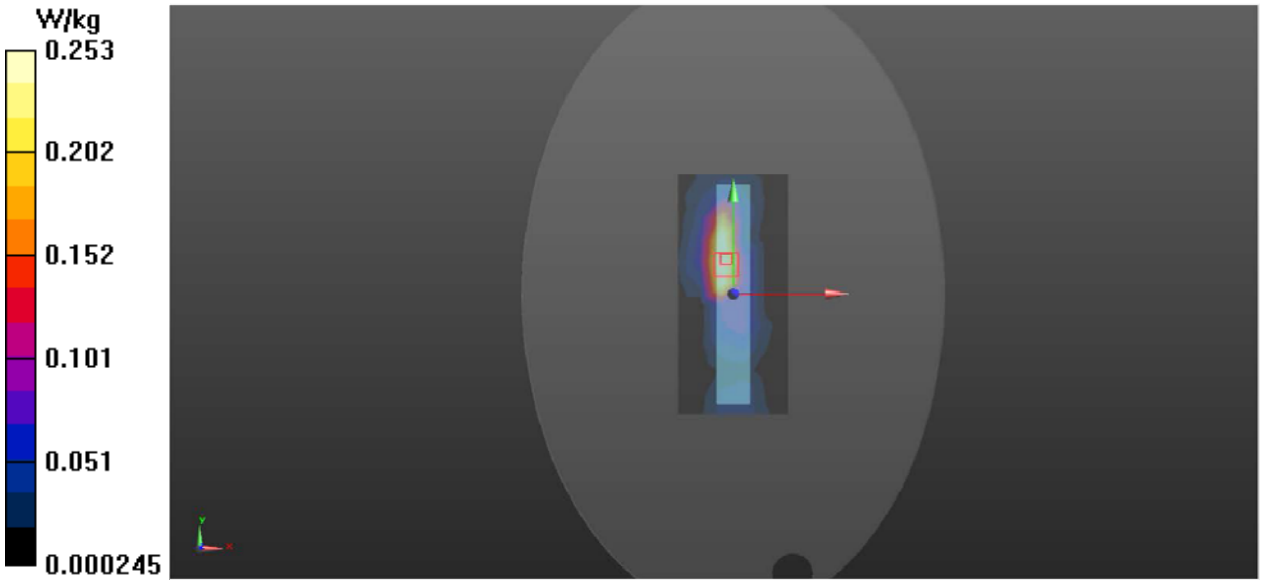

5.2GWIFI

DUT: Tablet

Communication System:802.11a; Frequency: 5200 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5200 MHz; σ = 4.68 S/m; ε_r = 36.94; ρ = 1000 kg/m^3
Ambient Temperature：21.5 ℃; Liquid Temperature：21.3℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
- Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANT1/Area Scan (6x12x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.992 W/kg

Bottom-ANT1/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 8.774 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.995 W/kg
SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.270 W/kg
Maximum value of SAR (measured) = 0.786 W/kg

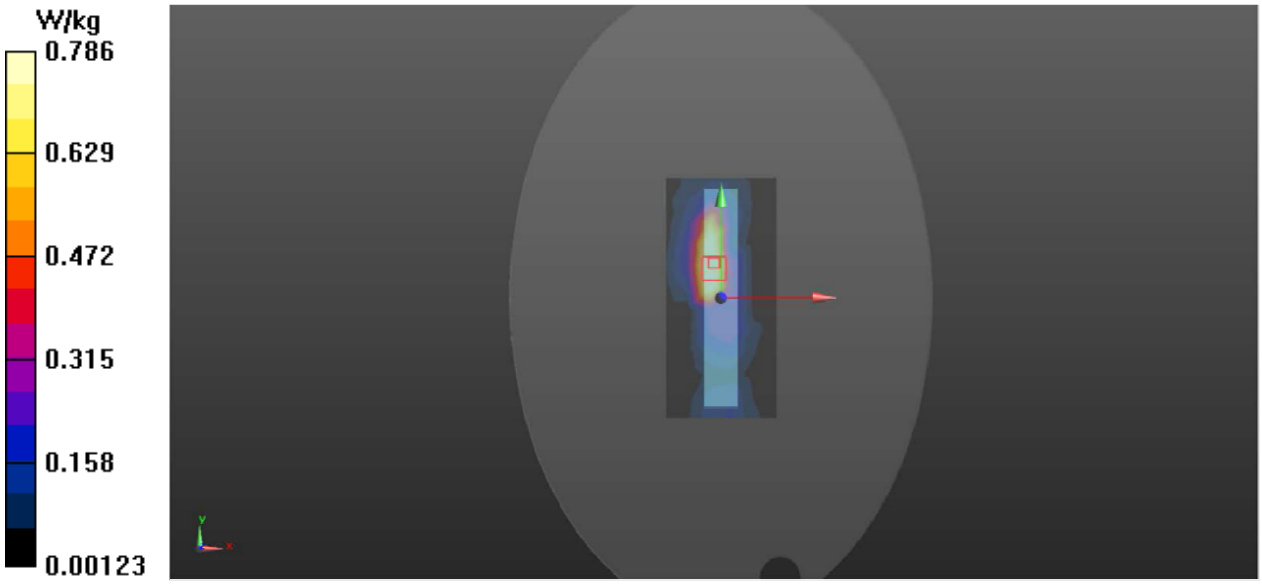

5.3GWIFI

DUT: Tablet

Communication System:802.11a; Frequency: 5300 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5300 MHz; σ = 4.80 S/m; ε_r = 36.75; ρ = 1000 kg/m^3
Ambient Temperature：21.5 ℃; Liquid Temperature：21.3℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
- Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANT1/Area Scan (6x12x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.600 W/kg

Bottom-ANT1/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.730 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.870 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.239 W/kg
Maximum value of SAR (measured) = 0.698 W/kg

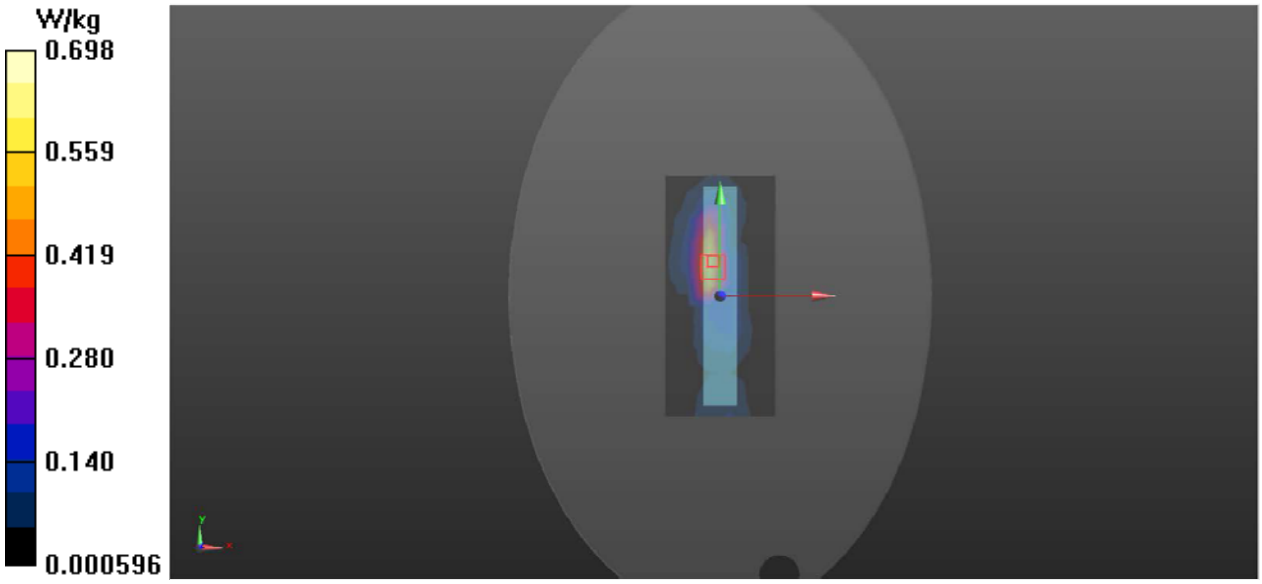

5.6GWIFI

DUT: Tablet

Communication System:802.11a; Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5580 MHz; σ = 5.14 S/m; ε_r = 36.18; ρ = 1000 kg/m^3
Ambient Temperature：22.2 ℃; Liquid Temperature：22.0℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
- Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANT1/Area Scan (6x12x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.656 W/kg

Bottom-ANT1/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 5.243 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 2.79 W/kg
SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.249 W/kg
Maximum value of SAR (measured) = 1.30 W/kg

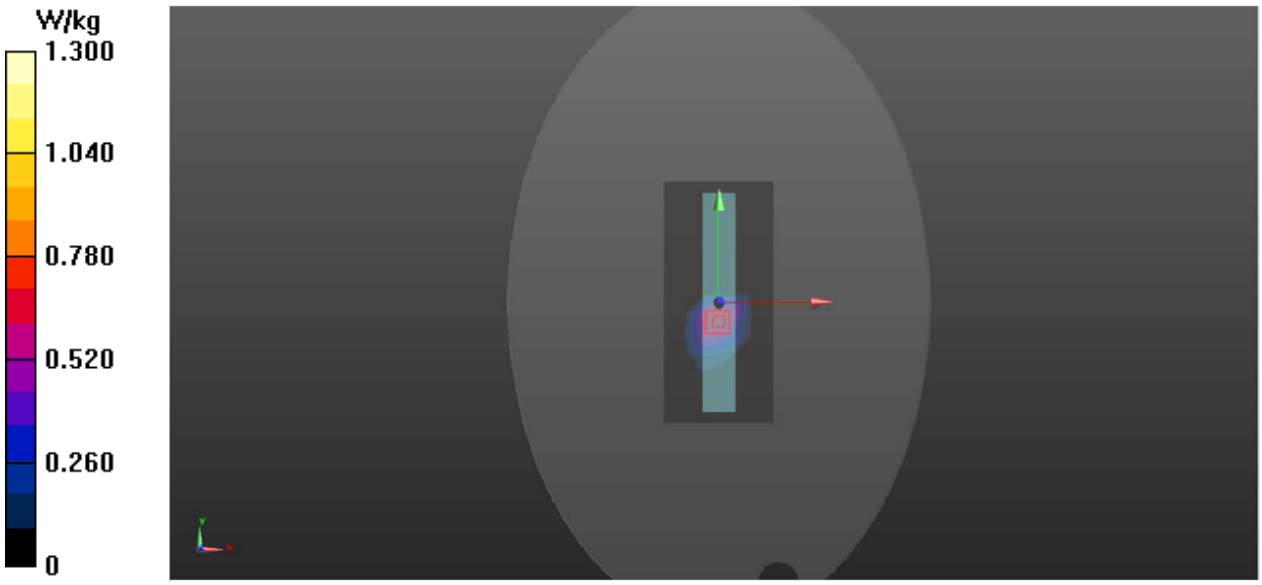

5.8GWIFI

DUT: Tablet

Communication System:802.11a; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium: H5G Medium parameters used: f = 5785 MHz; σ = 5.35 S/m; ε_r = 35.74; ρ = 1000 kg/m^3
Ambient Temperature：22.3 ℃; Liquid Temperature：22.1℃

DASY5 Configuration:
- Probe: EX3DV4 - SN7624; Calibrated: 2023/9/6;
- Electronics: DAE4 Sn1286; Calibrated: 2024/2/22
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Bottom-ANT1/Area Scan (6x12x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (measured) = 0.598 W/kg
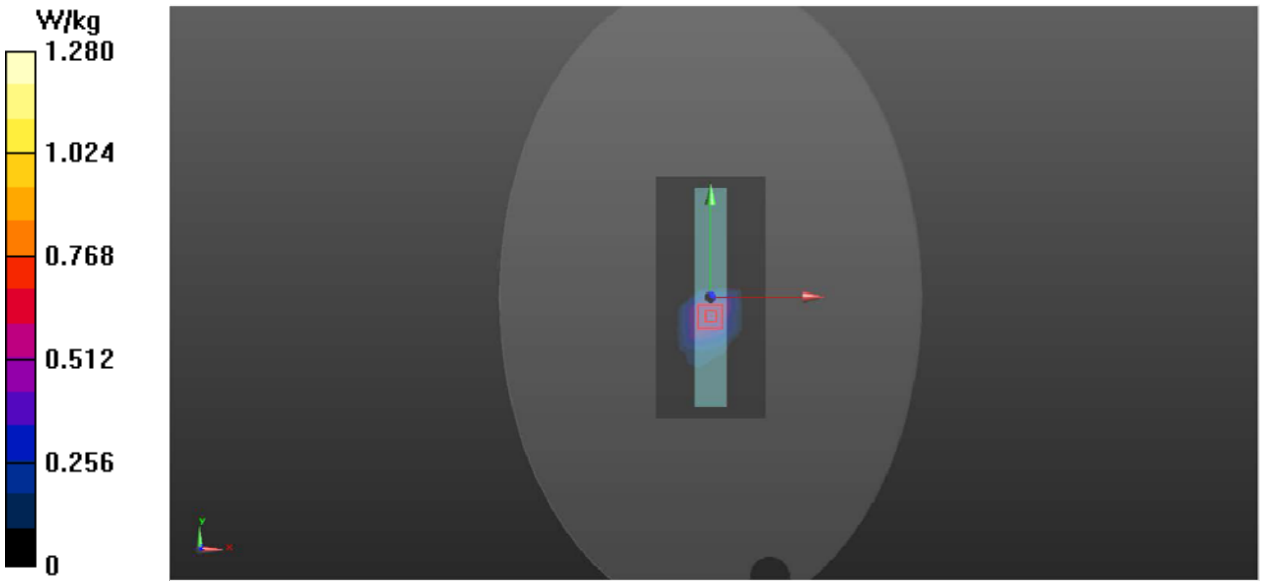
Bottom-ANT1/Zoom Scan (9x9x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.367 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 2.81 W/kg
SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.235 W/kg
Maximum value of SAR (measured) = 1.28 W/kg