Appendix D

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: Automatic Intelligent Medicine Dispenser

Test Model: GS01

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	22.9	>=0.5	Pass
NVNT	a	5200	Ant0	25.408	>=0.5	Pass
NVNT	a	5240	Ant0	19.722	>=0.5	Pass
NVNT	n20	5180	Ant0	28.247	>=0.5	Pass
NVNT	n20	5200	Ant0	27.258	>=0.5	Pass
NVNT	n20	5240	Ant0	20.101	>=0.5	Pass
NVNT	n40	5190	Ant0	47.197	>=0.5	Pass
NVNT	n40	5230	Ant0	40.387	>=0.5	Pass
NVNT	ac20	5180	Ant0	25.598	>=0.5	Pass
NVNT	ac20	5200	Ant0	28.66	>=0.5	Pass
NVNT	ac20	5240	Ant0	20.153	>=0.5	Pass
NVNT	ac40	5190	Ant0	53.203	>=0.5	Pass
NVNT	ac40	5230	Ant0	39.887	>=0.5	Pass
NVNT	ac80	5210	Ant0	97.647	>=0.5	Pass
NVNT	ax20	5180	Ant0	27.502	>=0.5	Pass
NVNT	ax20	5200	Ant0	24.314	>=0.5	Pass
NVNT	ax20	5240	Ant0	19.929	>=0.5	Pass
NVNT	ax40	5190	Ant0	39.412	>=0.5	Pass
NVNT	ax40	5230	Ant0	39.241	>=0.5	Pass
NVNT	ax80	5210	Ant0	79.255	>=0.5	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

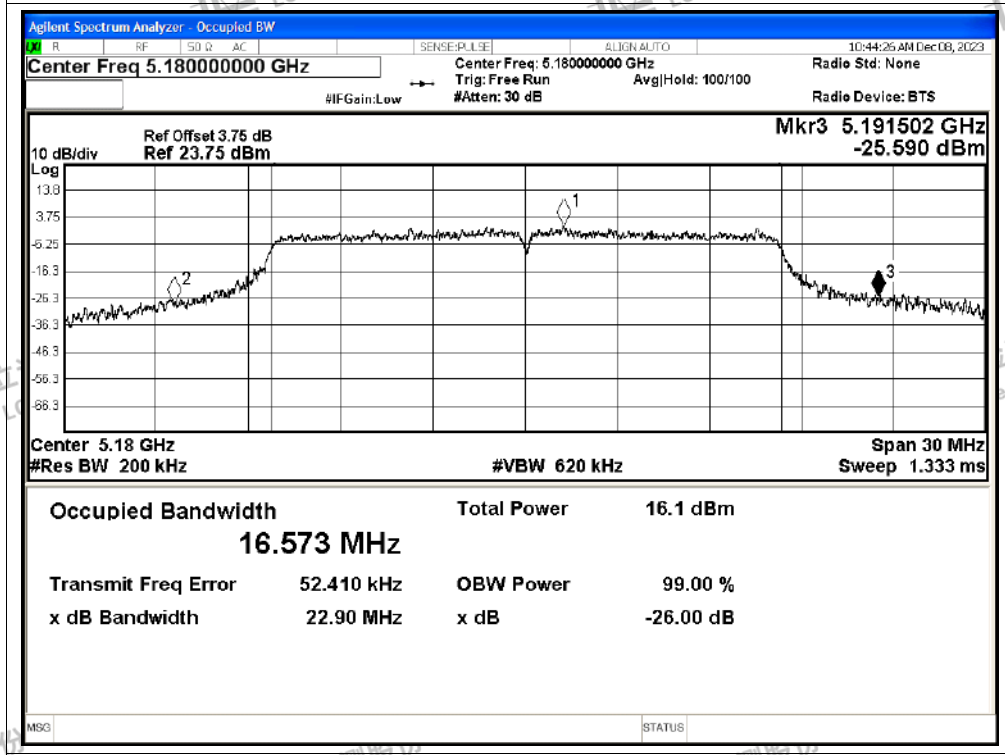

-26dB Bandwidth NVNT a 5200MHz Ant0

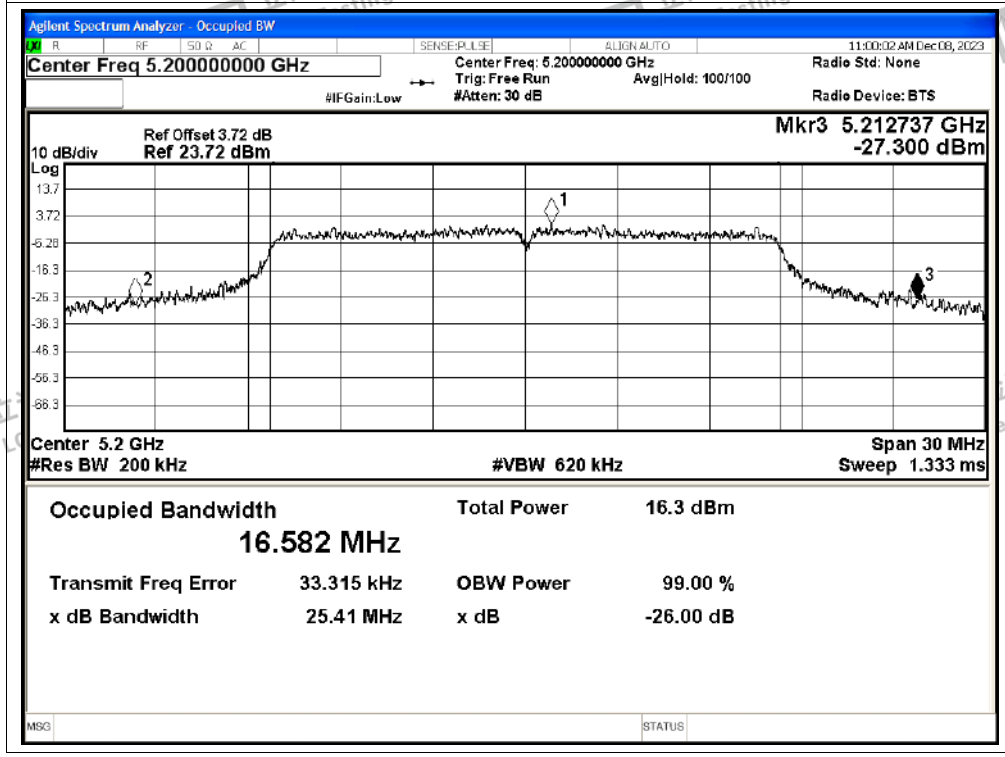

-26dB Bandwidth NVNT a 5240MHz Ant0

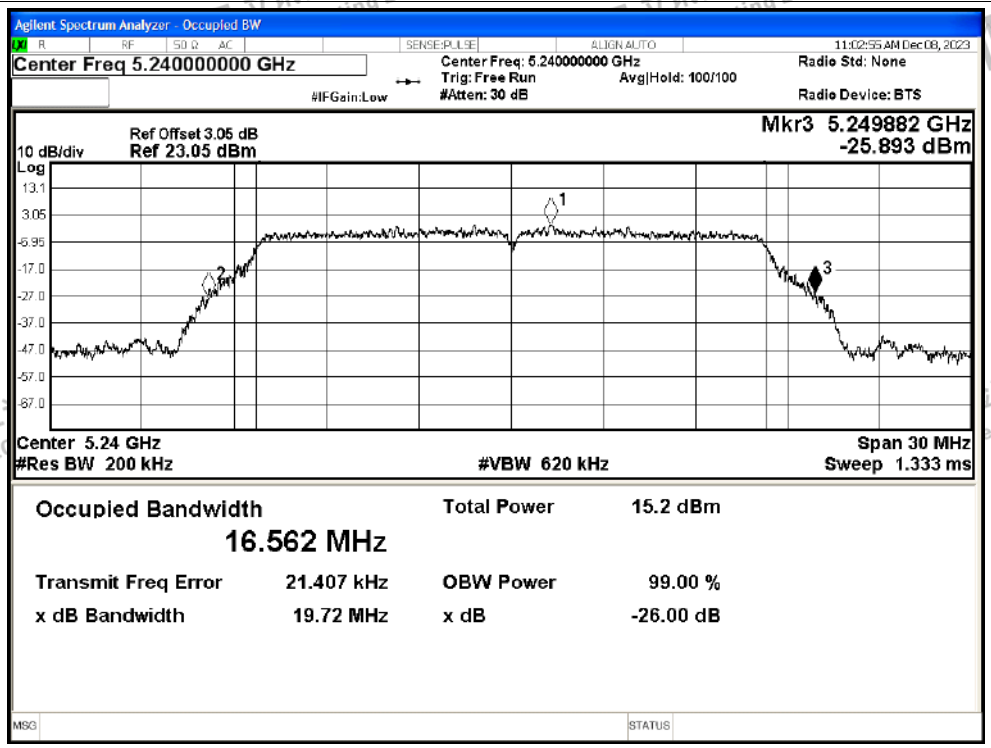

-26dB Bandwidth NVNT n20 5180MHz Ant0

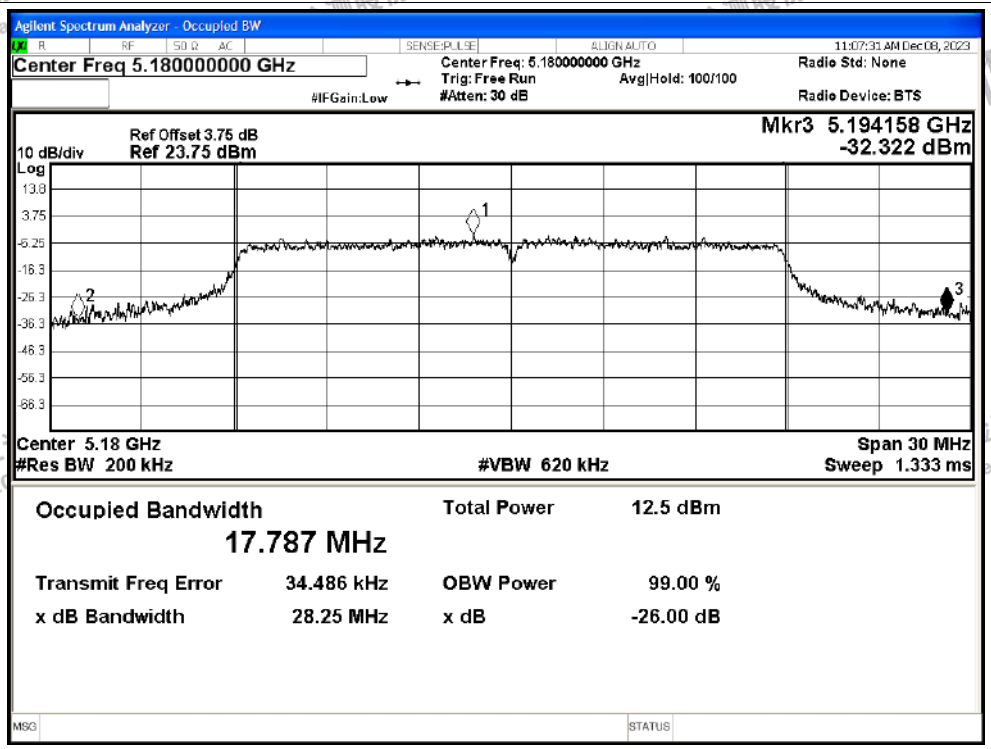

-26dB Bandwidth NVNT n20 5200MHz Ant0

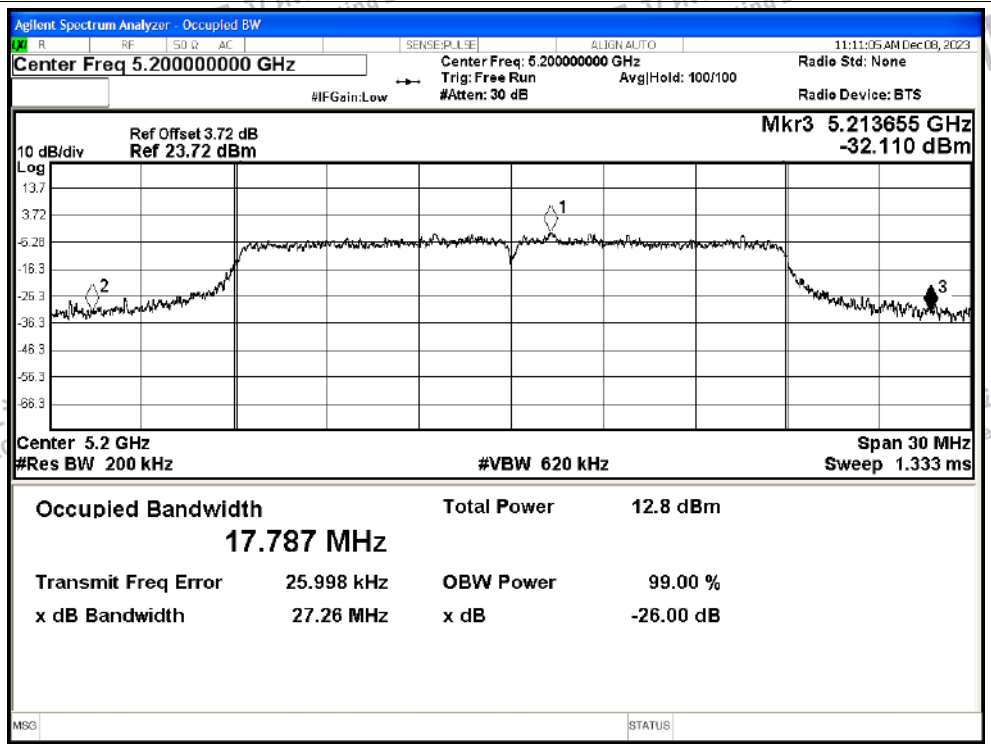

-26dB Bandwidth NVNT n20 5240MHz Ant0

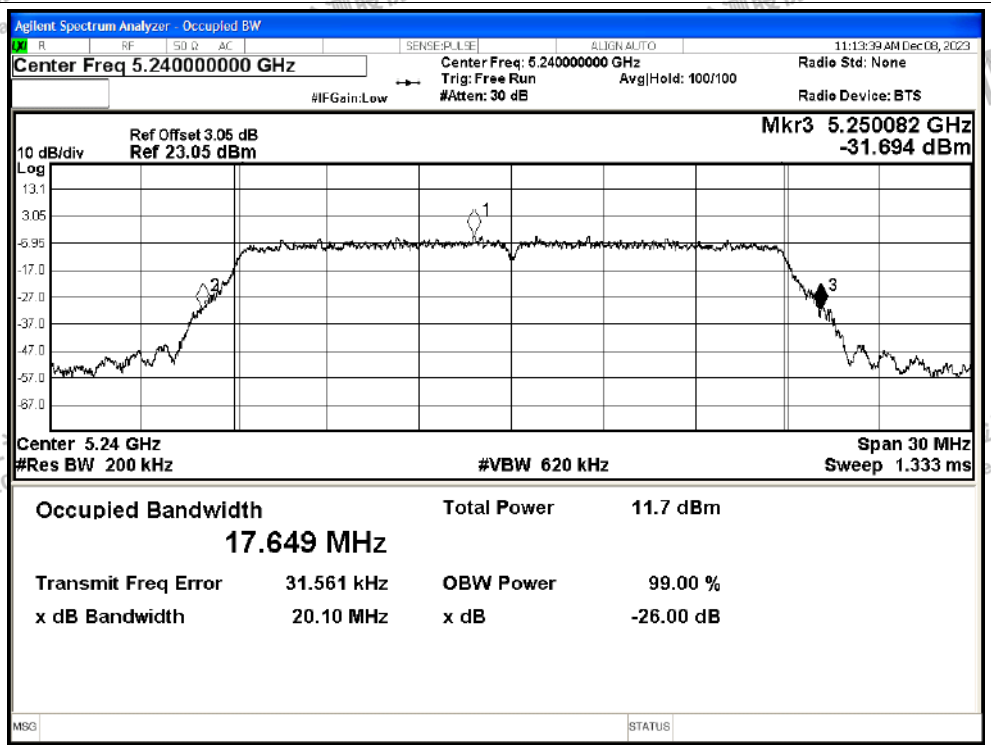

-26dB Bandwidth NVNT n40 5190MHz Ant0

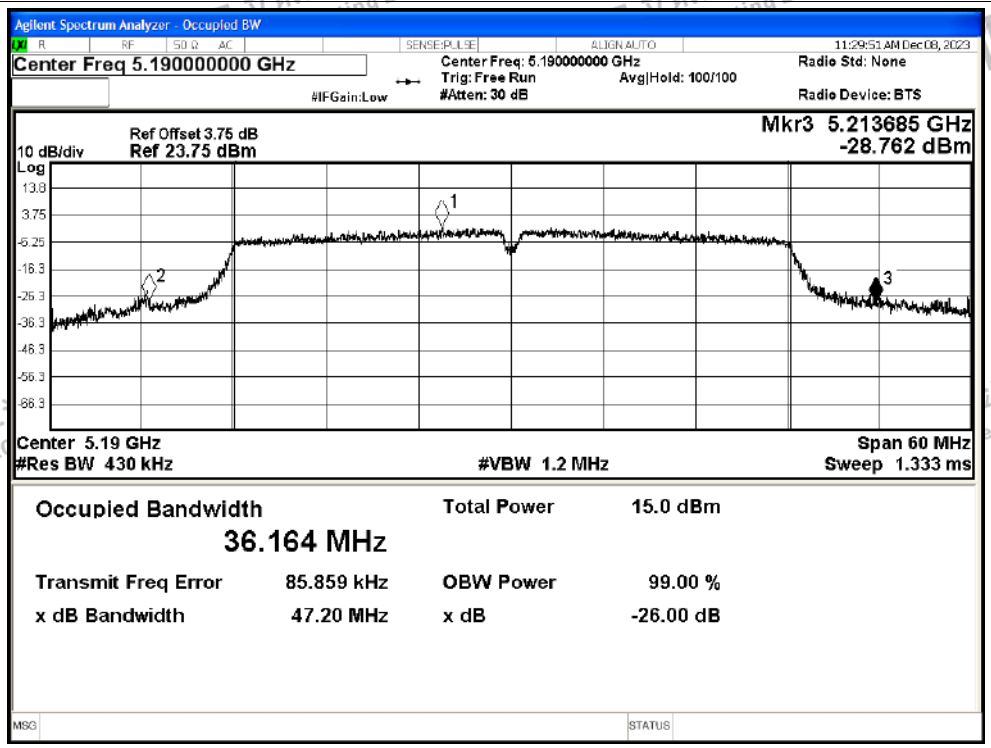

-26dB Bandwidth NVNT n40 5230MHz Ant0

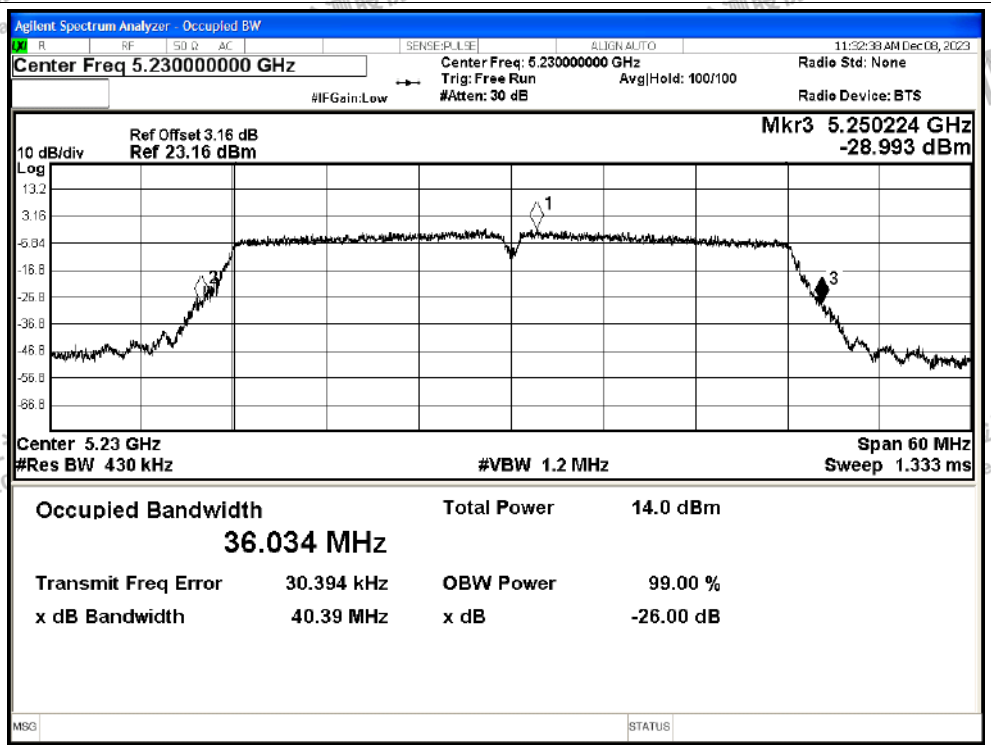

-26dB Bandwidth NVNT ac20 5180MHz Ant0

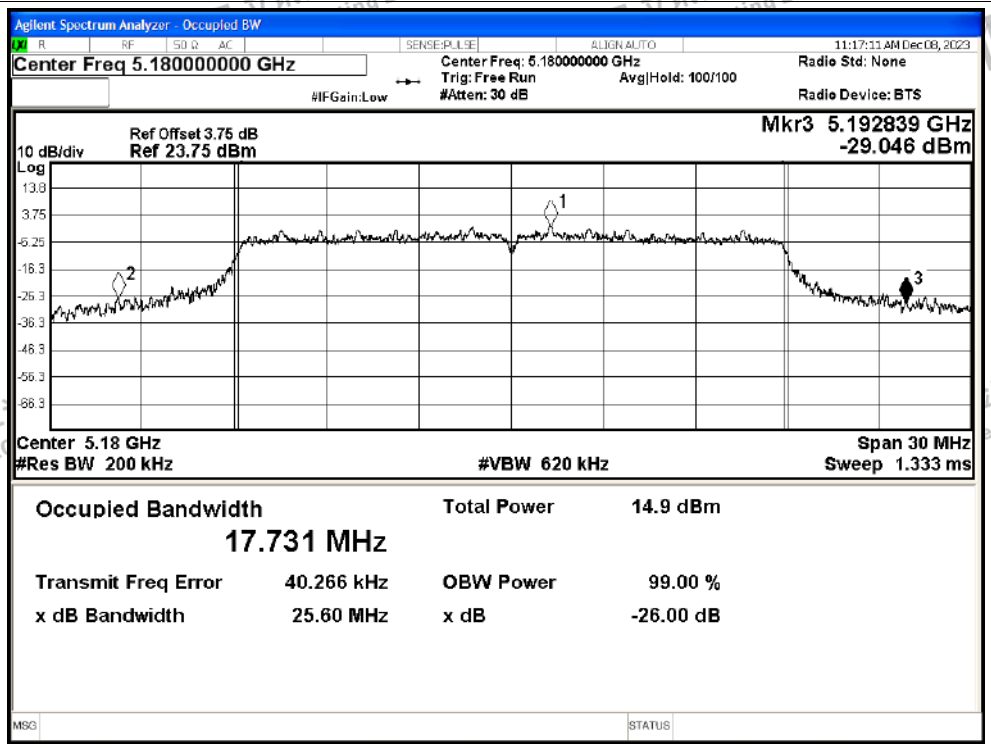

-26dB Bandwidth NVNT ac20 5200MHz Ant0

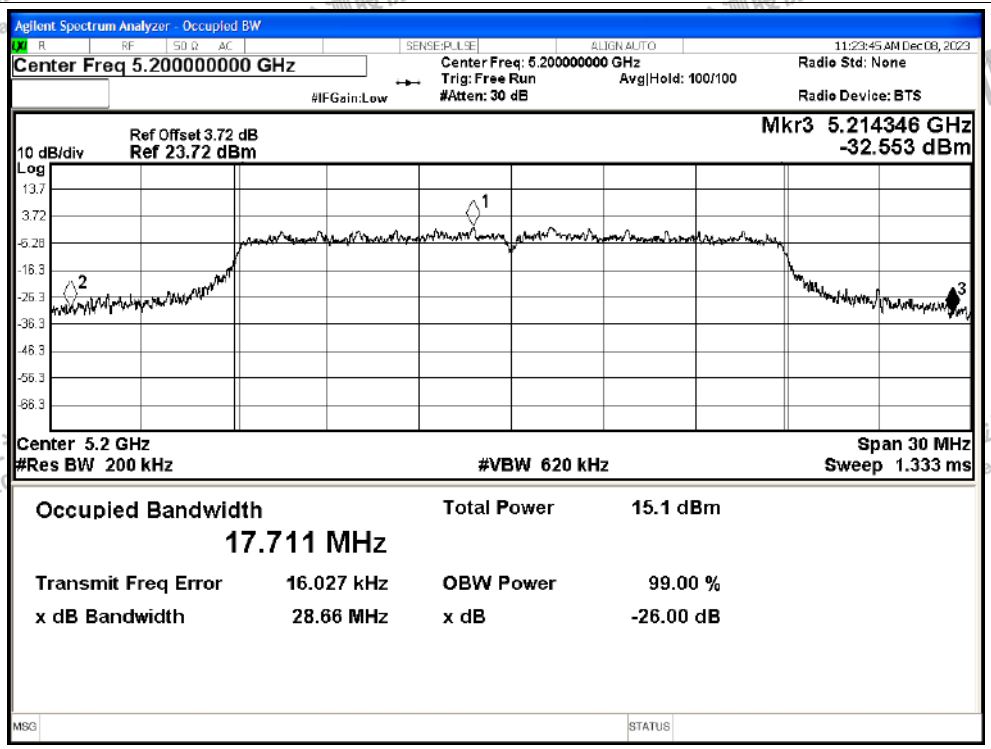

-26dB Bandwidth NVNT ac20 5240MHz Ant0

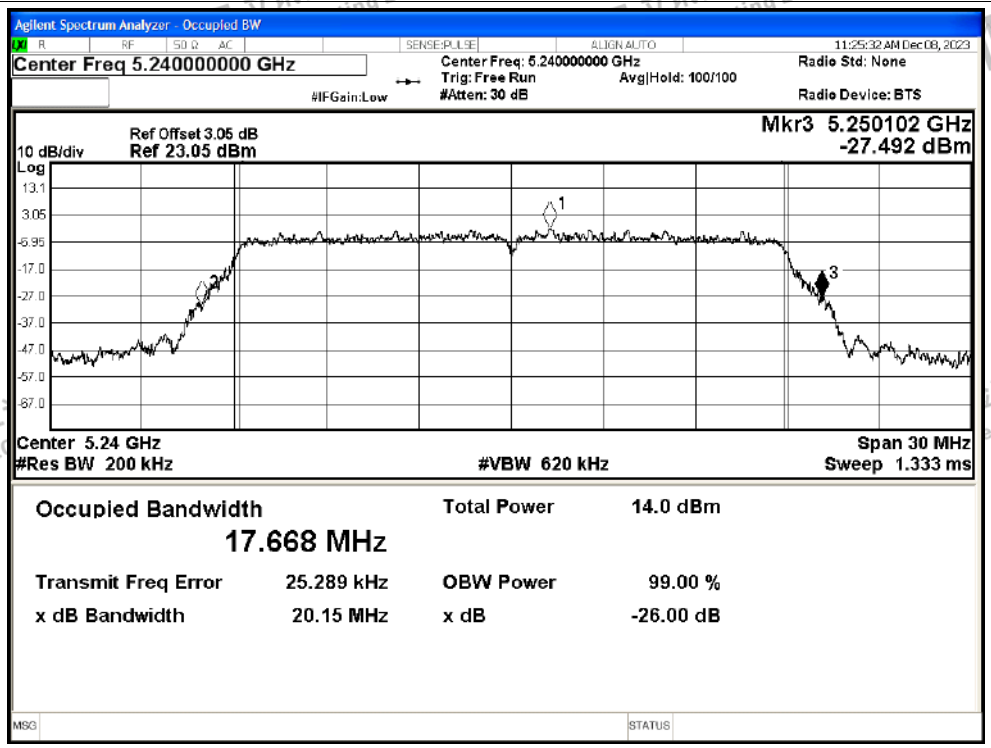

-26dB Bandwidth NVNT ac40 5190MHz Ant0

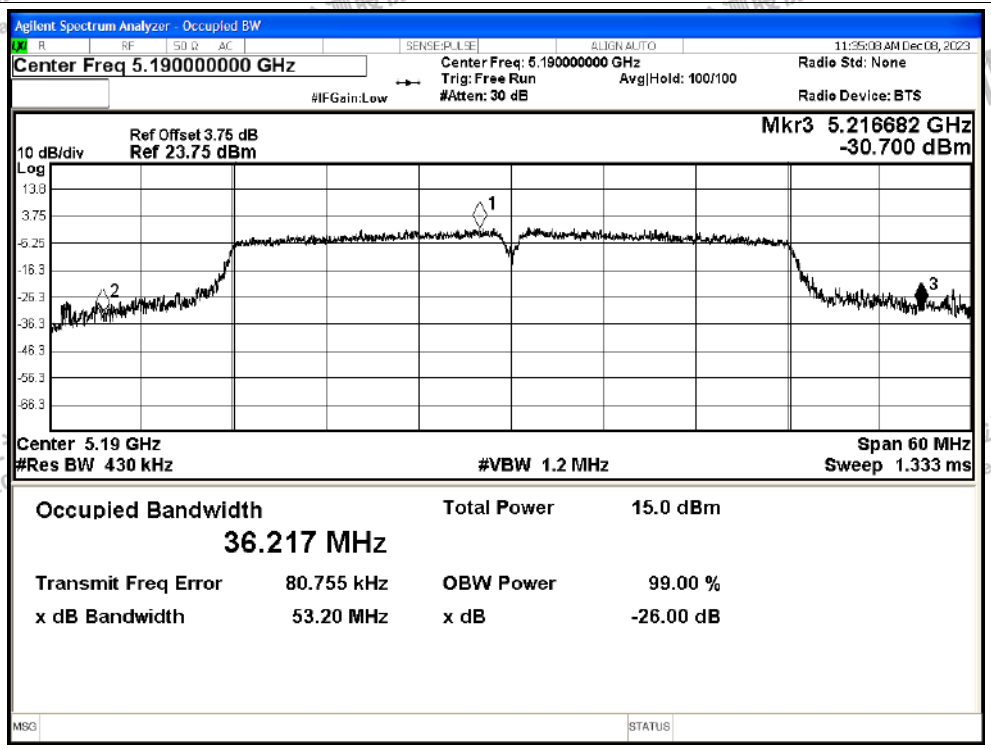

-26dB Bandwidth NVNT ac40 5230MHz Ant0

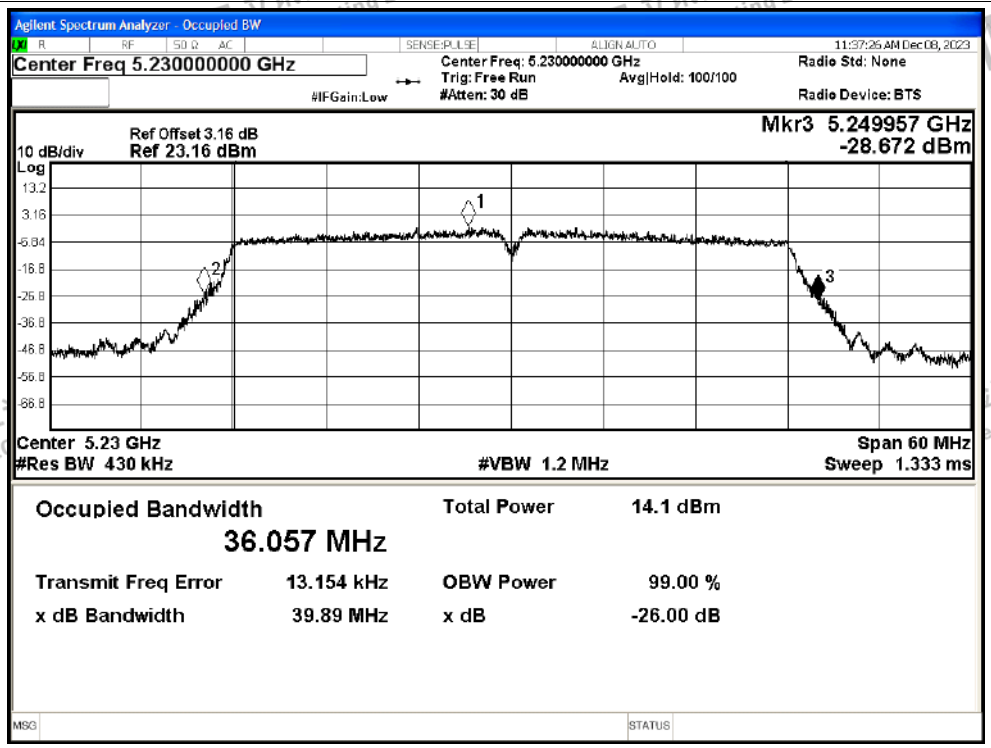

-26dB Bandwidth NVNT ac80 5210MHz Ant0

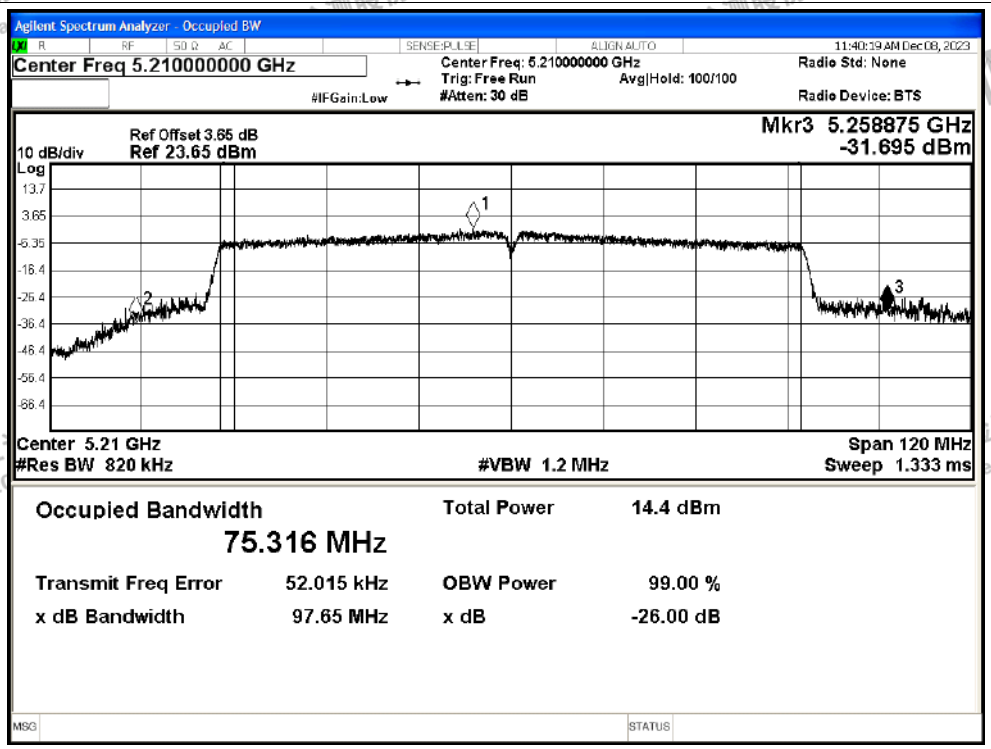

-26dB Bandwidth NVNT ax20 5180MHz Ant0

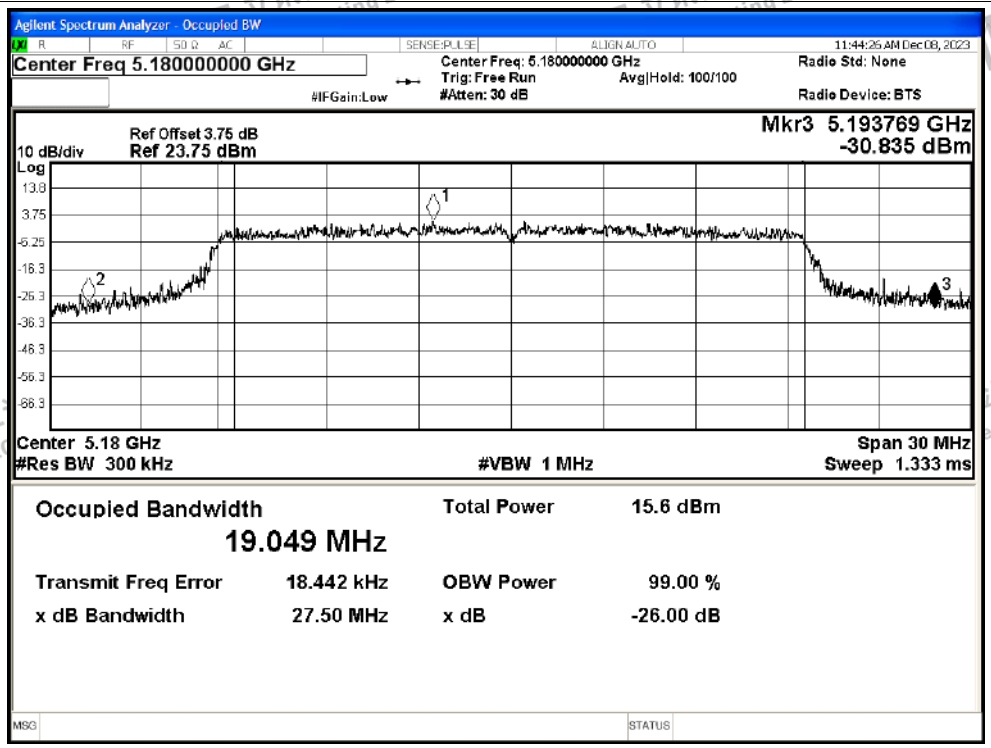

-26dB Bandwidth NVNT ax20 5200MHz Ant0

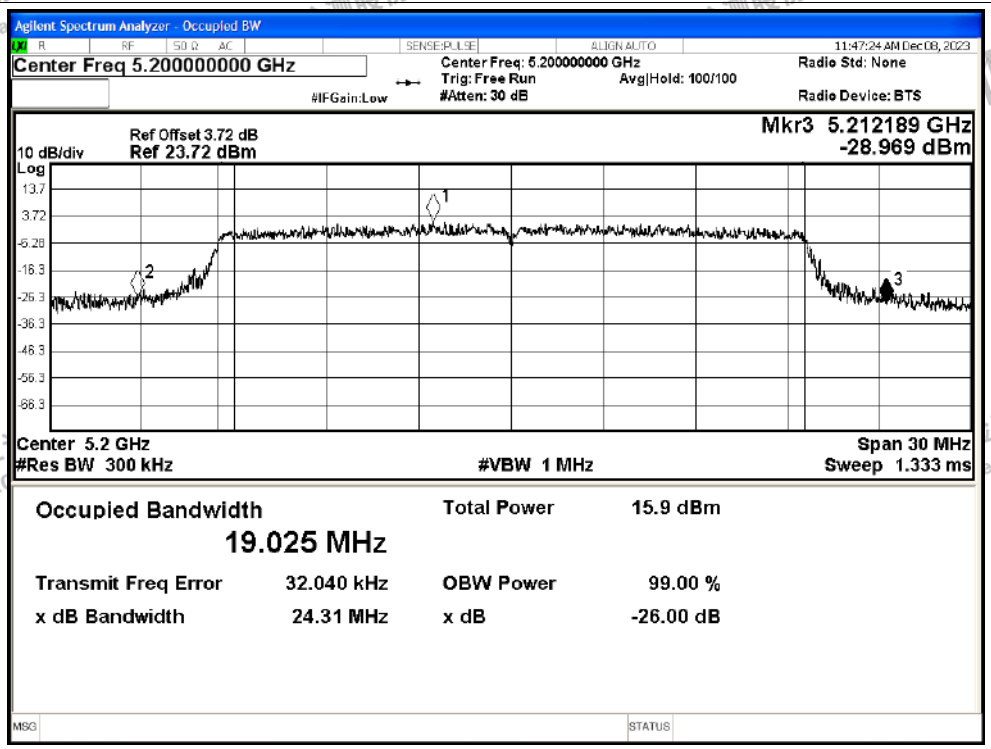

-26dB Bandwidth NVNT ax20 5240MHz Ant0

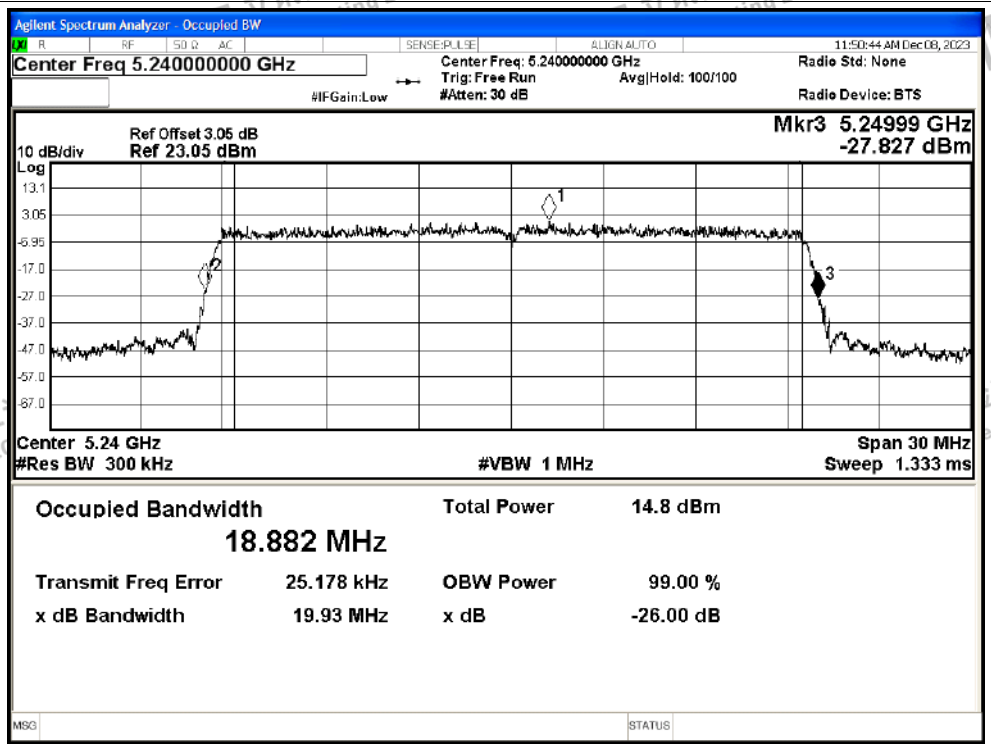

-26dB Bandwidth NVNT ax40 5190MHz Ant0

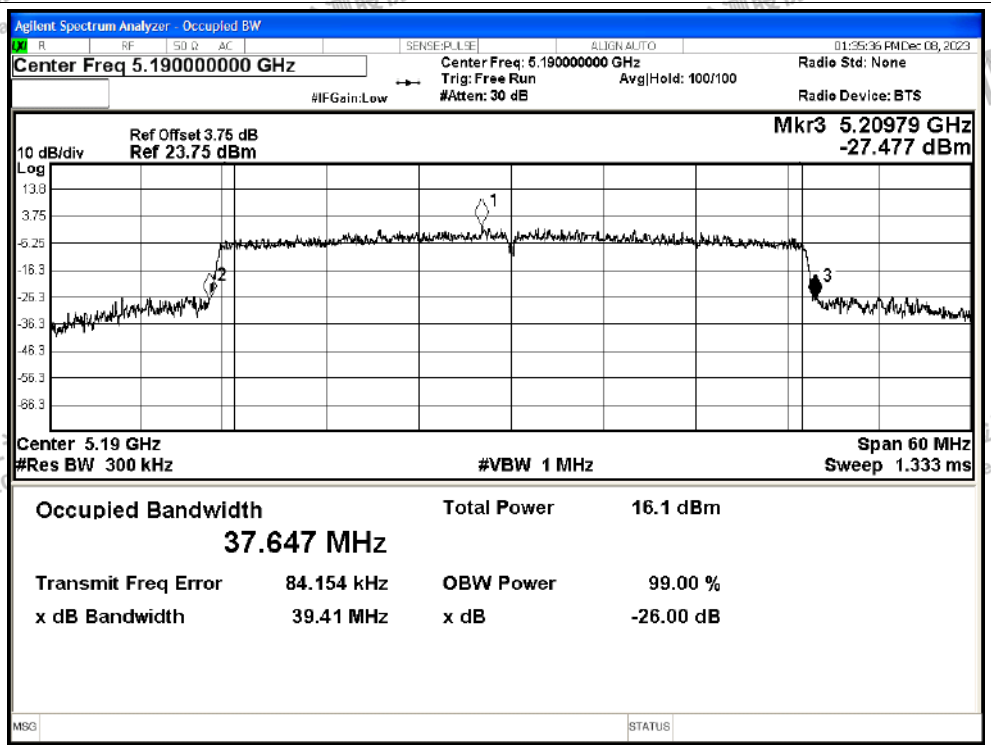

-26dB Bandwidth NVNT ax40 5230MHz Ant0

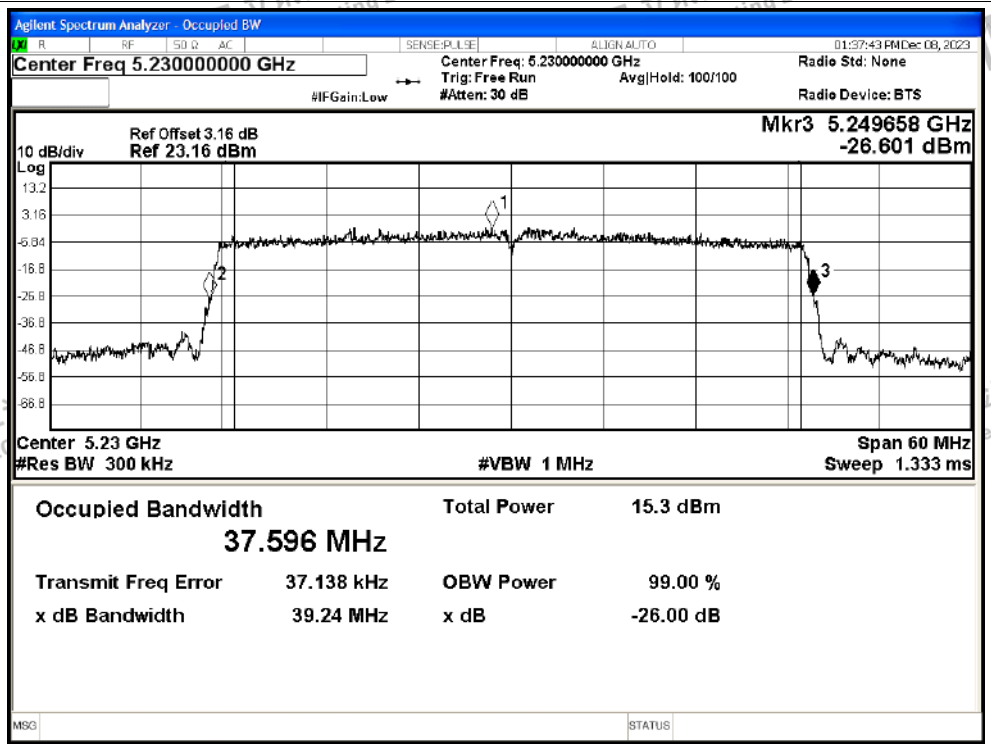

-26dB Bandwidth NVNT ax80 5210MHz Ant0

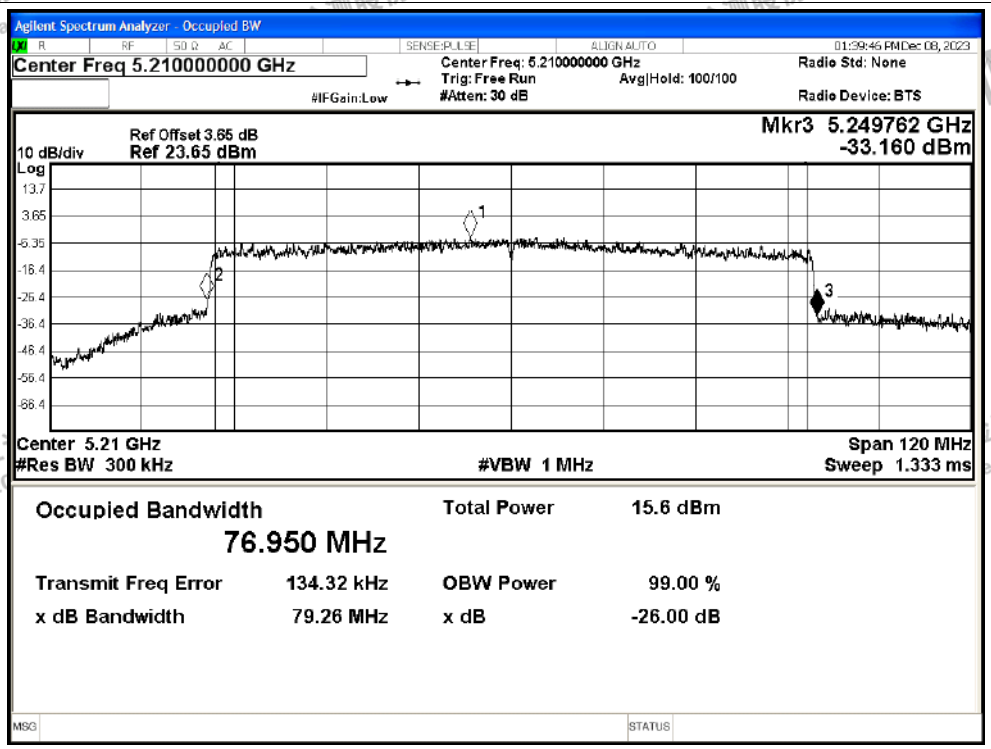

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	26.164	>=0.5	Pass
NVNT	a	5200	Ant1	28.004	>=0.5	Pass
NVNT	a	5240	Ant1	19.918	>=0.5	Pass
NVNT	n20	5180	Ant1	25.305	>=0.5	Pass
NVNT	n20	5200	Ant1	24.594	>=0.5	Pass
NVNT	n20	5240	Ant1	20.272	>=0.5	Pass
NVNT	n40	5190	Ant1	44.056	>=0.5	Pass
NVNT	n40	5230	Ant1	40.363	>=0.5	Pass
NVNT	ac20	5180	Ant1	24.668	>=0.5	Pass
NVNT	ac20	5200	Ant1	26.454	>=0.5	Pass
NVNT	ac20	5240	Ant1	20.271	>=0.5	Pass
NVNT	ac40	5190	Ant1	47.43	>=0.5	Pass
NVNT	ac40	5230	Ant1	40.579	>=0.5	Pass
NVNT	ac80	5210	Ant1	99.688	>=0.5	Pass
NVNT	ax20	5180	Ant1	23.924	>=0.5	Pass
NVNT	ax20	5200	Ant1	25.45	>=0.5	Pass
NVNT	ax20	5240	Ant1	19.981	>=0.5	Pass
NVNT	ax40	5190	Ant1	47.373	>=0.5	Pass
NVNT	ax40	5230	Ant1	39.052	>=0.5	Pass
NVNT	ax80	5210	Ant1	79.341	>=0.5	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

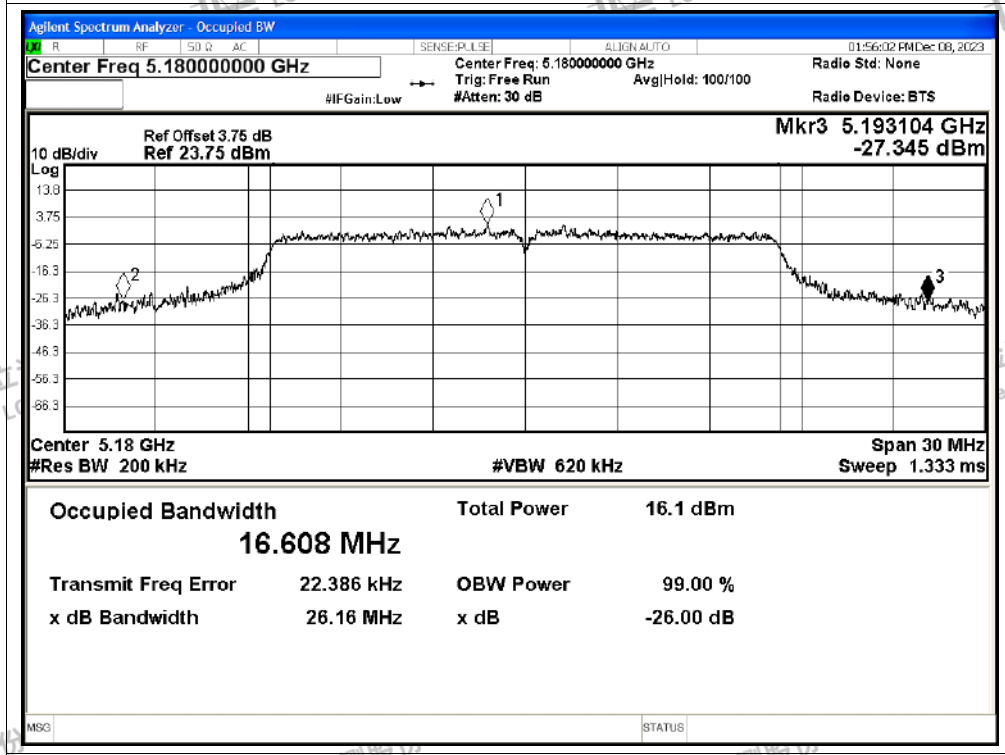

-26dB Bandwidth NVNT a 5200MHz Ant1

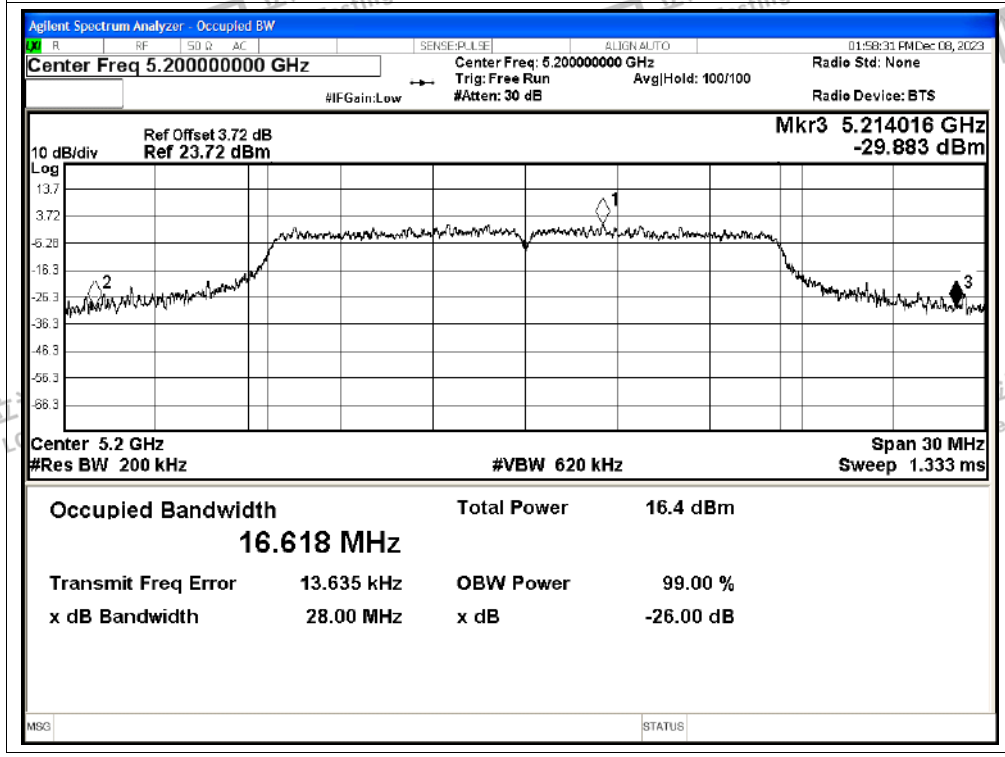

-26dB Bandwidth NVNT a 5240MHz Ant1

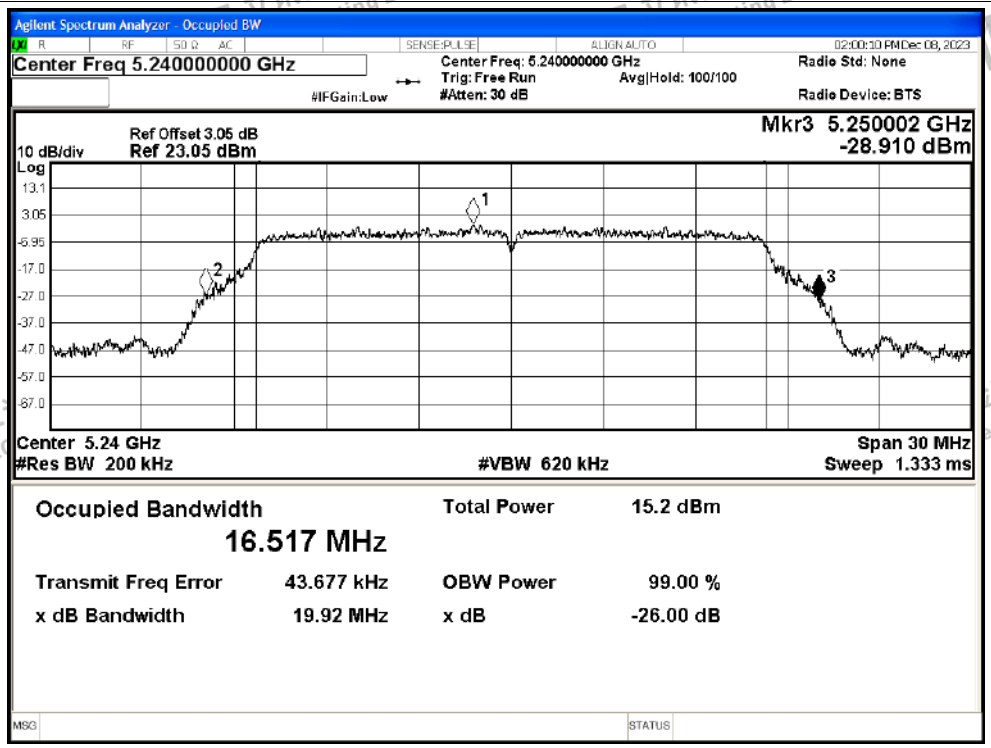

-26dB Bandwidth NVNT n20 5180MHz Ant1

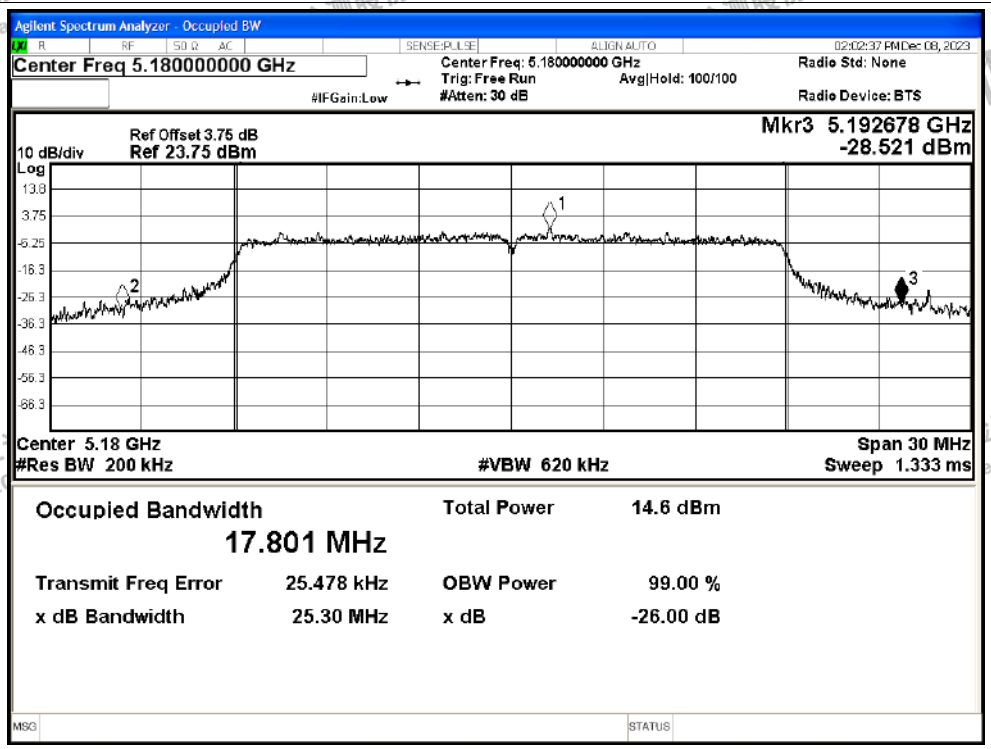

-26dB Bandwidth NVNT n20 5200MHz Ant1

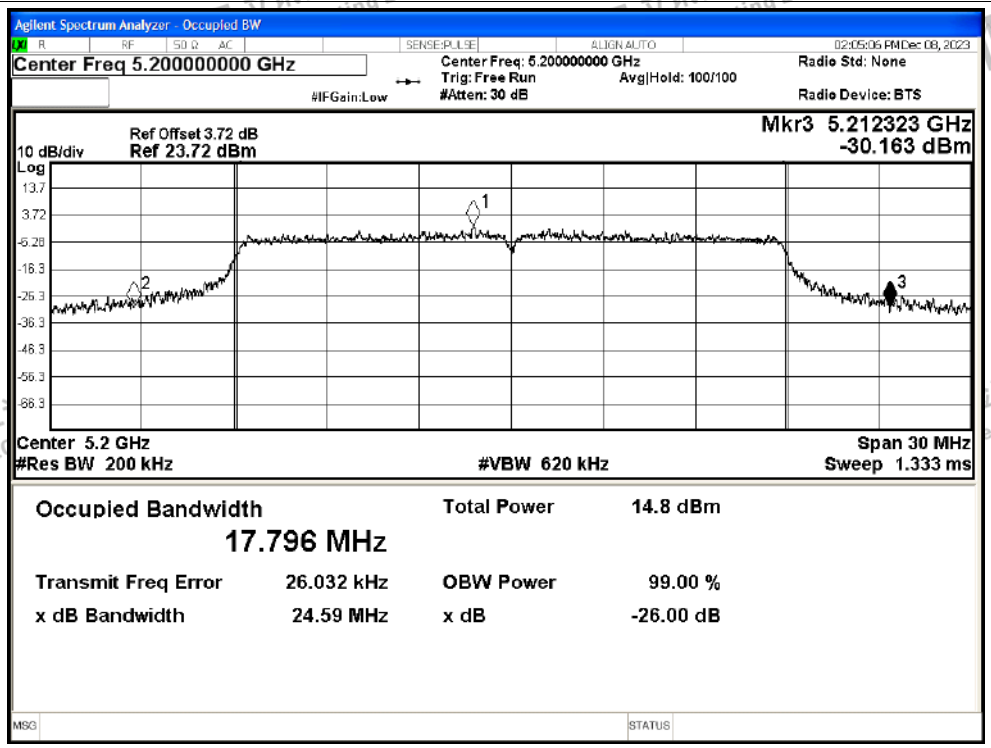

-26dB Bandwidth NVNT n20 5240MHz Ant1

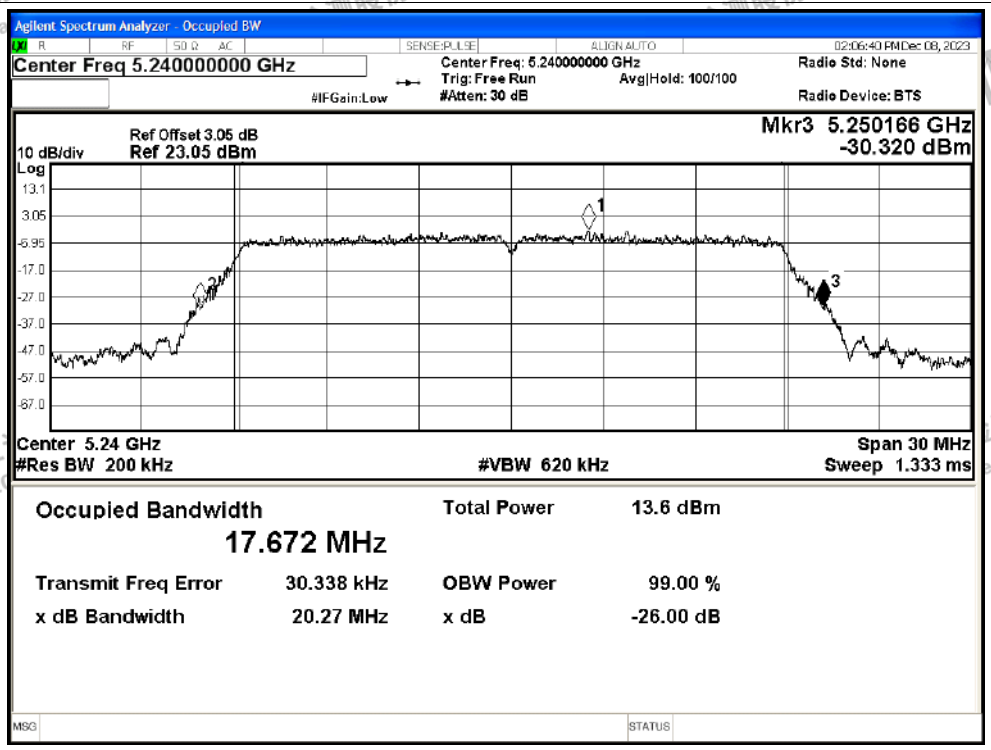

-26dB Bandwidth NVNT n40 5190MHz Ant1

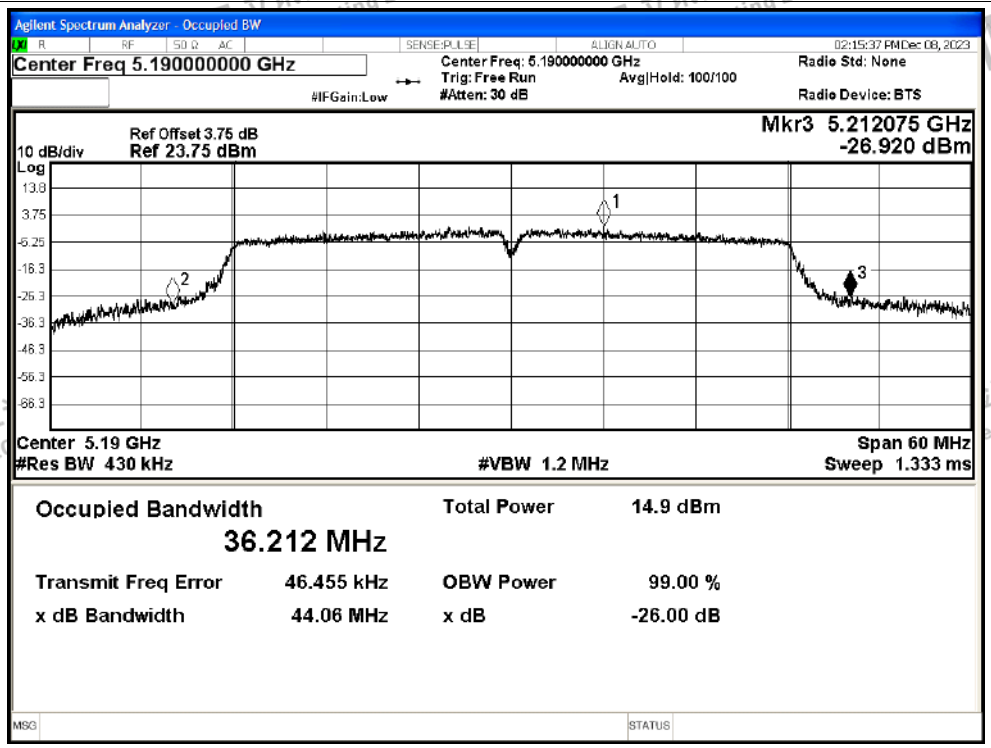

-26dB Bandwidth NVNT n40 5230MHz Ant1

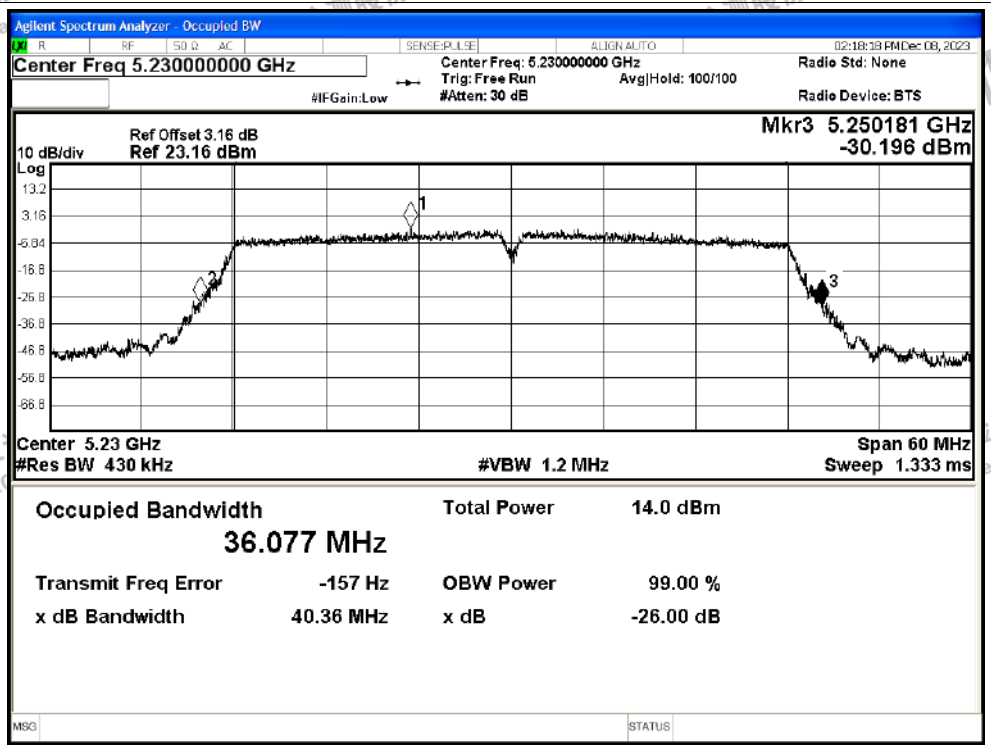

-26dB Bandwidth NVNT ac20 5180MHz Ant1

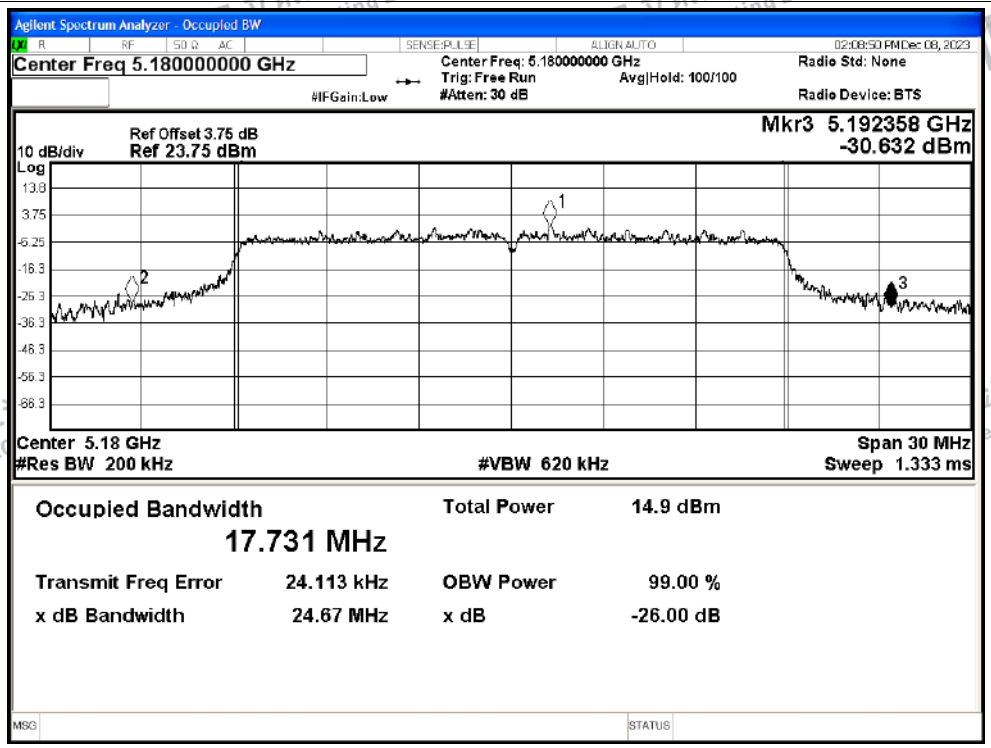

-26dB Bandwidth NVNT ac20 5200MHz Ant1

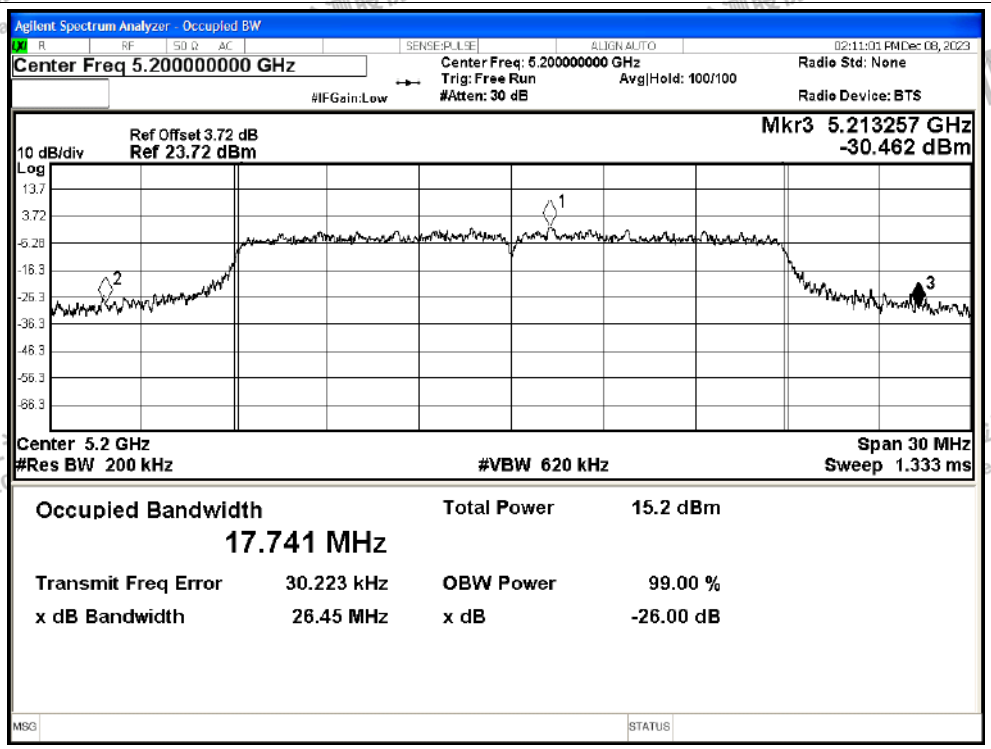

-26dB Bandwidth NVNT ac20 5240MHz Ant1

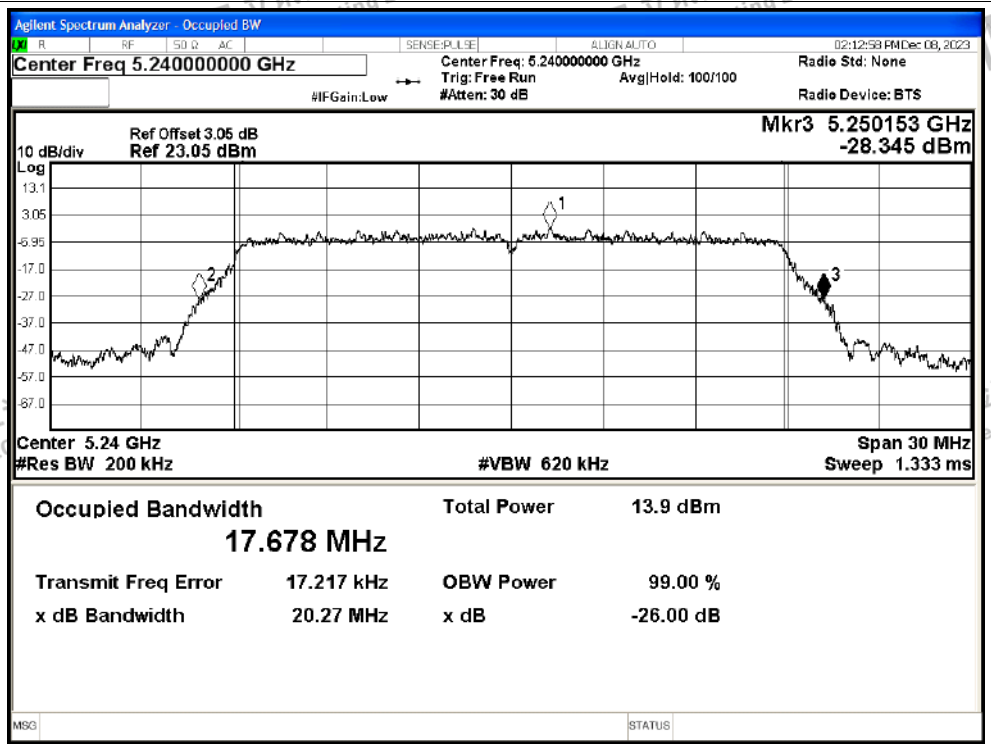

-26dB Bandwidth NVNT ac40 5190MHz Ant1

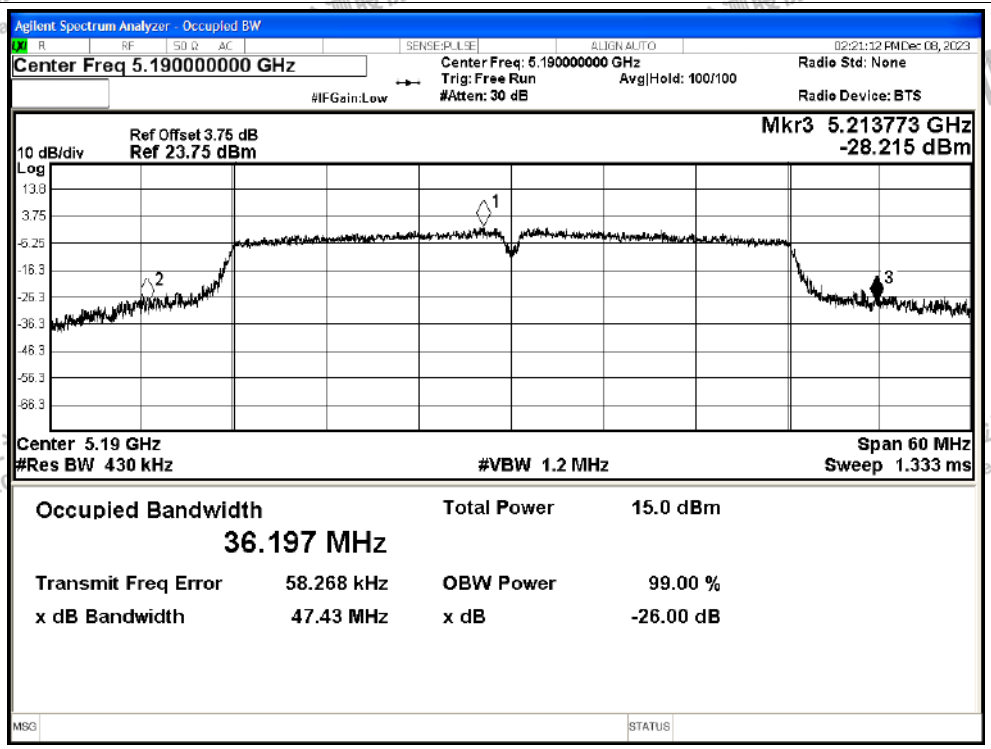

-26dB Bandwidth NVNT ac40 5230MHz Ant1

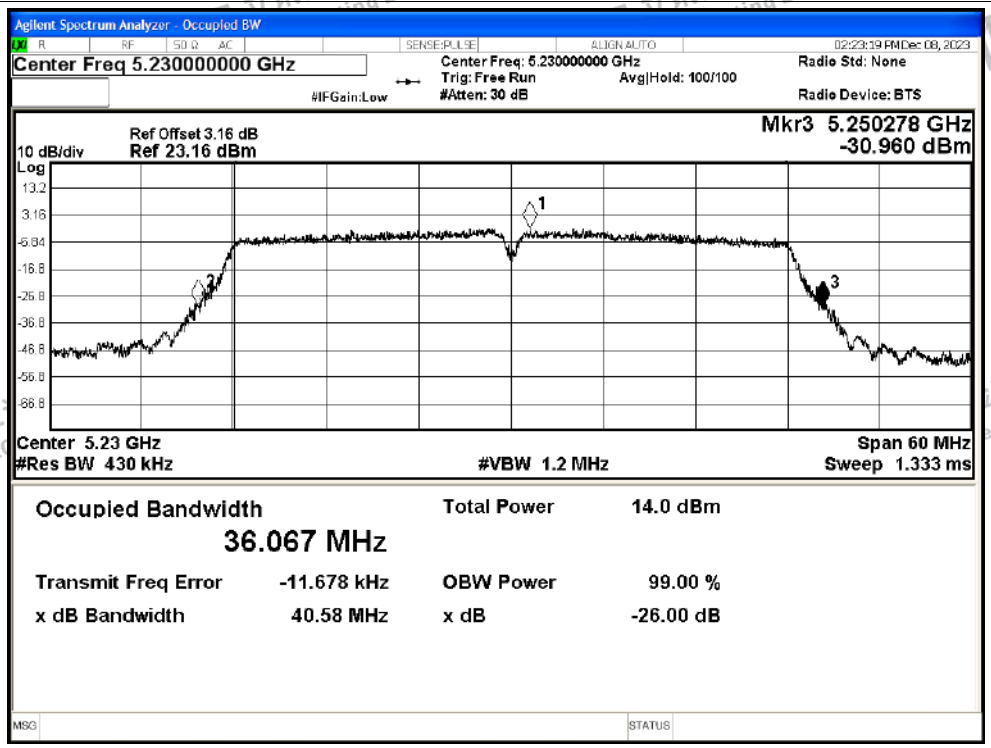

-26dB Bandwidth NVNT ac80 5210MHz Ant1

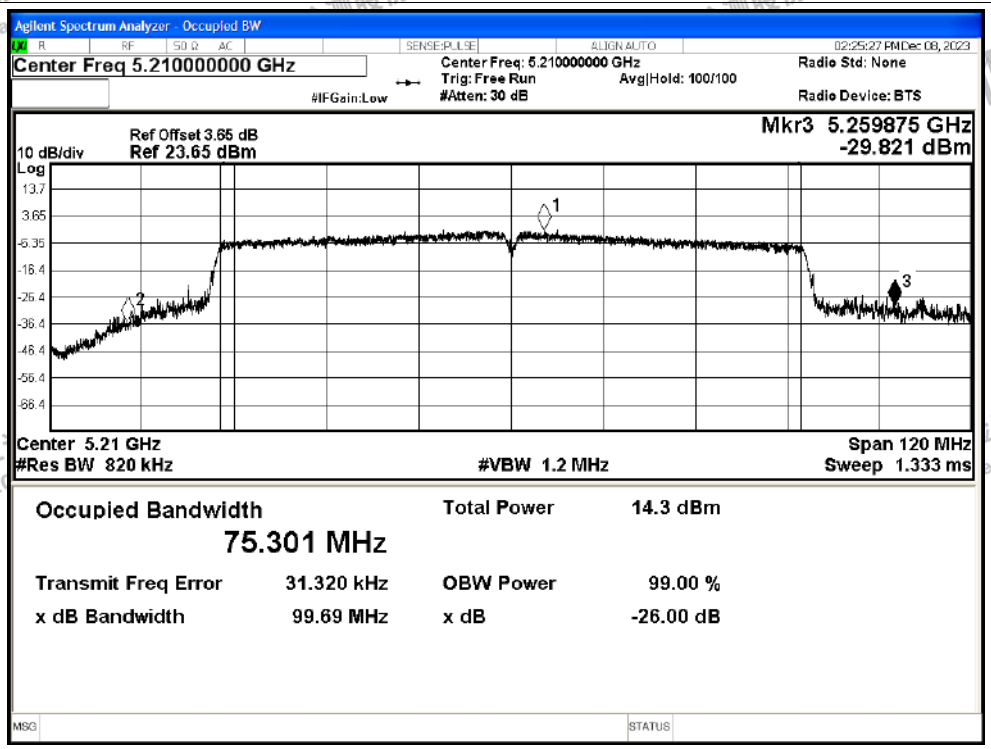

-26dB Bandwidth NVNT ax20 5180MHz Ant1

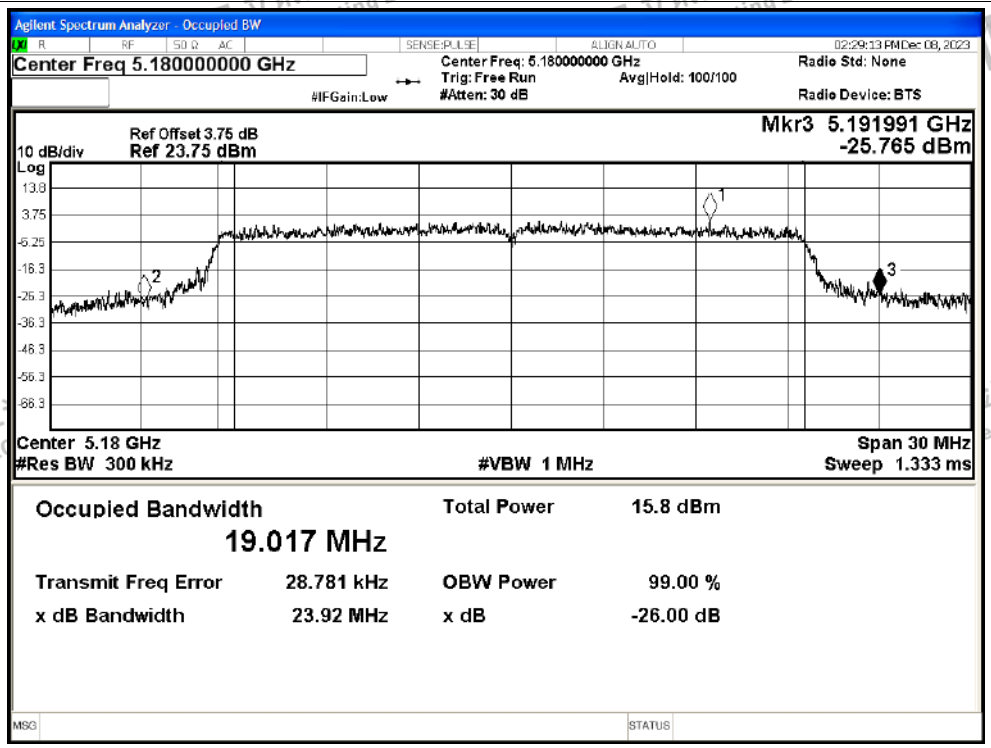

-26dB Bandwidth NVNT ax20 5200MHz Ant1

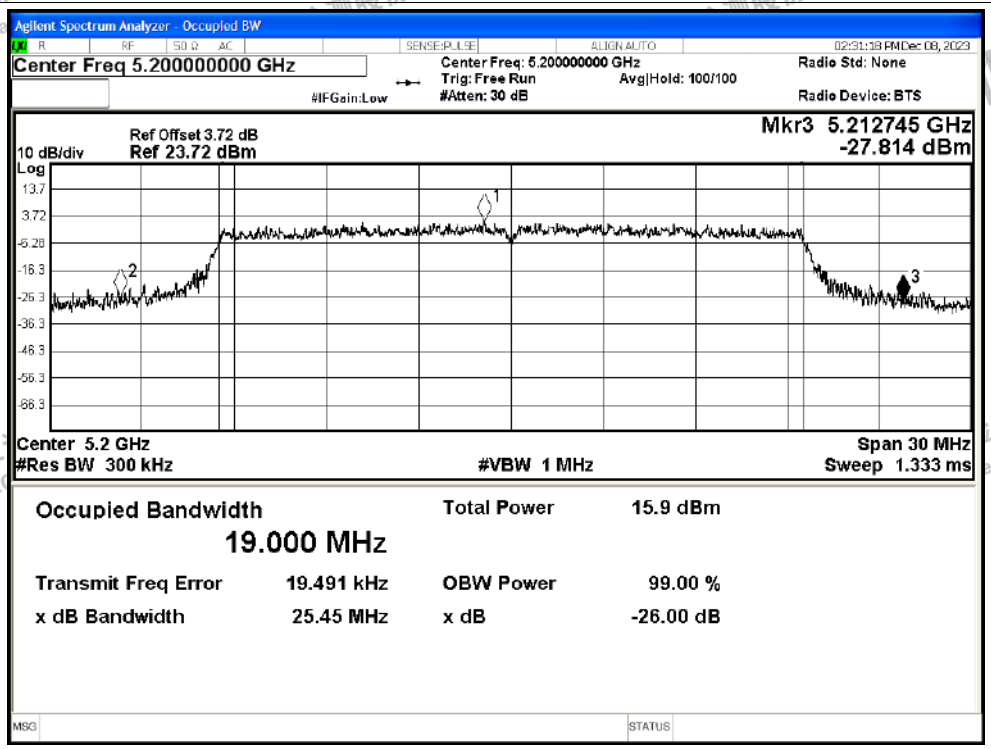

-26dB Bandwidth NVNT ax20 5240MHz Ant1

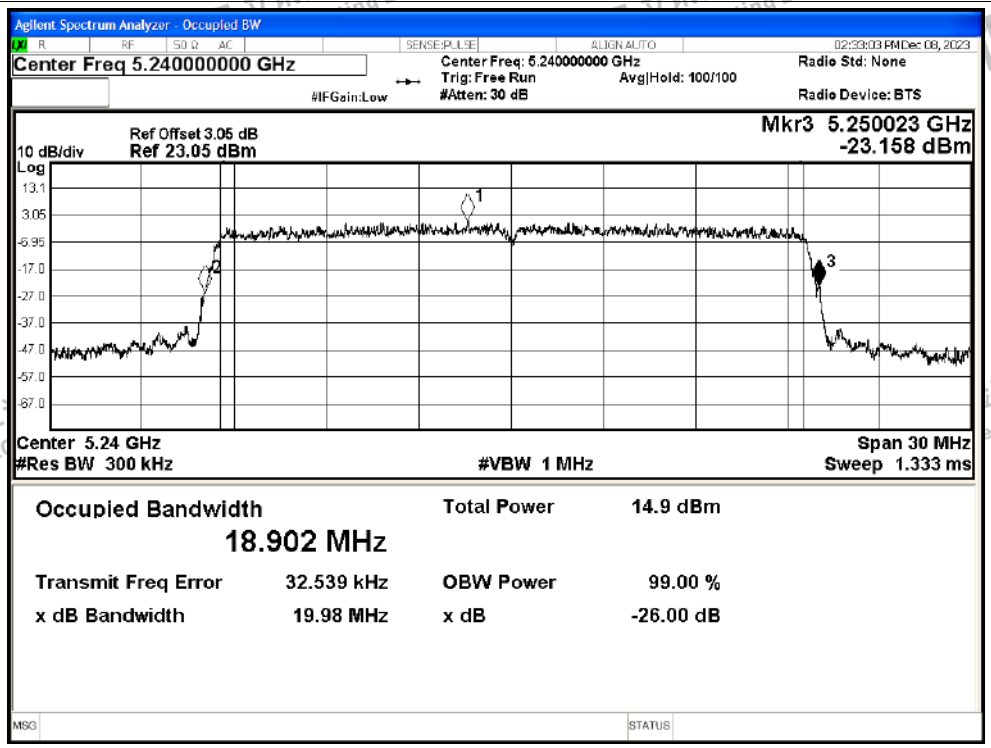

-26dB Bandwidth NVNT ax40 5190MHz Ant1

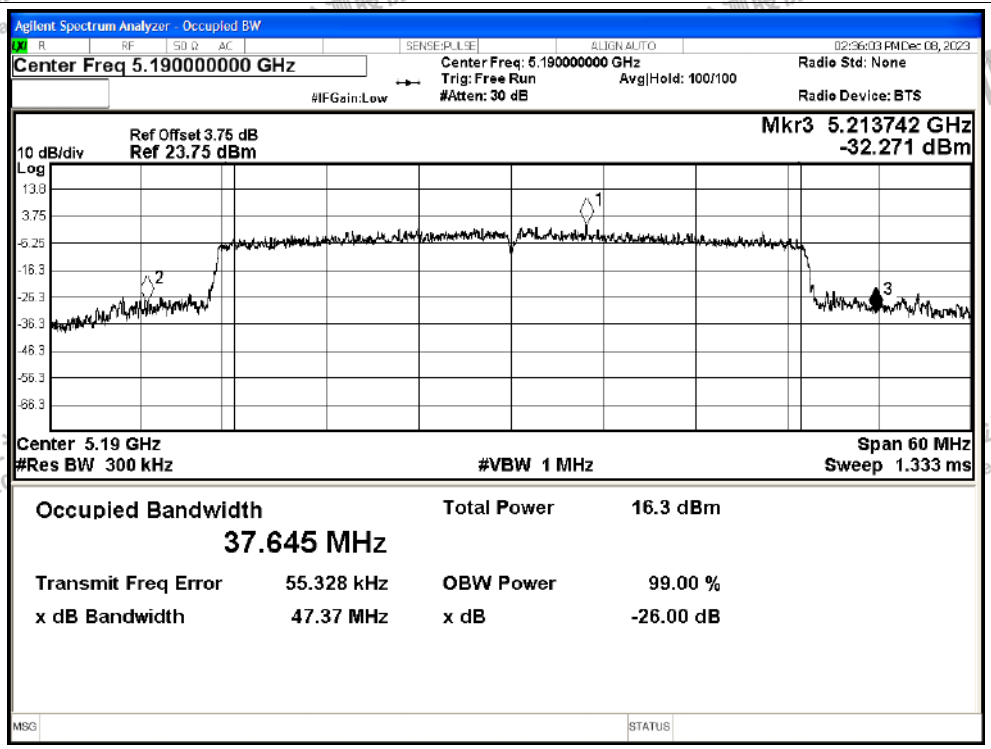

-26dB Bandwidth NVNT ax40 5230MHz Ant1

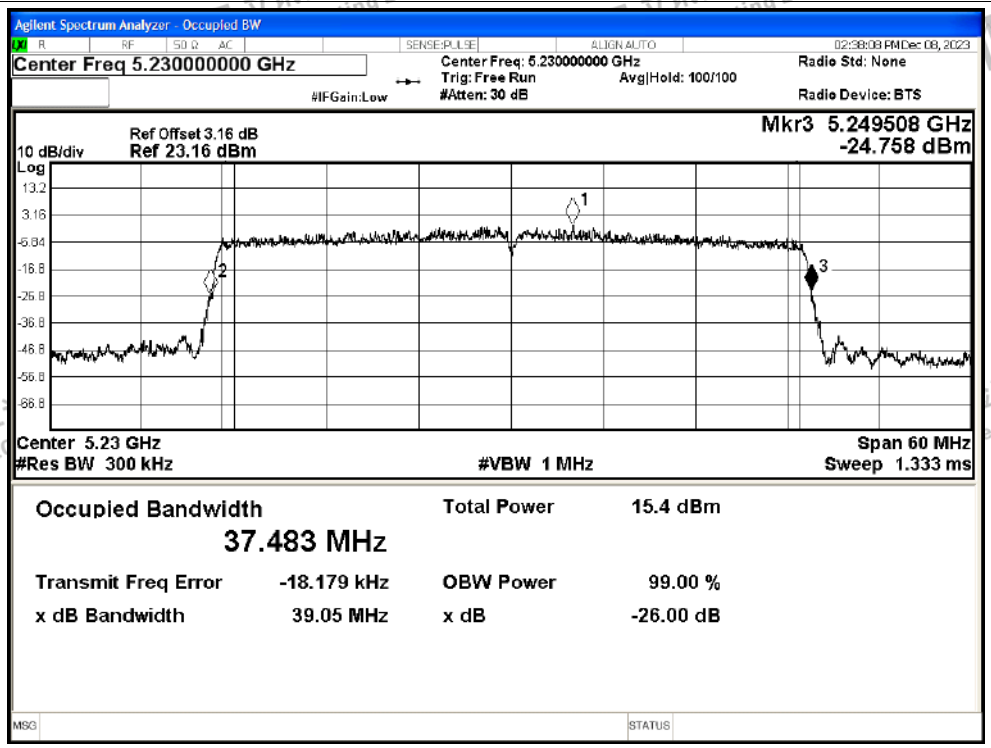

-26dB Bandwidth NVNT ax80 5210MHz Ant1

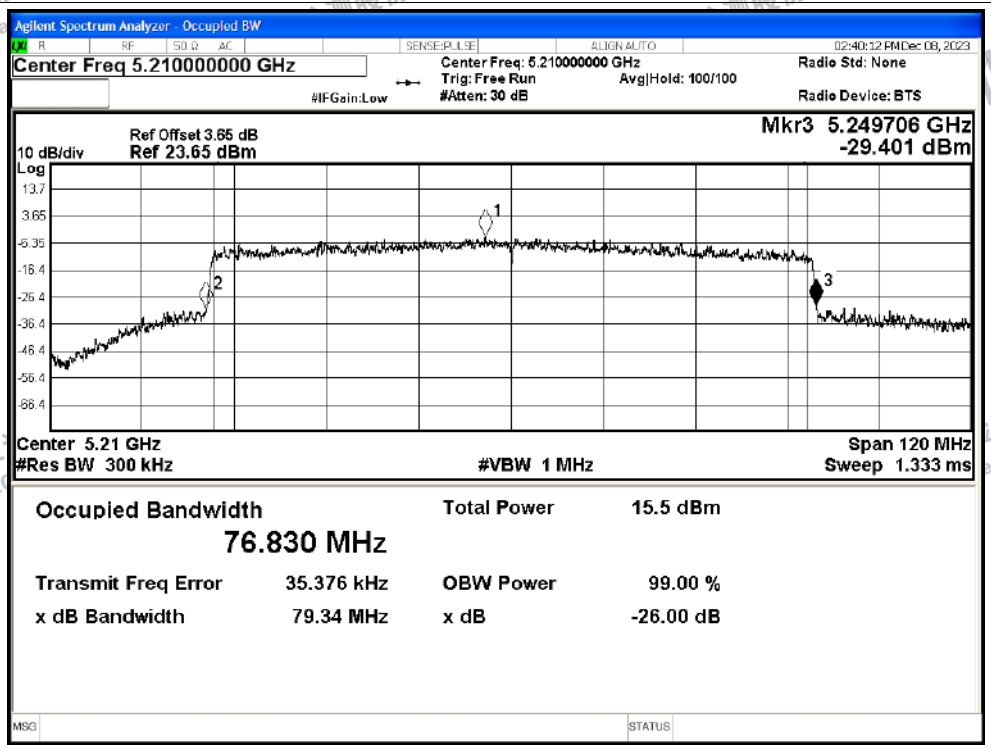

D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	10.39	0.17	10.56	24	Pass
NVNT	a	5200	Ant0	10.57	0.17	10.74	24	Pass
NVNT	a	5240	Ant0	9.6	0.17	9.77	24	Pass
NVNT	n20	5180	Ant0	6.68	0.18	6.86	24	Pass
NVNT	n20	5200	Ant0	6.87	0.19	7.06	24	Pass
NVNT	n20	5240	Ant0	6.01	0.19	6.2	24	Pass
NVNT	n40	5190	Ant0	8.97	0.36	9.33	24	Pass
NVNT	n40	5230	Ant0	8.03	0.37	8.4	24	Pass
NVNT	ac20	5180	Ant0	8.68	0.49	9.17	24	Pass
NVNT	ac20	5200	Ant0	8.85	0.49	9.34	24	Pass
NVNT	ac20	5240	Ant0	7.86	0.49	8.35	24	Pass
NVNT	ac40	5190	Ant0	8.58	0.86	9.44	24	Pass
NVNT	ac40	5230	Ant0	7.64	0.86	8.5	24	Pass
NVNT	ac80	5210	Ant0	6.77	1.41	8.18	24	Pass
NVNT	ax20	5180	Ant0	8.81	0.54	9.35	24	Pass
NVNT	ax20	5200	Ant0	9.01	0.53	9.54	24	Pass
NVNT	ax20	5240	Ant0	8.02	0.54	8.56	24	Pass
NVNT	ax40	5190	Ant0	9.16	0.54	9.7	24	Pass
NVNT	ax40	5230	Ant0	8.28	0.55	8.83	24	Pass
NVNT	ax80	5210	Ant0	7.94	0.56	8.5	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	10.35	0.17	10.52	24	Pass
NVNT	a	5200	Ant1	10.59	0.17	10.76	24	Pass
NVNT	a	5240	Ant1	9.48	0.18	9.66	24	Pass
NVNT	n20	5180	Ant1	8.86	0.19	9.05	24	Pass
NVNT	n20	5200	Ant1	8.99	0.18	9.17	24	Pass
NVNT	n20	5240	Ant1	7.93	0.19	8.12	24	Pass
NVNT	n40	5190	Ant1	8.94	0.36	9.3	24	Pass
NVNT	n40	5230	Ant1	7.87	0.37	8.24	24	Pass
NVNT	ac20	5180	Ant1	8.7	0.49	9.19	24	Pass
NVNT	ac20	5200	Ant1	8.87	0.49	9.36	24	Pass
NVNT	ac20	5240	Ant1	7.7	0.49	8.19	24	Pass
NVNT	ac40	5190	Ant1	8.54	0.84	9.38	24	Pass
NVNT	ac40	5230	Ant1	7.45	0.86	8.31	24	Pass
NVNT	ac80	5210	Ant1	6.98	1.41	8.39	24	Pass
NVNT	ax20	5180	Ant1	8.91	0.54	9.45	24	Pass
NVNT	ax20	5200	Ant1	9.1	0.53	9.63	24	Pass
NVNT	ax20	5240	Ant1	8.04	0.54	8.58	24	Pass
NVNT	ax40	5190	Ant1	9.27	0.55	9.82	24	Pass
NVNT	ax40	5230	Ant1	8.13	0.55	8.68	24	Pass
NVNT	ax80	5210	Ant1	8.1	0.56	8.66	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Antenna		Total Power (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	6.86	9.05	11.10	30	Pass
NVNT	n20	5200	7.06	9.17	11.25	30	Pass
NVNT	n20	5240	6.2	8.12	10.28	30	Pass
NVNT	n40	5190	9.33	9.3	12.33	30	Pass
NVNT	n40	5230	8.4	8.24	11.33	30	Pass
NVNT	ac20	5180	9.17	9.19	12.19	30	Pass
NVNT	ac20	5200	9.34	9.36	12.36	30	Pass
NVNT	ac20	5240	8.35	8.19	11.28	30	Pass
NVNT	ac40	5190	9.44	9.38	12.42	30	Pass
NVNT	ac40	5230	8.5	8.31	11.42	30	Pass
NVNT	ac80	5210	8.18	8.39	11.30	30	Pass
NVNT	ax20	5180	9.35	9.45	12.41	30	Pass
NVNT	ax20	5200	9.54	9.63	12.60	30	Pass
NVNT	ax20	5240	8.56	8.58	11.58	30	Pass
NVNT	ax40	5190	9.7	9.82	12.77	30	Pass
NVNT	ax40	5230	8.83	8.68	11.77	30	Pass
NVNT	ax80	5210	8.5	8.66	11.59	30	Pass

D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	0.16	0.17	0.33	11	Pass
NVNT	a	5200	Ant0	0.31	0.17	0.48	11	Pass
NVNT	a	5240	Ant0	-0.66	0.17	-0.49	11	Pass
NVNT	n20	5180	Ant0	-3.57	0.18	-3.39	11	Pass
NVNT	n20	5200	Ant0	-3.45	0.19	-3.26	11	Pass
NVNT	n20	5240	Ant0	-4.67	0.19	-4.48	11	Pass
NVNT	n40	5190	Ant0	-3.88	0.36	-3.52	11	Pass
NVNT	n40	5230	Ant0	-4.75	0.37	-4.38	11	Pass
NVNT	ac20	5180	Ant0	-1.66	0.49	-1.17	11	Pass
NVNT	ac20	5200	Ant0	-1.44	0.49	-0.95	11	Pass
NVNT	ac20	5240	Ant0	-2.15	0.49	-1.66	11	Pass
NVNT	ac40	5190	Ant0	-4.14	0.86	-3.28	11	Pass
NVNT	ac40	5230	Ant0	-4.81	0.86	-3.95	11	Pass
NVNT	ac80	5210	Ant0	-7.93	1.41	-6.52	11	Pass
NVNT	ax20	5180	Ant0	-1.67	0.54	-1.13	11	Pass
NVNT	ax20	5200	Ant0	-1.27	0.53	-0.74	11	Pass
NVNT	ax20	5240	Ant0	-1.94	0.54	-1.4	11	Pass
NVNT	ax40	5190	Ant0	-4.03	0.54	-3.49	11	Pass
NVNT	ax40	5230	Ant0	-4.53	0.55	-3.98	11	Pass
NVNT	ax80	5210	Ant0	-7.59	0.56	-7.03	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	-3.39	-3.39	-0.38	11	Pass
NVNT	a	5200	Ant1	-3.26	-3.26	-0.25	11	Pass
NVNT	a	5240	Ant1	-4.48	-4.48	-1.47	11	Pass
NVNT	n20	5180	Ant1	-3.52	-3.52	-0.51	11	Pass
NVNT	n20	5200	Ant1	-4.38	-4.38	-1.37	11	Pass
NVNT	n20	5240	Ant1	-1.17	-1.17	1.84	11	Pass
NVNT	n40	5190	Ant1	-0.95	-0.95	2.06	11	Pass
NVNT	n40	5230	Ant1	-1.66	-1.66	1.35	11	Pass
NVNT	ac20	5180	Ant1	-3.28	-3.28	-0.27	11	Pass
NVNT	ac20	5200	Ant1	-3.95	-3.95	-0.94	11	Pass
NVNT	ac20	5240	Ant1	-6.52	-6.52	-3.51	11	Pass
NVNT	ac40	5190	Ant1	-1.13	-1.13	1.88	11	Pass
NVNT	ac40	5230	Ant1	-0.74	-0.74	2.27	11	Pass
NVNT	ac80	5210	Ant1	-1.4	-1.4	1.61	11	Pass
NVNT	ax20	5180	Ant1	-3.49	-3.49	-0.48	11	Pass
NVNT	ax20	5200	Ant1	-3.98	-3.98	-0.97	11	Pass
NVNT	ax20	5240	Ant1	-7.03	-7.03	-4.02	11	Pass
NVNT	ax40	5190	Ant1	-3.5	0.55	1.99	11	Pass
NVNT	ax40	5230	Ant1	-4.56	0.55	1.72	11	Pass
NVNT	ax80	5210	Ant1	-7.5	0.56	1.19	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm) Duty Factor (dB)		Total PSD (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	3.60	2.98	6.31	11	Pass
NVNT	n20	5200	3.55	3.28	6.43	11	Pass
NVNT	n20	5240	3.19	3.32	6.27	11	Pass
NVNT	n40	5190	1.46	1.01	4.25	11	Pass
NVNT	n40	5230	1.45	0.37	3.95	11	Pass
NVNT	ac20	5180	3.49	3.48	6.50	11	Pass
NVNT	ac20	5200	3.82	3.66	6.75	11	Pass
NVNT	ac20	5240	2.56	3.04	5.82	11	Pass
NVNT	ac40	5190	1.90	1.19	4.57	11	Pass
NVNT	ac40	5230	1.04	1.44	4.25	11	Pass
NVNT	ac80	5210	-1.38	-1.25	1.70	11	Pass
NVNT	ax20	5180	2.86	2.75	5.82	11	Pass
NVNT	ax20	5200	3.17	3.18	6.19	11	Pass
NVNT	ax20	5240	2.54	2.13	5.35	11	Pass
NVNT	ax40	5190	1.32	1.38	4.36	11	Pass
NVNT	ax40	5230	1.07	0.33	3.73	11	Pass
NVNT	ax80	5210	-0.93	-2.43	1.39	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant0

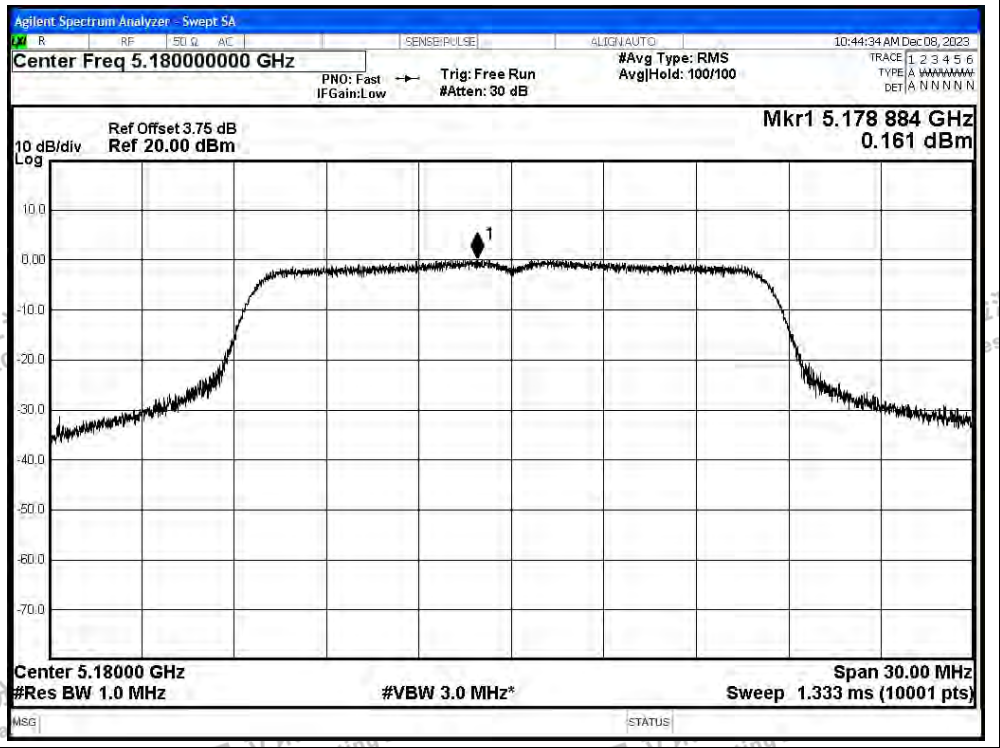

PSD NVNT a 5200MHz Ant0

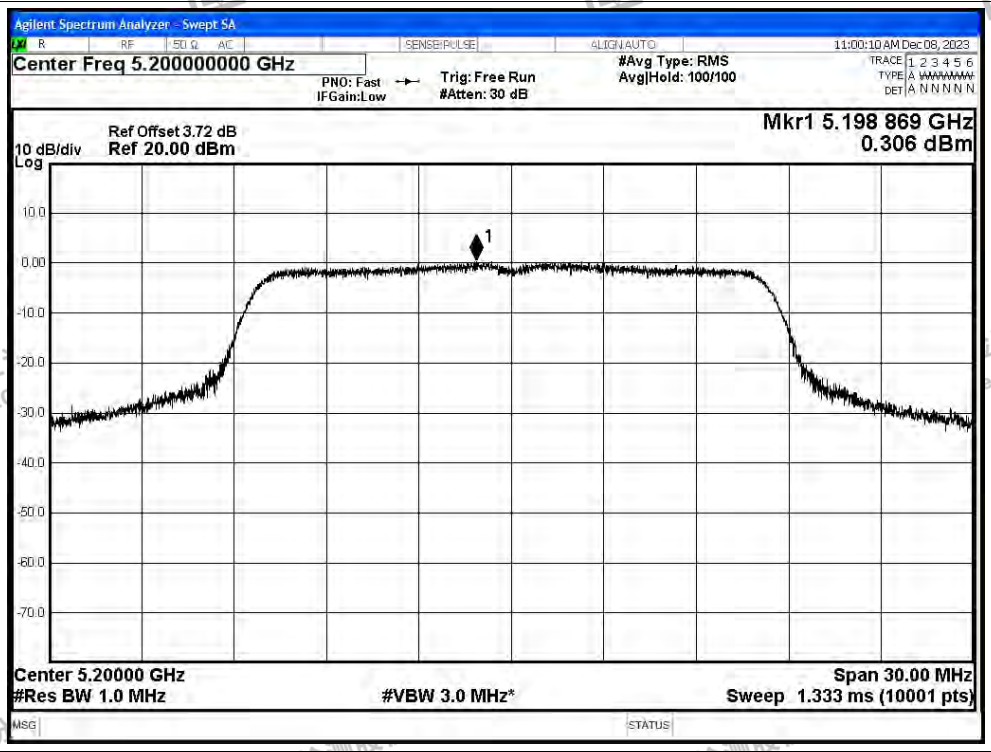

PSD NVNT a 5240MHz Ant0

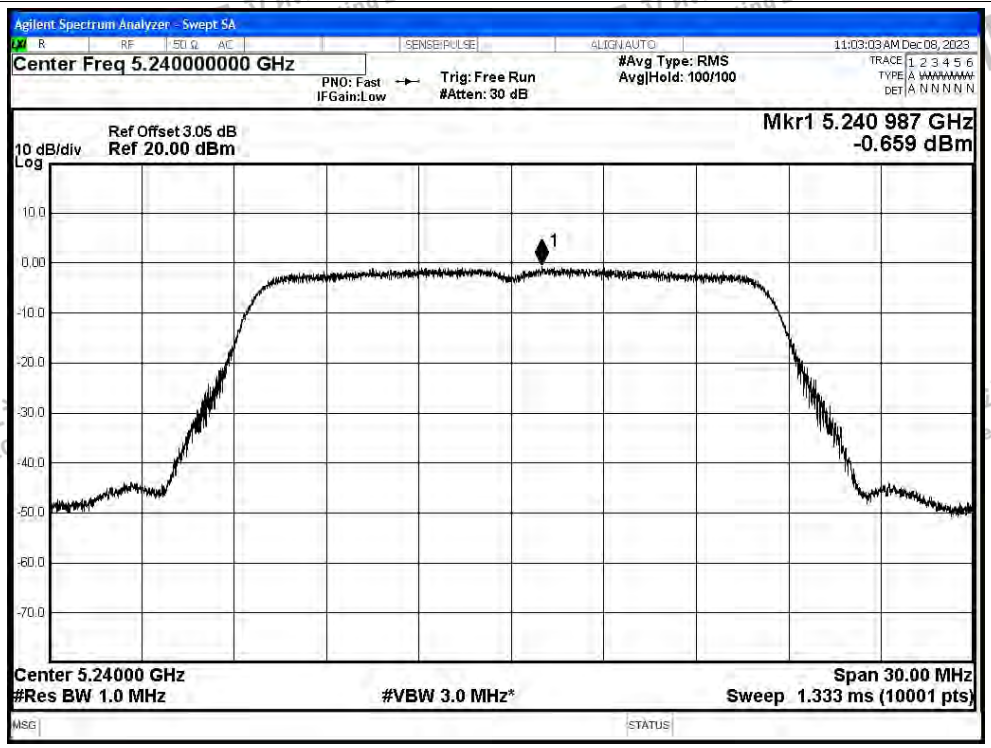

PSD NVNT n20 5180MHz Ant0

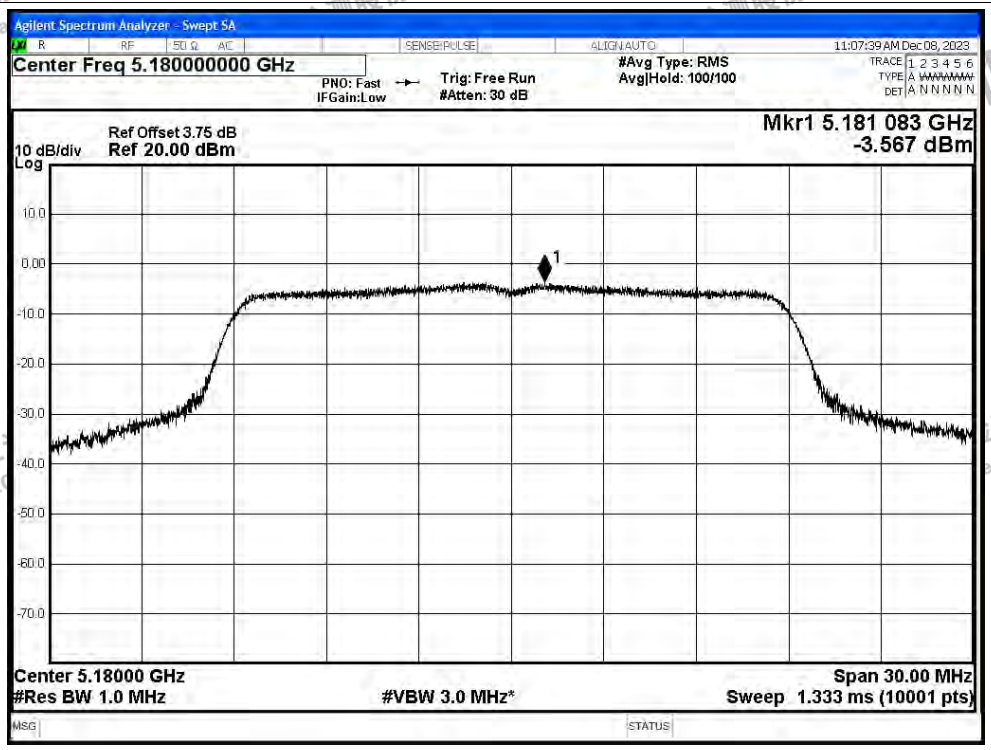

PSD NVNT n20 5200MHz Ant0

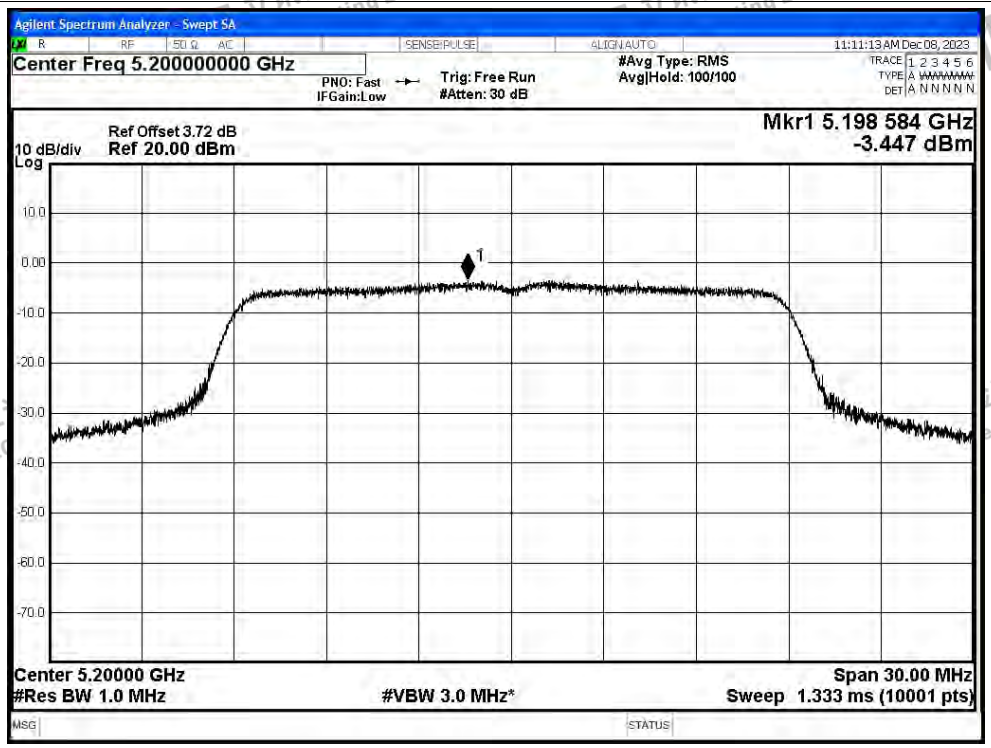

PSD NVNT n20 5240MHz Ant0

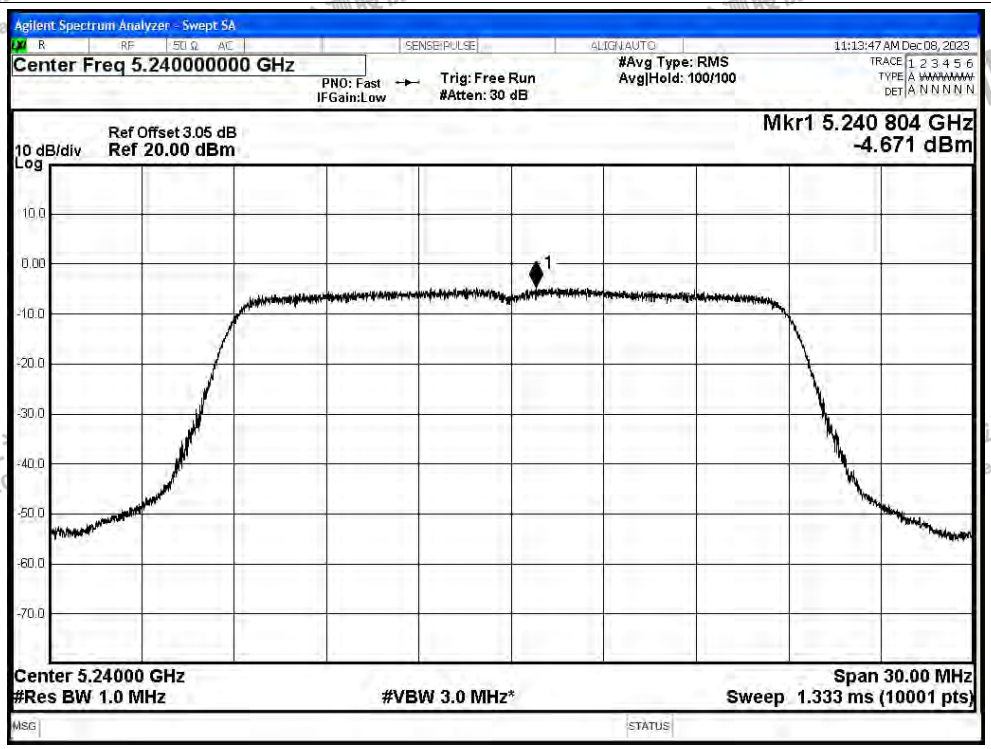

PSD NVNT n40 5190MHz Ant0

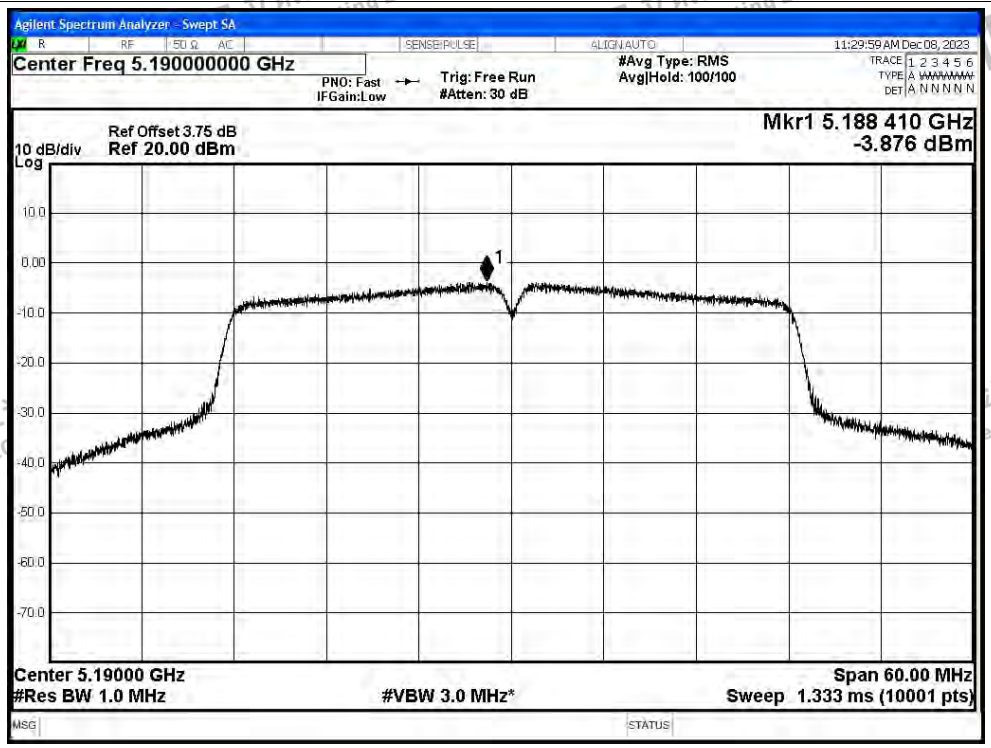

PSD NVNT n40 5230MHz Ant0

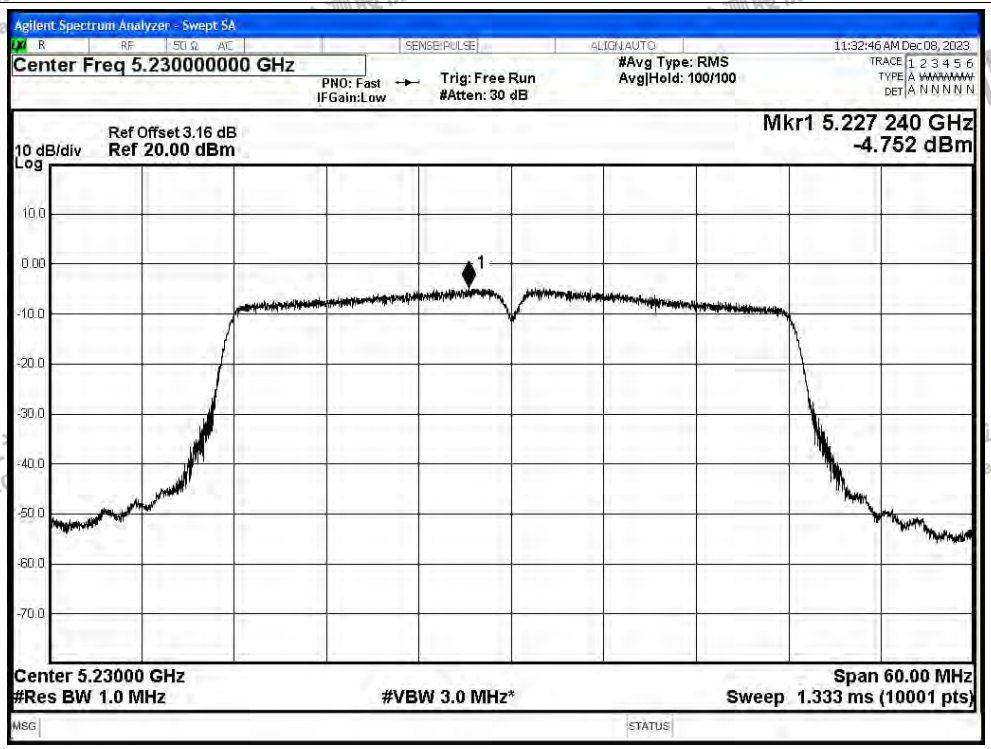

PSD NVNT ac20 5180MHz Ant0

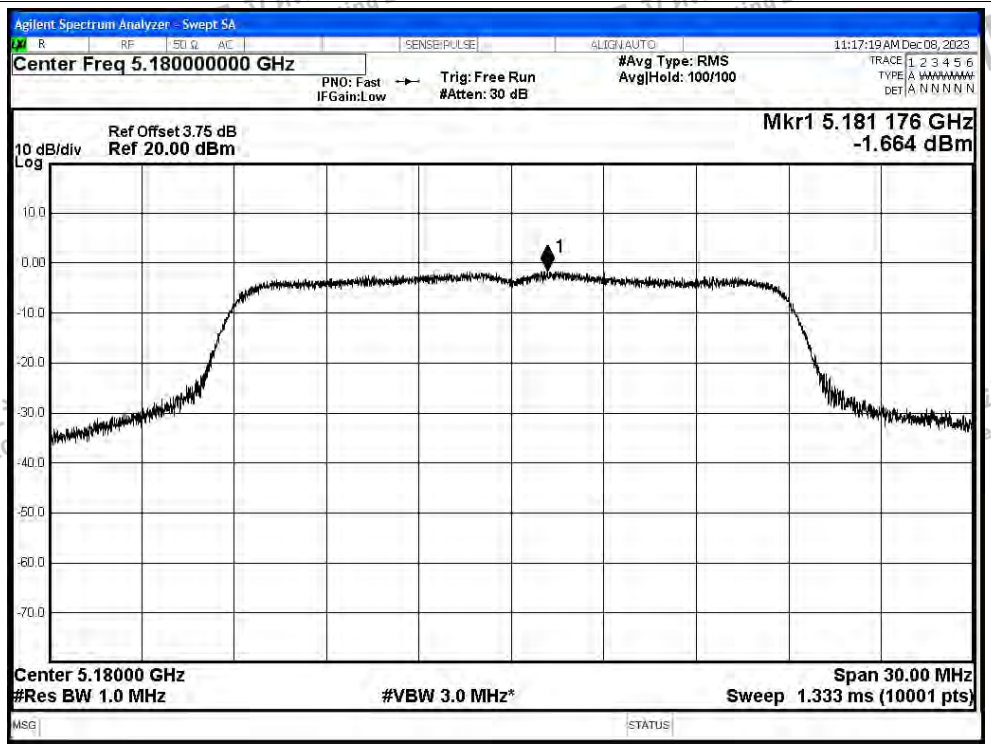

PSD NVNT ac20 5200MHz Ant0

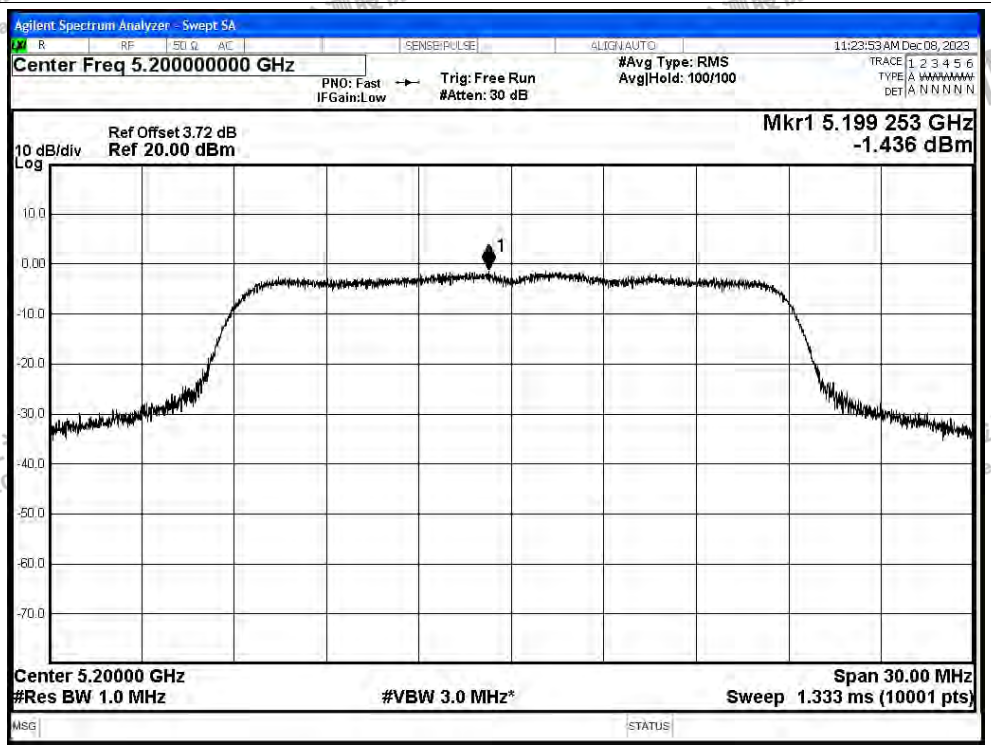

PSD NVNT ac20 5240MHz Ant0

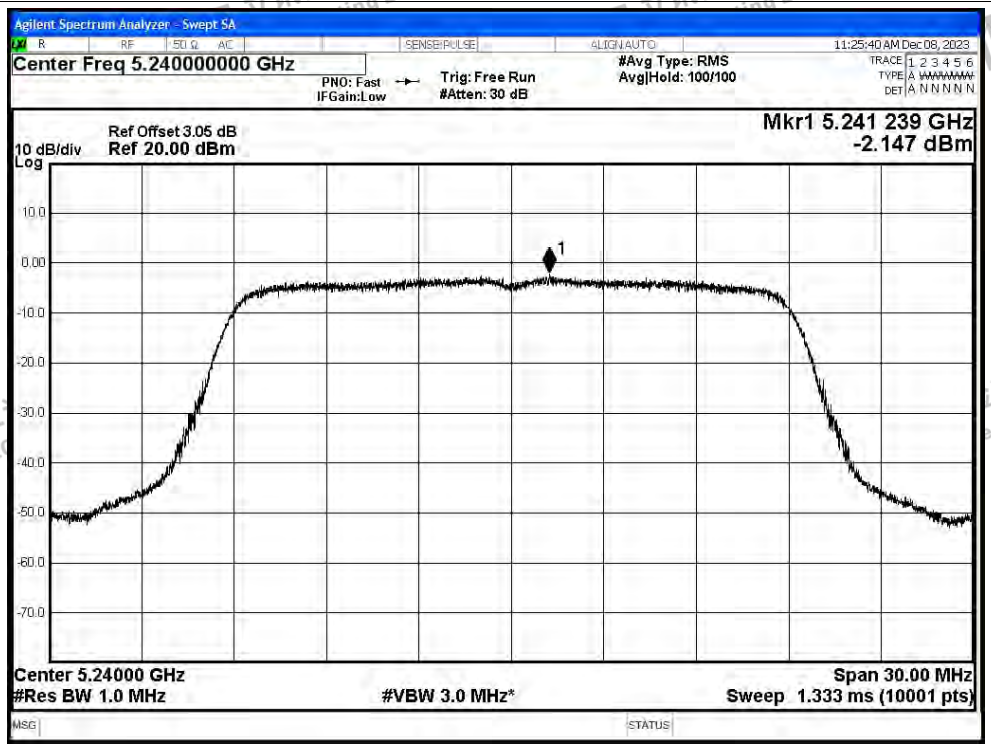

PSD NVNT ac40 5190MHz Ant0

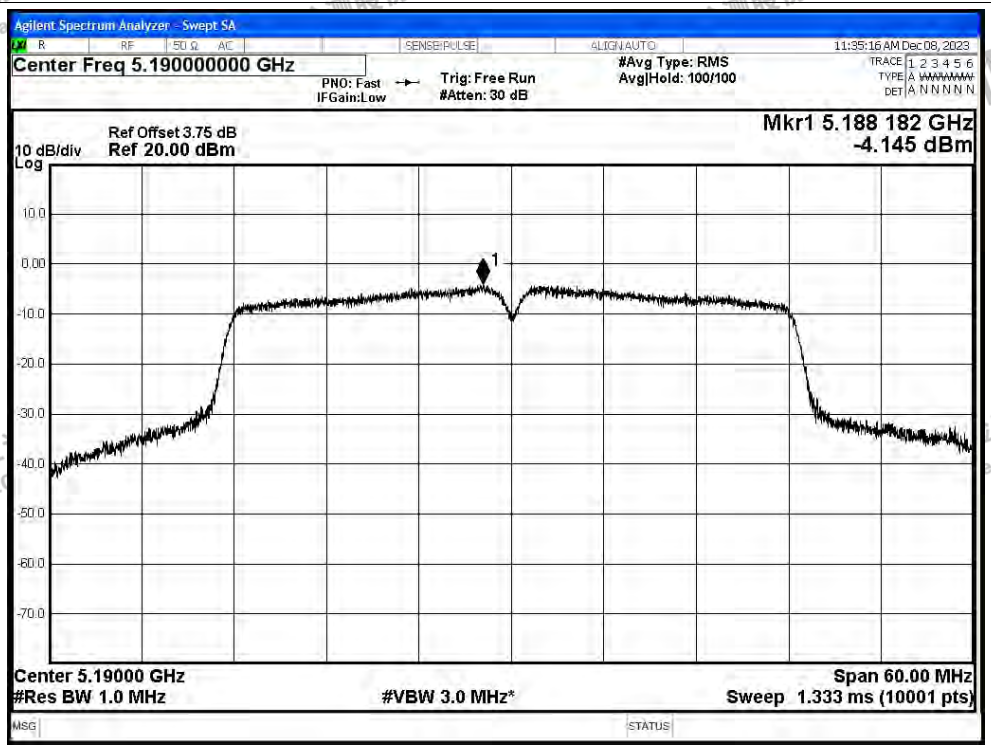

PSD NVNT ac40 5230MHz Ant0

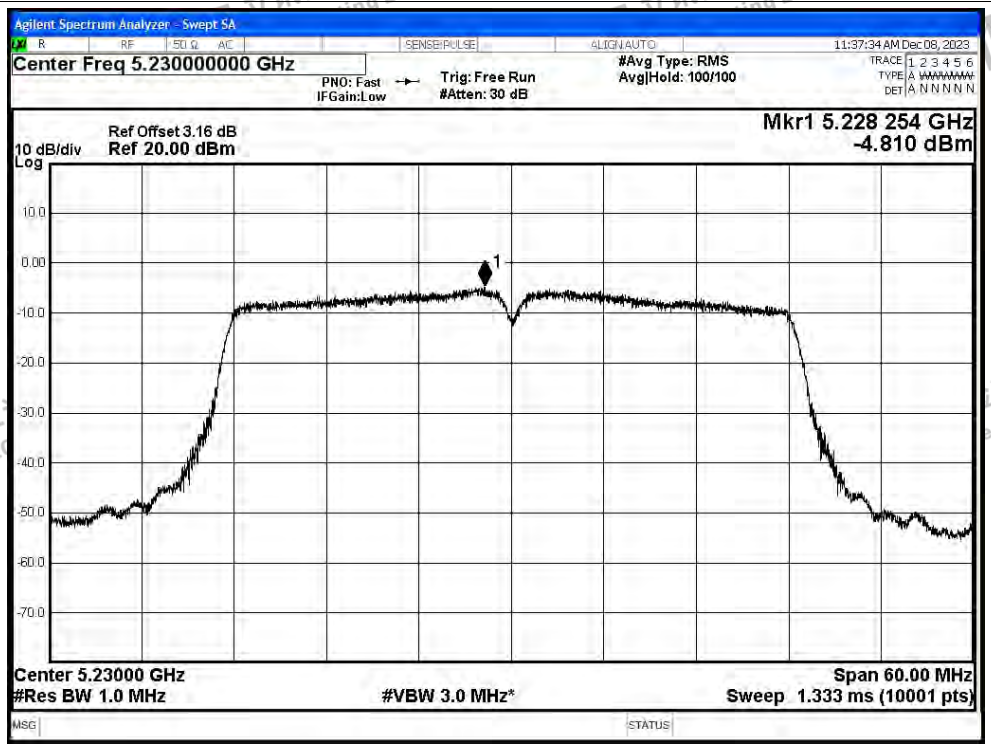

PSD NVNT ac80 5210MHz Ant0

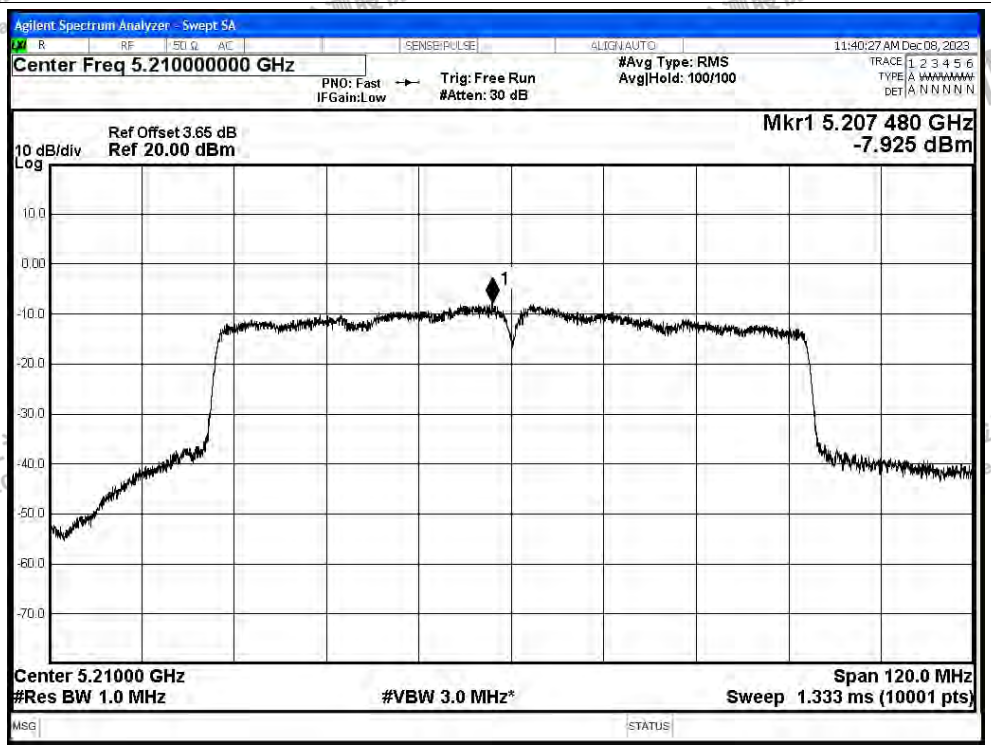

PSD NVNT ax20 5180MHz Ant0

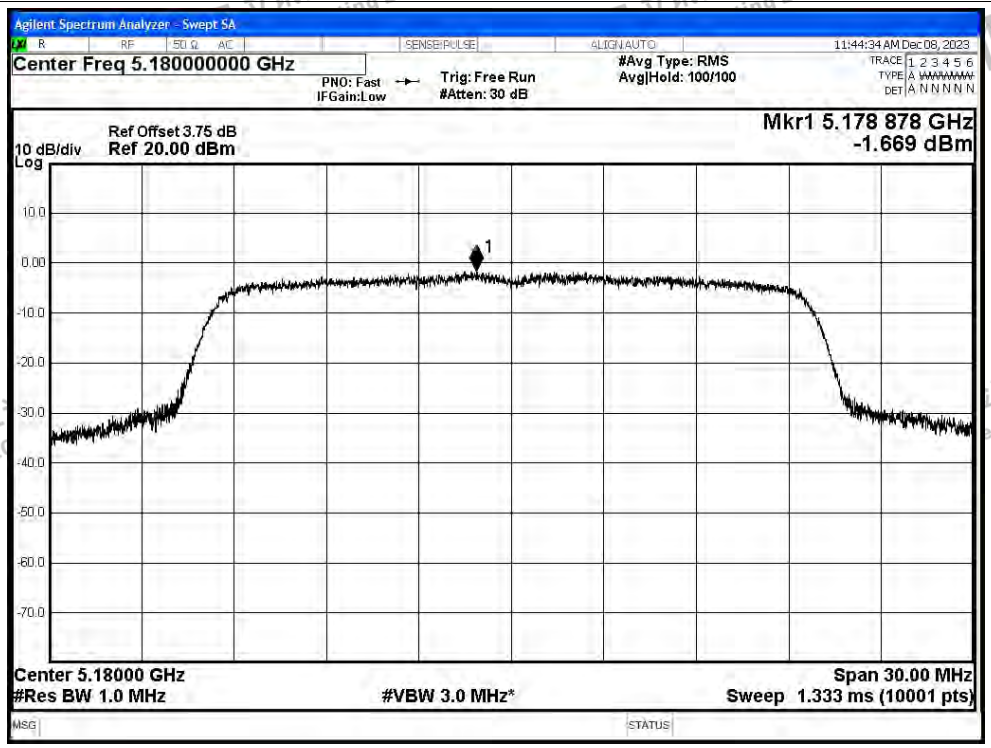

PSD NVNT ax20 5200MHz Ant0

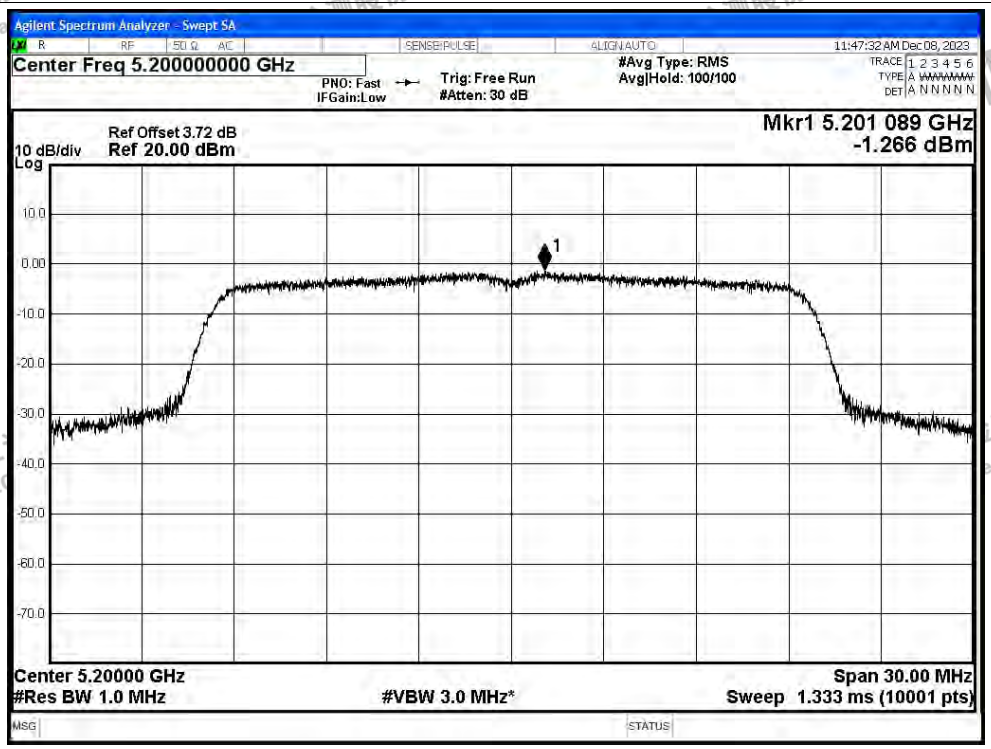

PSD NVNT ax20 5240MHz Ant0

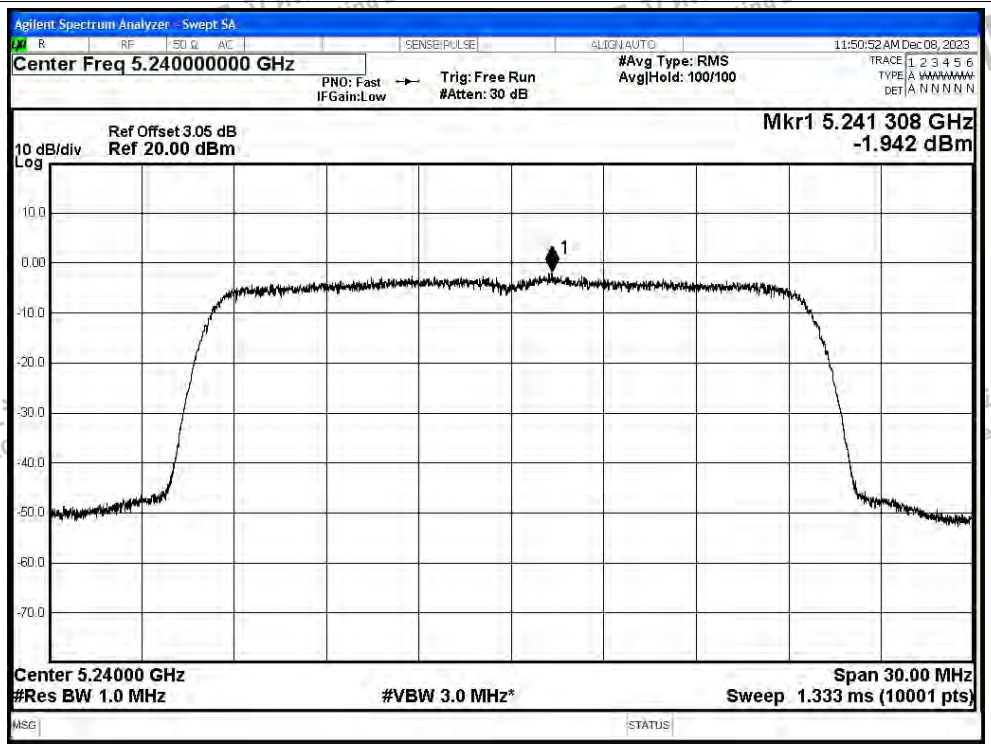

PSD NVNT ax40 5190MHz Ant0

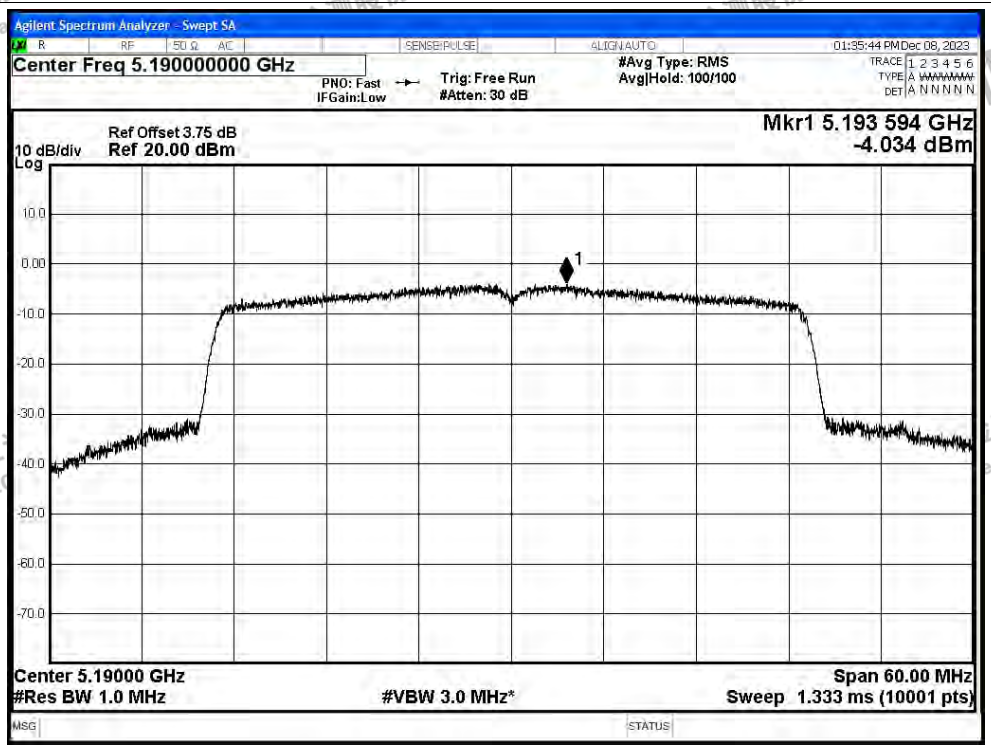

PSD NVNT ax40 5230MHz Ant0

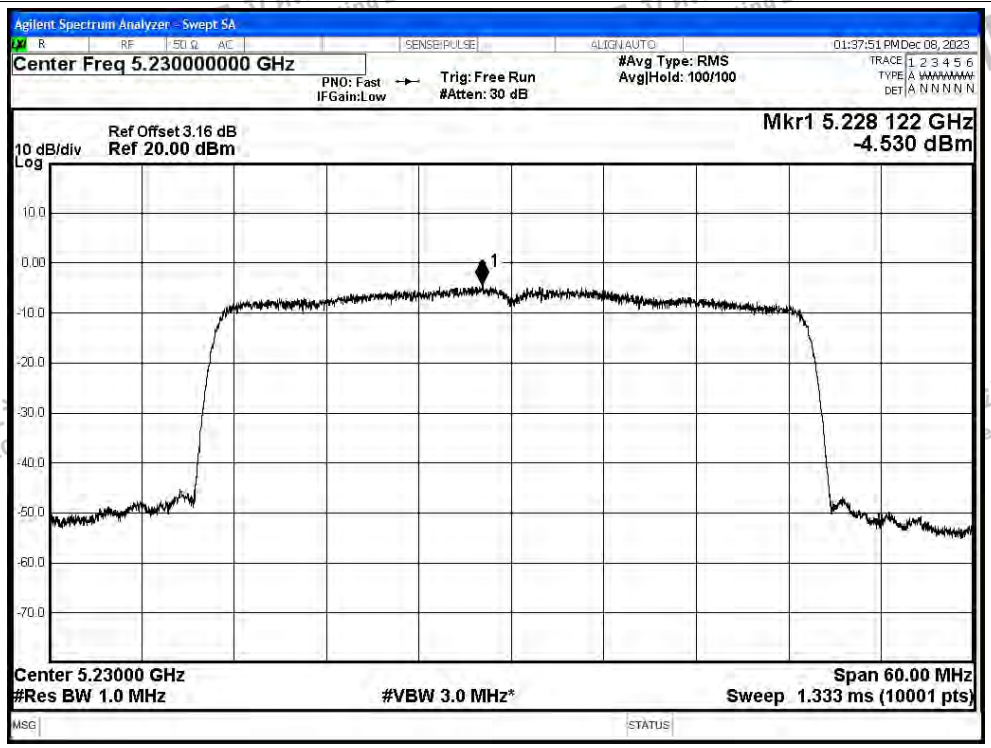

PSD NVNT ax80 5210MHz Ant0

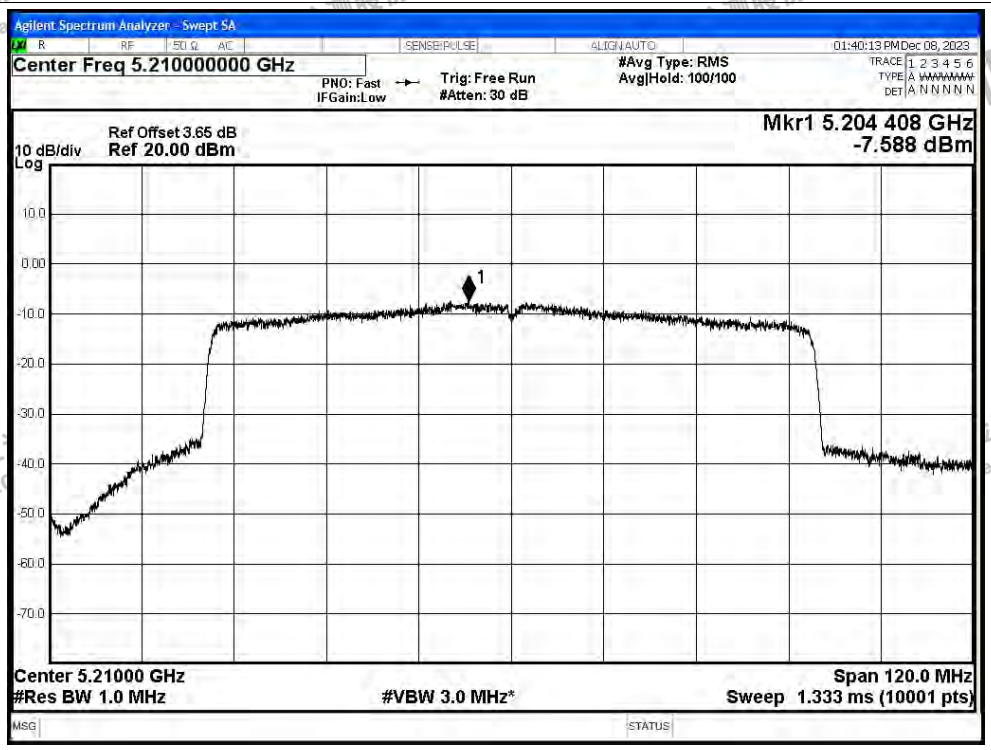

Test Graphs

PSD NVNT a 5180MHz Ant1

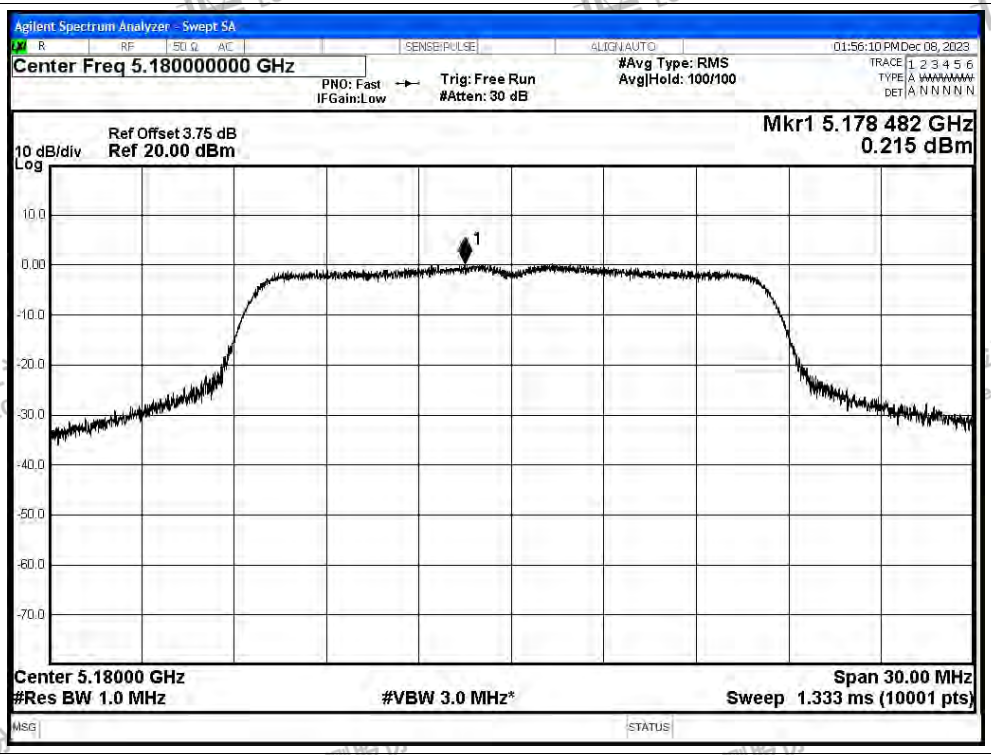

PSD NVNT a 5200MHz Ant1

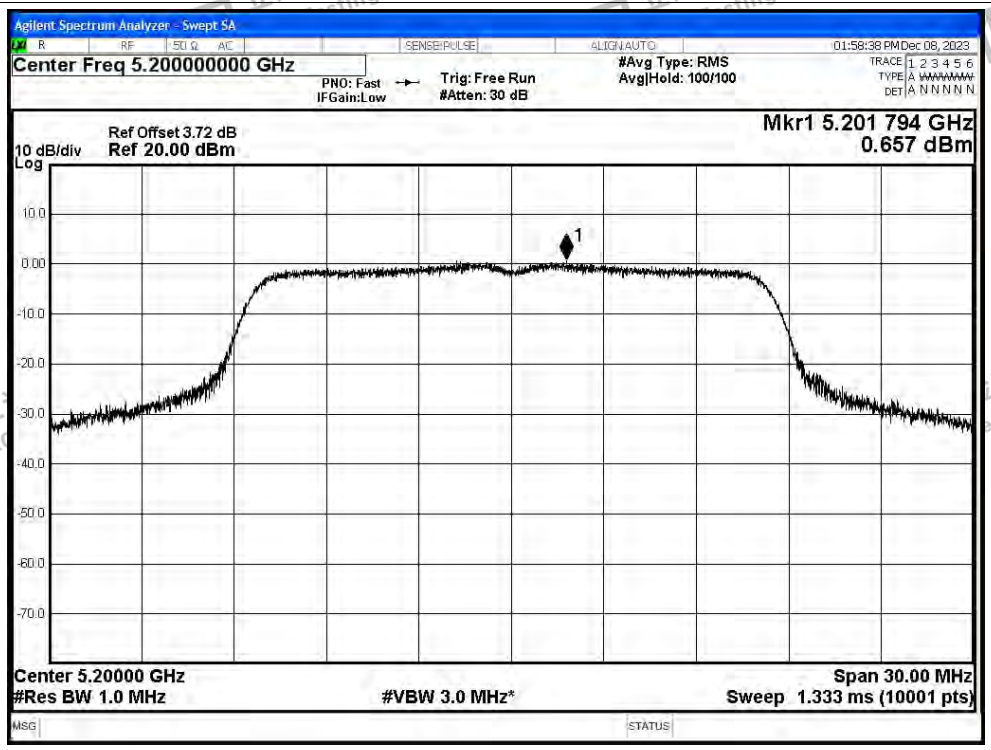

PSD NVNT a 5240MHz Ant1

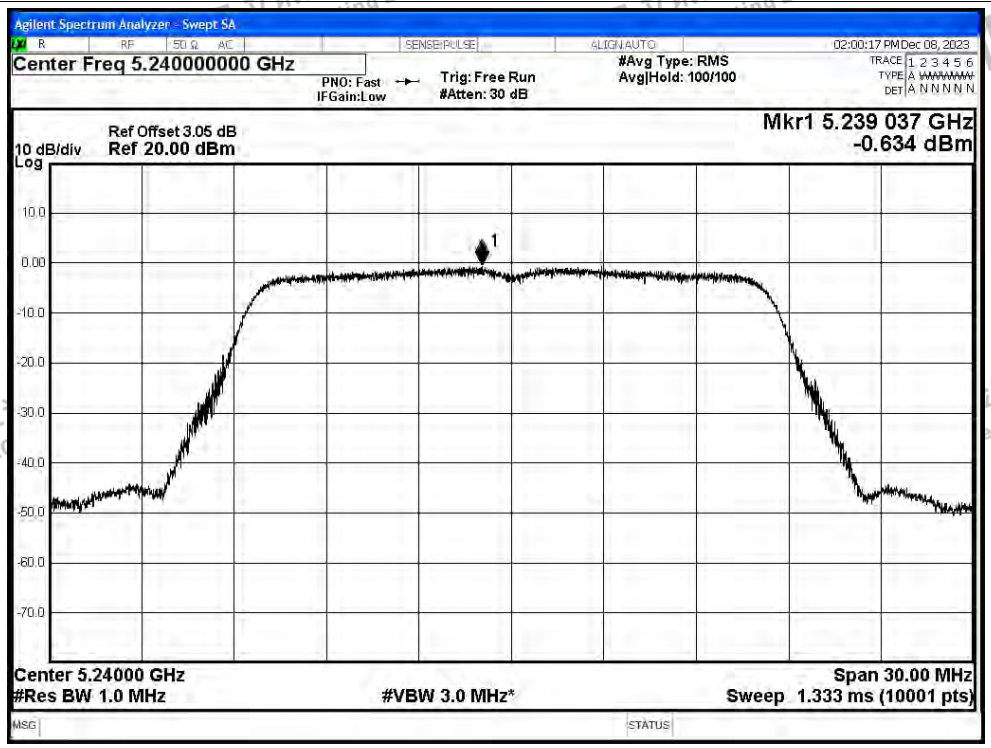

PSD NVNT n20 5180MHz Ant1

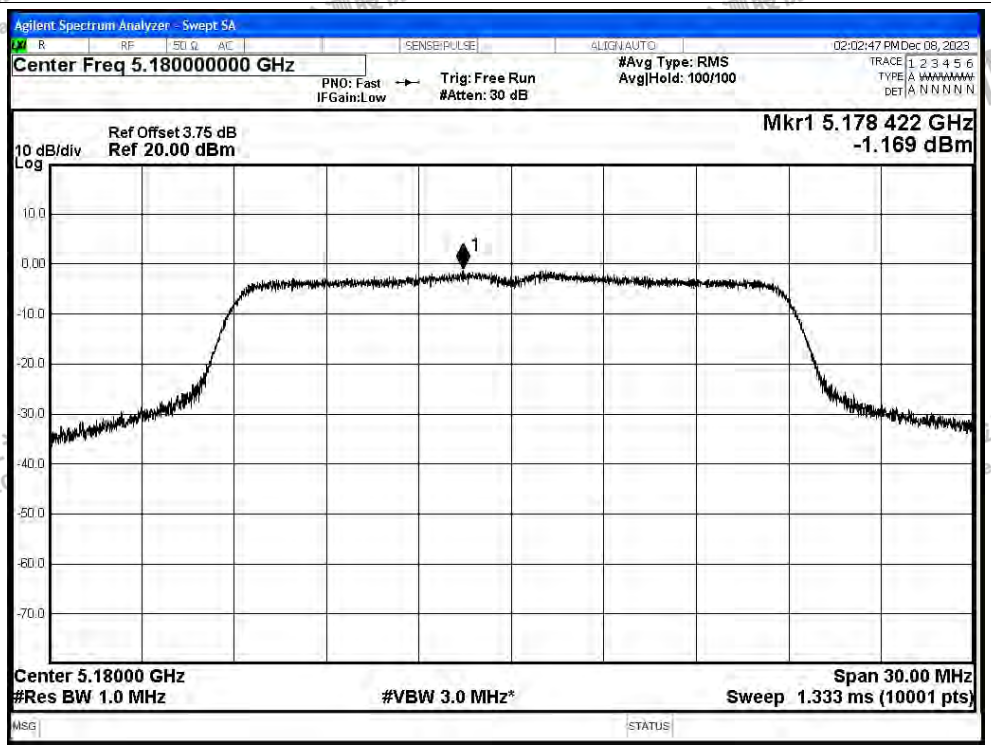

PSD NVNT n20 5200MHz Ant1

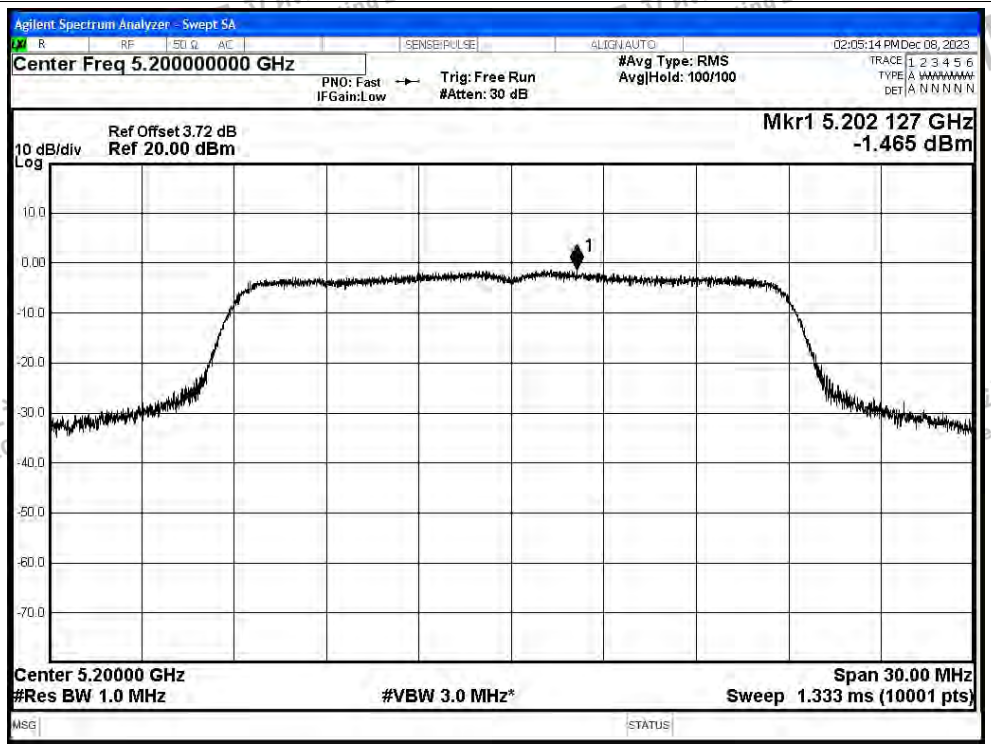

PSD NVNT n20 5240MHz Ant1

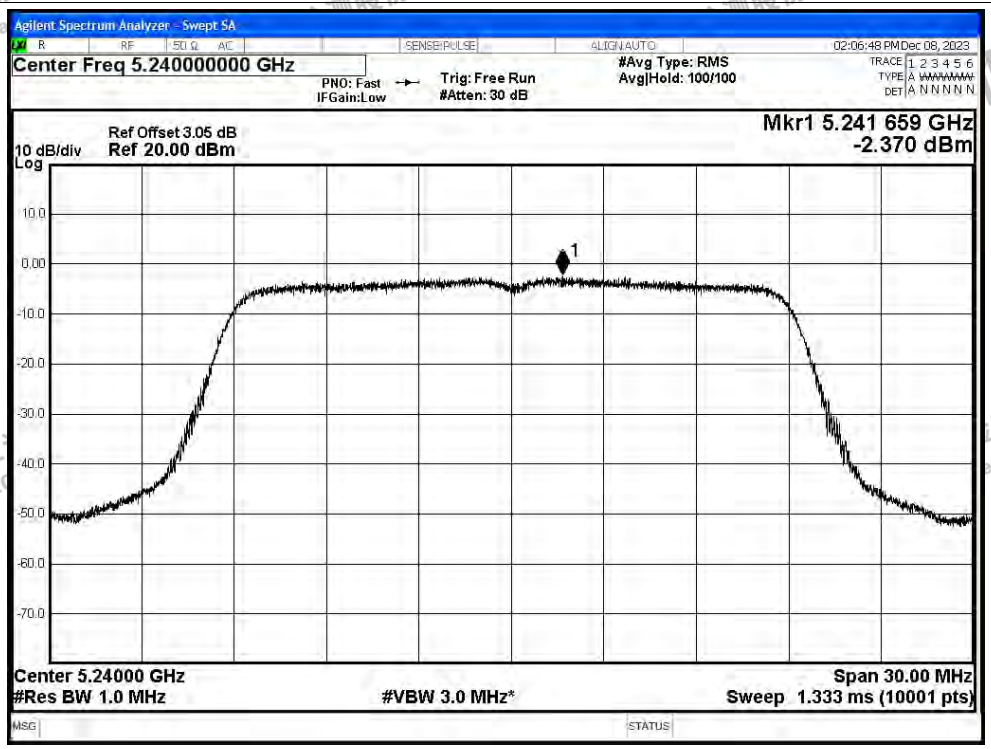

PSD NVNT n40 5190MHz Ant1

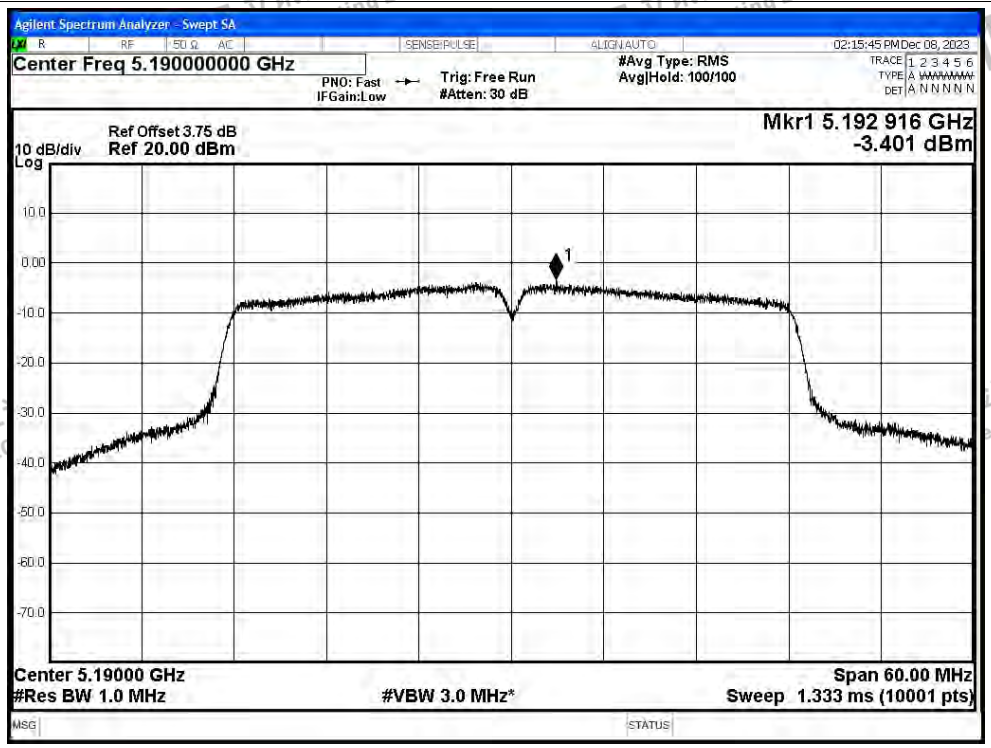

PSD NVNT n40 5230MHz Ant1

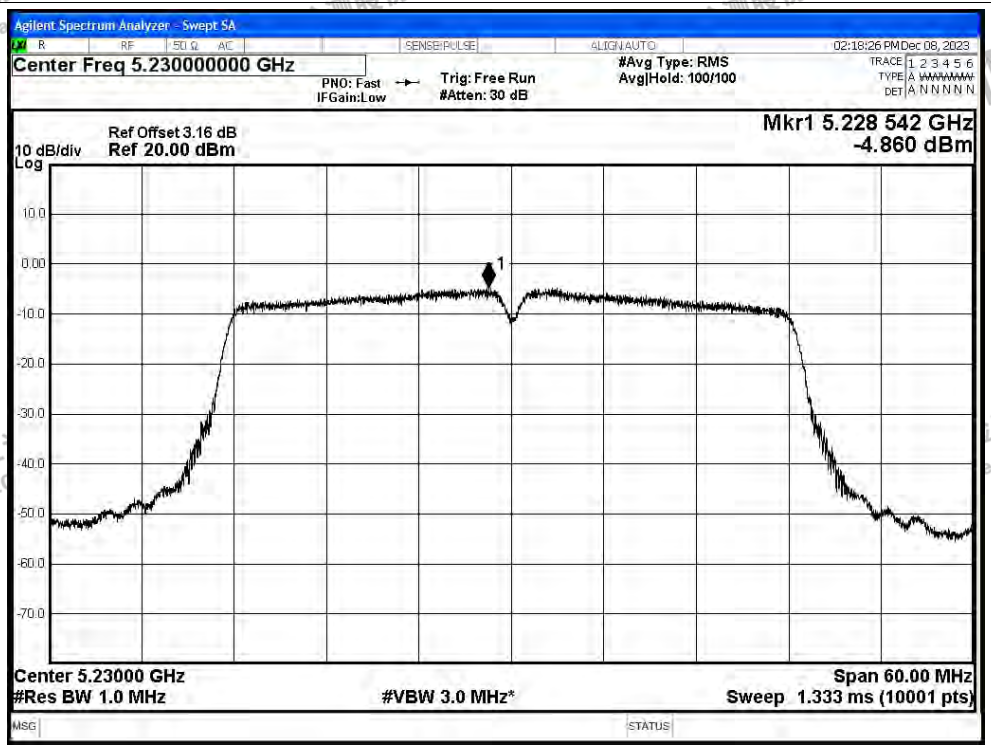

PSD NVNT ac20 5180MHz Ant1

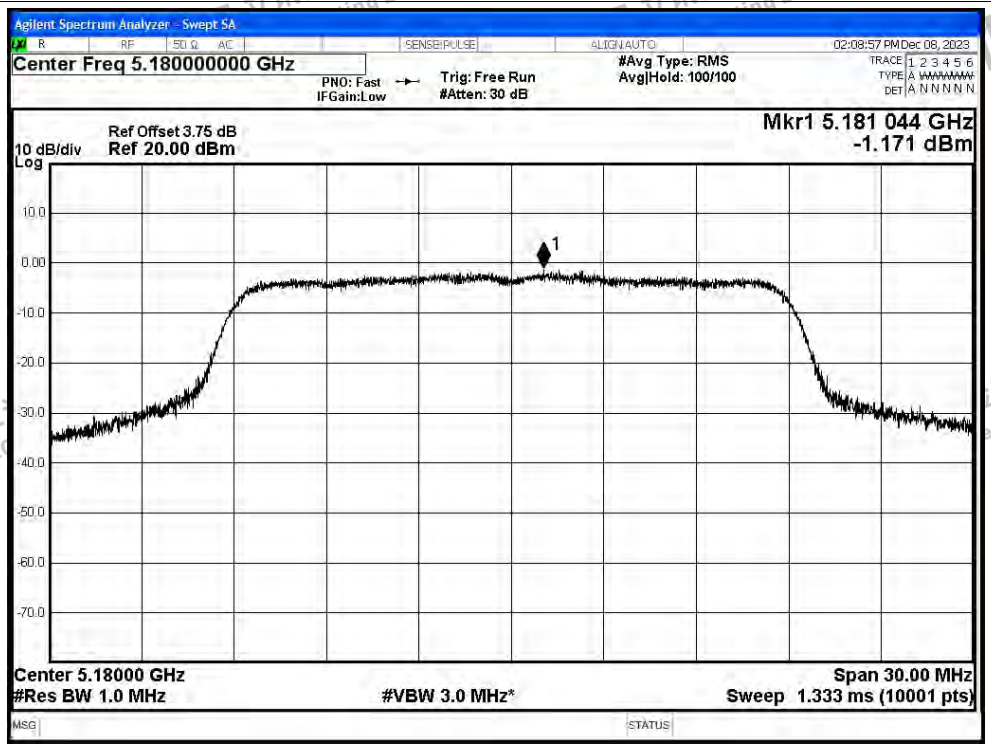

PSD NVNT ac20 5200MHz Ant1

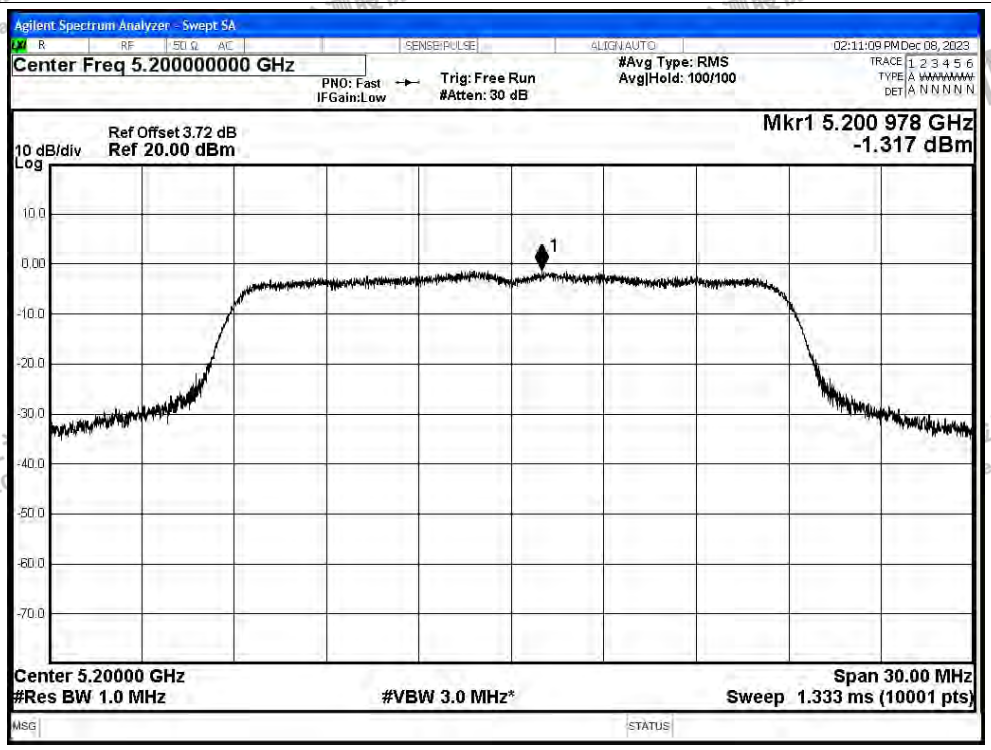

PSD NVNT ac20 5240MHz Ant1

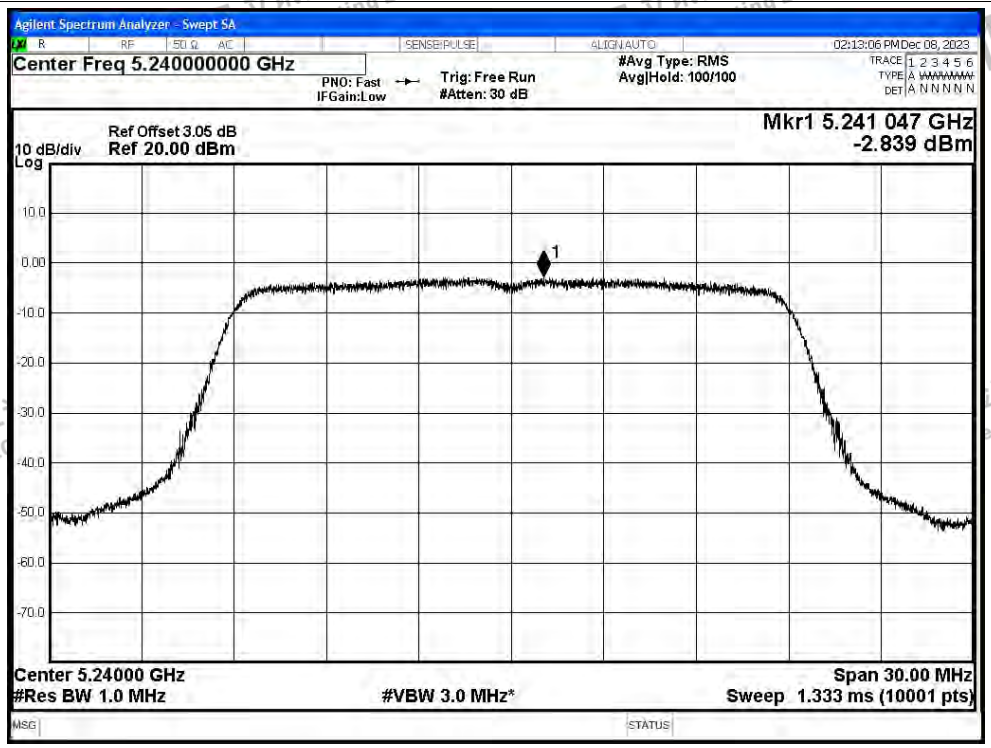

PSD NVNT ac40 5190MHz Ant1

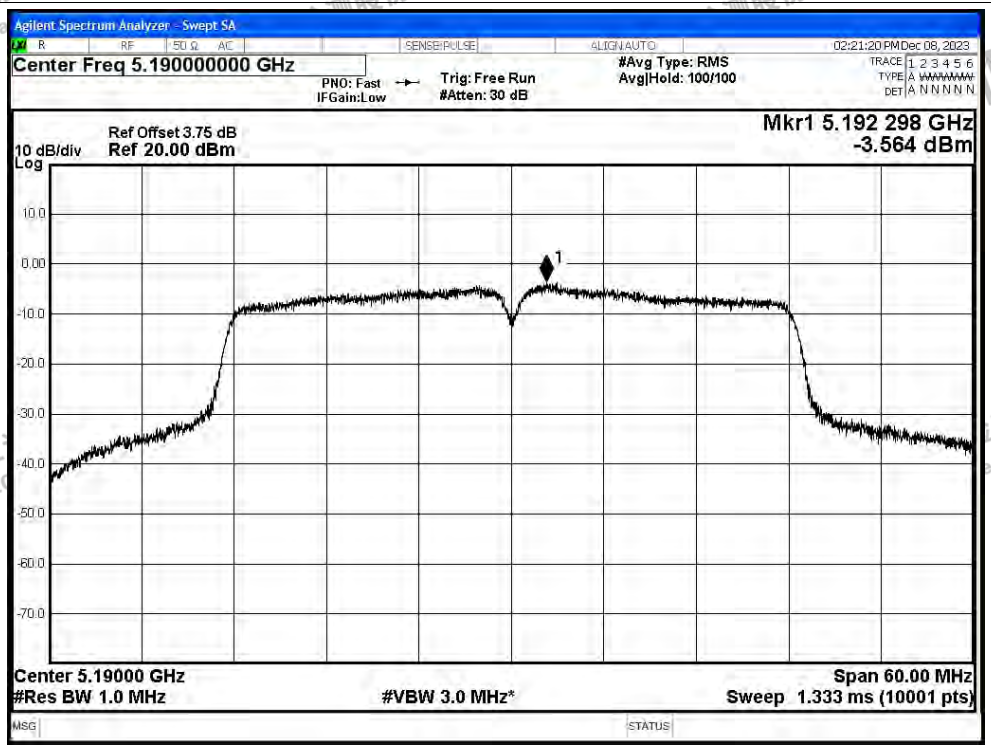

PSD NVNT ac40 5230MHz Ant1

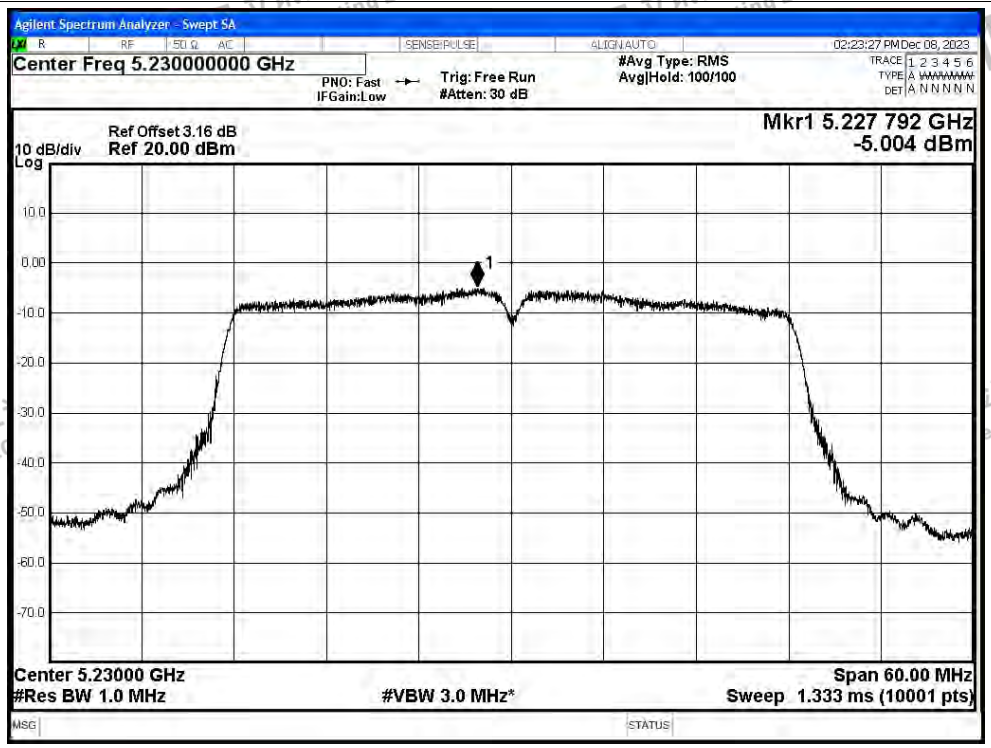

PSD NVNT ac80 5210MHz Ant1

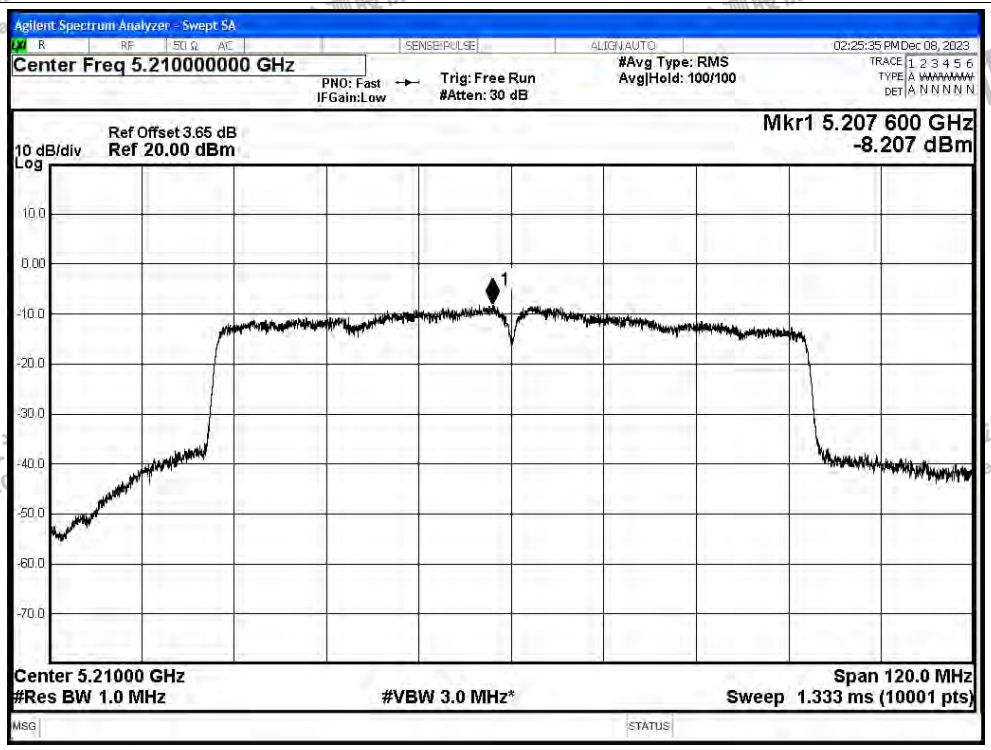

PSD NVNT ax20 5180MHz Ant1

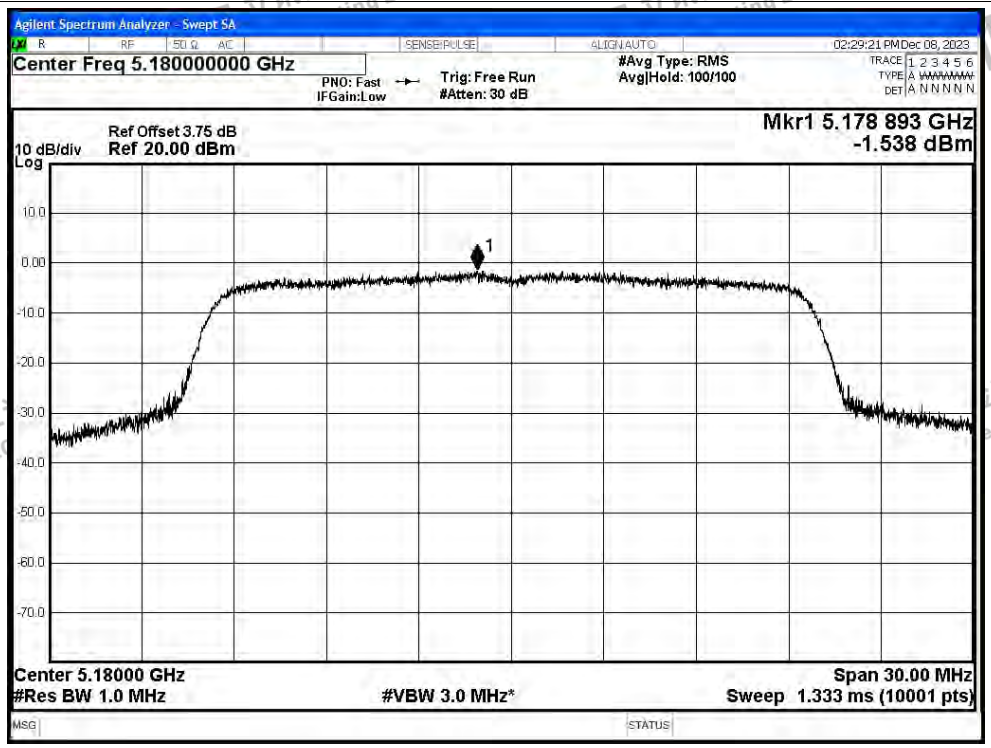

PSD NVNT ax20 5200MHz Ant1

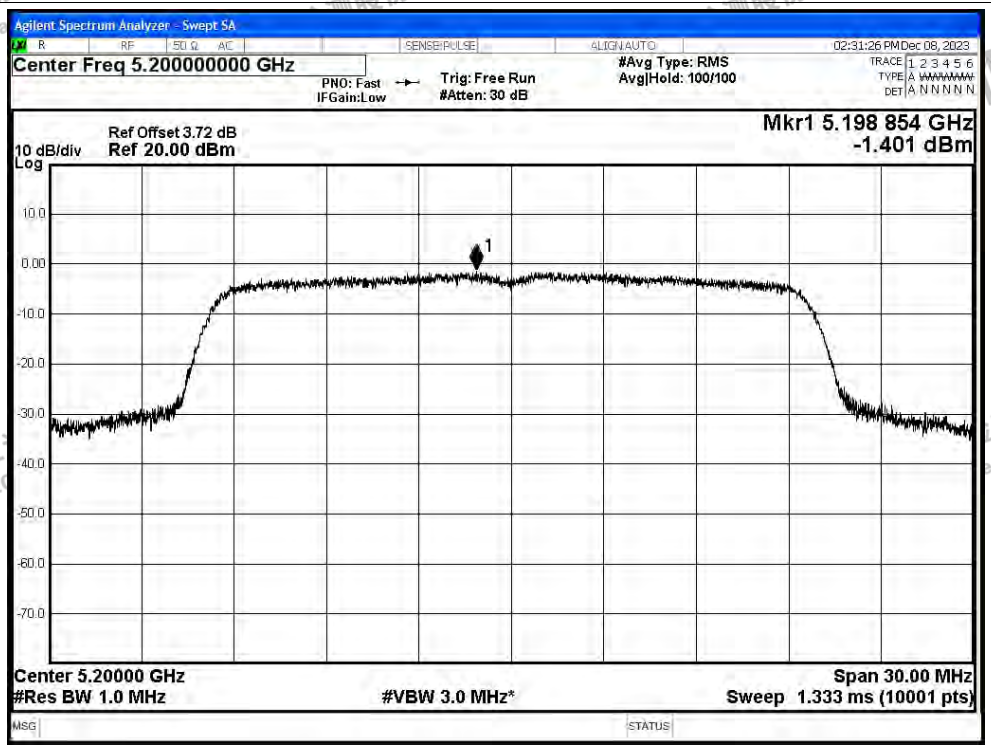

PSD NVNT ax20 5240MHz Ant1

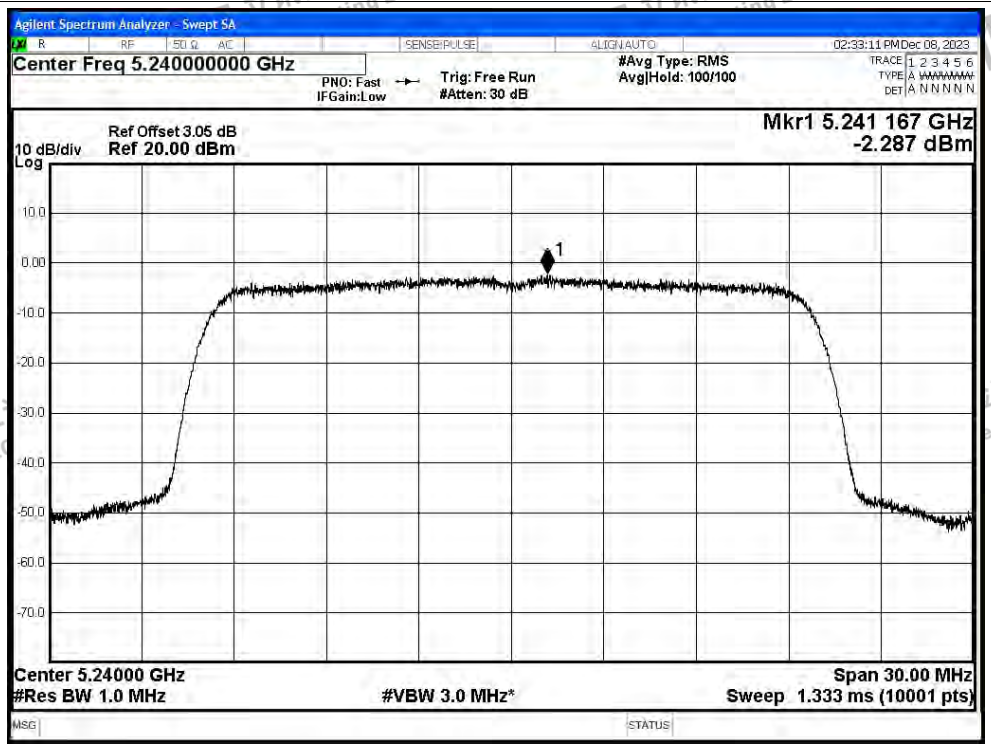

PSD NVNT ax40 5190MHz Ant1

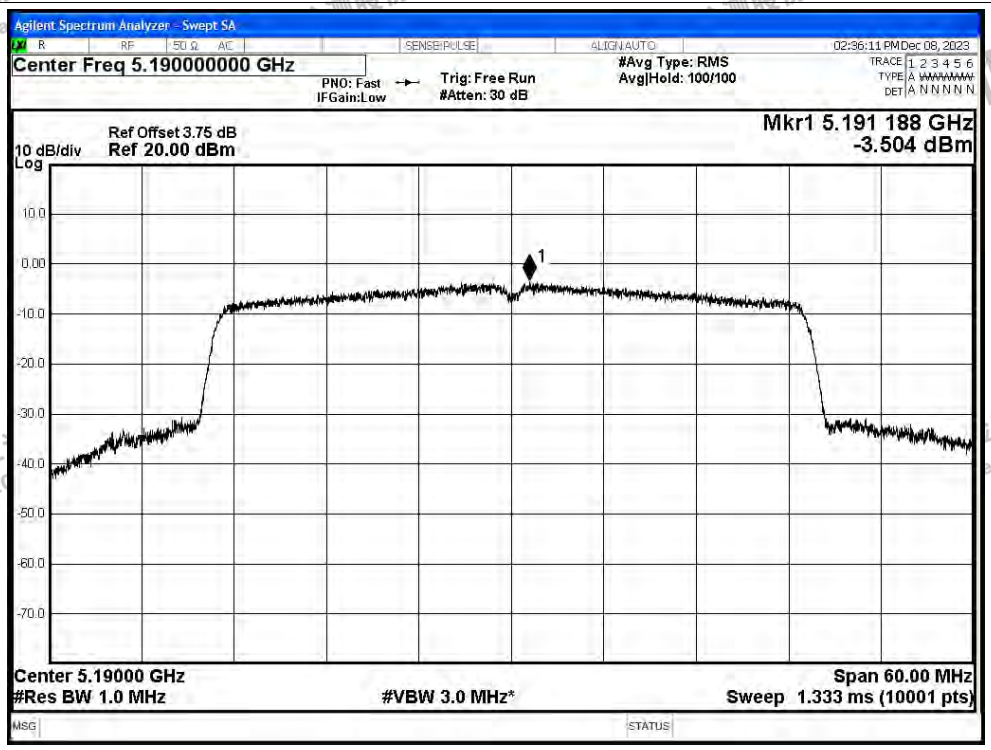

PSD NVNT ax40 5230MHz Ant1

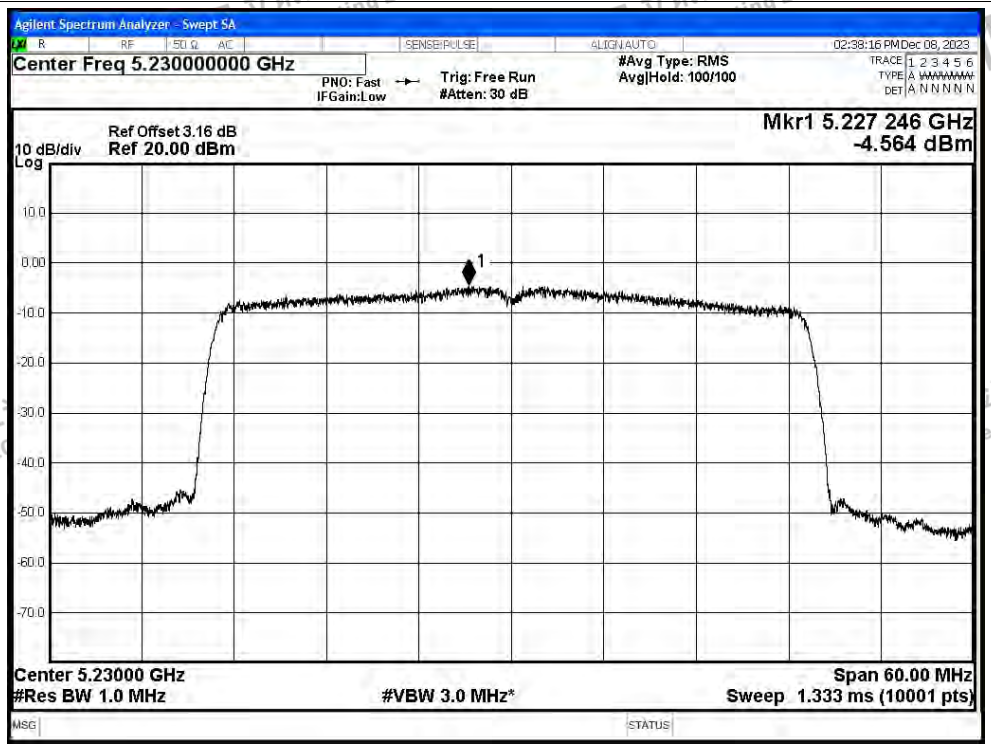

PSD NVNT ax80 5210MHz Ant1

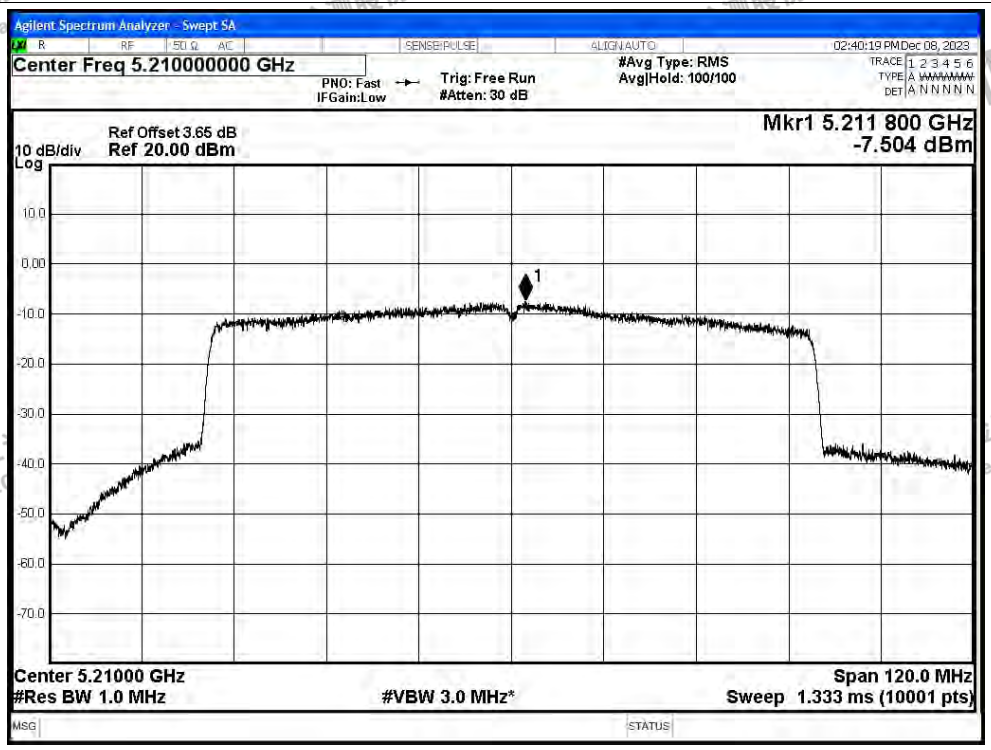

D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a-Ant0	5180	4500	-59.4	2	37.83	Peak	68.2	Pass
NVNT	a-Ant0	5180	4500	-67.16	2	30.07	Average	54	Pass
NVNT	a-Ant0	5180	5146.8	-48.66	2	48.57	Peak	68.2	Pass
NVNT	a-Ant0	5180	5020.1	-55.36	2	41.87	Average	54	Pass
NVNT	a-Ant0	5180	5150	-50.75	2	46.48	Peak	68.2	Pass
NVNT	a-Ant0	5180	5150	-56.43	2	40.8	Average	54	Pass
NVNT	a-Ant0	5240	5350	-54.77	2	42.46	Peak	68.2	Pass
NVNT	a-Ant0	5240	5350	-62.81	2	34.42	Average	54	Pass
NVNT	a-Ant0	5240	5365.44	-51.72	2	45.51	Peak	68.2	Pass
NVNT	a-Ant0	5240	5400	-58.79	2	38.44	Average	54	Pass
NVNT	a-Ant0	5240	5460	-58.89	2	38.34	Peak	68.2	Pass
NVNT	a-Ant0	5240	5460	-64.27	2	32.96	Average	54	Pass
NVNT	n20-mimo	5180	4500	-60.41	4.65	39.47	Peak	68.2	Pass
NVNT	n20-mimo	5180	4500	-67.17	4.65	32.71	Average	54	Pass
NVNT	n20-mimo	5180	4875.2	-51.11	4.65	48.77	Peak	68.2	Pass
NVNT	n20-mimo	5180	4873.8	-55.1	4.65	44.78	Average	54	Pass
NVNT	n20-mimo	5180	5150	-54.54	4.65	45.34	Peak	68.2	Pass
NVNT	n20-mimo	5180	5150	-60.94	4.65	38.94	Average	54	Pass
NVNT	n20-mimo	5240	5350	-57.15	4.65	42.73	Peak	68.2	Pass
NVNT	n20-mimo	5240	5350	-63.88	4.65	36.00	Average	54	Pass
NVNT	n20-mimo	5240	5400	-54.02	4.65	45.86	Peak	68.2	Pass
NVNT	n20-mimo	5240	5400	-60.3	4.65	39.58	Average	54	Pass
NVNT	n20-mimo	5240	5460	-58.23	4.65	41.65	Peak	68.2	Pass
NVNT	n20-mimo	5240	5460	-65.05	4.65	34.83	Average	54	Pass
NVNT	n40-mimo	5190	4500	-59.57	4.65	40.31	Peak	68.2	Pass
NVNT	n40-mimo	5190	4500	-66.88	4.65	33.00	Average	54	Pass
NVNT	n40-mimo	5190	5048.96	-51.12	4.65	48.76	Peak	68.2	Pass
NVNT	n40-mimo	5190	4873.76	-55.85	4.65	44.03	Average	54	Pass
NVNT	n40-mimo	5190	5150	-52.58	4.65	47.30	Peak	68.2	Pass
NVNT	n40-mimo	5190	5150	-57.3	4.65	42.58	Average	54	Pass
NVNT	n40-mimo	5230	5350	-56.01	4.65	43.87	Peak	68.2	Pass
NVNT	n40-mimo	5230	5350	-61.87	4.65	38.01	Average	54	Pass
NVNT	n40-mimo	5230	5390.34	-52.37	4.65	47.51	Peak	68.2	Pass
NVNT	n40-mimo	5230	5390.07	-58.81	4.65	41.07	Average	54	Pass
NVNT	n40-mimo	5230	5460	-56.99	4.65	42.89	Peak	68.2	Pass
NVNT	n40-mimo	5230	5460	-63.66	4.65	36.22	Average	54	Pass
NVNT	ac20-mimo	5180	4500	-60.05	4.65	39.83	Peak	68.2	Pass