

SPECIFICATION FOR APPROVAL

CUSTOMER (客户名称)	瑞江	
CS P/N (客户机种)		
PART NAME (品名)	内置FPC天线 (RT-FPC306 V0.0) 2.4G/5.8G ϕ 1.13 黑色 L=150MM 带IPEX ROHS	
FREQUENCY (频率)	2400-2500MHz/5150-5850MHz	
RTANT NO. (物料编号)	RT441-10006-A	
DATE (日期)	2023.12.06	
出样签章		
APPROVED BY 核准	CHECKED BY 确认	DRAWED BY 制作
黄龙保	刘云海	刘云海
Remark (备注):		
客户承认签章		
APPROVED BY 核准	CHECKED BY 确认	TESTED BY 检测
Sign(客户确认签字盖章): _____		

东莞市安特通信有限公司

电话: 0769-85833836

传真: 0769-82582573

Http://www.rtant.com

地址: 东莞市厚街镇沙塘工业区沙隆路德朗实业创新园E栋

1. Contents项目表

No.	content内容	Pages页数
0	Admit the cover	1
1	menu	2
2	Change resume	2
3	Product drawing	3
4	Specification sheet	3
5	Electrical test report	4-7
6	Sample inspection report	8
	2D product drawing, packaging specification	attachments

2. Revision history变更履历

Revision版本	Date日期	Change the content变更内容
X0	23. 12. 06	新版

3. 产品实物图片Product picture




4. 规格表Specification

A. Electrical Properties	
Frequency Rang频段范围	2400-2500MHz/5150-5850MHz
Impedance特性阻抗	50 Ω Nominal
VSWR电压驻波比	2.0Max. (带机壳)
Gain(peak)增益 (峰值)	4.14dBi
Efficiency效率	>50%
Out of roundness不圆度	3.0 dBi (Max.)
Radiation辐射方式	Omni-Directional/全向
Polarization极化方式	Linear Vertical/垂直
B. Physical Properties	
Connector Type连接方式	IPEX
Cable线材	Φ 1.13mm
Antenna Radiator天线振子体	FPC


5. 电性测试报告Electrical Test Report

5.1 Test equipment

OTA 系統架構圖

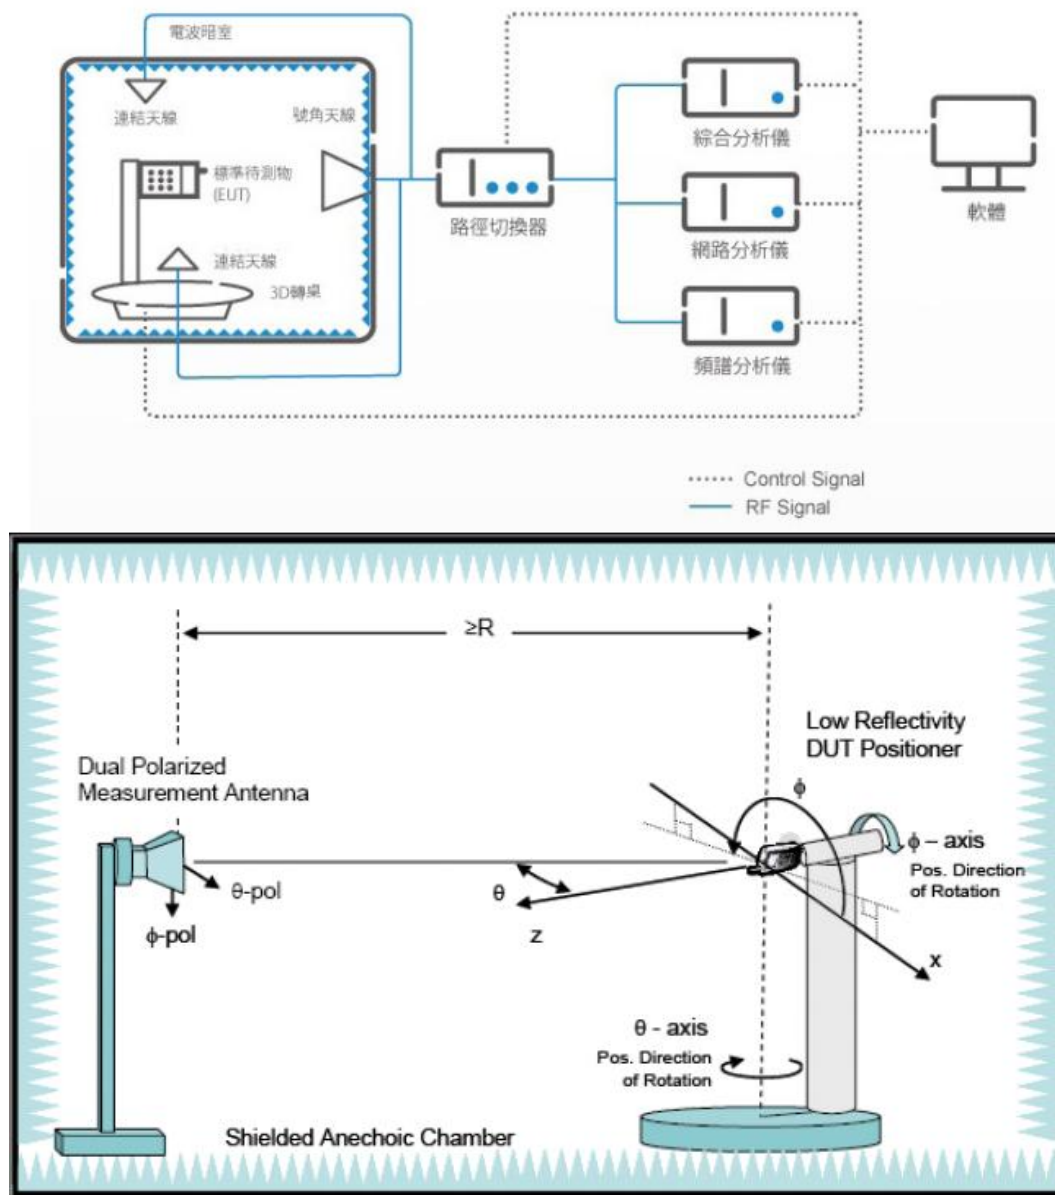

5.2 Network analyzer test report


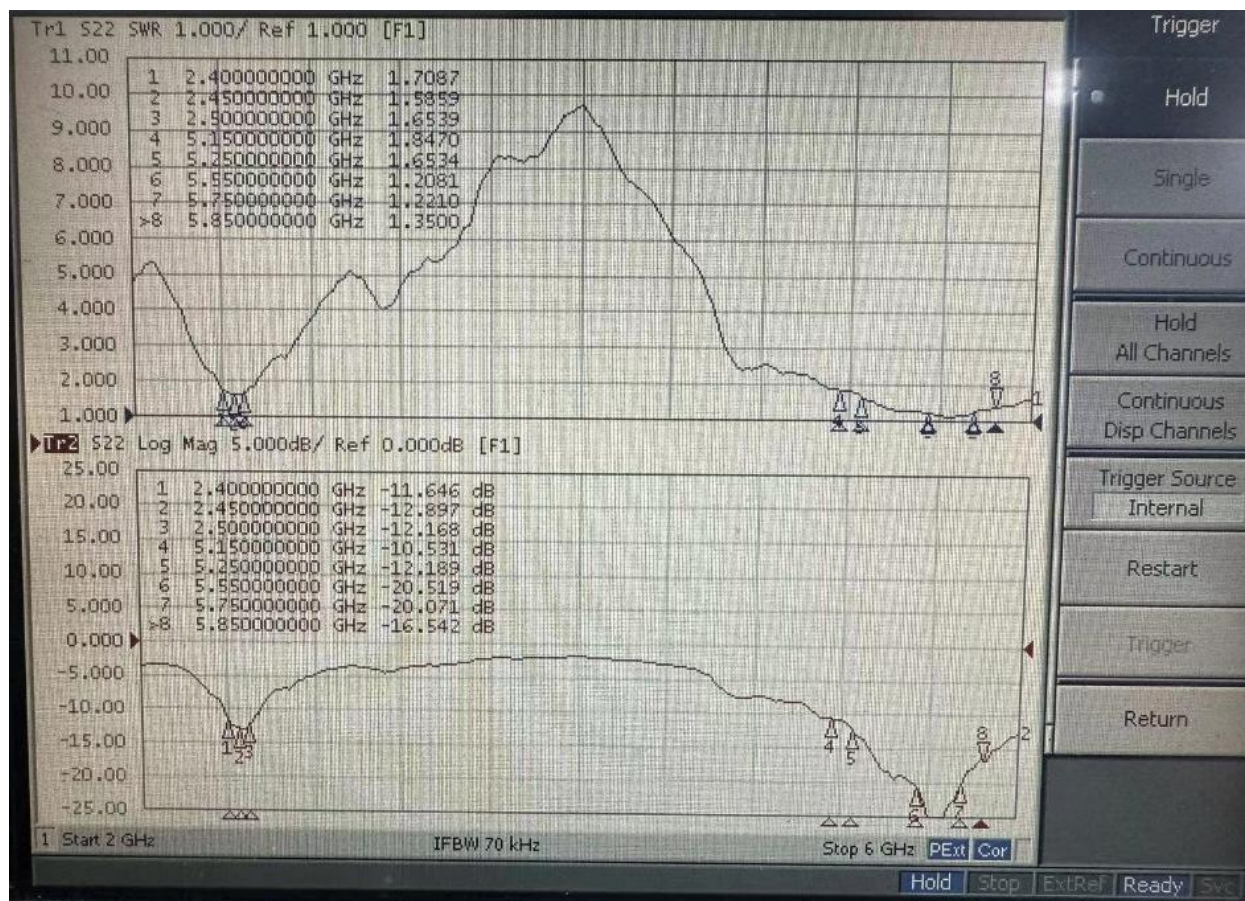


5.3 Passive test data



Frequency	Efficiency (%)	Gain (dBi)	Frequency	Efficiency (%)	Gain (dBi)
2.4GHz	68.82	3.23	5.15GHz	61.48	2.29
2.41GHz	67.58	3.46	5.2GHz	60.69	2.33
2.42GHz	65.94	3.6	5.25GHz	58.15	1.67
2.43GHz	66.95	3.76	5.3GHz	53.46	1.13
2.44GHz	66.77	3.98	5.35GHz	54.17	1.31
2.45GHz	68.9	4.12	5.4GHz	56.33	1.63
2.46GHz	69.17	4.14	5.45GHz	54.55	1.32
2.47GHz	68.97	4.03	5.5GHz	55.17	1.43
2.48GHz	66.33	3.84	5.55GHz	53.12	2.53
2.49GHz	65.25	3.75	5.6GHz	54.08	2.47
2.5GHz	64.23	3.94	5.65GHz	55.25	2.97
			5.7GHz	53.13	2.31
			5.75GHz	55.01	2.76
			5.8GHz	58.25	2.14
			5.85GHz	52.49	1.94

5.4 Directional diagram

2450MHz

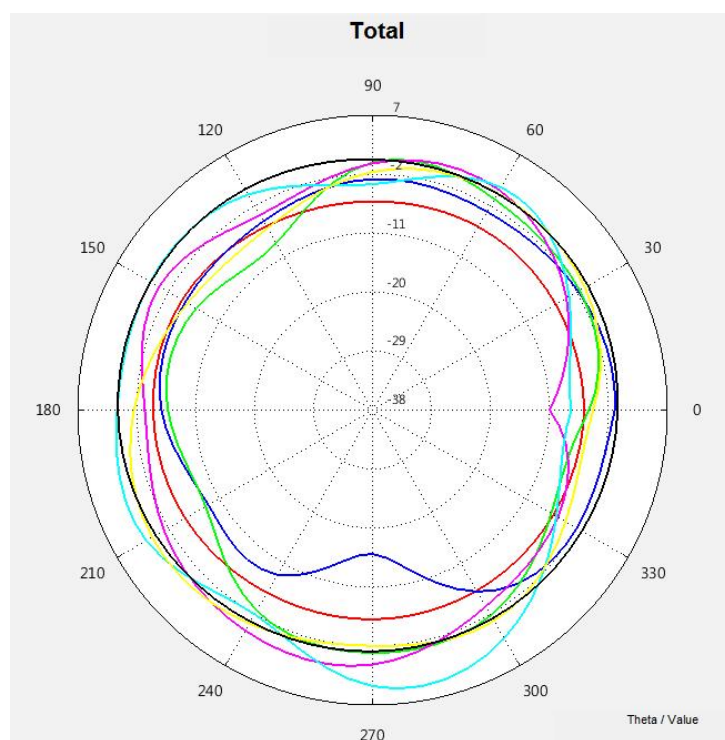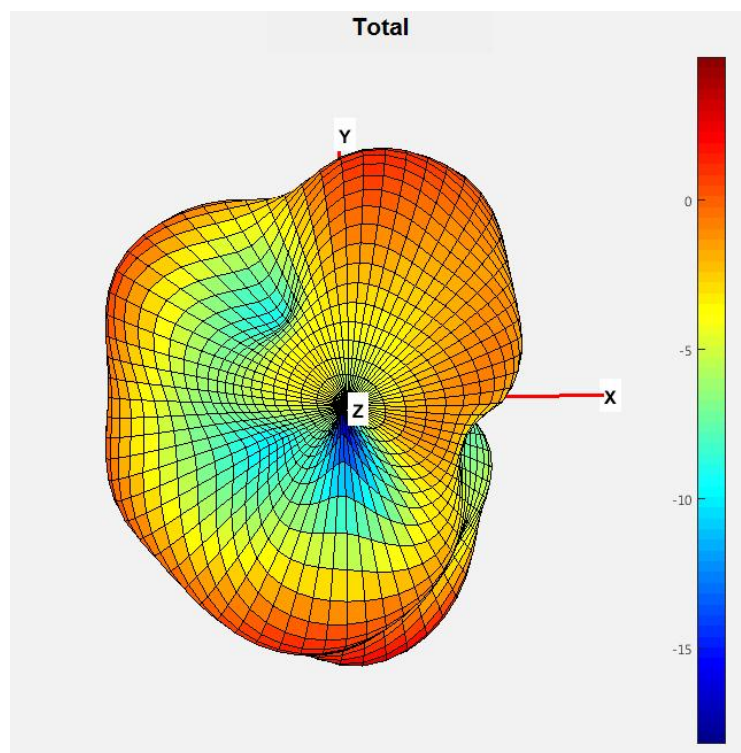


5500MHz

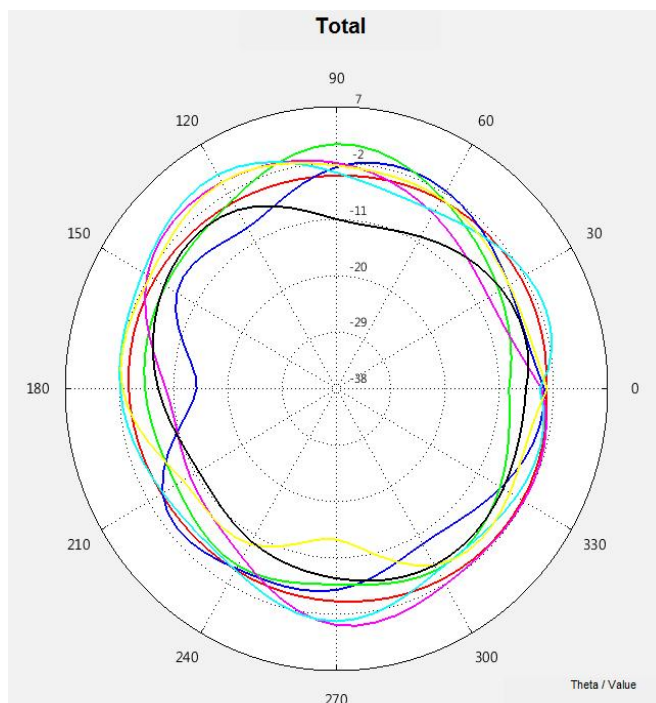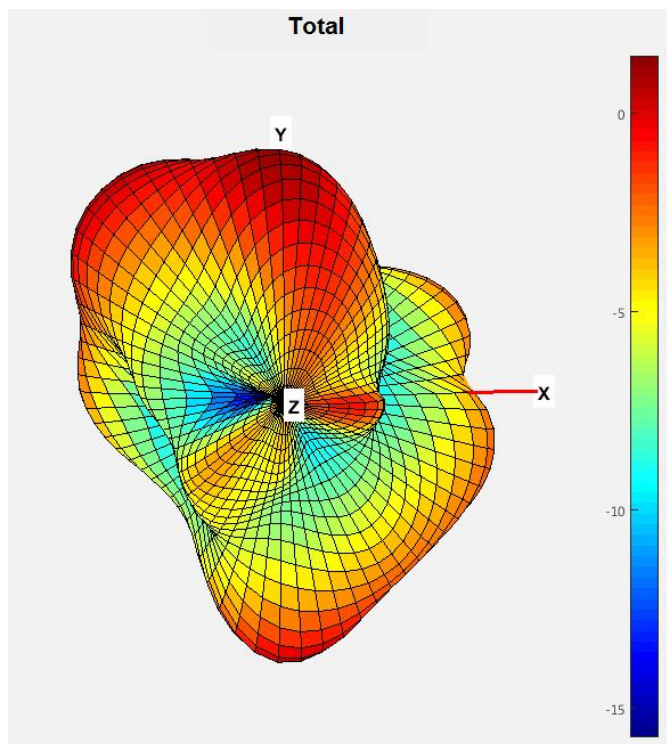


工程图

SIGN	DATE	DESCRIPTION	APPROVER
A0	23.08.23	New drawing	姜文祥

注：端子方向

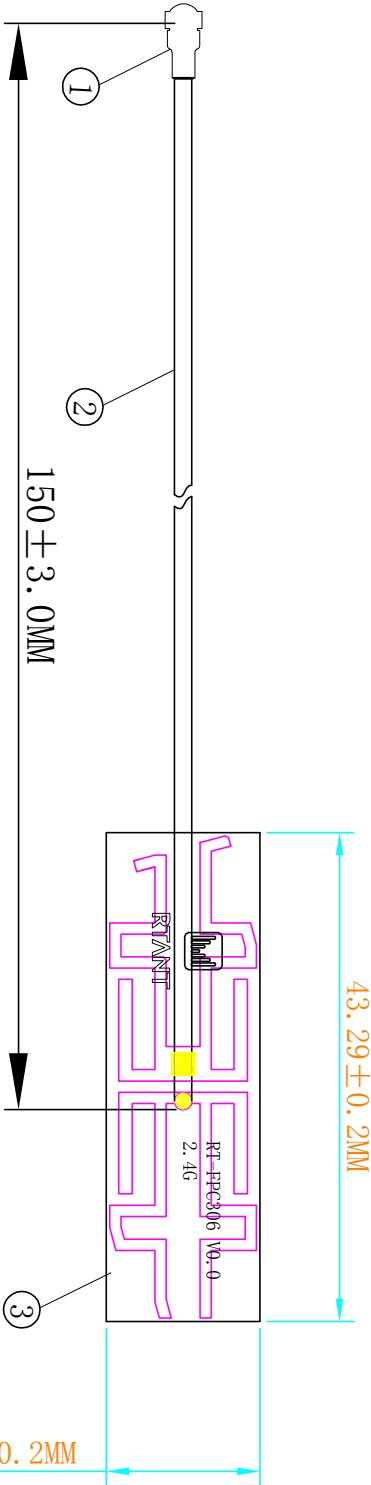

注：端子方向

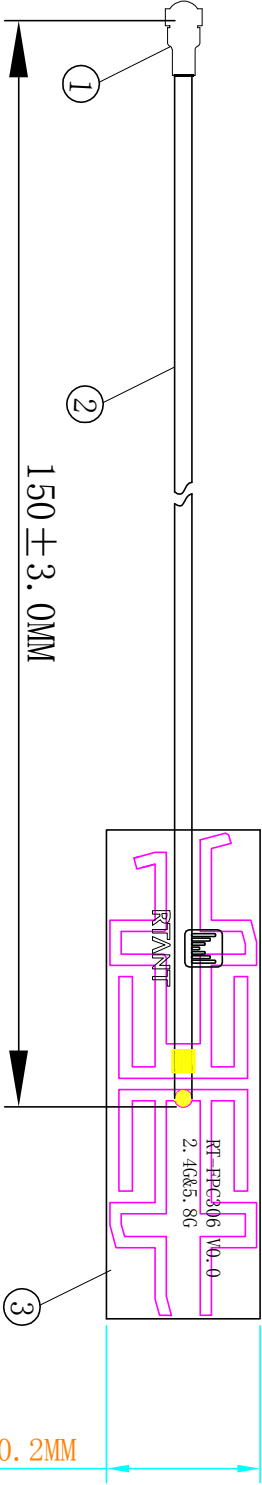


Detail A(IPEX)

剥线尺寸:

$*150 \pm 1$




Detail B(FPC)

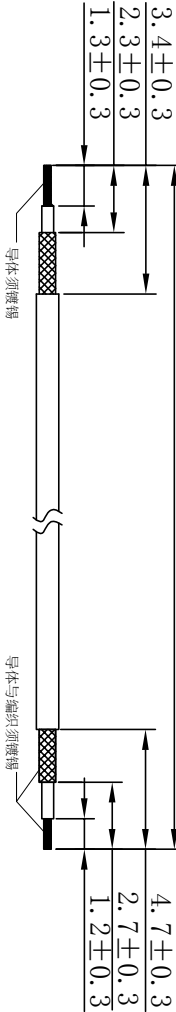

- NOTE:
- 带"*"为重点管制尺寸;
 - 电测:
Frequency Rang:2.4~2.5GHz
5.15~5.85GHz
VSWR:2.0MAX (带机壳)
 - 工作环境:-40℃~+65℃;
 - 环保要求: RoHS 2.0;
 - IPEX方向管制:
100mm±90度;
200mm±135度;
200mm以上不管控;

		导体须镀锡		导体与编织须镀锡	

SIGN	DATE	DESCRIPTION	APPROVER
A0	23.08.23	New drawing	姜文祥

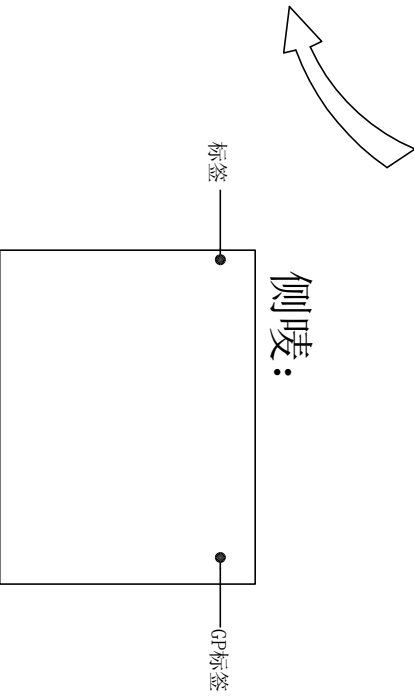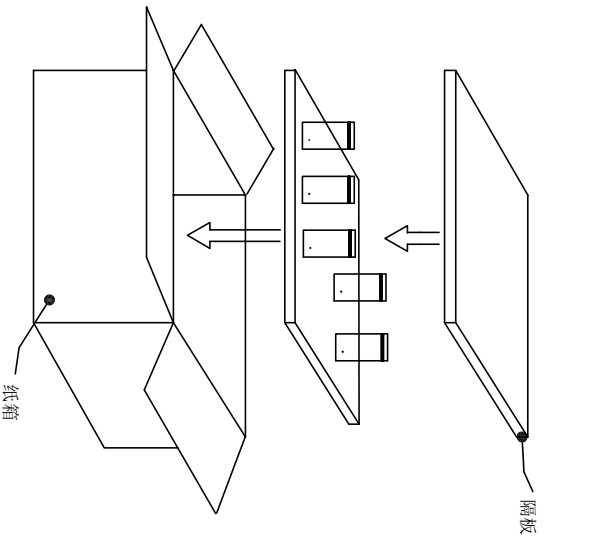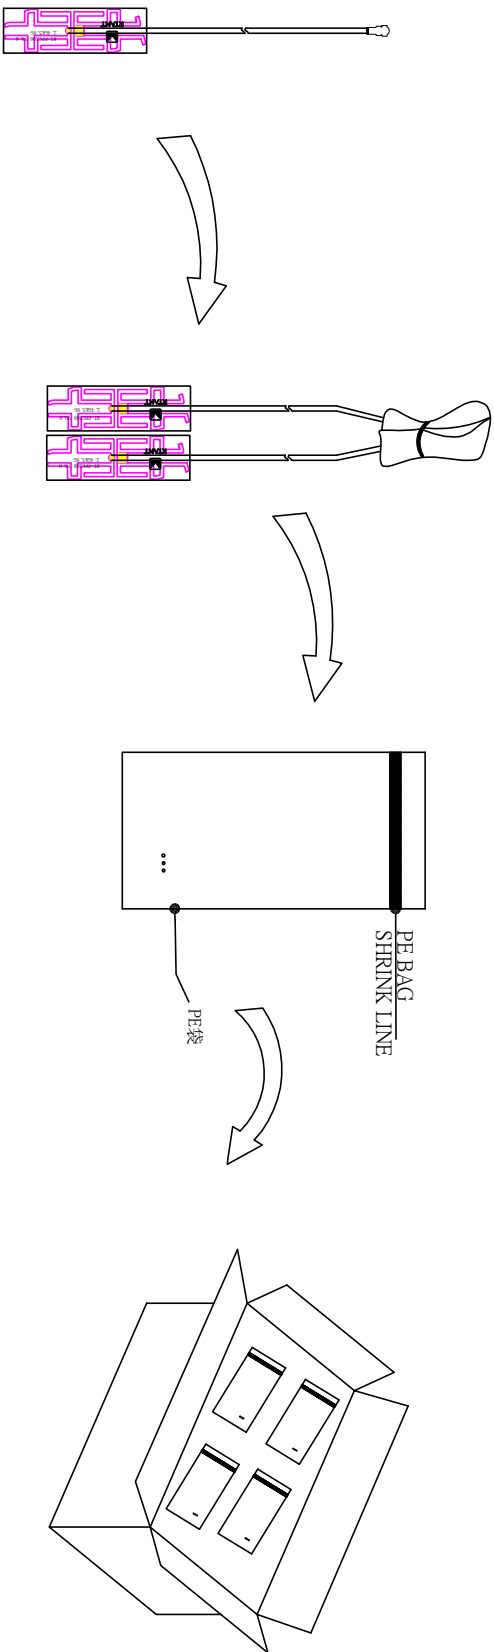

侧唛:

TITLE:	内置PC天线					RTANT COMMUNICATIONS CO.,LTD 东莞市安特通信有限公司 Http://www.rtant.com E-mail:dingtan@rtant.com			
P/N:	---					Tel: 0769-8583836 Fax: 0769-8268273			
CUSTOMER:	瑞江								
DRAW NO.:	RT441-10006-A								
DIMENSIONS TOLERANCES UNLESS OTHERWISE NOTED									
一般公差		XXX	±0.1	XX	±5	SHEET: 1/1		SCALE: NONE	CHECKED
TOLERANCE		X	±0.5	X	±1.0	UNIT: mm		REV:A0	DRAWED
		X	±3.0						姜文祥