






DH5-Ant1-2441-30~1000-PASS

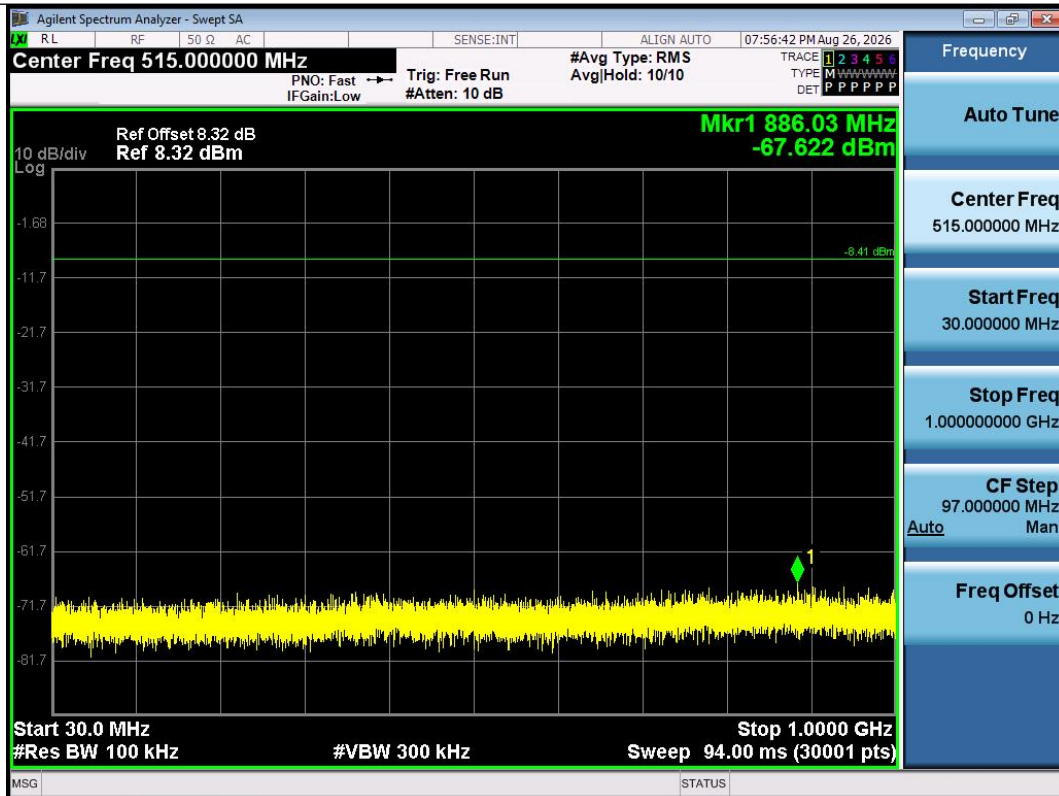


DH5-Ant1-2441-1000~26500-PASS

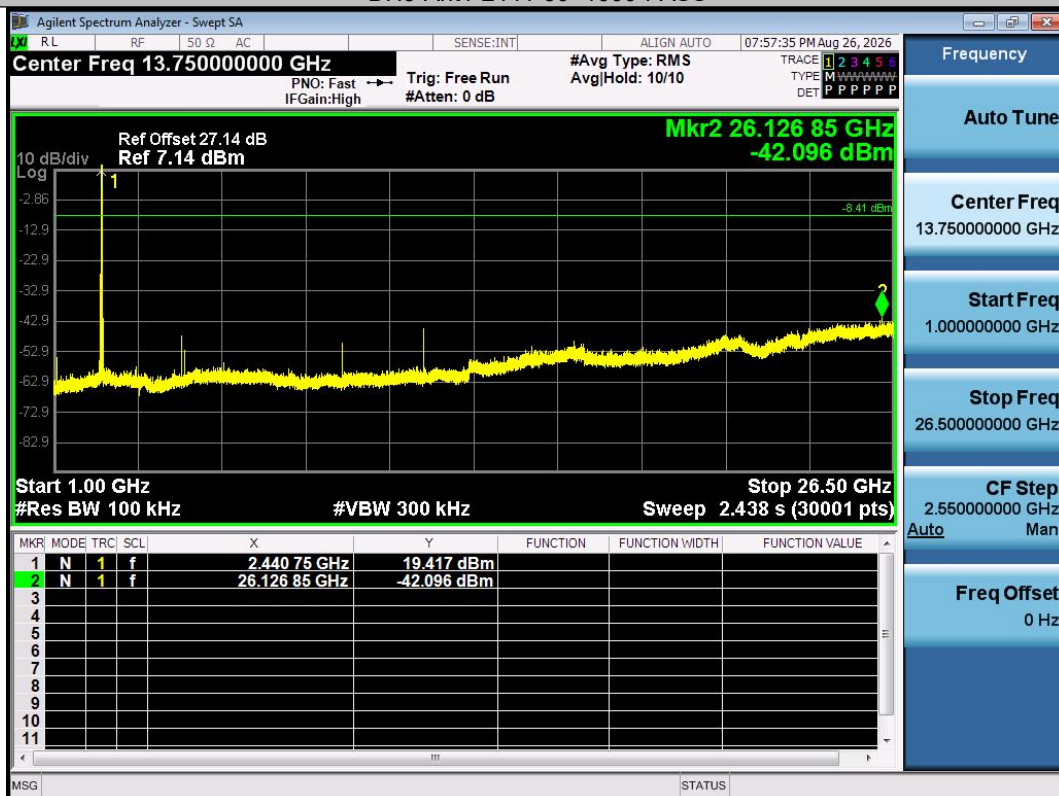


DH5-Ant1-2480-0~Reference-PASS

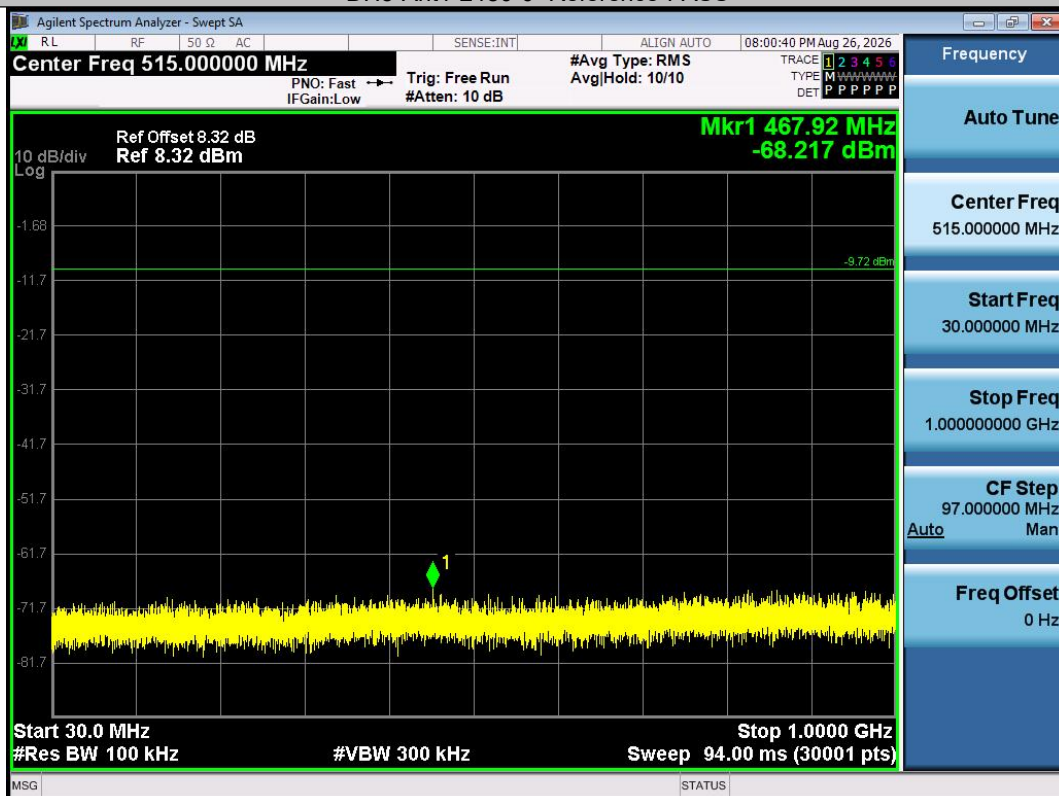


DH5-Ant1-2480-30~1000-PASS

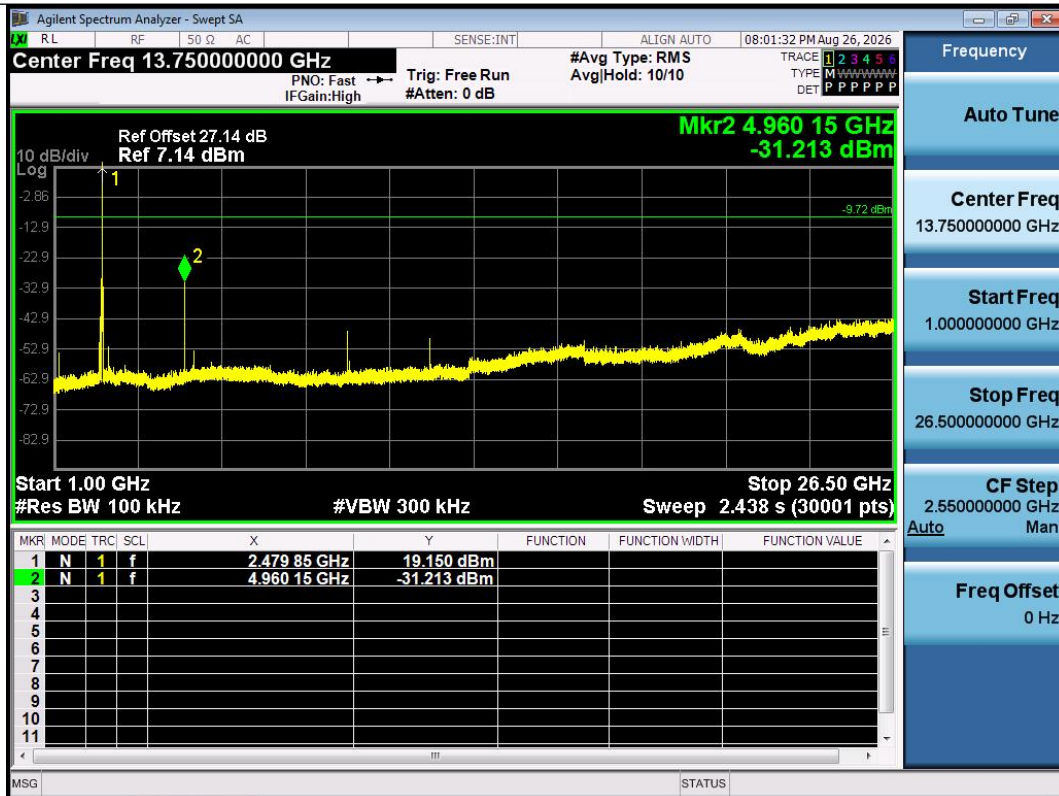


DH5-Ant1-2480-1000~26500-PASS

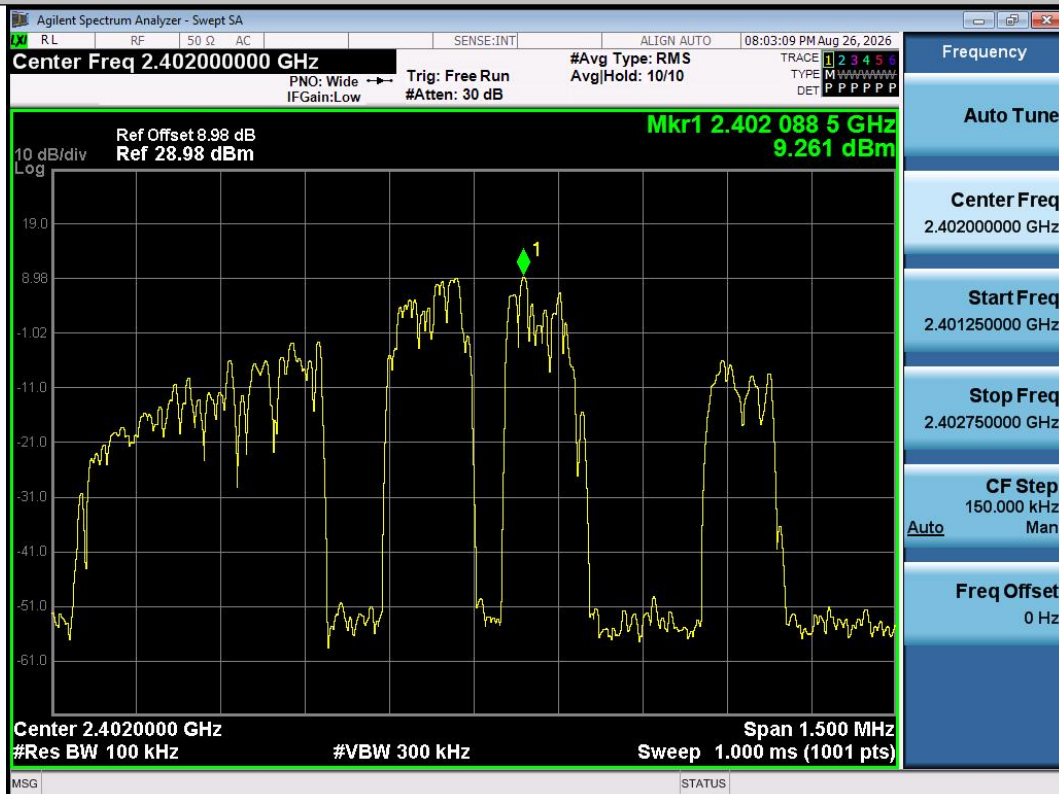

2DH5-Ant1-2402-0~Reference-PASS

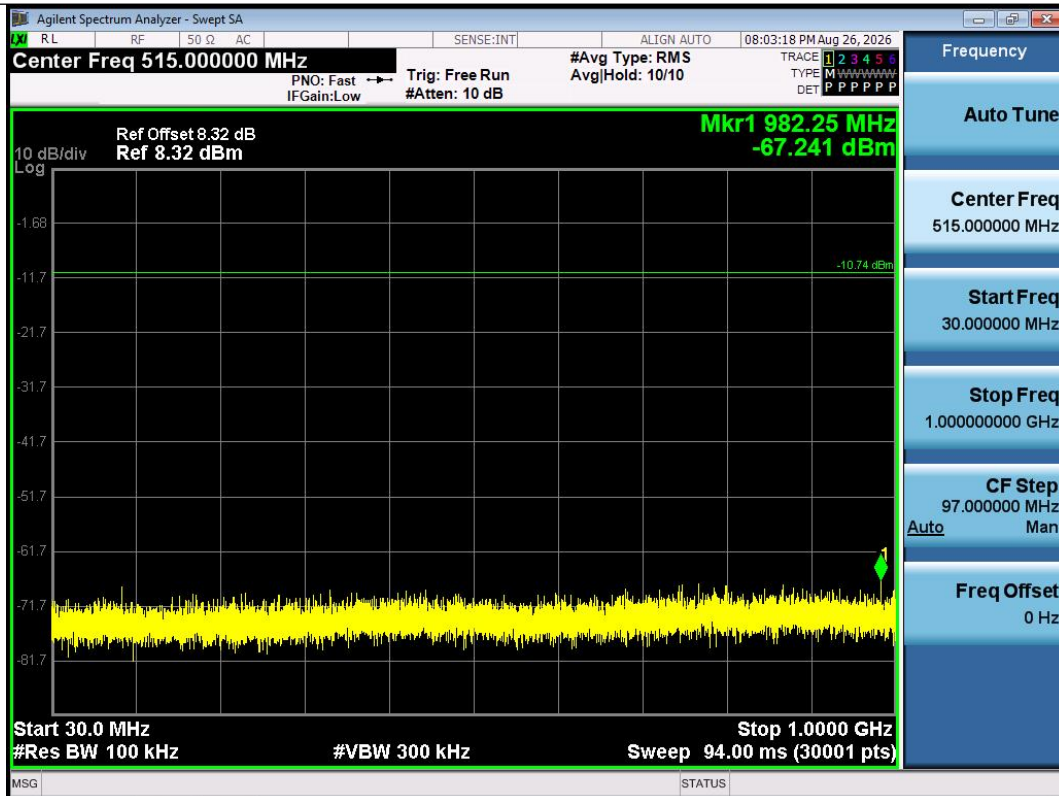


2DH5-Ant1-2402-30~1000-PASS

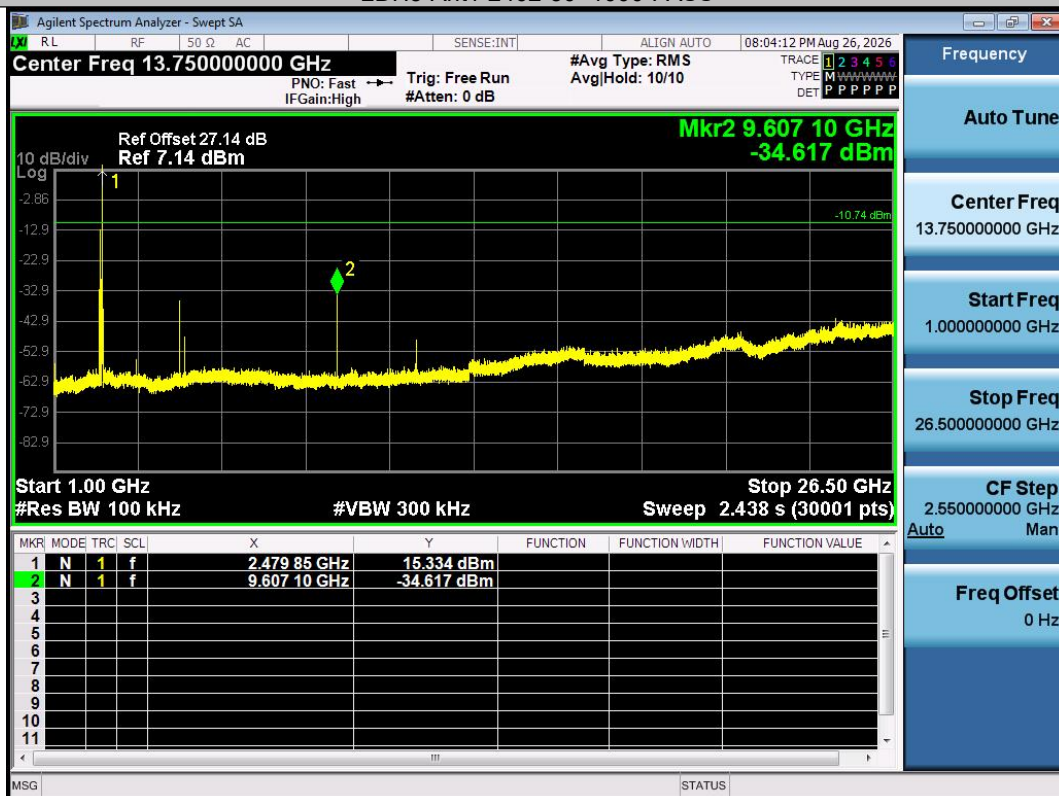


2DH5-Ant1-2402-1000~26500-PASS



2DH5-Ant1-2441-0~Reference-PASS

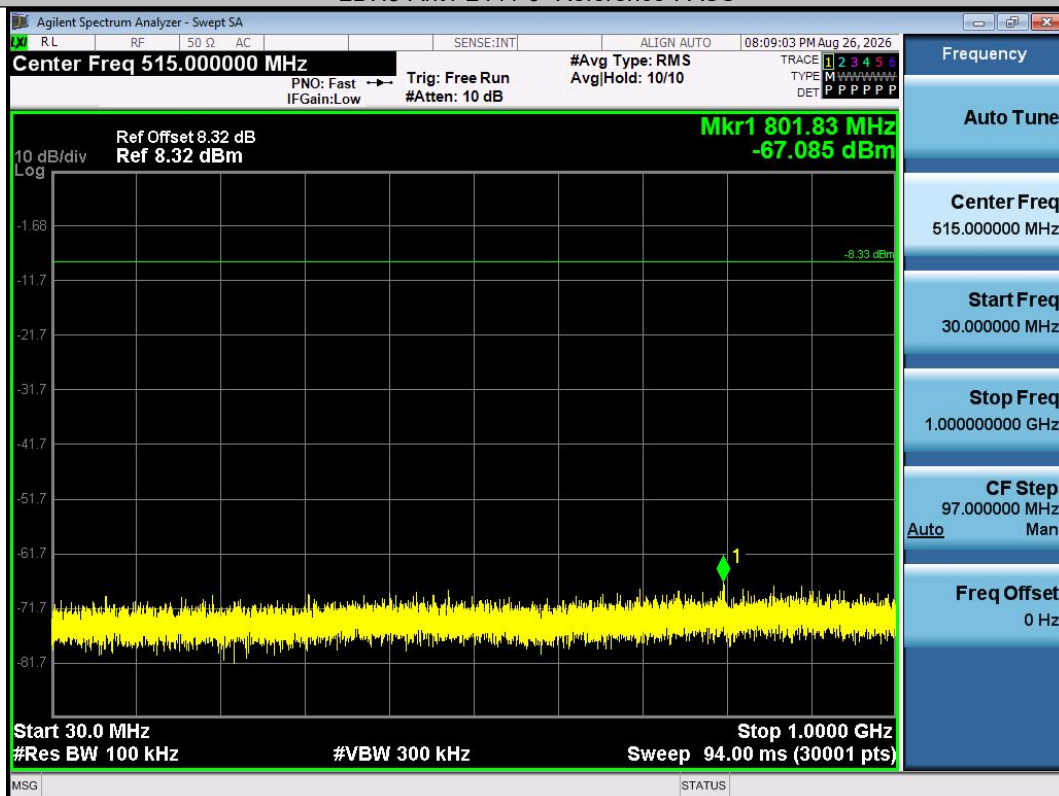


2DH5-Ant1-2441-30~1000-PASS

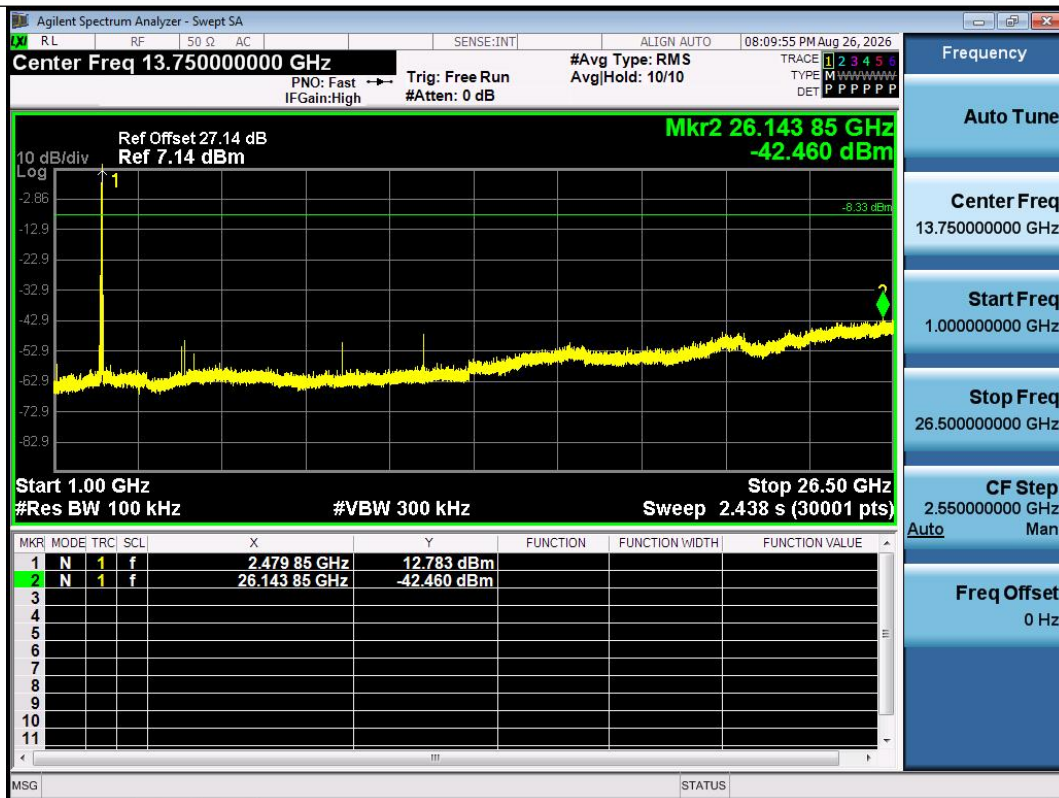


2DH5-Ant1-2441-1000~26500-PASS



2DH5-Ant1-2480-0~Reference-PASS

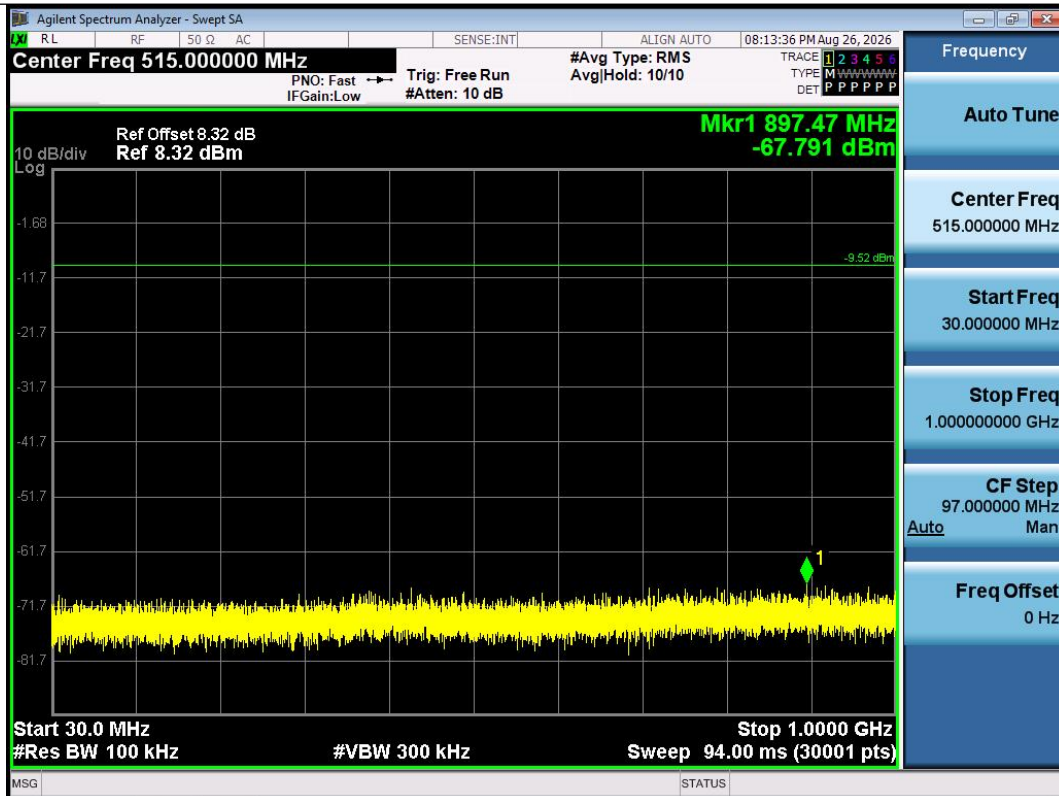


2DH5-Ant1-2480-30~1000-PASS

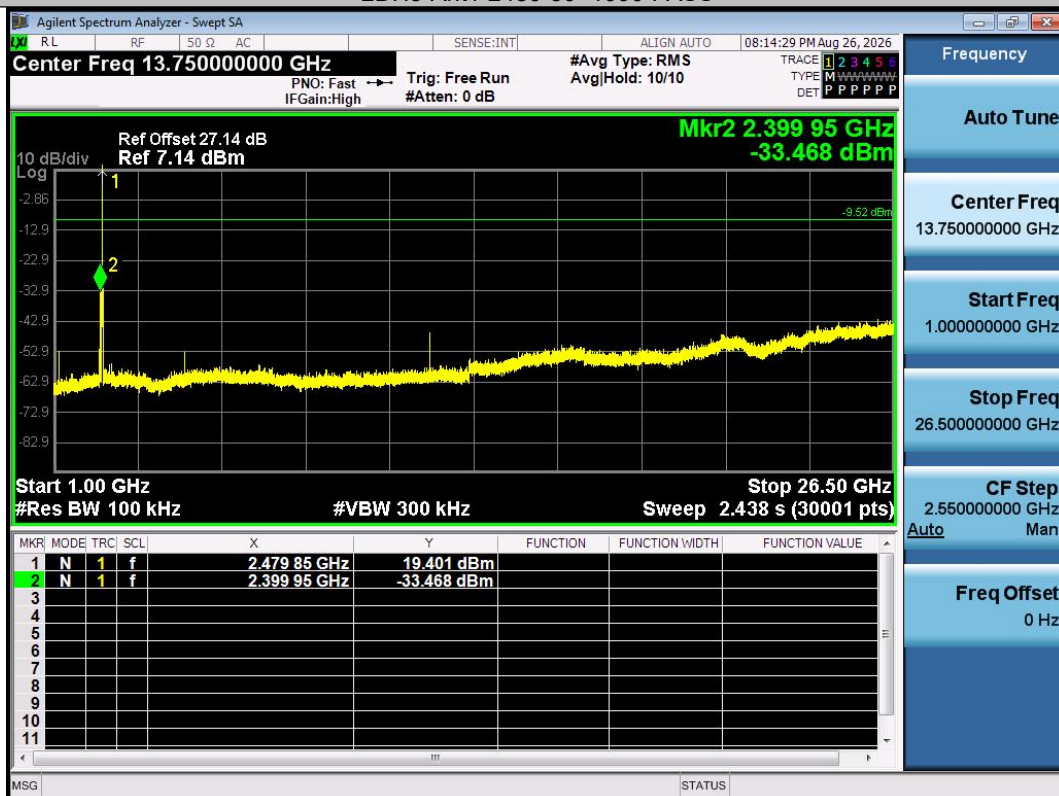


2DH5-Ant1-2480-1000~26500-PASS



3DH5-Ant1-2402-0~Reference-PASS

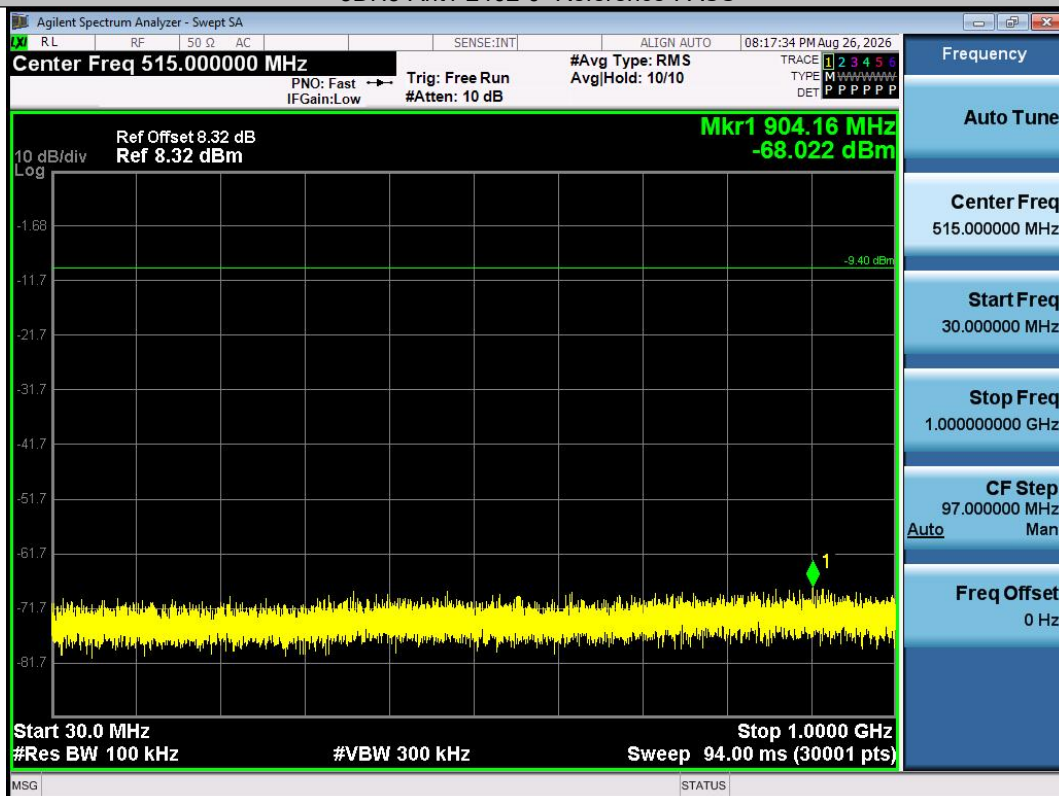


3DH5-Ant1-2402-30~1000-PASS

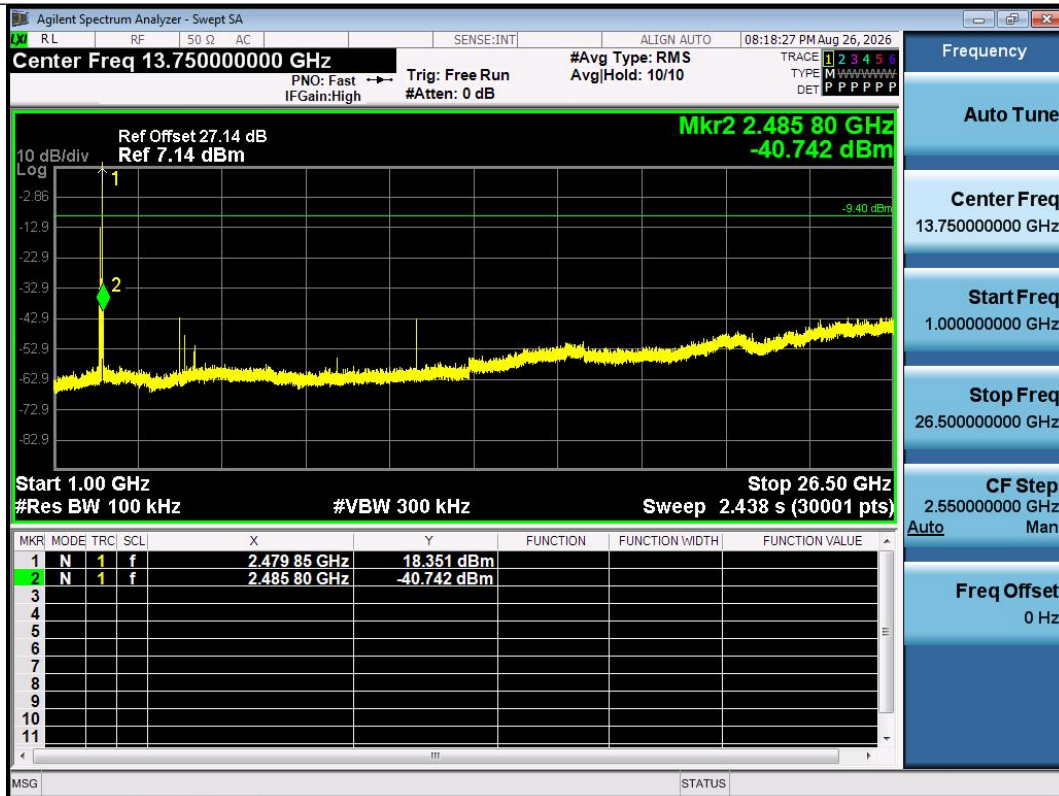


3DH5-Ant1-2402-1000~26500-PASS




3DH5-Ant1-2441-0~Reference-PASS

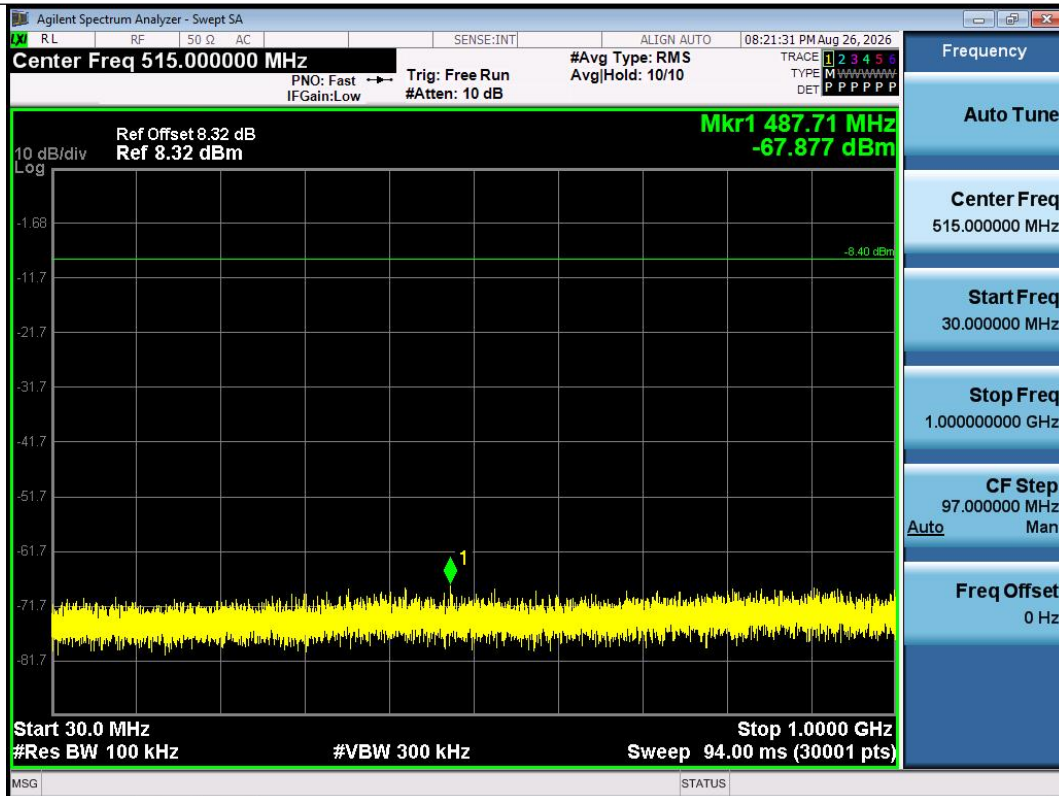

3DH5-Ant1-2441-30~1000-PASS

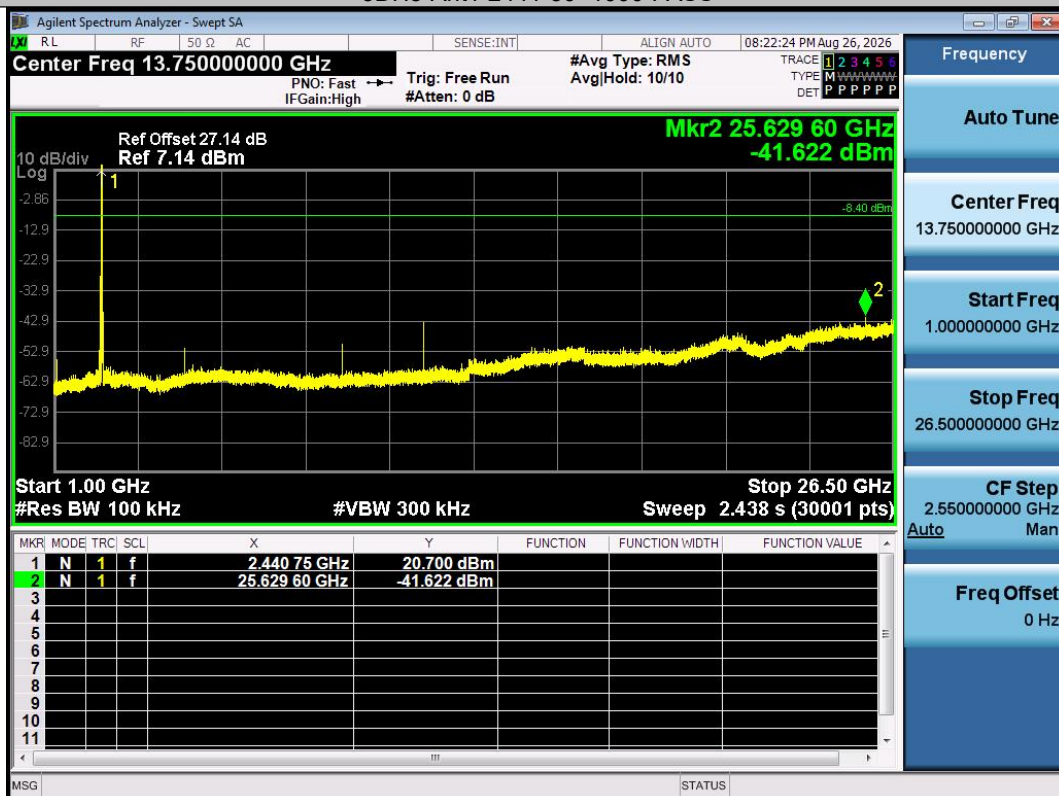

3DH5-Ant1-2441-1000~26500-PASS

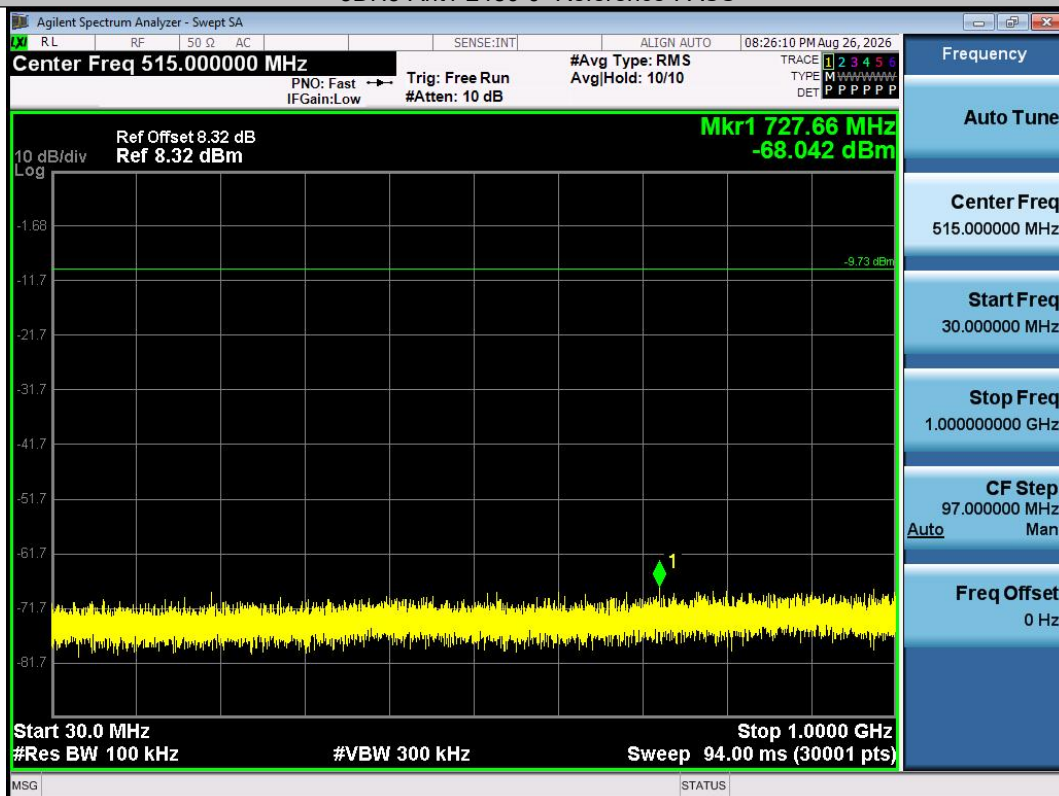



9.7 RADIATED SPURIOUS EMISSION

9.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-Gen and RSS-247

9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

9.7.5 Test Results

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature:	25° C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);


Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 1GHz to 18 GHz.

Test mode: GFSK Frequency: Channel 0: 2402MHz

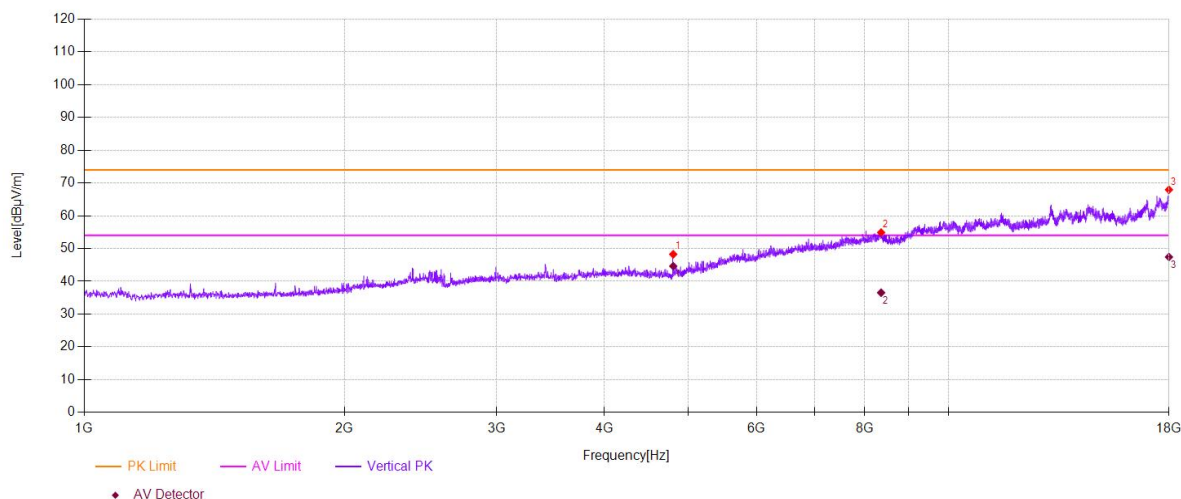


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4803.75	48.26	-12.36	74.00	25.74	PK	Vertical
2	8358.75	54.89	-2.07	74.00	19.11	PK	Vertical
3	17998.125	67.94	12.00	74.00	6.06	PK	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4803.9998	44.63	54.00	9.37	AV	Vertical
2	8358.75	36.54	54.00	17.46	AV	Vertical
3	17998.125	47.42	54.00	6.58	AV	Vertical

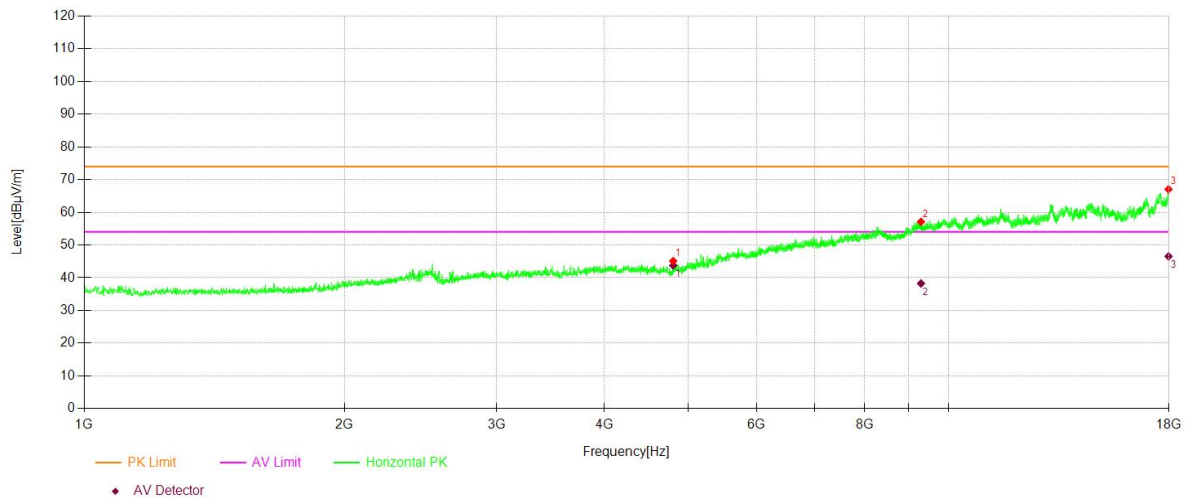


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4803.75	45.11	-12.36	74.00	28.89	PK	Horizontal
2	9296.25	57.10	0.03	74.00	16.90	PK	Horizontal
3	17979.375	67.03	11.24	74.00	6.97	PK	Horizontal

AV Final Data List

NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4803.75	43.76	54.00	10.24	AV	Horizontal
2	9296.25	38.27	54.00	15.73	AV	Horizontal
3	17979.375	46.55	54.00	7.45	AV	Horizontal

Test mode: GFSK Frequency: Channel 39: 2441MHz

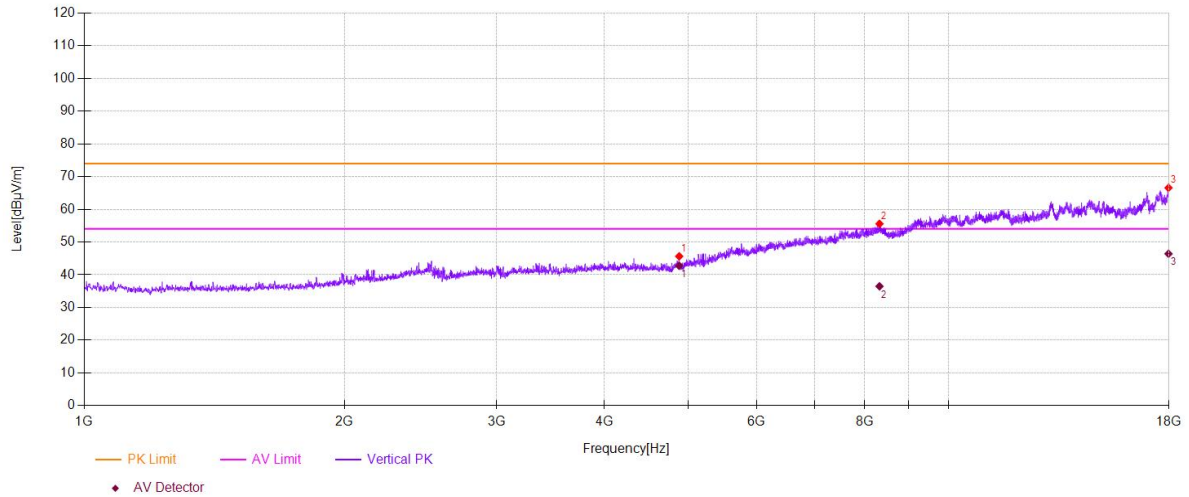


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4880.625	45.65	-12.35	74.00	28.35	PK	Vertical
2	8323.125	55.58	-2.13	74.00	18.42	PK	Vertical
3	17977.5	66.57	11.17	74.00	7.43	PK	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4880.625	42.77	54.00	11.23	AV	Vertical
2	8323.125	36.48	54.00	17.52	AV	Vertical
3	17977.5	46.41	54.00	7.59	AV	Vertical

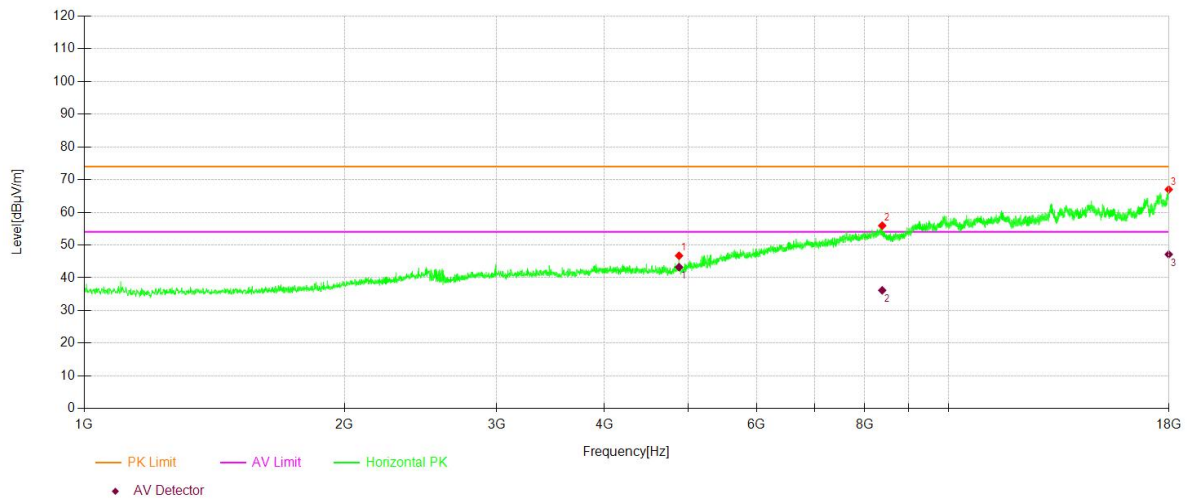


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4878.75	46.74	-12.35	74.00	27.26	PK	Horizontal
2	8383.125	55.92	-2.07	74.00	18.08	PK	Horizontal
3	17988.75	66.98	11.62	74.00	7.02	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4878.9698	43.25	54.00	10.75	AV	Horizontal
2	8383.125	36.17	54.00	17.83	AV	Horizontal
3	17988.75	47.14	54.00	6.86	AV	Horizontal

Test mode: GFSK Frequency: Channel 78: 2480MHz

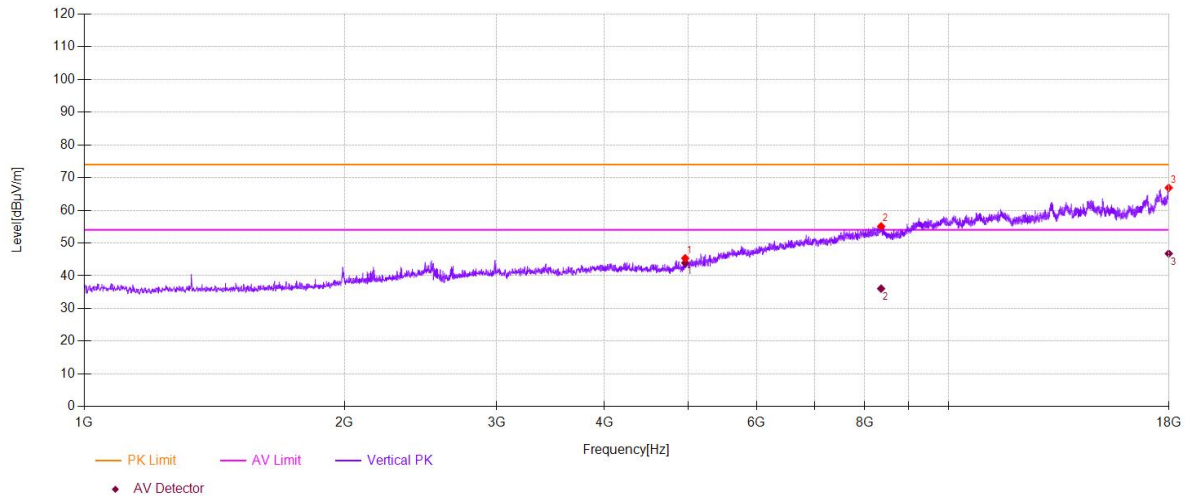

Suspected Data List							
NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4959.375	45.35	-12.20	74.00	28.65	PK	Vertical
2	8358.75	55.09	-2.07	74.00	18.91	PK	Vertical
3	17988.75	66.88	11.62	74.00	7.12	PK	Vertical

AV Final Data List						
NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4959.375	43.93	54.00	10.07	AV	Vertical
2	8358.75	36.07	54.00	17.93	AV	Vertical
3	17988.75	46.78	54.00	7.22	AV	Vertical

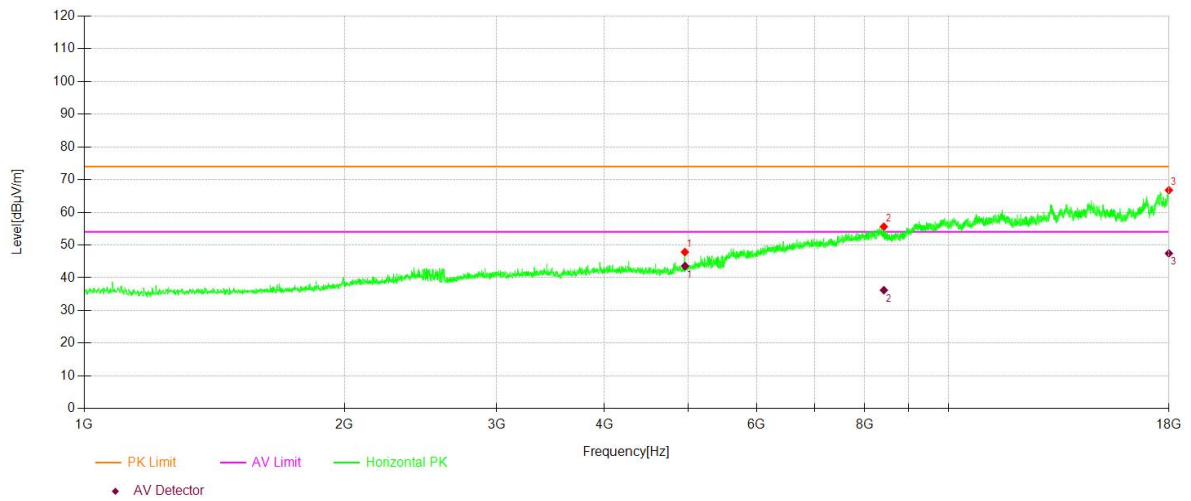

Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	4955.625	47.86	-12.20	74.00	26.14	PK	Horizontal
2	8420.625	55.62	-2.26	74.00	18.38	PK	Horizontal
3	17994.375	66.77	11.85	74.00	7.23	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	4957.0186	43.58	54.00	10.42	AV	Horizontal
2	8420.625	36.20	54.00	17.80	AV	Horizontal
3	17994.375	47.46	54.00	6.54	AV	Horizontal

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK, Hopping) mode have been tested, and the worst(Antenna 1,GFSK, Hopping) result recorded was report as below:

Test Model Spurious Emission in Restricted Band 2310-2390MHz
Channel 0: 2402MHz GFSK

V

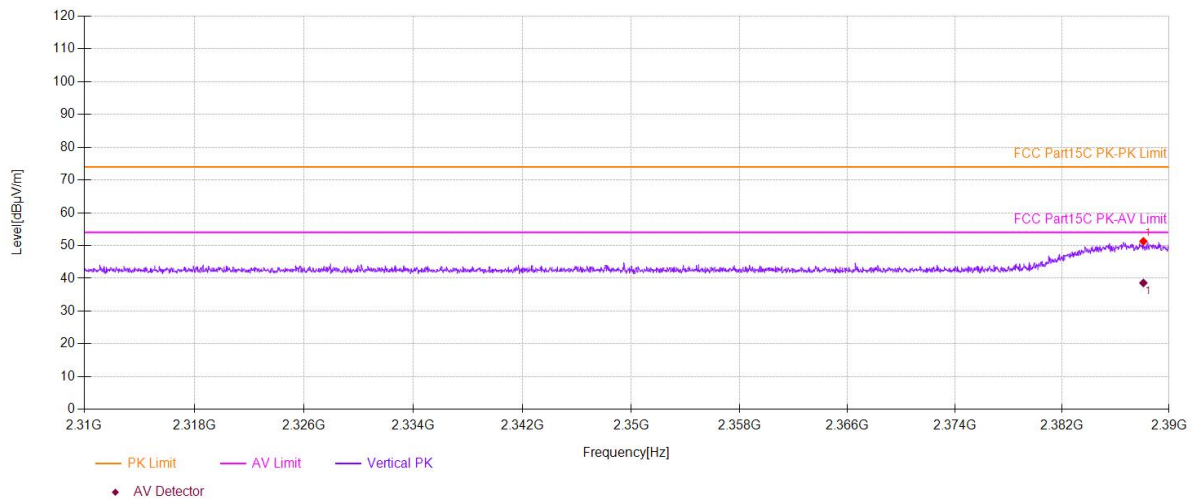


Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2388.0794	51.28	30.28	74.00	22.72	PK	Vertical

AV Final Data List

NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2388.0794	38.59	54.00	15.41	AV	Vertical


Test Model	Spurious Emission in Restricted Band 2310-2390MHz Channel 0: 2402MHz	GFSK	H
------------	---	------	---

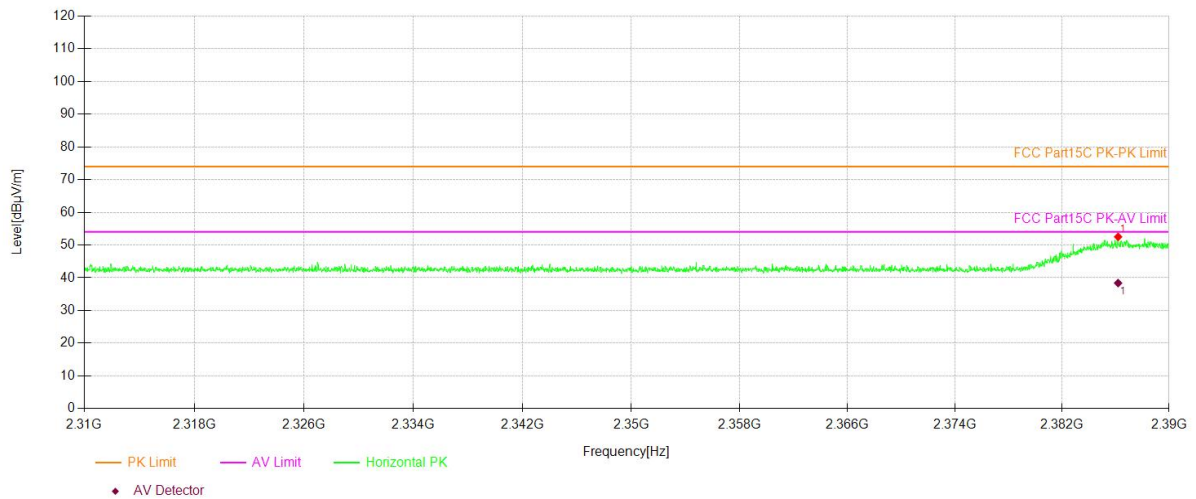

Suspected Data List							
NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.1854	52.51	30.28	74.00	21.49	PK	Horizontal

AV Final Data List						
NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2386.1854	38.38	54.00	15.62	AV	Horizontal


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz Channel 78: 2480MHz	GFSK	V
------------	--	------	---

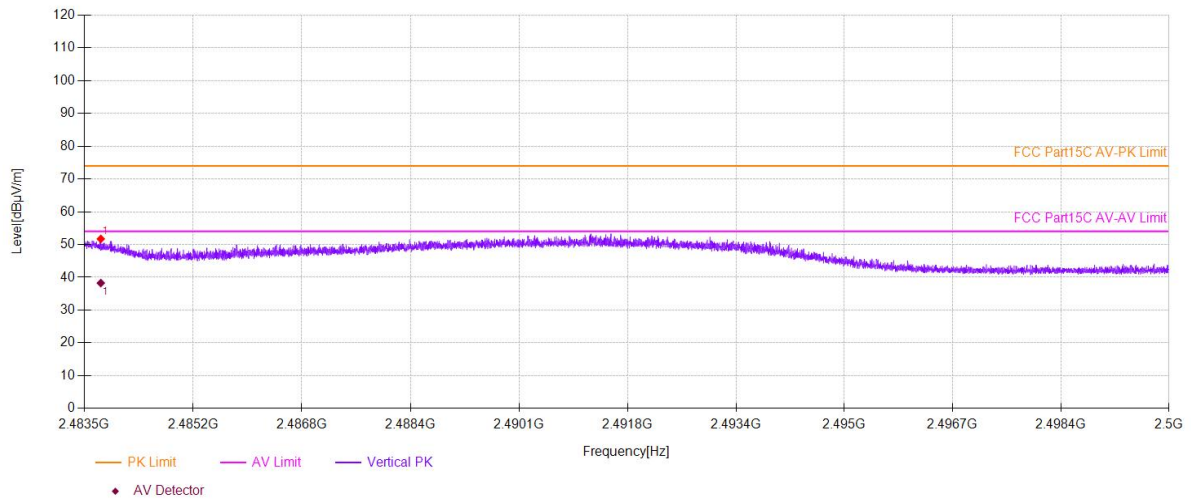

Suspected Data List							
NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.7508	51.71	30.13	74.00	22.29	PK	Vertical

AV Final Data List						
NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2483.7508	38.25	54.00	15.75	AV	Vertical


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz Channel 78: 2480MHz	GFSK	H
------------	--	------	---

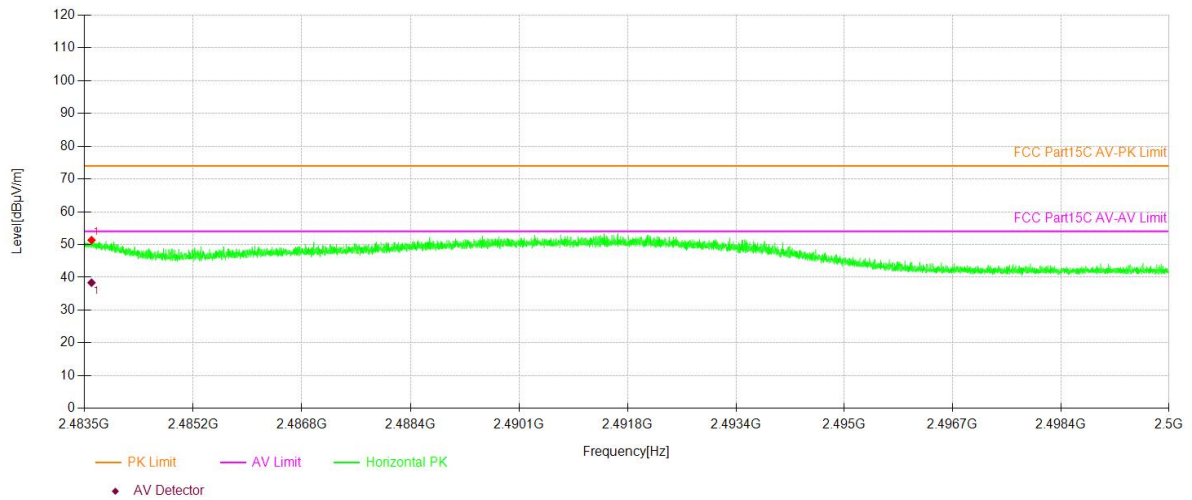

Suspected Data List							
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.6106	51.34	30.12	74.00	22.66	PK	Horizontal

AV Final Data List						
NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2483.6106	38.36	54.00	15.64	AV	Horizontal

Test Model	Spurious Emission in Restricted Band2310-2390MHz and 2400-2483.5MHz Hopping	GFSK	V
------------	---	------	---

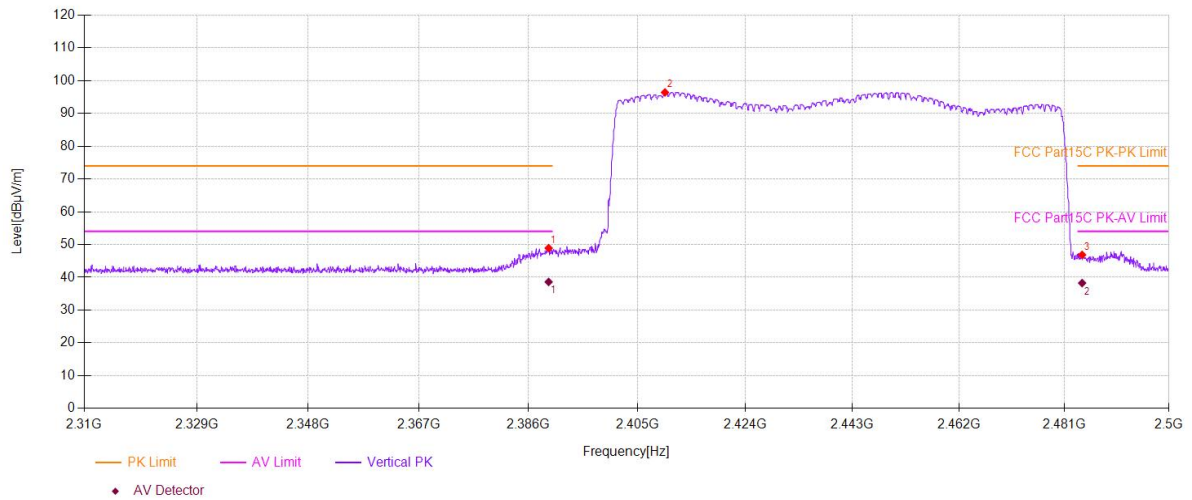


Suspected Data List							
NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.5098	48.90	30.29	74.00	25.10	PK	Vertical
2	2409.8466	96.41	30.25	-	-	PK	Vertical
3	2484.2247	46.85	30.12	74.00	27.15	PK	Vertical

AV Final Data List						
NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2389.5098	38.60	54.00	15.40	AV	Vertical
2	2484.2247	38.26	54.00	15.74	AV	Vertical

Test Model

Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
Hopping GFSK H

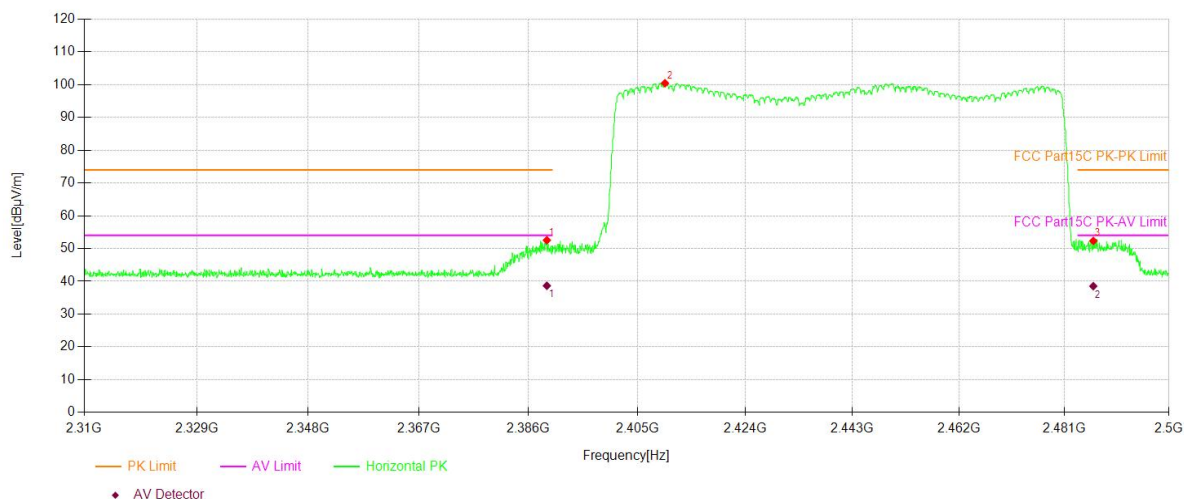

Suspected Data List

NO.	Freq. [MHz]	Level [dBμV/m]	Factor[dB/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2389.1931	52.53	30.29	74.00	21.47	PK	Horizontal
2	2409.8466	100.42	30.25	-	-	PK	Horizontal
3	2486.2521	52.32	30.12	74.00	21.68	PK	Horizontal

AV Final Data List


NO.	Freq. [MHz]	AV Value [dBμV/m]	AV Limit [dBμV/m]	AV Margin [dB]	Detector	Polarity
1	2389.1931	38.65	54.00	15.35	AV	Horizontal
2	2486.2521	38.53	54.00	15.47	AV	Horizontal

■ Spurious Emission below 1GHz(30MHz to 1GHz)

All the antenna(Antenna 1) and modes(GFSK, $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst(Antenna 1,GFSK) result recorded was report as below:

■


Mode:	BT 2402
Environment:	Temp: 25°C; Humi:60%

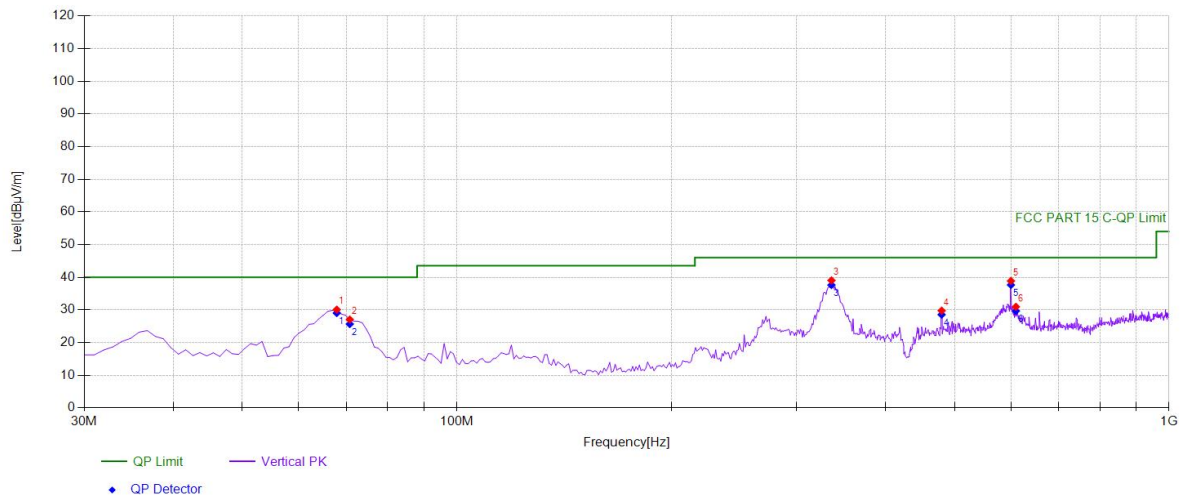

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	43.08	-12.98	30.10	PK	40.00	9.90	Vertical
2	70.7808	40.45	-13.40	27.05	PK	40.00	12.95	Vertical
3	335.855	45.37	-6.36	39.01	PK	46.00	6.99	Vertical
4	479.559	32.85	-3.09	29.76	PK	46.00	16.24	Vertical
5	599.96	38.69	0.16	38.85	PK	46.00	7.15	Vertical
6	609.669	31.19	-0.23	30.96	PK	46.00	15.04	Vertical

Final Data List						
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	67.8679	42.01	-12.98	29.03	40.00	10.97
2	70.7808	39.06	-13.40	25.66	40.00	14.34
3	335.8559	43.98	-6.36	37.62	46.00	8.38
4	479.5596	31.64	-3.09	28.55	46.00	17.45
5	599.96	37.48	0.16	37.64	46.00	8.36
6	609.6697	29.9	-0.23	29.67	46.00	16.33

Mode:	BT 2402
Environment:	Temp: 25°C; Humi:60%

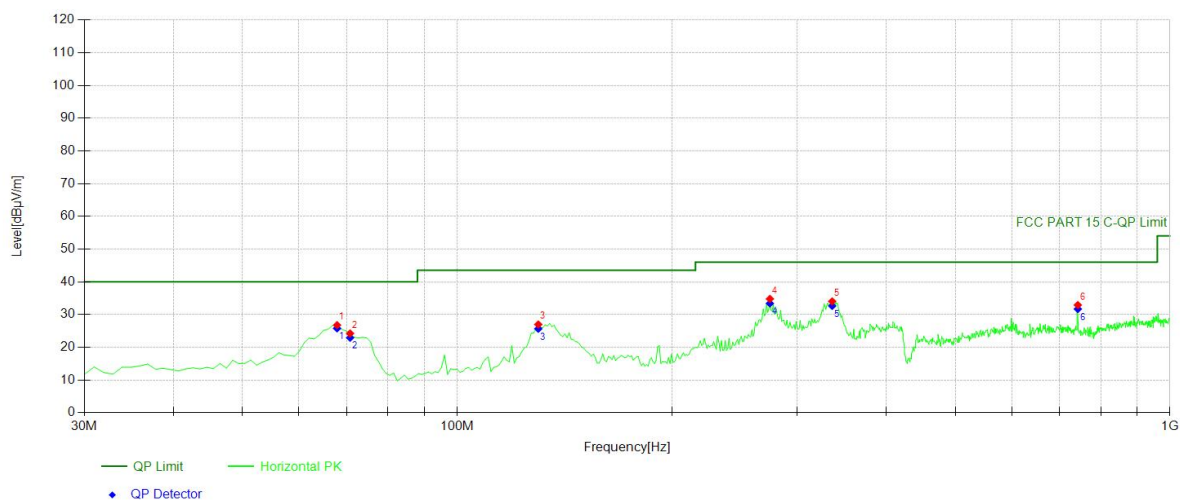


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	39.74	-12.98	26.76	PK	40.00	13.24	Horizontal
2	70.7808	37.61	-13.40	24.21	PK	40.00	15.79	Horizontal
3	130.01	40.55	-13.59	26.96	PK	43.50	16.54	Horizontal
4	274.684	43.81	-9.03	34.78	PK	46.00	11.22	Horizontal
5	335.855	40.38	-6.36	34.02	PK	46.00	11.98	Horizontal
6	742.692	32.11	0.79	32.90	PK	46.00	13.10	Horizontal

Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	67.8679	38.74	-12.98	25.76	40.00	14.24
2	70.7808	36.29	-13.40	22.89	40.00	17.11
3	130.01	39.23	-13.59	25.64	43.50	17.86
4	274.6847	42.41	-9.03	33.38	46.00	12.62
5	335.8559	38.98	-6.36	32.62	46.00	13.38
6	742.6927	30.88	0.79	31.67	46.00	14.33

Mode:	BT 2441
Environment:	Temp: 25°C; Humi:60%

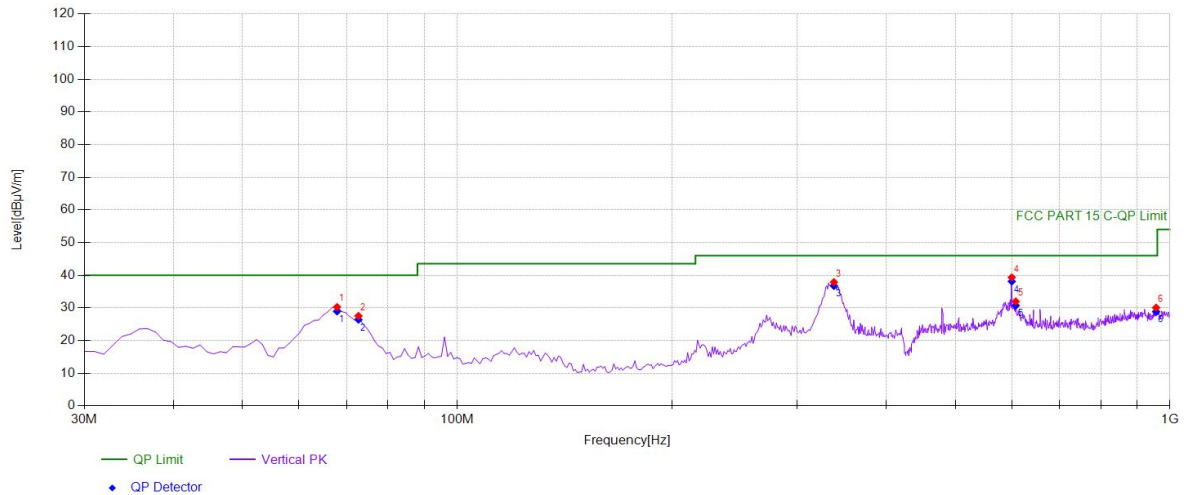


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	43.26	-12.98	30.28	PK	40.00	9.72	Vertical
2	72.7227	41.24	-13.69	27.55	PK	40.00	12.45	Vertical
3	337.797	44.11	-6.22	37.89	PK	46.00	8.11	Vertical
4	599.96	39.18	0.16	39.34	PK	46.00	6.66	Vertical
5	607.727	32.11	-0.15	31.96	PK	46.00	14.04	Vertical
6	956.306	26.26	3.81	30.07	PK	46.00	15.93	Vertical

Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	67.8679	41.92	-12.98	28.94	40.00	11.06
2	72.7227	40.08	-13.69	26.39	40.00	13.61
3	337.7978	42.95	-6.22	36.73	46.00	9.27
4	599.96	37.94	0.16	38.10	46.00	7.90
5	607.7277	30.87	-0.15	30.72	46.00	15.28
6	956.3063	25.02	3.81	28.83	46.00	17.17


Mode:	BT 2441
Environment:	Temp: 25°C; Humi:60%

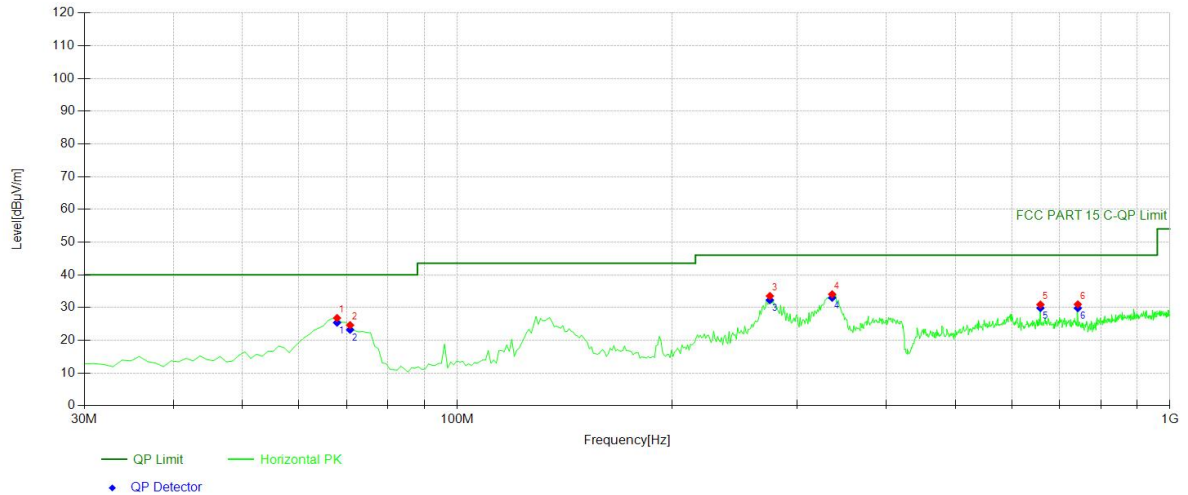

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	39.77	-12.98	26.79	PK	40.00	13.21	Horizontal
2	70.7808	38.01	-13.40	24.61	PK	40.00	15.39	Horizontal
3	274.684	42.54	-9.03	33.51	PK	46.00	12.49	Horizontal
4	335.855	40.40	-6.36	34.04	PK	46.00	11.96	Horizontal
5	658.218	31.09	-0.20	30.89	PK	46.00	15.11	Horizontal
6	742.692	30.17	0.79	30.96	PK	46.00	15.04	Horizontal

Final Data List						
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	67.8679	38.35	-12.98	25.37	40.00	14.63
2	70.7808	36.59	-13.40	23.19	40.00	16.81
3	274.6847	41.3	-9.03	32.27	46.00	13.73
4	335.8559	39.34	-6.36	32.98	46.00	13.02
5	658.2182	30.03	-0.20	29.83	46.00	16.17
6	742.6927	29.02	0.79	29.81	46.00	16.19

Mode:	BT 2480
Environment:	Temp: 25°C; Humi:60%

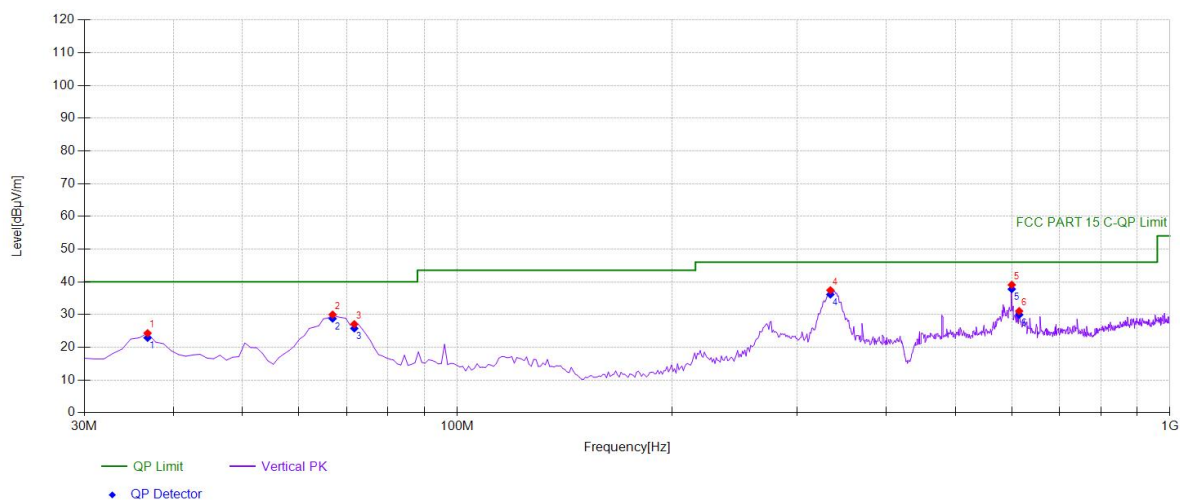


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	36.71	-12.42	24.29	PK	40.00	15.71	Vertical
2	66.8969	42.80	-12.83	29.97	PK	40.00	10.03	Vertical
3	71.7518	40.61	-13.55	27.06	PK	40.00	12.94	Vertical
4	333.913	43.92	-6.50	37.42	PK	46.00	8.58	Vertical
5	599.96	38.90	0.16	39.06	PK	46.00	6.94	Vertical
6	614.524	31.50	-0.44	31.06	PK	46.00	14.94	Vertical

Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	35.3	-12.42	22.88	40.00	17.12
2	66.8969	41.57	-12.83	28.74	40.00	11.26
3	71.7518	39.3	-13.55	25.75	40.00	14.25
4	333.9139	42.61	-6.50	36.11	46.00	9.89
5	599.96	37.59	0.16	37.75	46.00	8.25
6	614.5245	30.37	-0.44	29.93	46.00	16.07

Mode:	BT 2480
Environment:	Temp: 25°C; Humi:60%

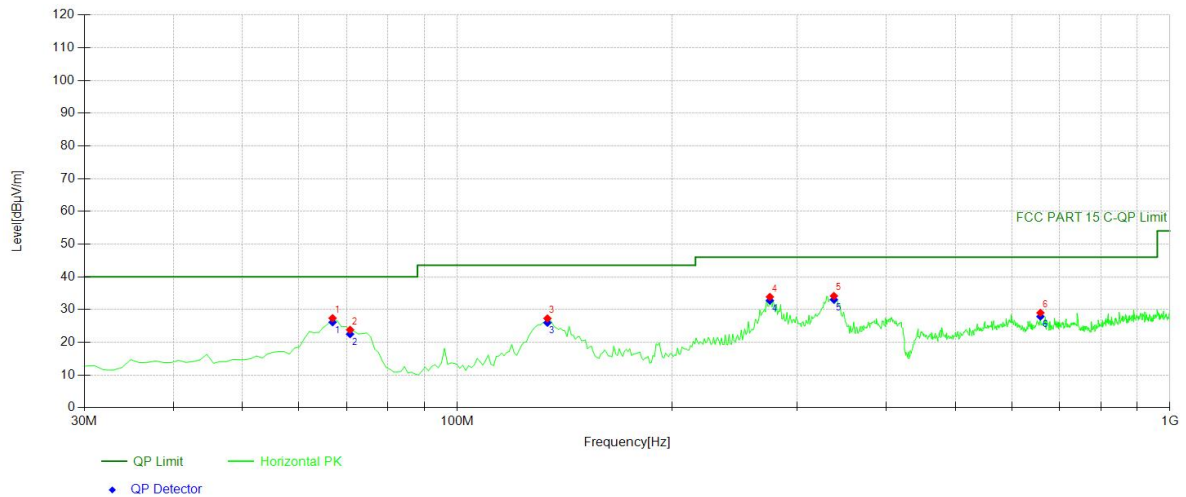

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	66.8969	40.18	-12.83	27.35	PK	40.00	12.65	Horizontal
2	70.7808	37.19	-13.40	23.79	PK	40.00	16.21	Horizontal
3	133.893	41.14	-13.86	27.28	PK	43.50	16.22	Horizontal
4	274.684	42.89	-9.03	33.86	PK	46.00	12.14	Horizontal
5	337.797	40.36	-6.22	34.14	PK	46.00	11.86	Horizontal
6	658.218	29.19	-0.20	28.99	PK	46.00	17.01	Horizontal

Final Data List						
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	66.8969	38.94	-12.83	26.11	40.00	13.89
2	70.7808	35.87	-13.40	22.47	40.00	17.53
3	133.8939	39.82	-13.86	25.96	43.50	17.54
4	274.6847	41.75	-9.03	32.72	46.00	13.28
5	337.7978	39.22	-6.22	33.00	46.00	13.00
6	658.2182	28.05	-0.20	27.85	46.00	18.15

9.8 CONDUCTED EMISSION TEST

9.8.1 Applicable Standard

According to FCC Part 15.207
According to IC RSS-Gen 8.8

9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

9.8.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below: