

承 认 书

SPECIFICATION FOR APPROVAL

客 户 CUSTOMER:	深圳市动致科技有限公司 SHENZHEN DYNAMIC TECHNOLOGY CO.,LTD
客 户 料 号: CUST P/N:	
天 夏 料 号: TX P/N:	TX-ZKZX-Y0825XS-2.8uh
产 品 型 号 DESC:	φ 15*20.5-0.08*24P-8TS-8mm-2.8uh-25CC
日 期 DATE:	2022/07/25
版 本: Version:	A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
曾伟浩	张燕	罗勇军	

深圳市天夏科技有限公司

地址：深圳市宝安区33区C33科创园523-525室

Room 523-525, C33 Kechuang Park, Area 33, Bao'
an District, Shenzhen, China

TEL: 18718699959

E-mail: 2321113770@qq.com


Version Change History

[illegible]

SPECIFICATION

产 品 型 号: DESC	φ 15*20.5-0.08*24P-8TS-8mm-2.8uh-25CC	Rev: A.0	客户CUST:	
			客户料号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

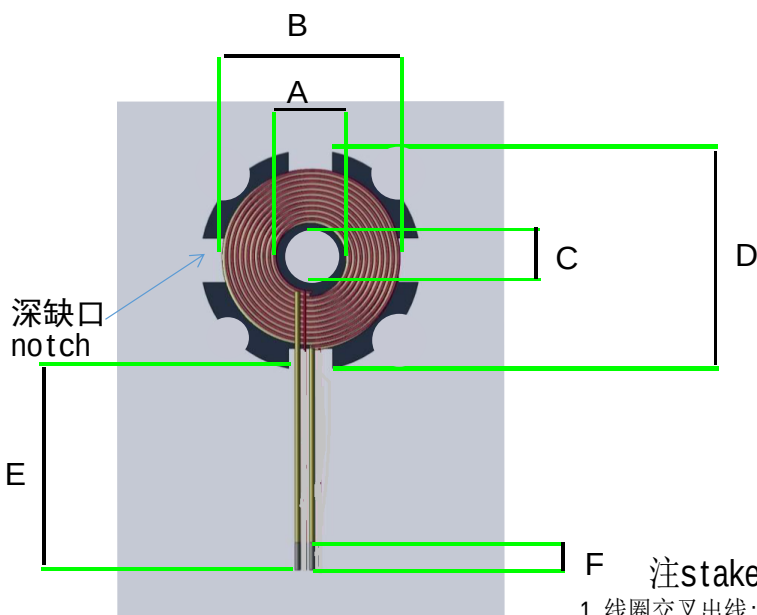

A	15 ± 0.5mm
B	20.5 ± 0.5 mm
C	8 ± 0.5mm
D	25 ± 0.5mm
E	8 ± 1mm
F	3 ± 1mm

注stake:

- 1.线圈交叉出线;Coil Crossing Out
- 2.线圈贴圆形不规则软磁片外加泡沫棉,尺寸为 $\phi 8*25*2.0\text{mm}$; The coil is attached with a round irregular soft magnetic sheet and foam cotton, and the size is $\phi 8*25*2.0\text{mm}$;
- 3.引线出线位置如图(出线朝下时,深缺口在左侧)
Lead line out position as shown (deep notch on the left side when the line out is facing down)
- 4.双线浸锡,线长7-9mm.
Double wire tinning, wire length 7-9mm

二、原理图 SCHEMATIC DIAGRAM



三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	0.08*24	8Ts	顺时针counterclockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	2.0uH ± 10% 单独线圈solenoid	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	2.8 uH ± 10% 带磁片diskette	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	600m Ω Max		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
曾伟浩 2022/07/25	张燕 2022/07/25