

Case No. : <u>GTS20260310014-2-02</u>	
Ambient Condition: <u>24</u> °C, <u>52</u> %RH	
According Standard: ■Part15C	
Test Date: <u>2026.4.2</u>	Test Engineer: <u>Evan ouyang</u>

Appendix A.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	0.756	2401.604	2402.360	0.5	PASS
		2440	0.772	2439.592	2440.364	0.5	PASS
		2480	0.788	2479.584	2480.372	0.5	PASS

Test Graphs






Appendix A.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant1	2402	1.0482	2401.4722	2402.5204	---	---
		2440	1.1453	2439.4161	2440.5614	---	---
		2480	1.1036	2479.4407	2480.5443	---	---

Test Graphs

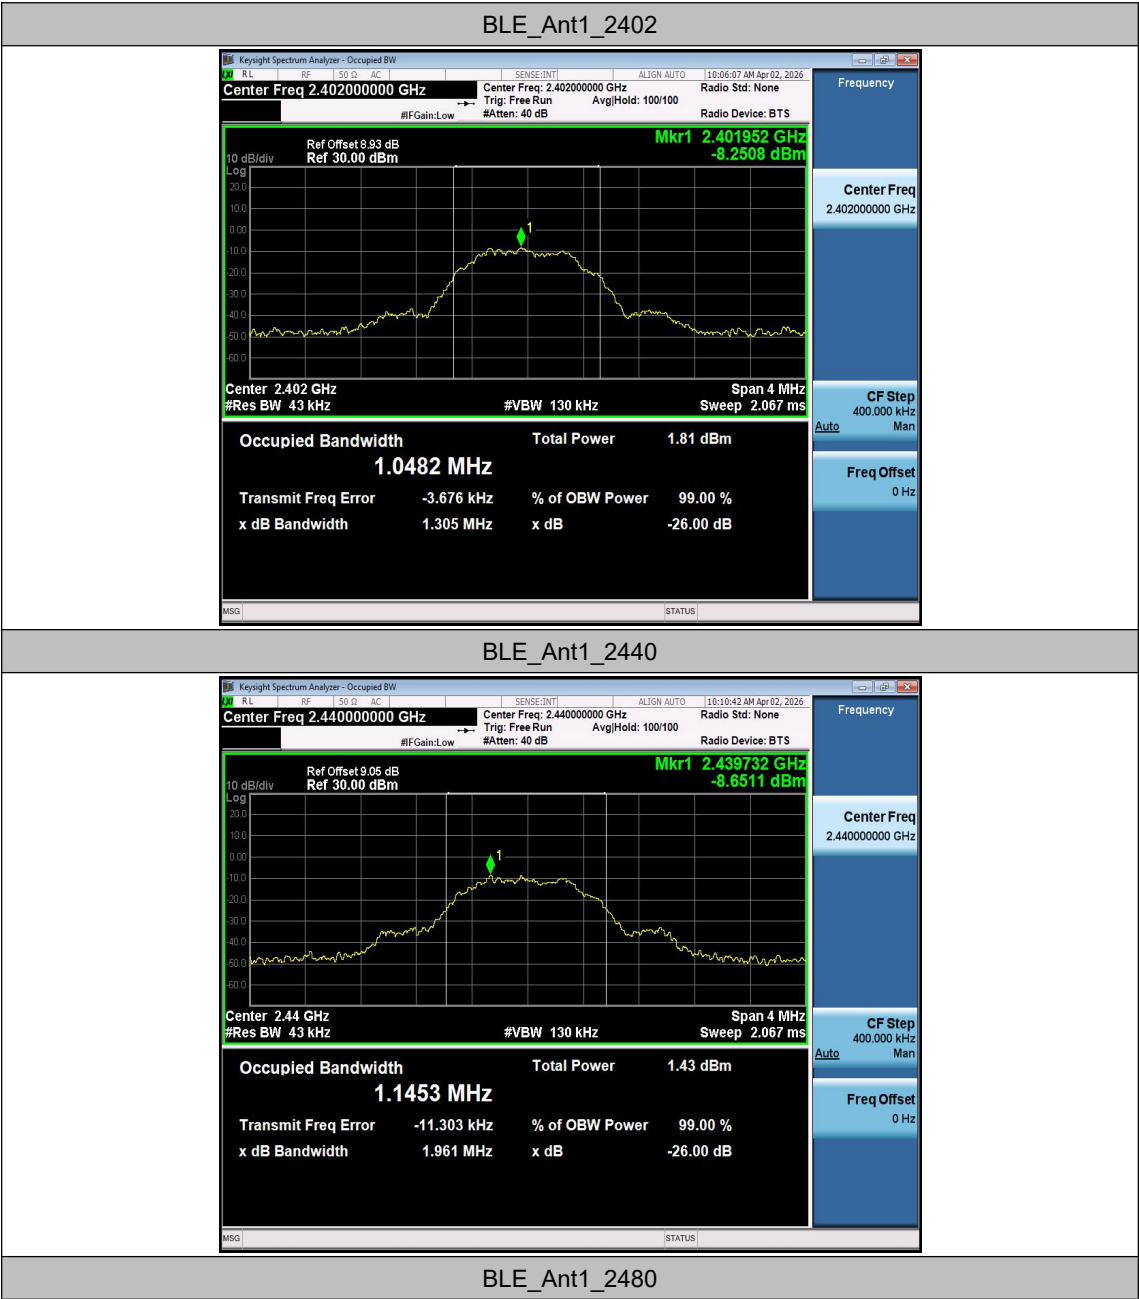



Appendix A.3: Maximum conducted output power

Test Result Peak

TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE	Ant1	2402	-4.36	≤30	-4.36	≤36	PASS
		2440	-4.61	≤30	-4.61	≤36	PASS
		2480	-4.49	≤30	-4.49	≤36	PASS

Appendix A.4: Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant1	2402	-19.12	≤8.00	PASS
		2440	-20.22	≤8.00	PASS
		2480	-19.52	≤8.00	PASS

Note:

1. The Duty Cycle Factor and RBW Factor is compensated in the graph.

Test Graphs

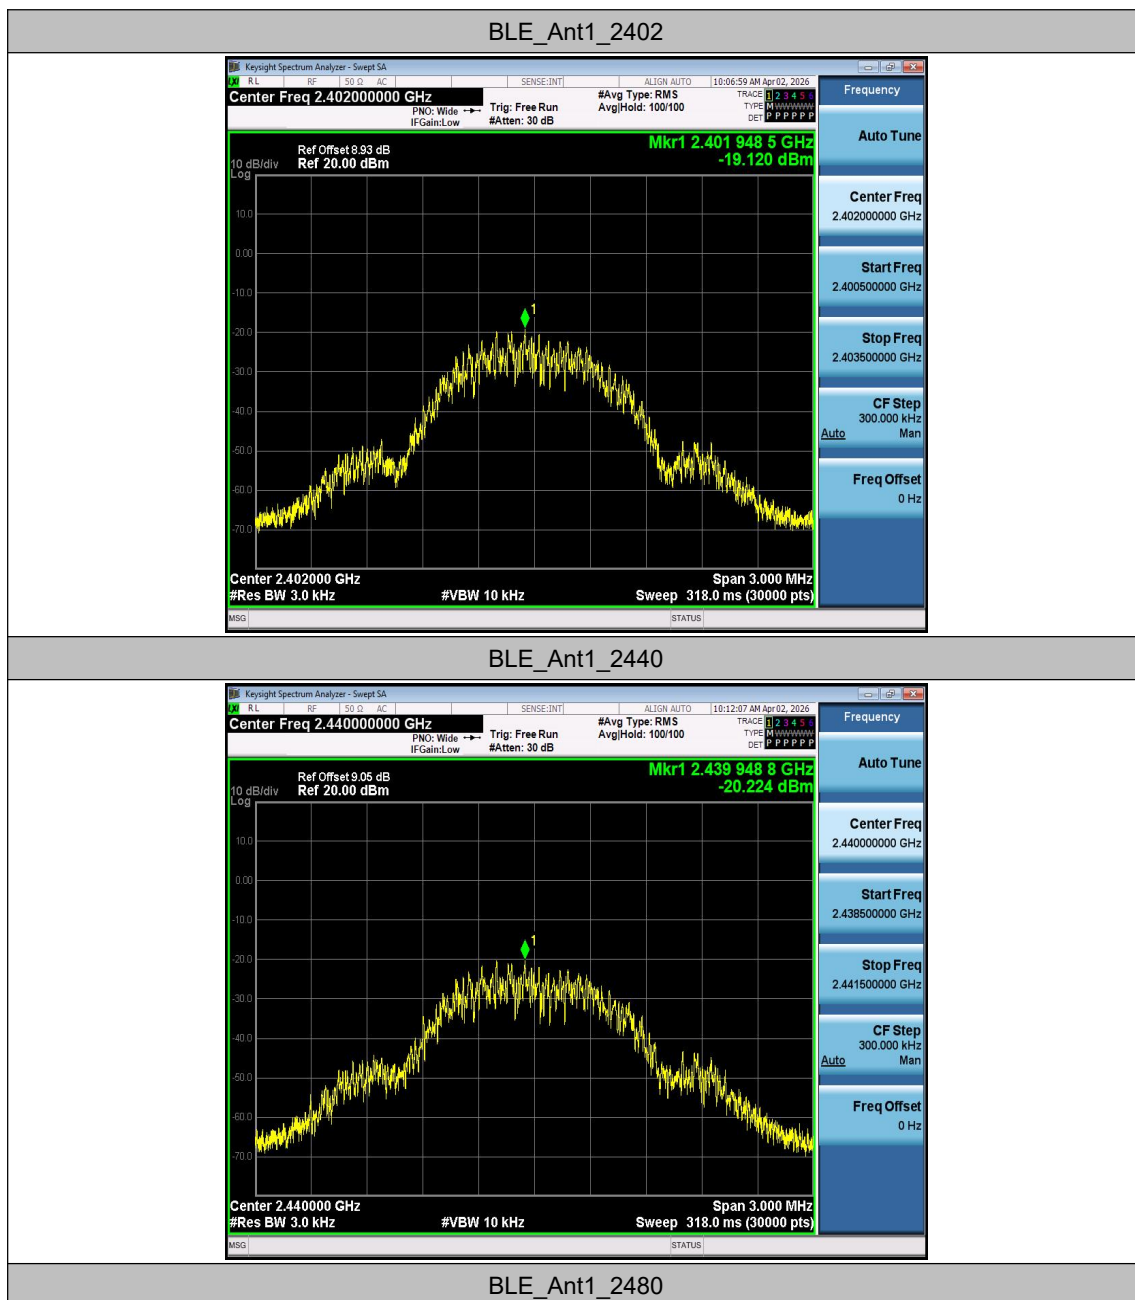




Appendix A.5: Band edge measurements

Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	Low	2402	-5.47	-49.77	≤-25.47	PASS
		High	2480	-5.38	-49.17	≤-25.38	PASS

Test Graphs

BLE_Ant1_Low_2402

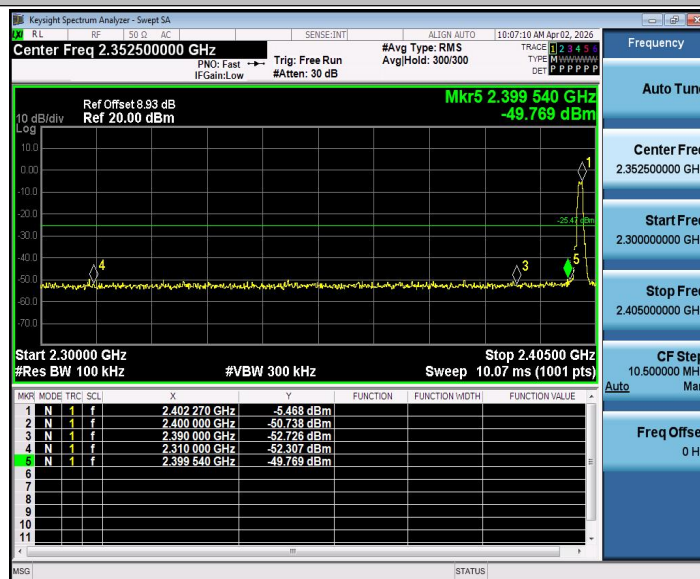

BLE_Ant1_High_2480

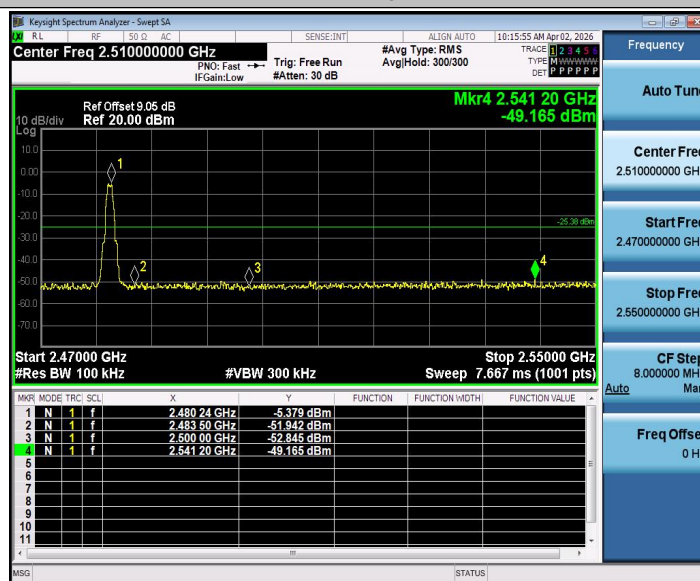


Appendix A.6: Conducted Spurious Emission


Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant1	2402	Reference	-5.79	-5.79	---	PASS
			30~1000	-5.79	-50.73	≤-25.79	PASS
			1000~26500	-5.79	-36.35	≤-25.79	PASS
		2440	Reference	-6.08	-6.08	---	PASS
			30~1000	-6.08	-50.06	≤-26.08	PASS
			1000~26500	-6.08	-37.66	≤-26.08	PASS
		2480	Reference	-5.74	-5.74	---	PASS
			30~1000	-5.74	-50.53	≤-25.74	PASS
			1000~26500	-5.74	-38.6	≤-25.74	PASS

Test Graphs

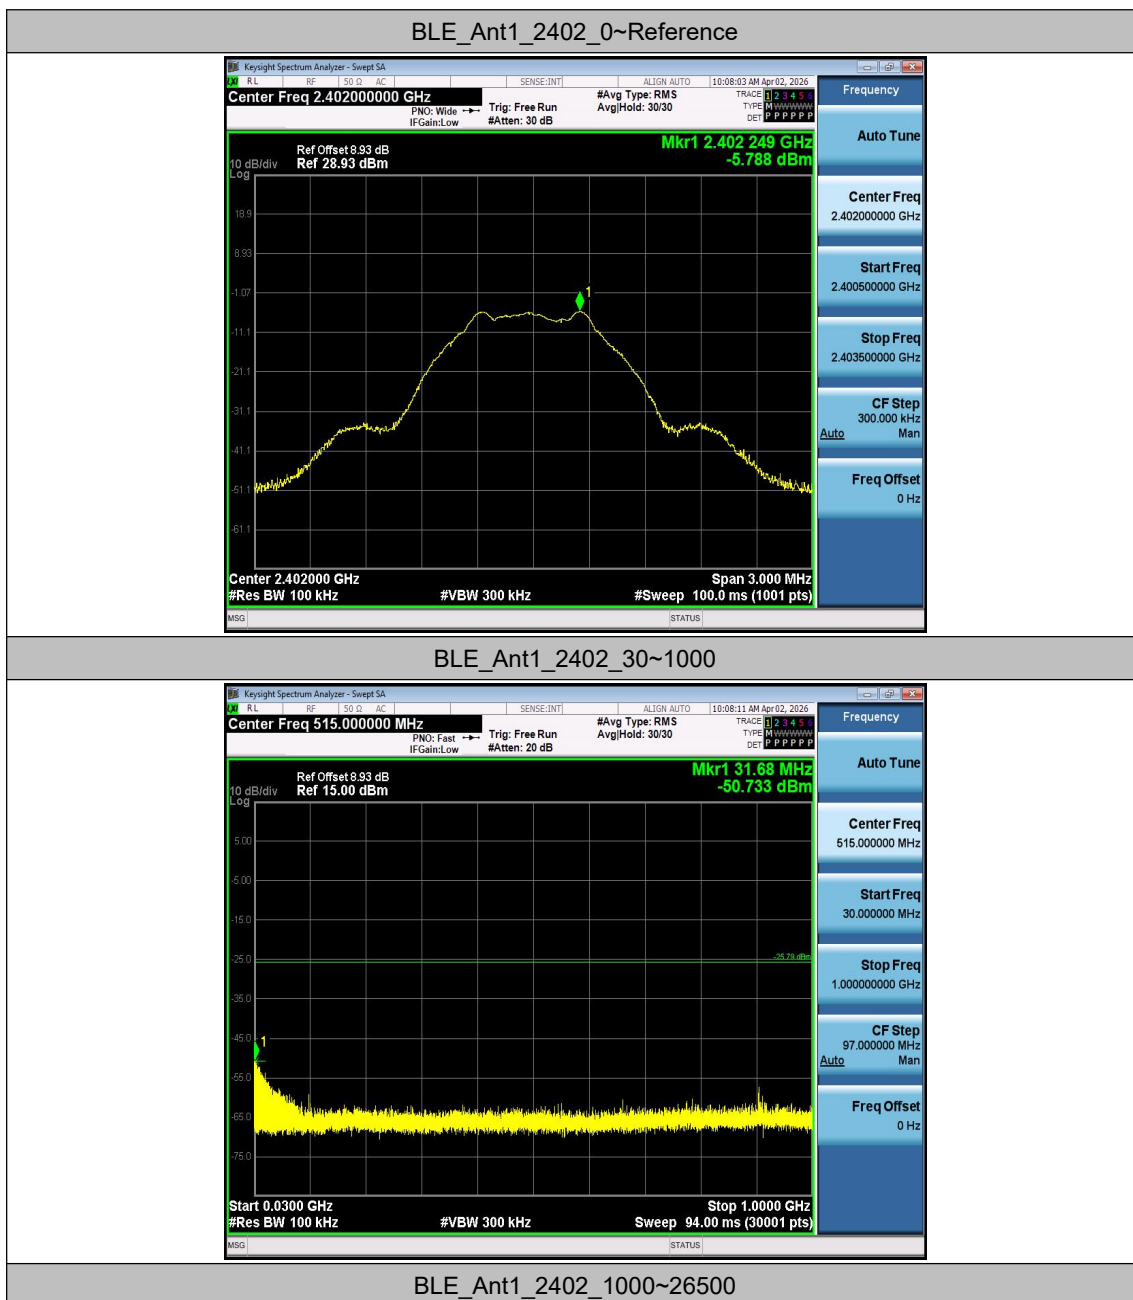


BLE_Ant1_2440_1000~26500

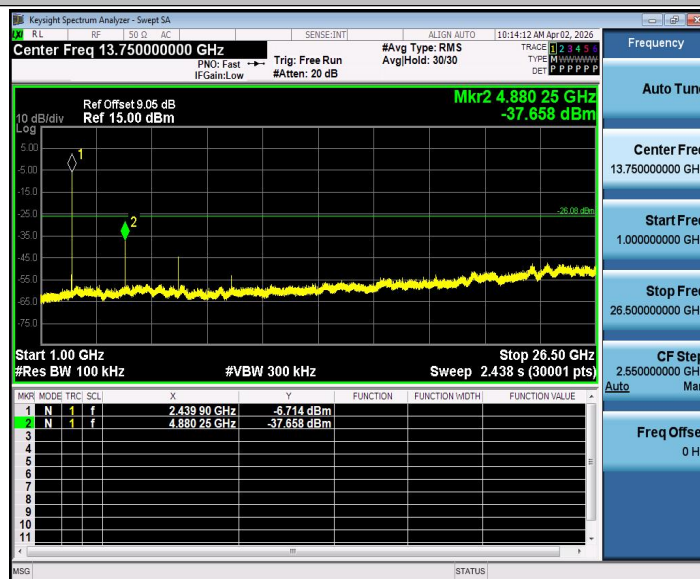

BLE_Ant1_2480_0~Reference



BLE_Ant1_2480_30~1000

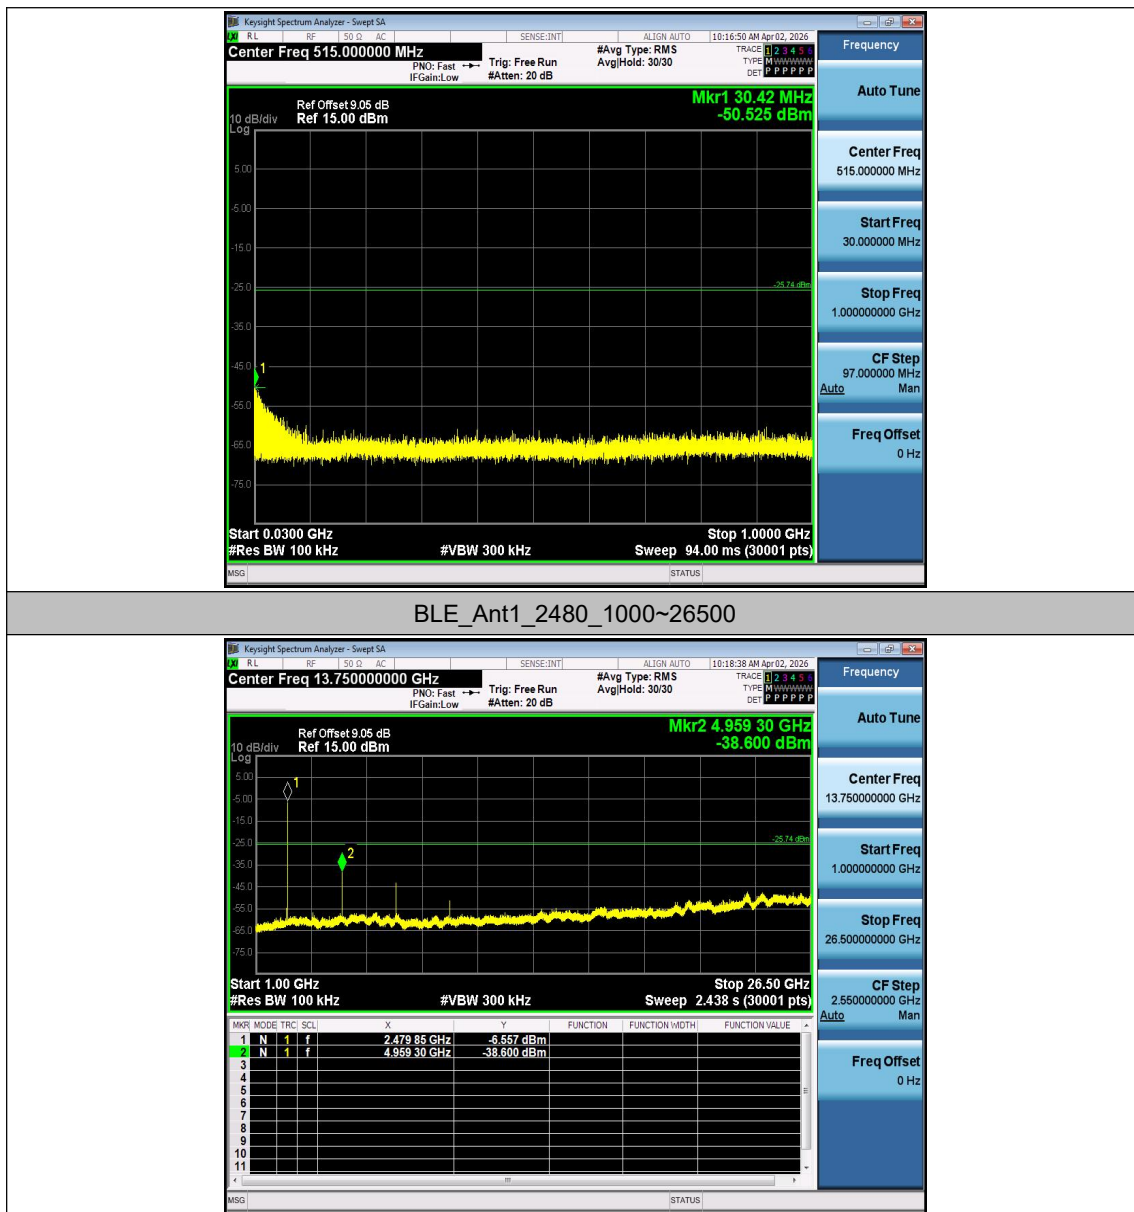



Appendix A.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant1	2402	0.39	0.62	0.6290	62.90	2.01	2.56
		2440	0.39	0.62	0.6290	62.90	2.01	2.56
		2480	0.39	0.63	0.6190	61.90	2.08	2.56

Test Graphs

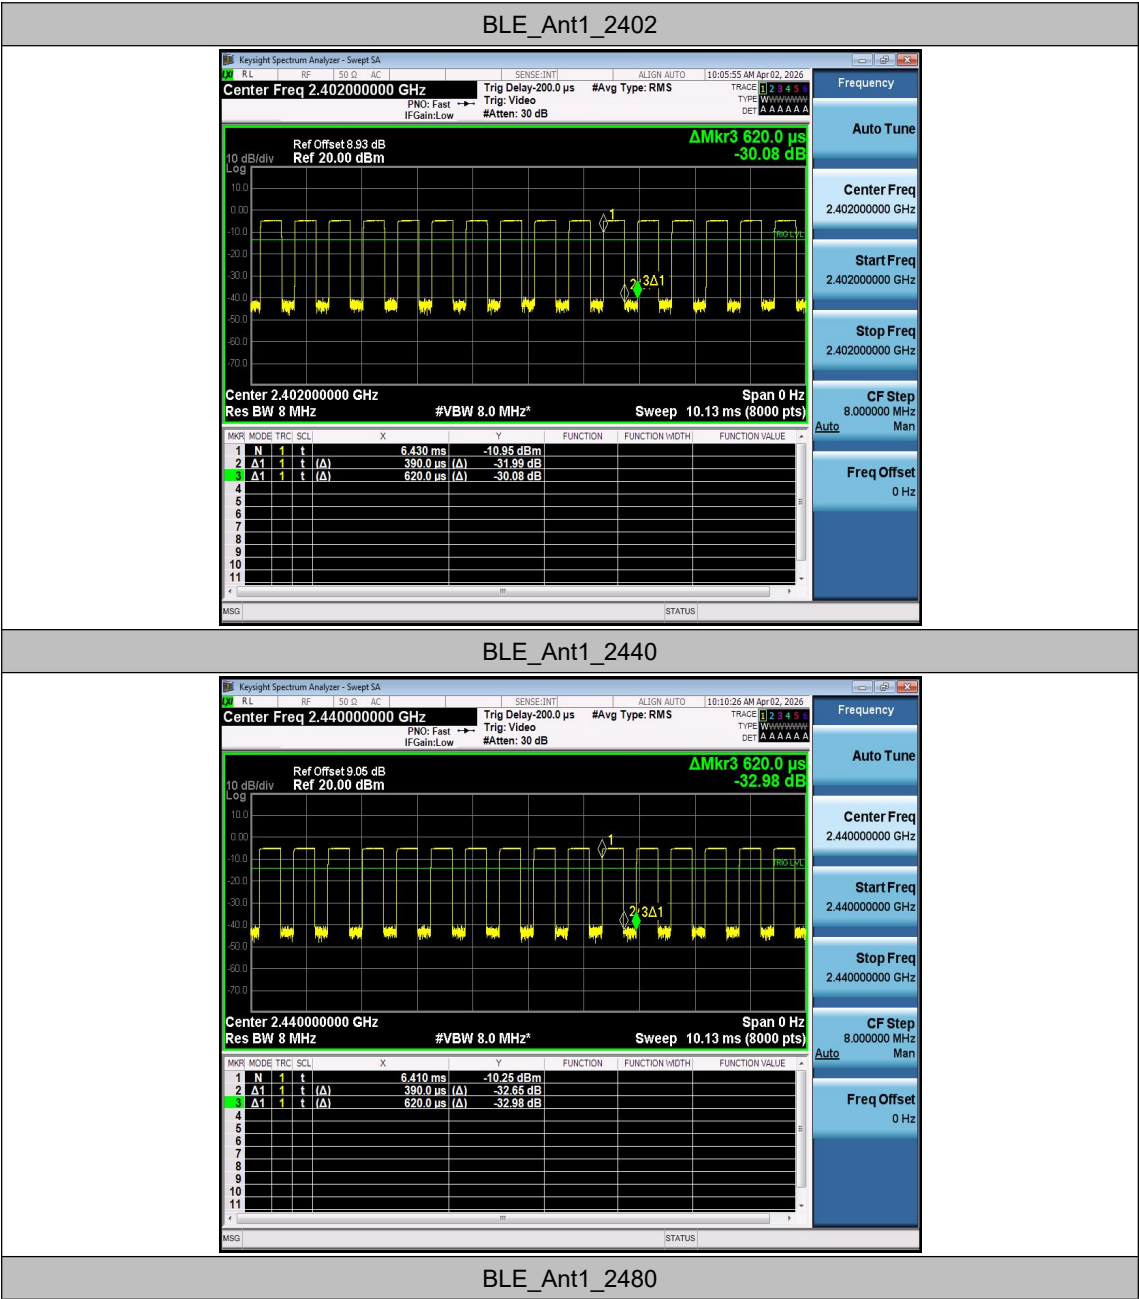

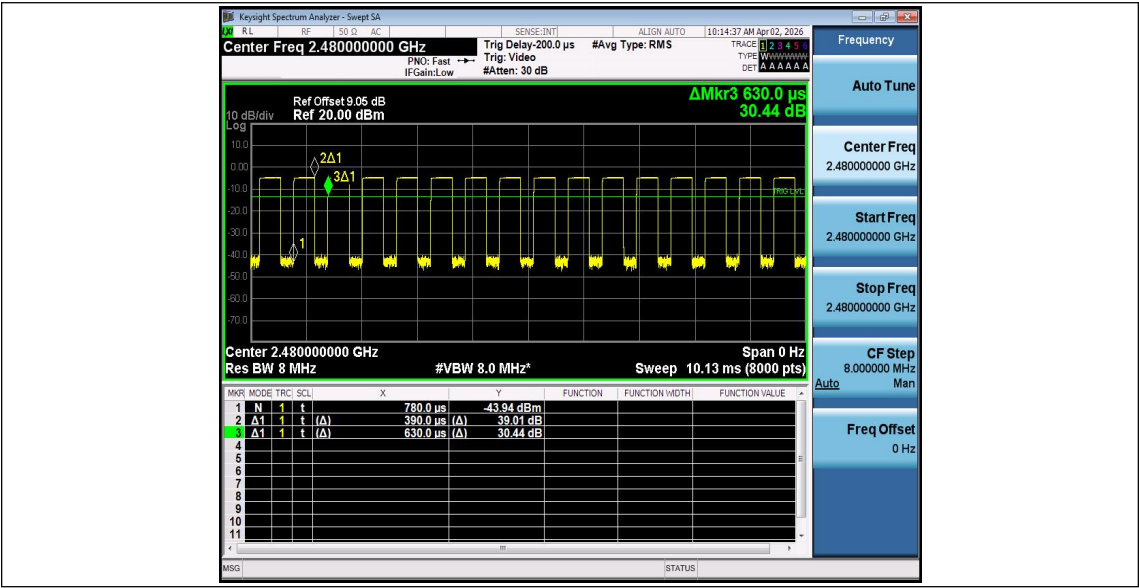

Appendix A.8: Emissions in Restricted Bands

Test Result


TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant1	Low	2402	AV	2310.000	-49.5	≤-41.20	45.70	≤54	PASS
				AV	2389.985	-49.09	≤-41.20	46.11	≤54	PASS
				AV	2390.000	-49.09	≤-41.20	46.11	≤54	PASS
				Peak	2310.000	-42.04	≤-21.20	53.16	≤74	PASS
				Peak	2368.355	-39.37	≤-21.20	55.83	≤74	PASS
				Peak	2390.000	-40.15	≤-21.20	55.05	≤74	PASS
		High	2480	AV	2483.500	-48.44	≤-41.20	46.76	≤54	PASS
				AV	2483.520	-48.44	≤-41.20	46.76	≤54	PASS
				AV	2500.000	-48.56	≤-41.20	46.64	≤54	PASS
				Peak	2483.500	-41.5	≤-21.20	53.70	≤74	PASS
				Peak	2492.720	-38.91	≤-21.20	56.29	≤74	PASS
				Peak	2500.000	-39.96	≤-21.20	55.24	≤74	PASS

Note:


1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs


BLE_Ant1_Low_2402_AV

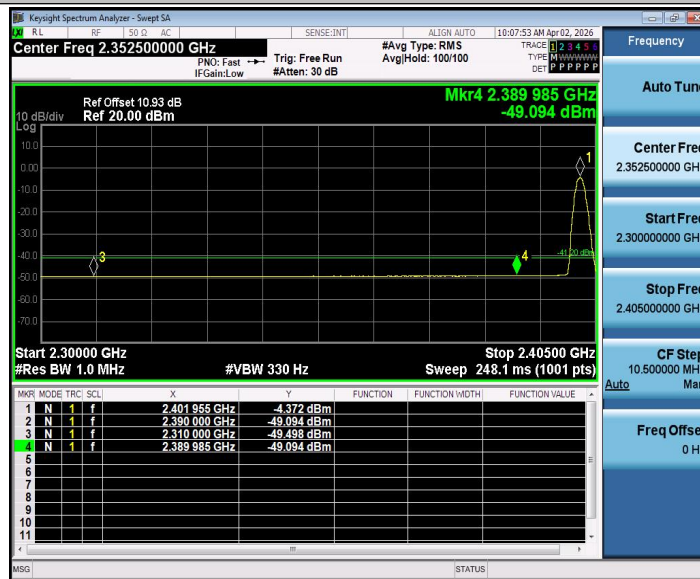

BLE_Ant1_Low_2402_Peak

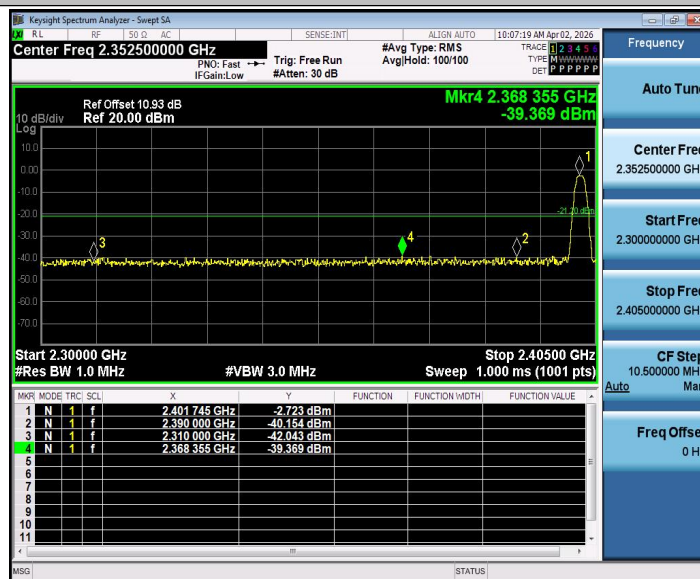

BLE_Ant1_High_2480_AV

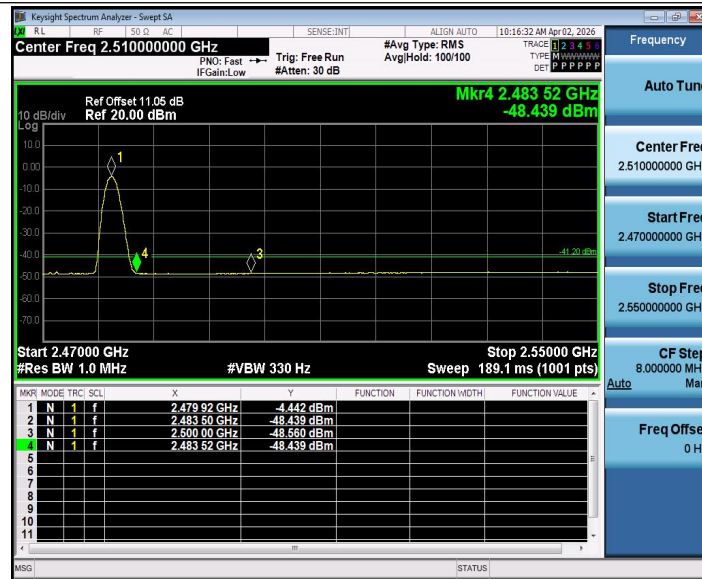

BLE_Ant1_High_2480_Peak

