



EMC TEST REPORT

Product Name: Nimo Mini PC

Model Number: MME2S

FCC ID: 2BEMH-03-MME2S

Issued For : YEAHER INC.

51 Steel Dr, Unit A, New Castle, DE 19720 United States

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT26H273EM01

Sample Received Date: Aug. 31, 2026

Date of Test: Aug. 31, 2026 ~ Sep. 09, 2026

Date of Issue: Sep. 09, 2026

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: YEAHER INC.

Address: 51 Steel Dr, Unit A, New Castle, DE 19720 United States

Manufacturer: Nimo Direct Inc.

Address: 51 Steel Dr, Unit A, New Castle, DE 19720 United States

Product Name: Nimo Mini PC

Trademark: NIMO

Model Number: MME2S

Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

Terry Zhao

Terry Zhao
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

1. TEST SUMMARY	5
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.4 MEASUREMENT INSTRUMENTS LIST	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	16
APPENDIX I - TEST SETUP	22
APPENDIX II - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	24



Revision History

Rev.	Issue Date	Revisions
00	Sep. 09, 2026	Initial Issue



1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.61
Radiated Emissions	1000 ~ 6000	5.10
Radiated Emissions	6000 ~ 18000	5.49
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2. The measurement uncertainty is not included in the test result.		



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	Nimo Mini PC
Test Model Number:	MME2S
Series Number:	N/A
Model Difference:	N/A
Maximum operating frequency:	>108MHz
Rating:	Input: AC 100-240V 50/60Hz
Test voltage:	AC 120V/60Hz
Hardware Version:	N/A
Software Version:	N/A
Connecting I/O Port(s):	Please refer to the Note 1.

Note:

- 1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.*
- 2. The EUT information in the table of section 2.1 is provided by the applicant.*
- 3. LGT is not responsible for wrong test results due to incorrect information (e.g., max. internal operating frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).*
- 4. LGT is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).*
- 5. Sample source: sent by customer.*



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating
Mode 2	Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating

Conducted Emission Test	
Final Test Mode	Description
Mode 1	Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating
Mode 2	Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating
Mode 2	Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating

2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
HDMI cable	N/A	N/A	N/A	1.8m
Power cord	N/A	US	N/A	1.2m

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Mouse	Lenovo	EMS-537A	N/A	N/A
Keyboard	Lenovo	EKB-536A	N/A	N/A
Earphone	VESAFE	39630078	N/A	N/A
Samsung Portable ssd	SAMSUNG	MU-PA500B	N/A	N/A
USB Flash disk	HP	V206	N/A	N/A
Monitor	Philips	288E2	N/A	N/A
DP cable	N/A	N/A	N/A	1m
RJ45 cable	CHOSEAL	10121816507	N/A	2m, unshielded
HDMI cable	SONY	20276	N/A	0.8m, shielded

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.4 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESCI	100458	2026-04-21	2027-04-20
LISN	COM-POWER	LI-115	02032	2026-03-03	2027-03-02
LISN	SCHWARZBECK	NNLK 8122	00160	2026-03-03	2027-03-02
LISN	EMTRACE	PWL-50-3200	00317	2026-03-03	2027-03-02
LISN	EMTRACE	PVDC-150R-200	00353	2026.03.03	2027-03-02
ISN	FCC	T4-02	91317	2026-03-02	2027-03-01
ISN	SCHWARZBECK	NTFM 8158	00303	2026-03-02	2027-03-01
Transient Limiter	EMTRACE	PL00903	2318	2026-03-03	2027-03-02
Temperature & Humidity	BT-3	JINGCHUAG	N.A	2026-03-05	2027-03-04
Testing Software	SKET	EMC-I	V1.4.0.3	N/A	N/A
Radiated Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2026-03-02	2027-03-01
Spectrum Analyzer	Keysight	N9020A	MY50530994	2026-03-02	2027-03-01
Spectrum Analyzer	Keysight	N9010B	MY60242508	2026-03-03	2027-03-02
Active loop Antenna	ETS	6502	00049544	2025-03-11	2028-03-10
Trilog Broadband Antenna	SCHWARZBECK	VULB 9168	01447	2024-05-17	2027-05-16
Horn Antenna	SCHWARZBECK	3115	10SL0060	2025-03-10	2028-03-09
Pre-amplifier (9kHz-1GHz)	EMtrace	RP01A	02017	2026-03-02	2027-03-01
Pre-amplifier (1-26.5G)	Agilent	8449B	3008A4722	2026-03-02	2027-03-01
Temperature & Humidity	BT-3	JINGCHUANG	N.A	2026-03-05	2027-03-04
Testing Software	SKET	EMC-I	V1.4.0.3	N/A	N/A



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor
Margin Level = Measurement Value - Limit Value


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.


3.1.3 TEST SETUP

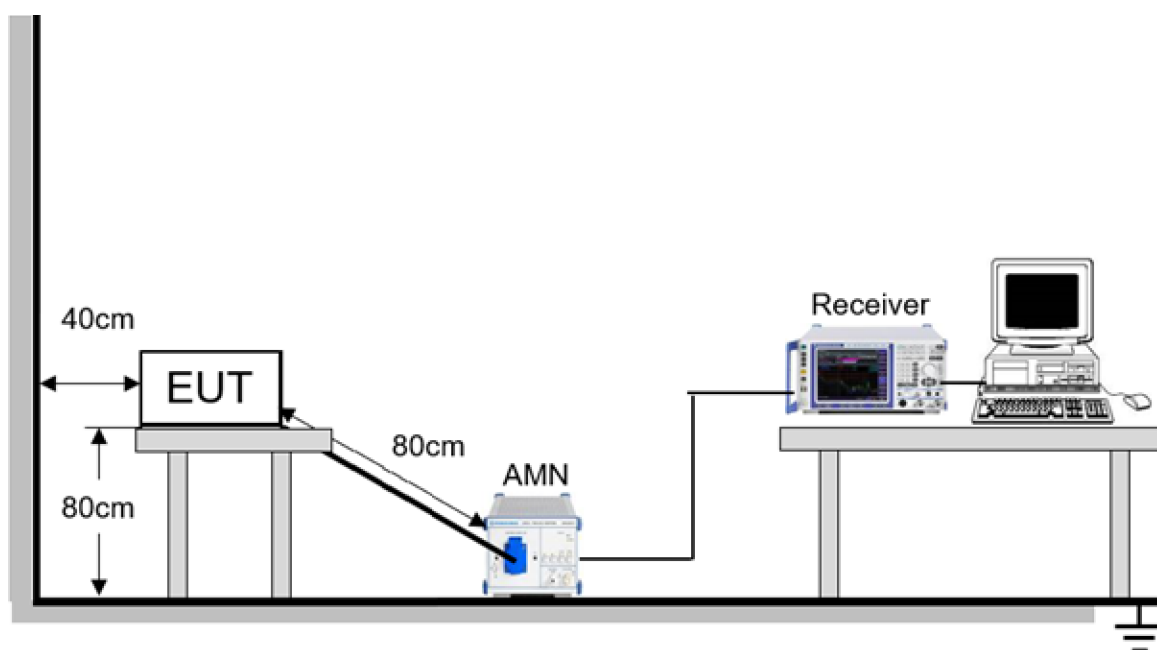



3.1.4 TEST RESULTS


Project: LGT26H273	Test Engineer: Bill Chen
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 48%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-04
Test Mode: Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating	
Note: AC Mains port	

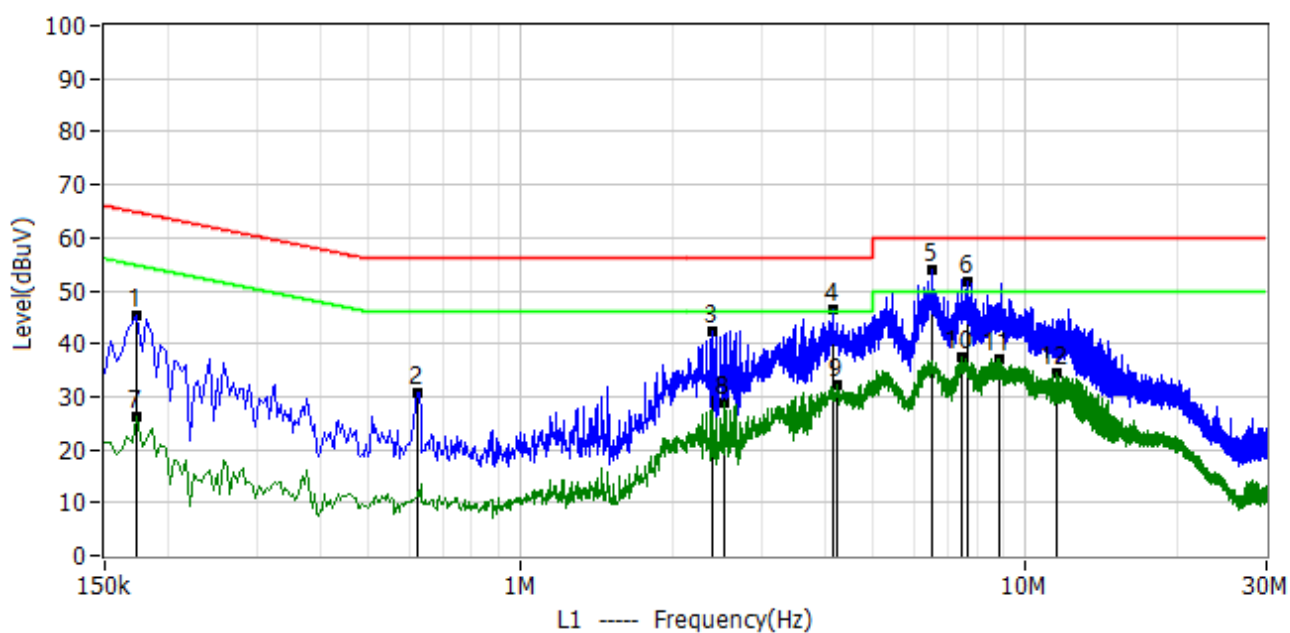

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.174	34.62	10.63	45.25	64.77	-19.52	QP	L1
2*	0.626	20.17	10.64	30.81	56.00	-25.19	QP	L1
3*	2.406	31.40	10.89	42.29	56.00	-13.71	QP	L1
4*	4.158	35.63	10.98	46.61	56.00	-9.39	QP	L1
5*	6.518	42.75	11.09	53.84	60.00	-6.16	QP	L1
6*	7.698	40.39	11.15	51.54	60.00	-8.46	QP	L1
7*	0.174	15.41	10.63	26.04	54.77	-28.72	AV	L1
8*	2.522	17.90	10.90	28.80	46.00	-17.20	AV	L1
9*	4.218	21.12	10.98	32.10	46.00	-13.90	AV	L1
10*	7.474	26.15	11.14	37.29	50.00	-12.71	AV	L1
11*	8.894	25.98	11.21	37.19	50.00	-12.81	AV	L1
12*	11.518	23.10	11.32	34.42	50.00	-15.58	AV	L1




Project: LGT26H273	Test Engineer: Bill Chen
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 48%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-04
Test Mode: Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating	
Note: AC Mains port	

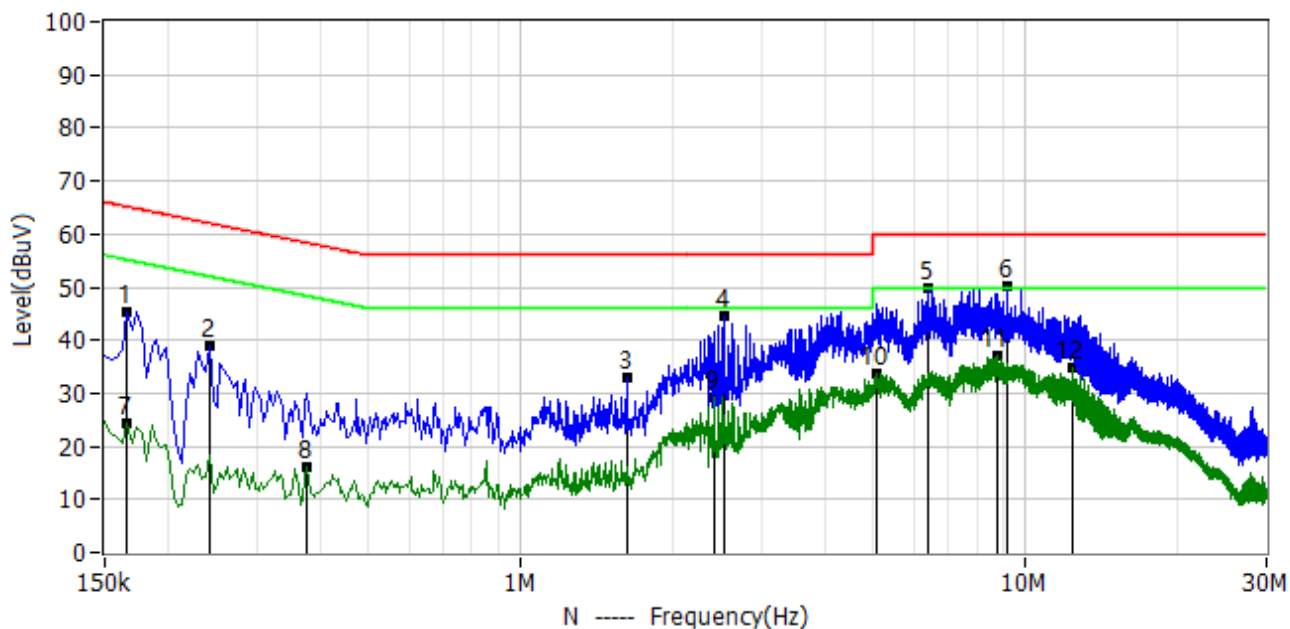

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.166	34.63	10.65	45.28	65.16	-19.88	QP	N
2*	0.242	28.26	10.64	38.90	62.03	-23.13	QP	N
3*	1.622	22.30	10.80	33.10	56.00	-22.90	QP	N
4*	2.534	33.56	10.91	44.47	56.00	-11.53	QP	N
5*	6.398	38.70	11.05	49.75	60.00	-10.25	QP	N
6*	9.222	38.86	11.24	50.10	60.00	-9.90	QP	N
7*	0.166	13.71	10.65	24.36	55.16	-30.80	AV	N
8*	0.378	5.55	10.64	16.19	48.32	-32.13	AV	N
9*	2.422	18.46	10.90	29.36	46.00	-16.64	AV	N
10*	5.082	22.68	11.00	33.68	50.00	-16.32	AV	N
11*	8.830	26.05	11.21	37.26	50.00	-12.74	AV	N
12*	12.394	23.38	11.38	34.76	50.00	-15.24	AV	N




Project: LGT26H273	Test Engineer: Bill Chen
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 48%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-04
Test Mode: Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating	
Note: AC Mains port	

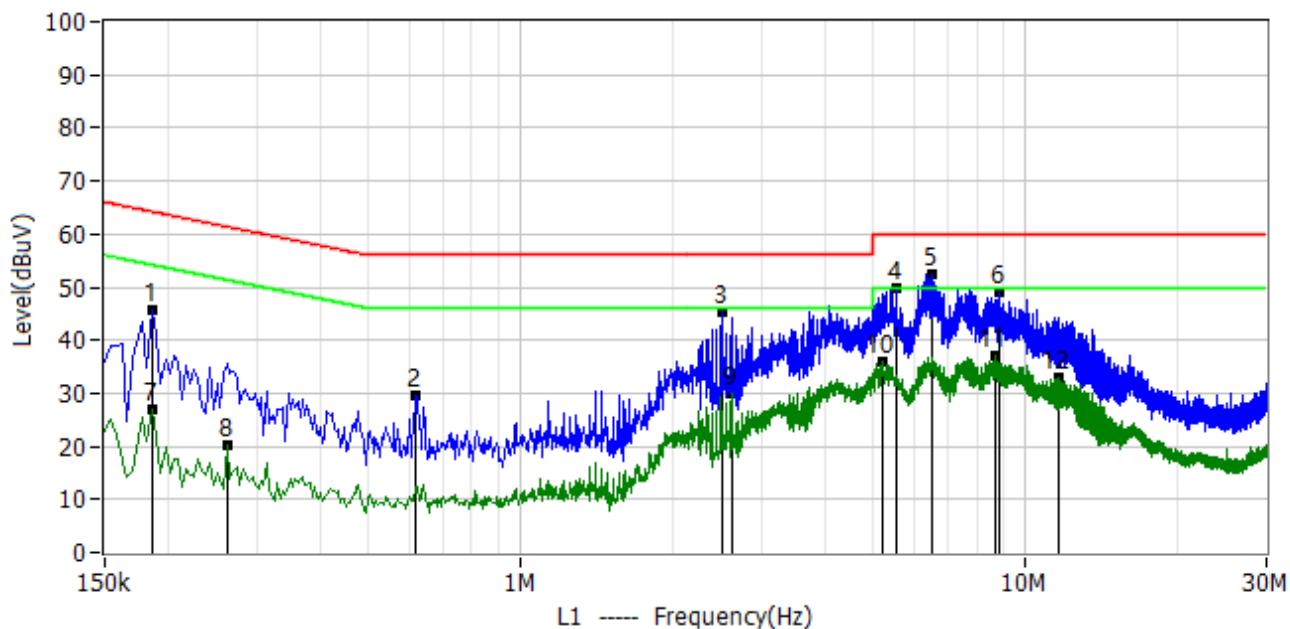

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.186	35.01	10.63	45.64	64.21	-18.58	QP	L1
2*	0.618	18.95	10.64	29.59	56.00	-26.41	QP	L1
3*	2.514	34.60	10.90	45.50	56.00	-10.50	QP	L1
4*	5.554	38.76	11.05	49.81	60.00	-10.19	QP	L1
5*	6.514	41.49	11.09	52.58	60.00	-7.42	QP	L1
6*	8.886	37.75	11.21	48.96	60.00	-11.04	QP	L1
7*	0.186	16.22	10.63	26.85	54.21	-27.36	AV	L1
8*	0.262	9.71	10.62	20.33	51.37	-31.04	AV	L1
9*	2.630	18.96	10.90	29.86	46.00	-16.14	AV	L1
10*	5.186	24.83	11.03	35.86	50.00	-14.14	AV	L1
11*	8.730	25.79	11.21	37.00	50.00	-13.00	AV	L1
12*	11.590	21.75	11.33	33.08	50.00	-16.92	AV	L1



Project: LGT26H273	Test Engineer: Bill Chen
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 48%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-04
Test Mode: Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating	
Note: AC Mains port	

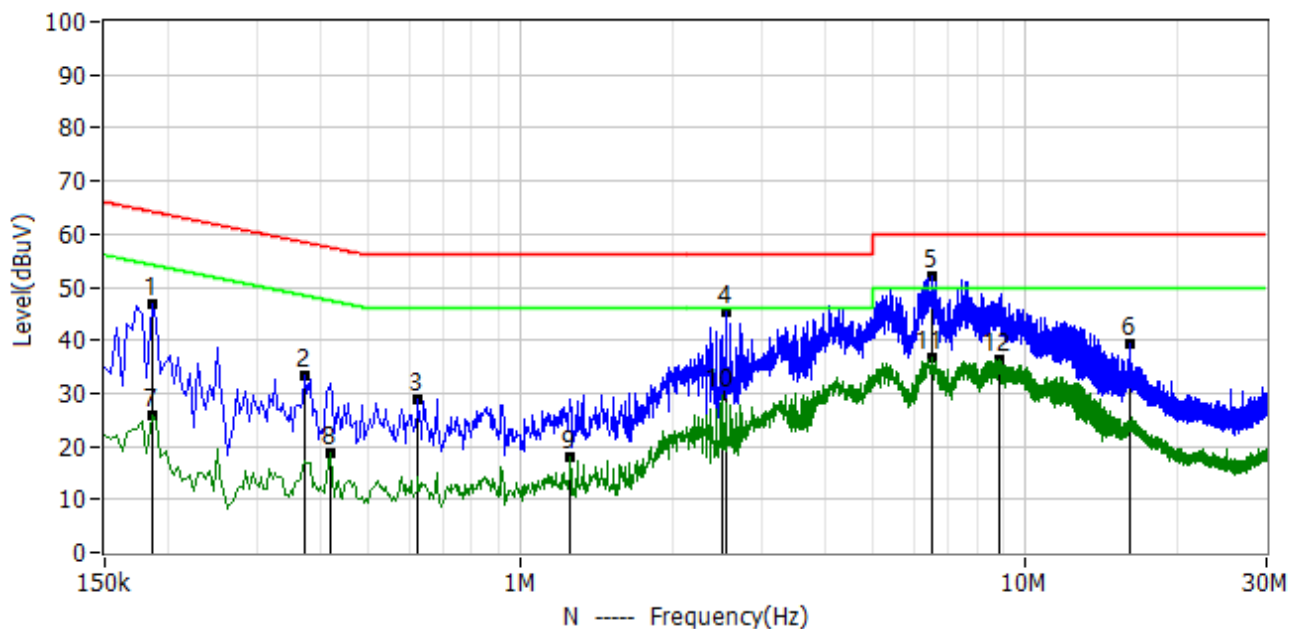

No.	Frequency MHz	Reading dBuV	Factor dB	Result dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.186	36.04	10.65	46.69	64.21	-17.52	QP	N
2*	0.374	22.58	10.64	33.22	58.41	-25.19	QP	N
3*	0.626	18.36	10.65	29.01	56.00	-26.99	QP	N
4*	2.554	34.30	10.91	45.21	56.00	-10.79	QP	N
5*	6.502	40.99	11.06	52.05	60.00	-7.95	QP	N
6*	16.058	27.87	11.50	39.37	60.00	-20.63	QP	N
7*	0.186	15.18	10.65	25.83	54.21	-28.39	AV	N
8*	0.418	8.02	10.65	18.67	47.49	-28.81	AV	N
9*	1.254	7.09	10.72	17.81	46.00	-28.19	AV	N
10*	2.518	18.86	10.91	29.77	46.00	-16.23	AV	N
11*	6.502	25.77	11.06	36.83	50.00	-13.17	AV	N
12*	8.890	25.16	11.21	36.37	50.00	-13.63	AV	N



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS

Below 1 GHz

Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:


- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),
Margin Level = Measurement Value - Limit Value.

3.2.2 TEST PROCEDURE


- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

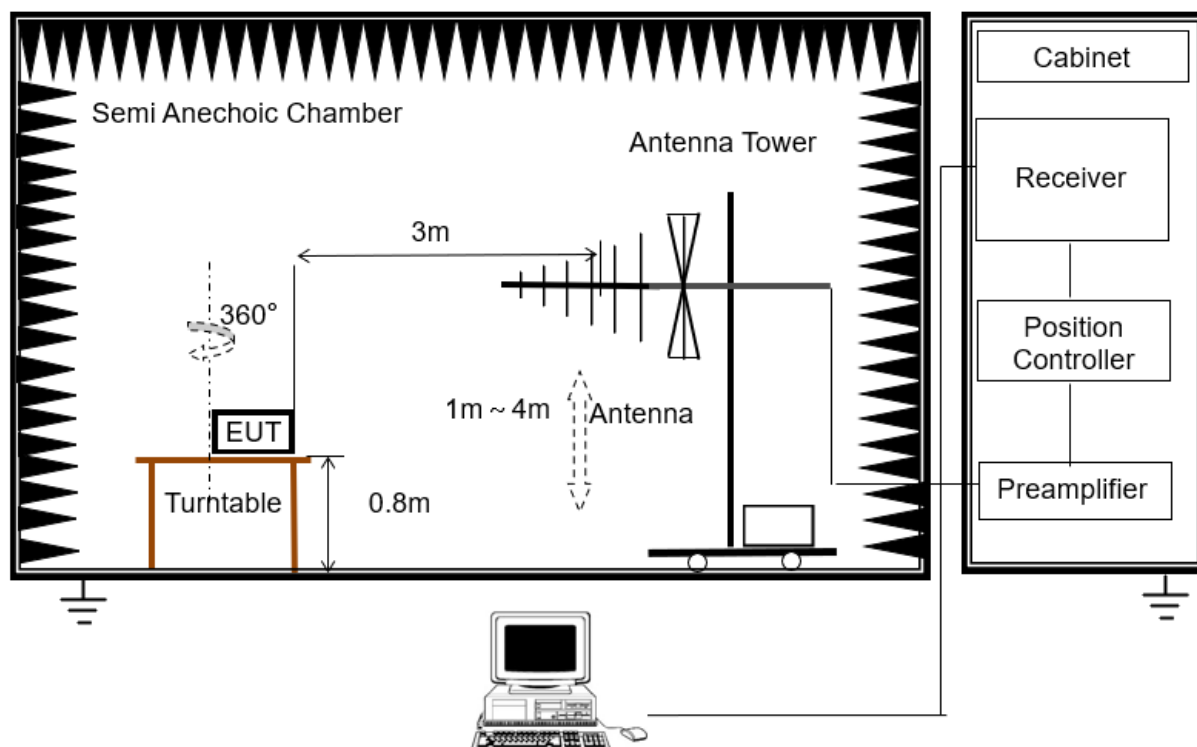

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

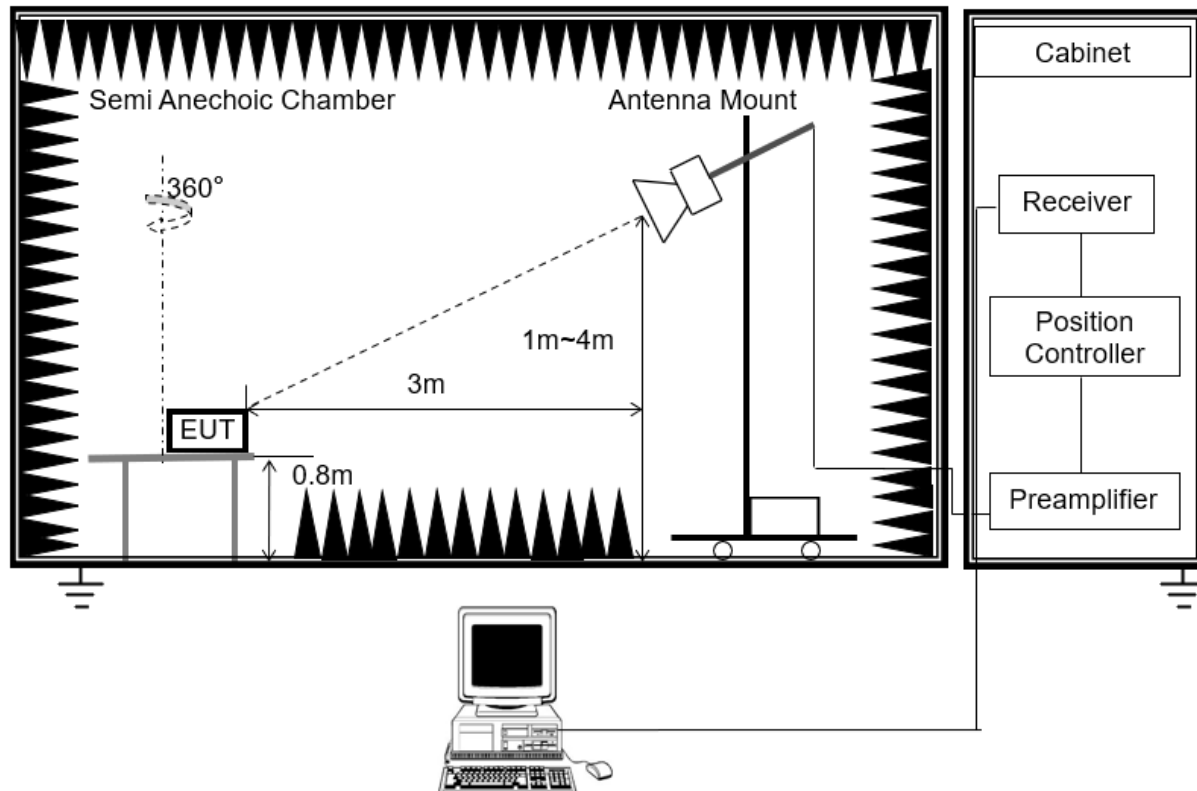


For the actual test configuration, please refer to Appendix I: Photographs of the Test Configuration




3.2.4 TEST RESULTS

Below 1 GHz

Project: LGT26H273	Test Engineer: zhangchengxiang
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 43%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-07
Test Mode: Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating	
Note:	

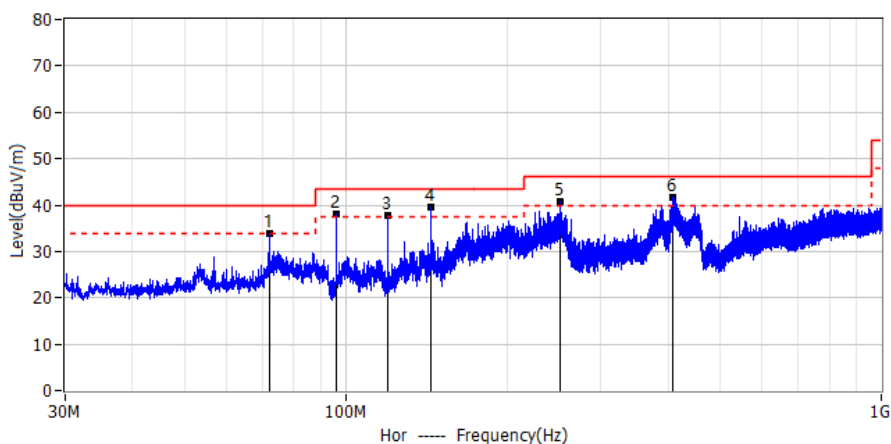


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	72.033	16.35	17.65	34.00	40.00	-6.00	QP	Hor
2*	96.059	21.07	16.96	38.03	43.50	-5.47	QP	Hor
3*	120.086	18.02	19.73	37.75	43.50	-5.75	QP	Hor
4*	144.112	17.73	21.68	39.41	43.50	-4.09	QP	Hor
5*	252.254	20.38	20.39	40.77	46.00	-5.23	QP	Hor
6*	408.947	16.14	25.63	41.77	46.00	-4.23	QP	Hor

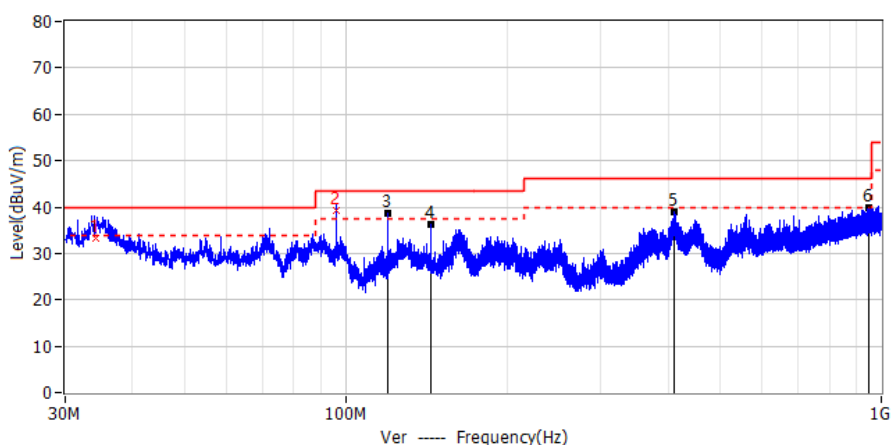


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1	34.312	13.56	19.80	33.36	40.00	-6.64	QP	Ver
2	96.086	22.39	17.00	39.39	43.50	-4.11	QP	Ver
3*	120.086	18.86	19.73	38.59	43.50	-4.91	QP	Ver
4*	144.112	14.68	21.68	36.36	43.50	-7.14	QP	Ver
5*	410.240	13.12	25.75	38.87	46.00	-7.13	QP	Ver
6*	948.217	4.92	34.90	39.82	46.00	-6.18	QP	Ver



Project: LGT26H273	Test Engineer: zhangchengxiang
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: MME2S	Humidity: 43%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-07
Test Mode: Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating	
Note:	

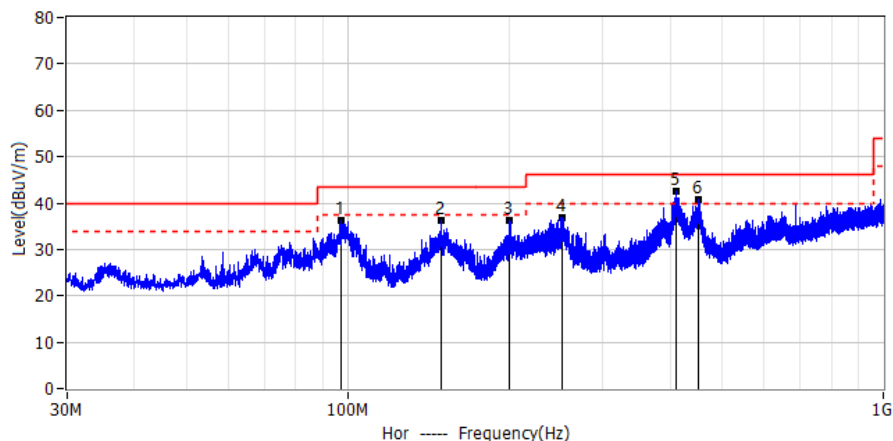

No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	97.054	19.51	16.80	36.31	43.50	-7.19	QP	Hor
2*	149.335	14.26	21.96	36.22	43.50	-7.28	QP	Hor
3*	200.770	18.06	18.07	36.13	43.50	-7.37	QP	Hor
4*	251.011	16.55	20.24	36.79	46.00	-9.21	QP	Hor
5*	410.489	16.69	25.75	42.44	46.00	-3.56	QP	Hor
6*	451.477	13.94	26.74	40.68	46.00	-5.32	QP	Hor

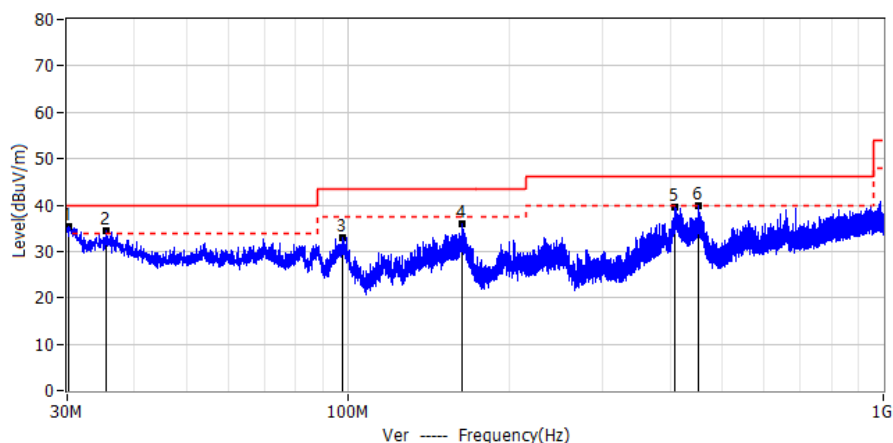


No.	Frequency MHz	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	30.199	15.87	19.54	35.41	40.00	-4.59	QP	Ver
2*	35.472	14.52	19.85	34.37	40.00	-5.63	QP	Ver
3*	98.049	15.59	17.28	32.87	43.50	-10.63	QP	Ver
4*	163.562	14.27	21.63	35.90	43.50	-7.60	QP	Ver
5*	408.847	13.85	25.61	39.46	46.00	-6.54	QP	Ver
6*	451.975	13.17	26.71	39.88	46.00	-6.12	QP	Ver




ABOVE 1GHZ

Project: LGT26H273	Test Engineer: zhangchengxiang
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: FusionXpark M	Humidity: 43%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-07
Test Mode: Charging+BT+WLAN+LAN+DP+USB+Type-C+Earphone+SD operating	
Note:	

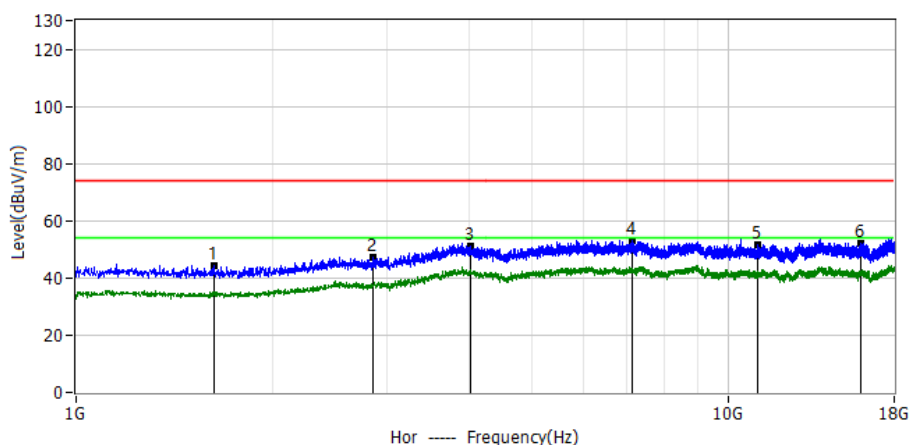


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.6290GHz	60.24	-16.03	44.21	74.00	-29.79	PK	Hor
2*	2.8572GHz	55.03	-7.74	47.29	74.00	-26.71	PK	Hor
3*	4.0239GHz	53.85	-2.71	51.14	74.00	-22.86	PK	Hor
4*	7.1497GHz	58.40	-5.49	52.91	74.00	-21.09	PK	Hor
5*	11.1192GHz	57.71	-5.94	51.77	74.00	-22.23	PK	Hor
6*	16.0131GHz	56.93	-4.87	52.06	74.00	-21.94	PK	Hor

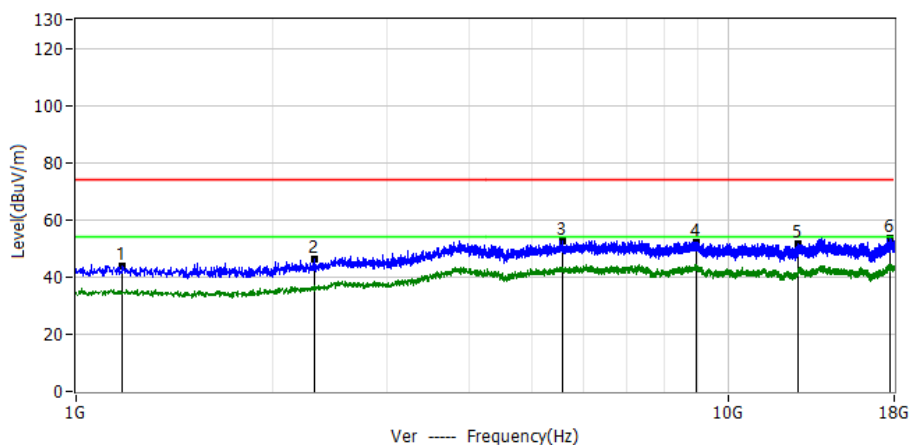


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.1764GHz	61.24	-17.33	43.91	74.00	-30.09	PK	Ver
2*	2.3217GHz	56.86	-10.74	46.12	74.00	-27.88	PK	Ver
3*	5.5794GHz	57.16	-4.61	52.55	74.00	-21.45	PK	Ver
4*	8.9262GHz	58.12	-5.79	52.33	74.00	-21.67	PK	Ver
5*	12.8150GHz	57.82	-6.06	51.76	74.00	-22.24	PK	Ver
6*	17.6961GHz	57.34	-3.90	53.44	74.00	-20.56	PK	Ver



Project: LGT26H273	Test Engineer: zhangchengxiang
EUT: Nimo Mini PC	Temperature: 24.8°C
M/N: FusionXpark M	Humidity: 43%RH
Test Voltage: AC 120V/60Hz	Test Date: 2026-09-07
Test Mode: Charging+BT+WLAN+LAN+HDMI+USB+Type-C+Earphone+SD operating	
Note:	

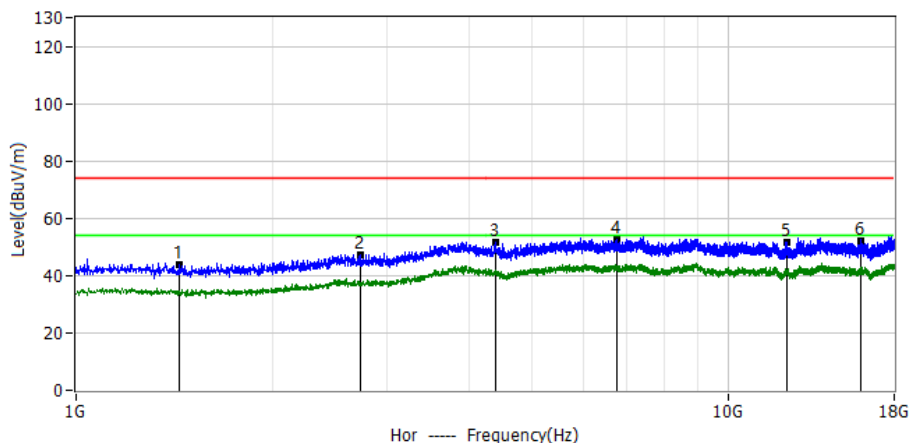


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.4399GHz	60.94	-17.13	43.81	74.00	-30.19	PK	Hor
2*	2.7255GHz	55.26	-7.95	47.31	74.00	-26.69	PK	Hor
3*	4.3957GHz	55.76	-4.34	51.42	74.00	-22.58	PK	Hor
4*	6.7587GHz	57.91	-5.40	52.51	74.00	-21.49	PK	Hor
5*	12.3411GHz	58.32	-6.52	51.80	74.00	-22.20	PK	Hor
6*	16.0280GHz	57.28	-4.94	52.34	74.00	-21.66	PK	Hor

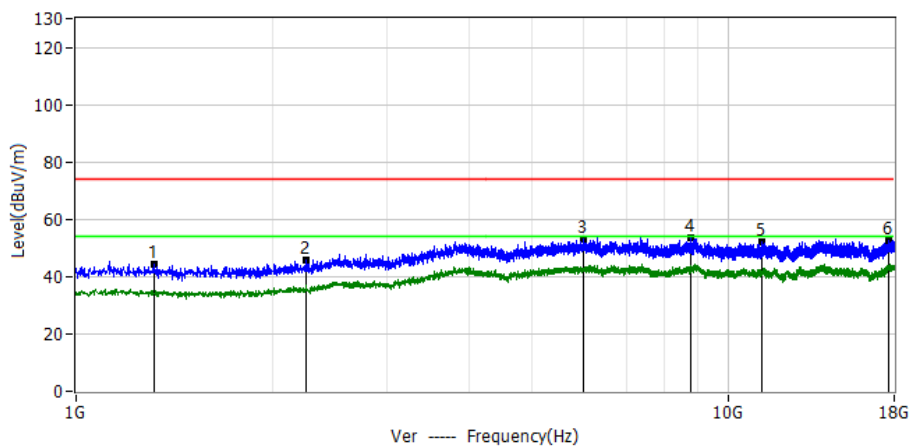


No.	Frequency	Reading dBuV	Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	1.3145GHz	61.84	-17.38	44.46	74.00	-29.54	PK	Ver
2*	2.2495GHz	57.43	-11.48	45.95	74.00	-28.05	PK	Ver
3*	5.9895GHz	57.85	-4.97	52.88	74.00	-21.12	PK	Ver
4*	8.7860GHz	59.62	-5.93	53.69	74.00	-20.31	PK	Ver
5*	11.2914GHz	57.67	-5.70	51.97	74.00	-22.03	PK	Ver
6*	17.6196GHz	56.25	-3.78	52.47	74.00	-21.53	PK	Ver

APPENDIX I - TEST SETUP


Set-up for Conducted Emission on AC Mains (CE)

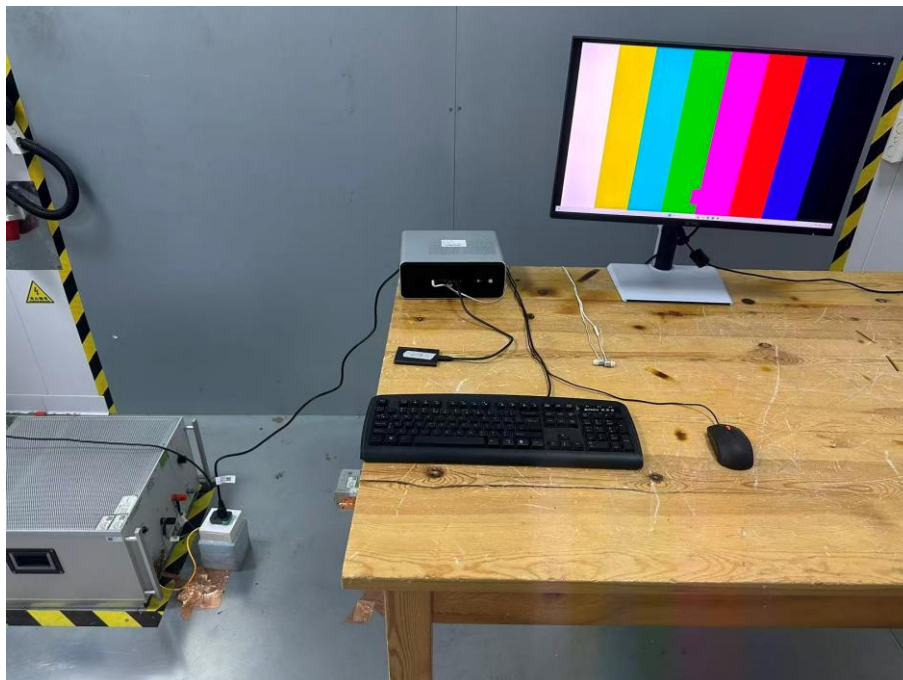

Set-up for Radiated Emission (RE), Below 1GHz

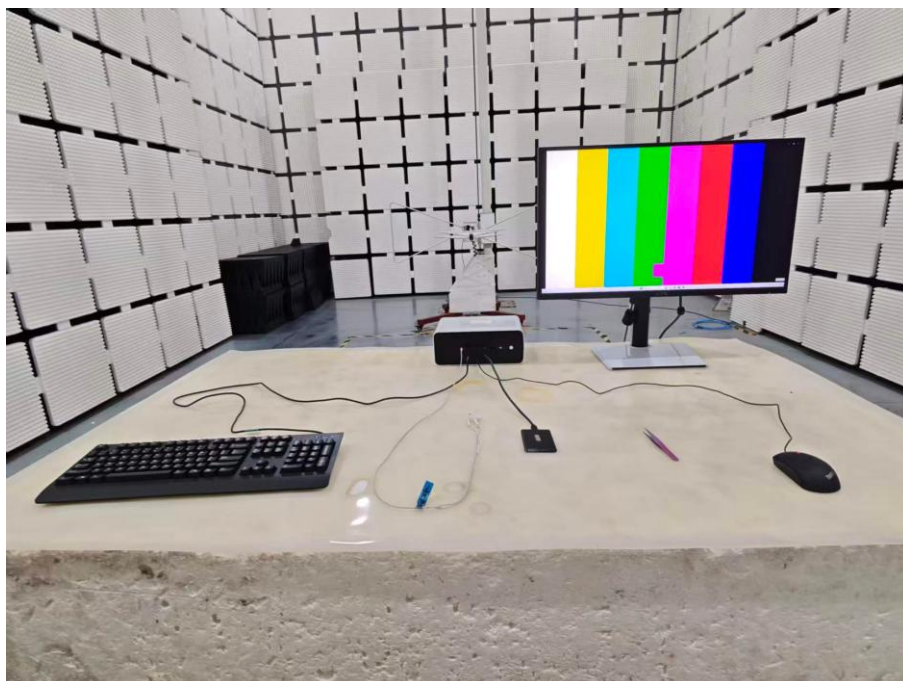

Set-up for Radiated Emission (RE), Above 1GHz

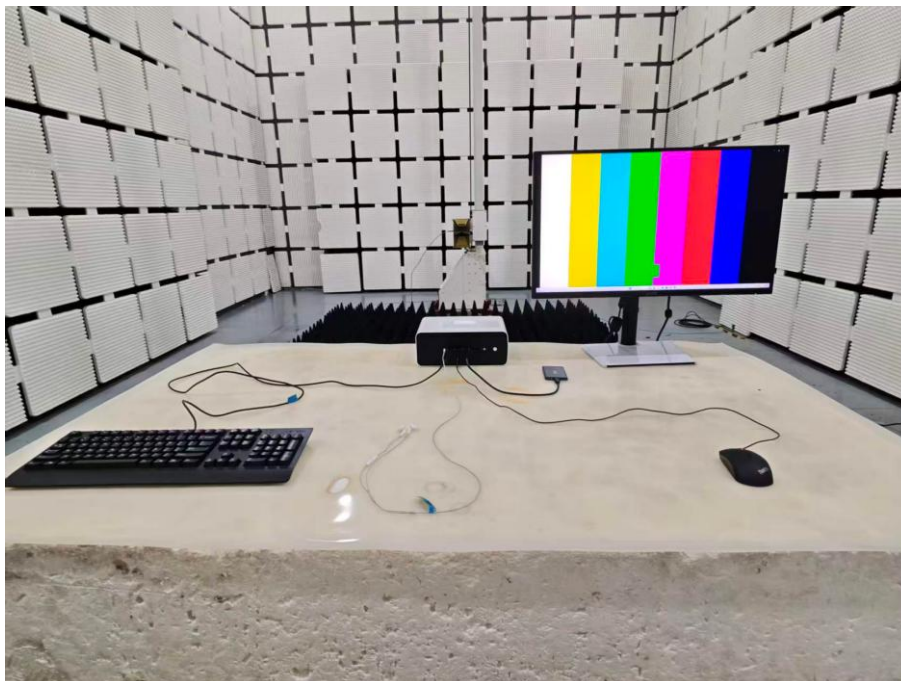



APPENDIX II - PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

Photo 1

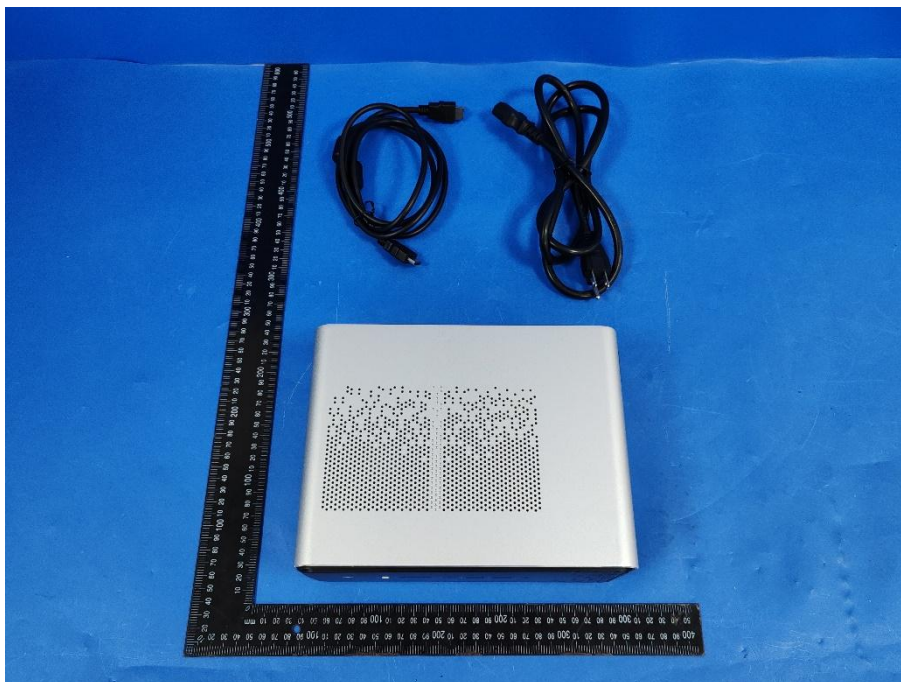


Photo 2

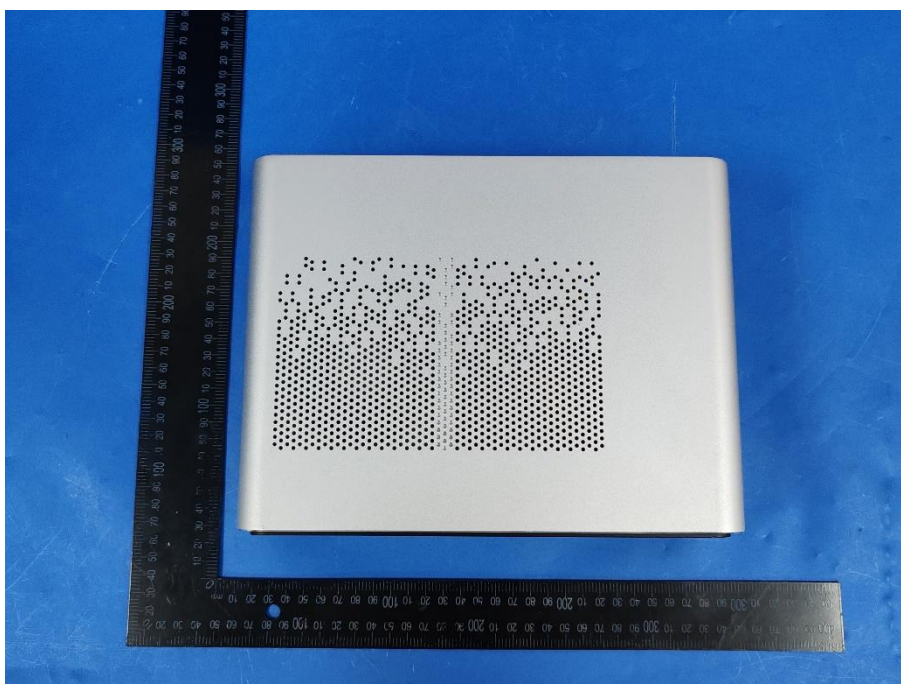


Photo 3

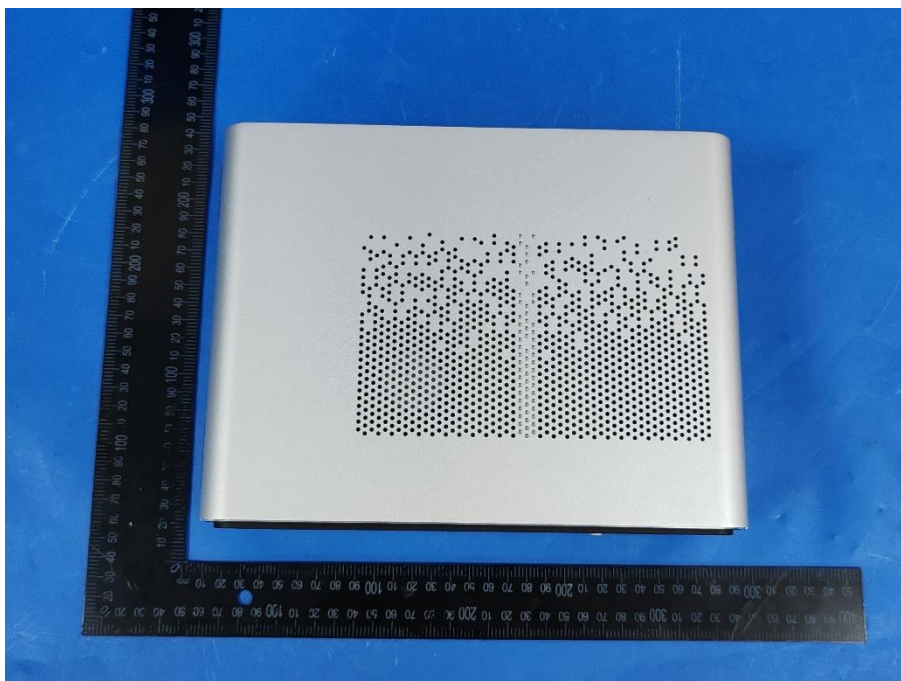


Photo 4



Photo 5



Photo 6

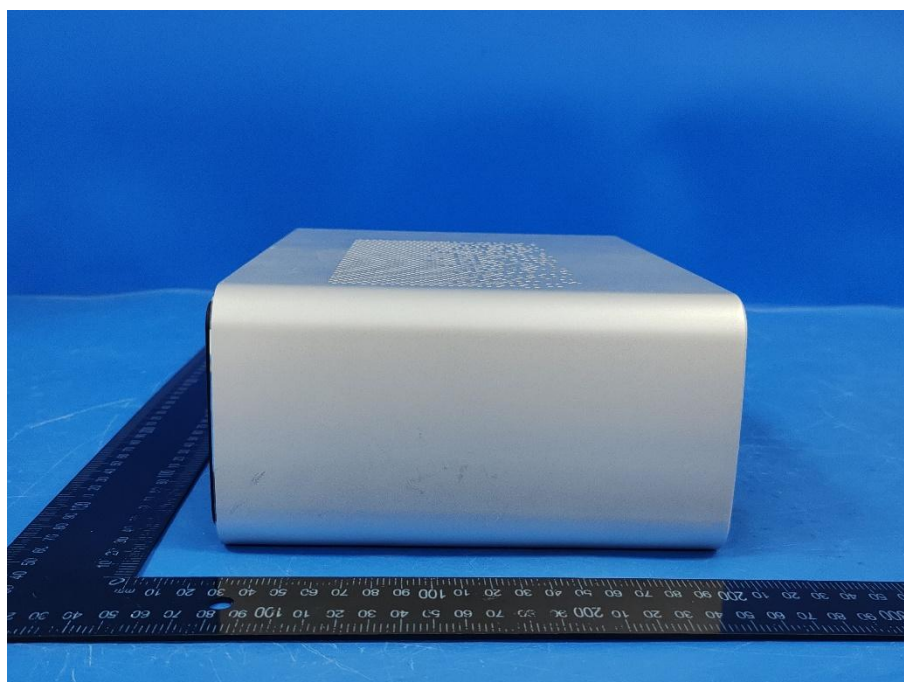


Photo 7



Photo 8



Photo 9

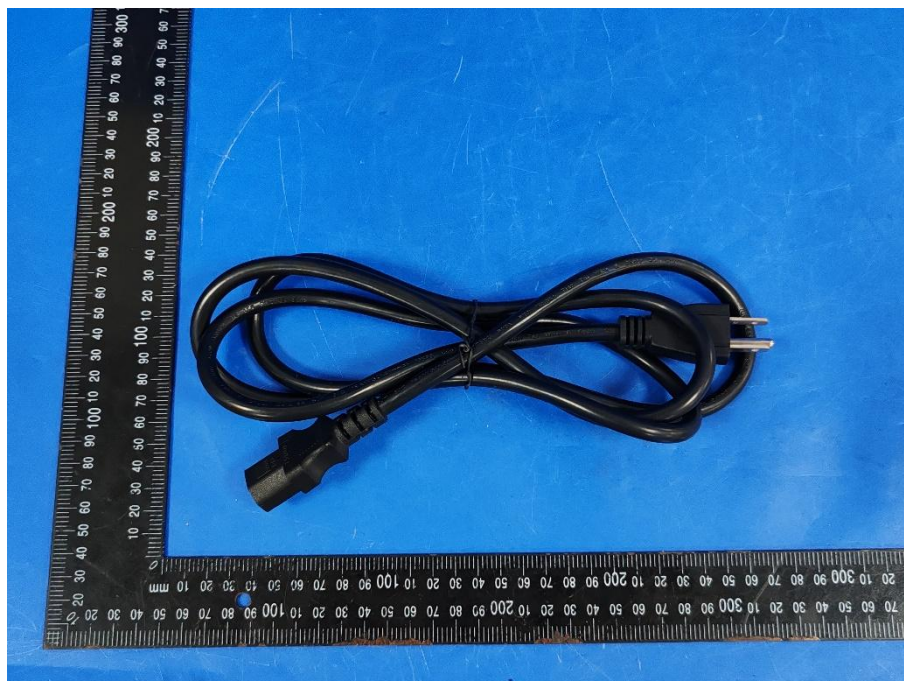


Photo 10



Photo 11

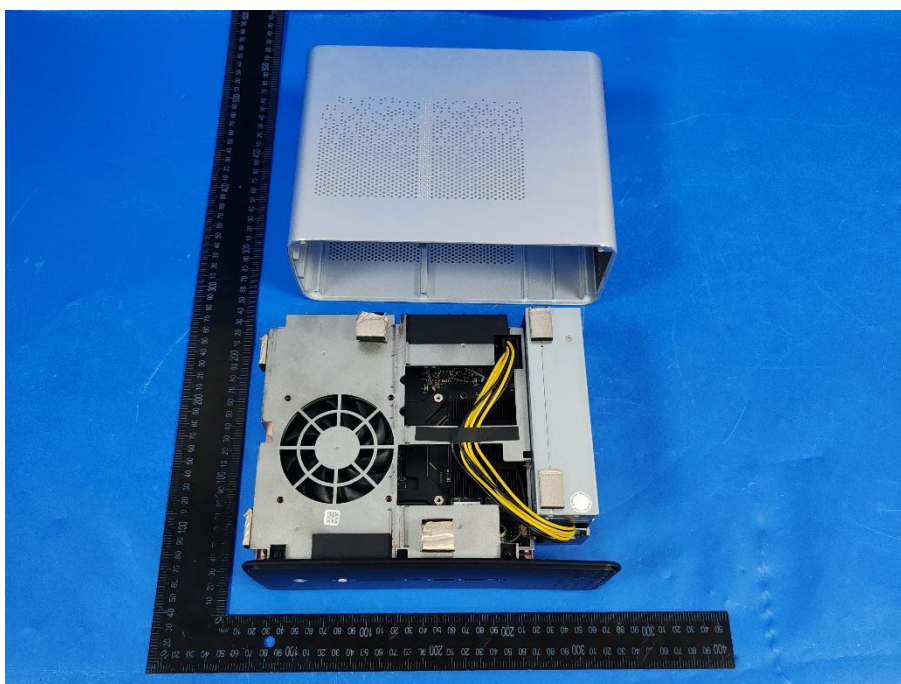


Photo 12

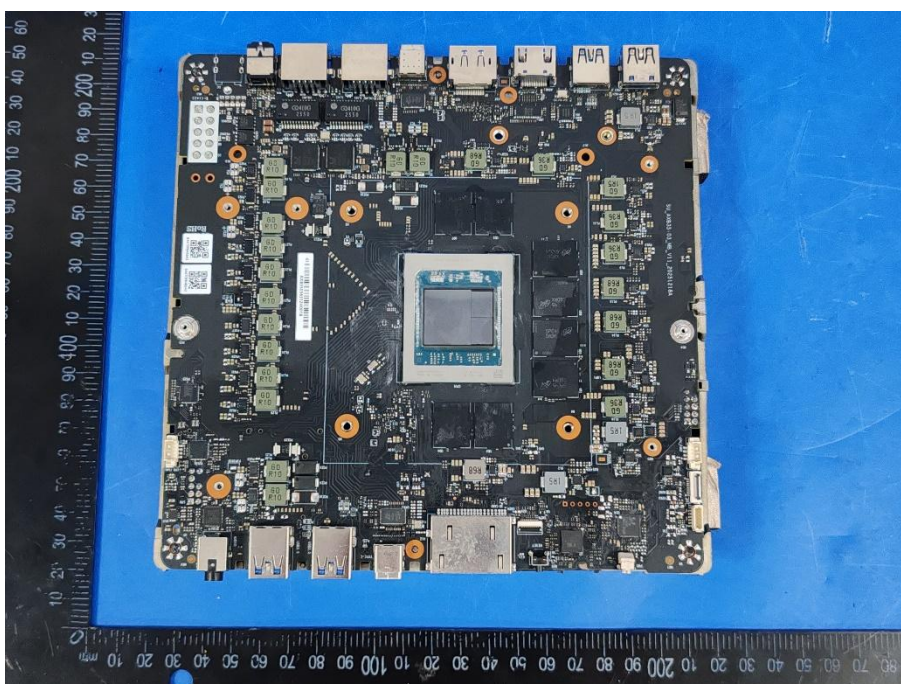


Photo 13

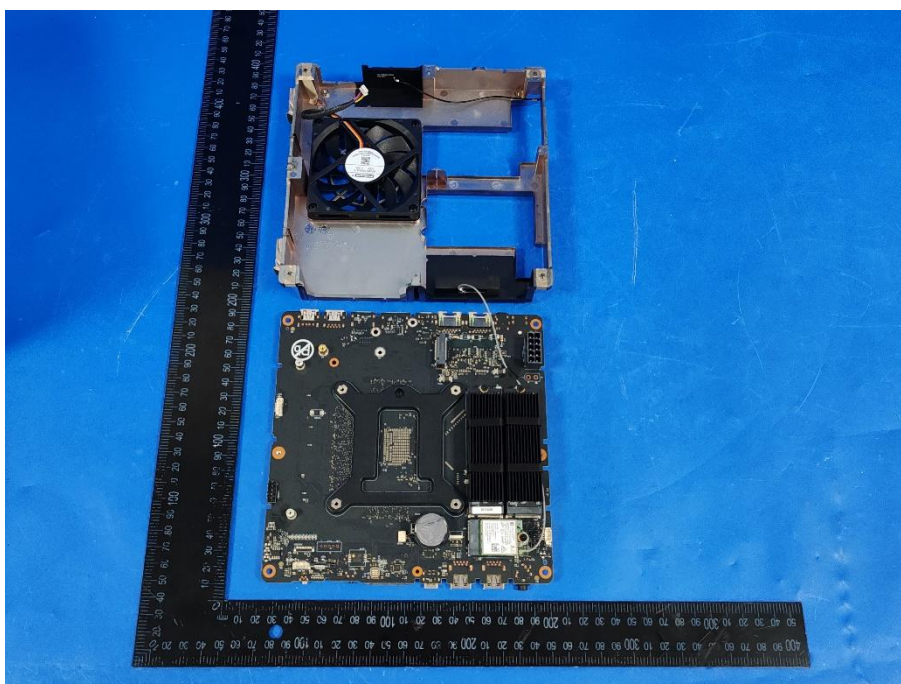


Photo 14



Photo 15

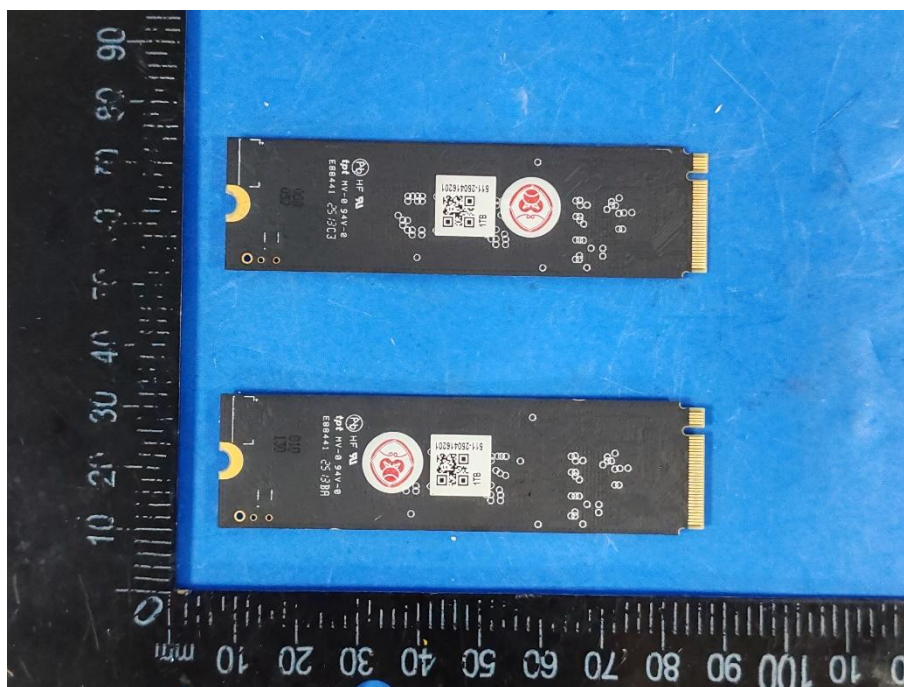


Photo 16

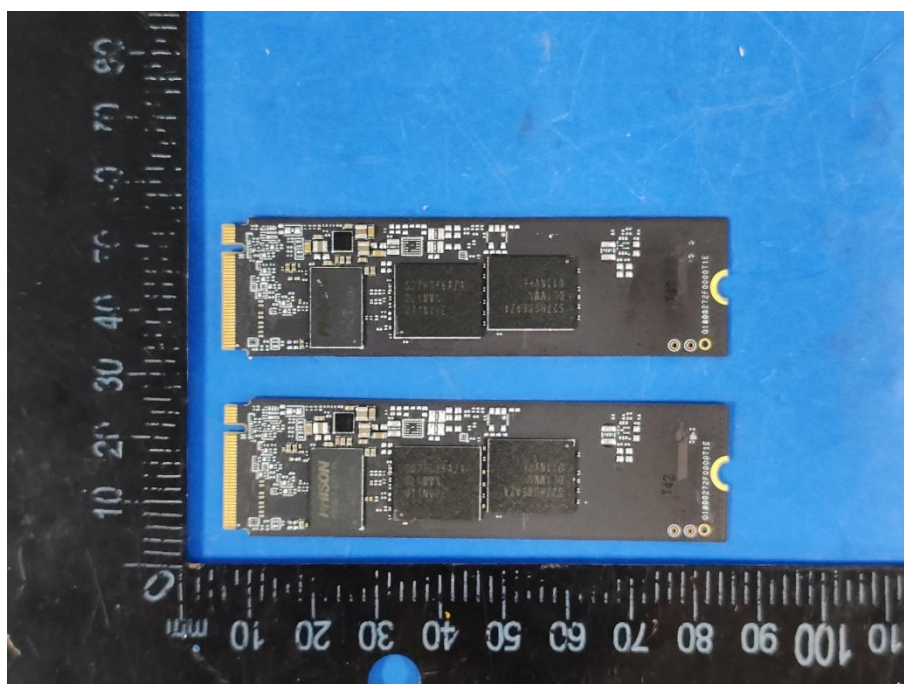




Photo 17

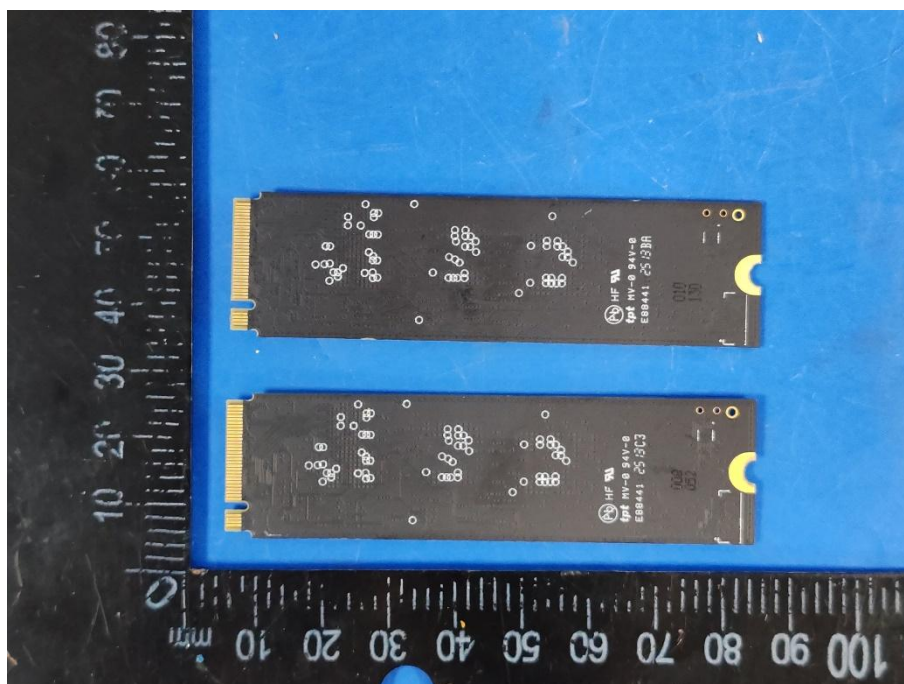


Photo 18



Photo 19

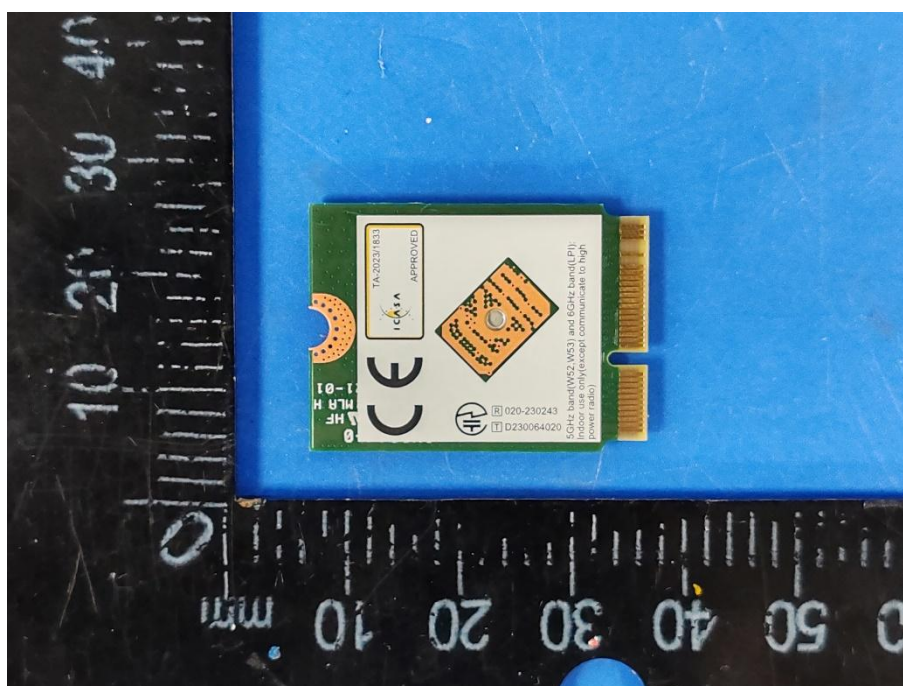


Photo 20

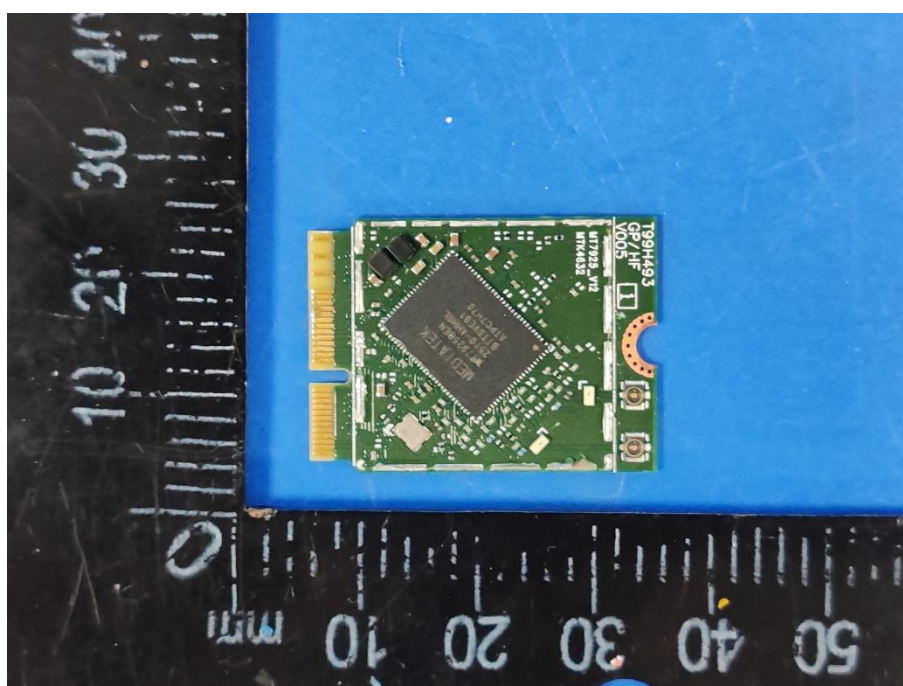


Photo 21



Photo 22

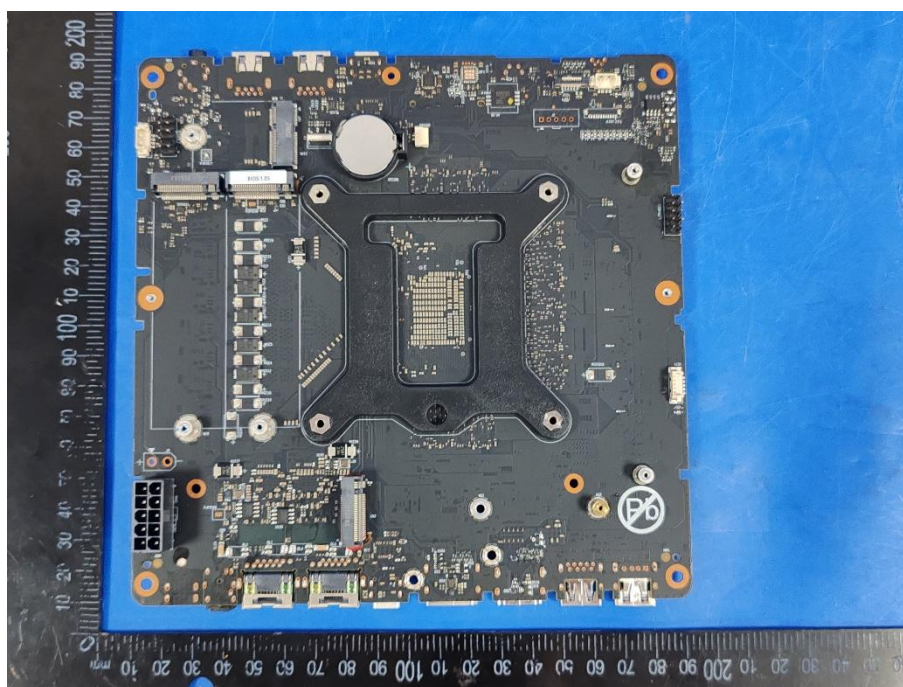


Photo 23

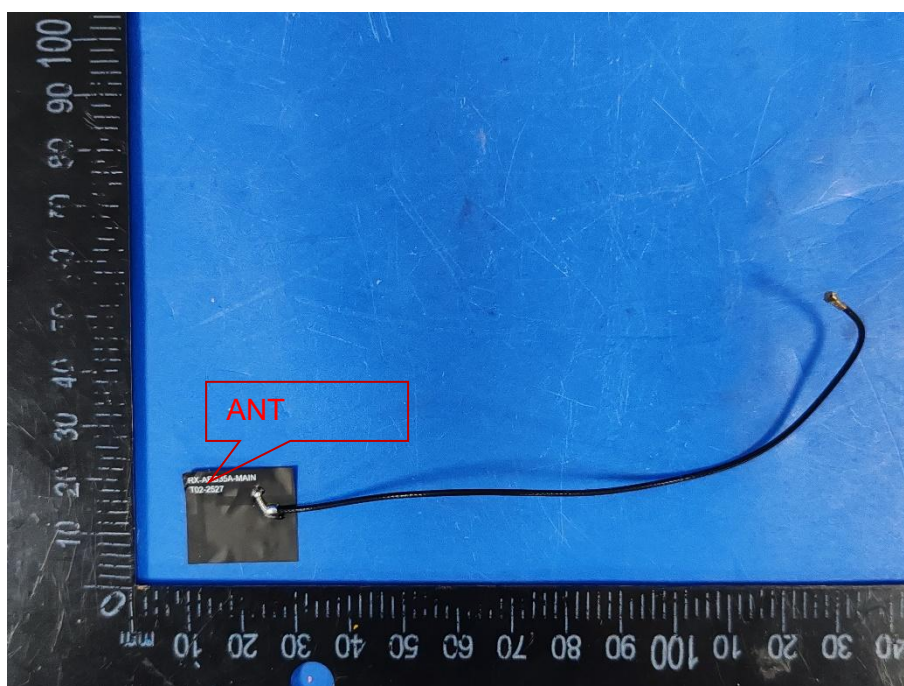


Photo 24

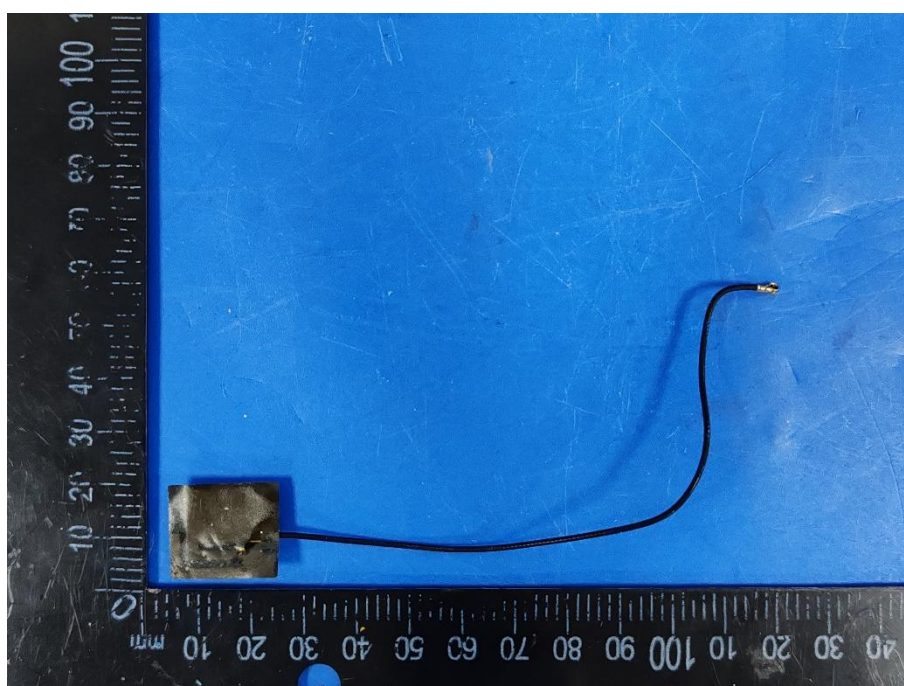


Photo 25

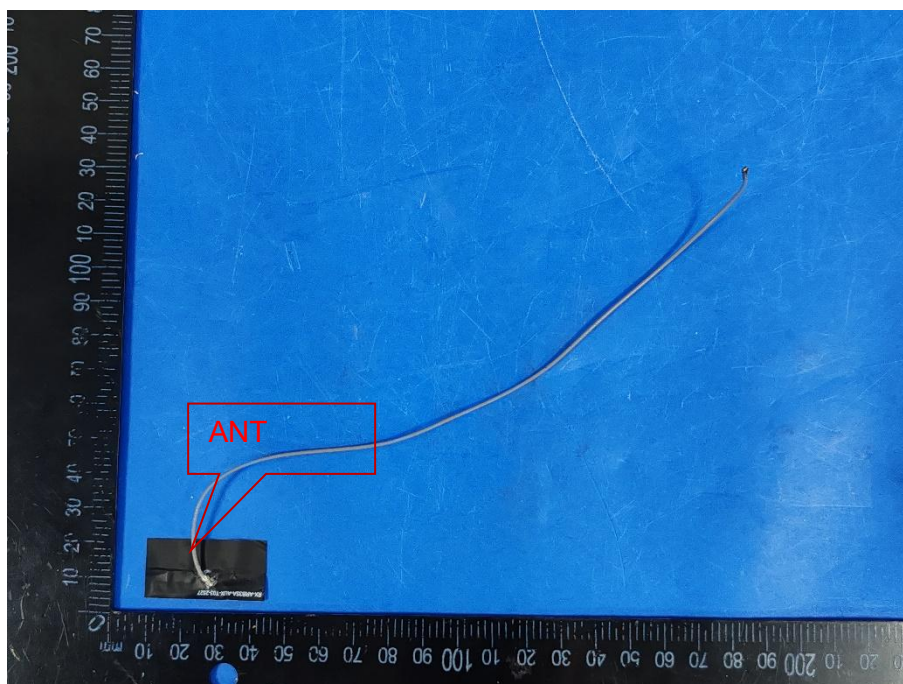


Photo 26



*****END OF THE REPORT*****