



# FCC RF Test Report

APPLICANT : FCNT LLC.  
EQUIPMENT : Mobile cellular phone  
BRAND NAME : arrows We2  
MODEL NAME : FCG02  
FCC ID : 2BEPUFMP196  
STANDARD : 47 CFR Part 2, 27  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)  
TEST DATE(S) : Feb. 27, 2024 ~ Apr. 07, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



## TABLE OF CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                          | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION .....</b>                           | <b>5</b>  |
| 1.1 Applicant .....                                          | 5         |
| 1.2 Manufacturer .....                                       | 5         |
| 1.3 Product Feature of Equipment Under Test .....            | 5         |
| 1.4 Product Specification of Equipment Under Test .....      | 5         |
| 1.5 Modification of EUT .....                                | 5         |
| 1.6 Maximum EIRP and Emission Designator .....               | 6         |
| 1.7 Testing Location .....                                   | 6         |
| 1.8 Test Software .....                                      | 6         |
| 1.9 Applicable Standards .....                               | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>    | <b>8</b>  |
| 2.1 Test Mode .....                                          | 8         |
| 2.2 Connection Diagram of Test System .....                  | 9         |
| 2.3 Support Unit used in test configuration and system ..... | 9         |
| 2.4 Measurement Results Explanation Example .....            | 10        |
| 2.5 Frequency List of Low/Middle/High Channels .....         | 10        |
| <b>3 CONDUCTED TEST ITEMS .....</b>                          | <b>11</b> |
| 3.1 Measuring Instruments .....                              | 11        |
| 3.2 Test Setup .....                                         | 11        |
| 3.3 Test Result of Conducted Test .....                      | 11        |
| 3.4 Conducted Output Power and EIRP .....                    | 12        |
| 3.5 Peak-to-Average Ratio .....                              | 13        |
| 3.6 Occupied Bandwidth .....                                 | 14        |
| 3.7 Conducted Band Edge .....                                | 15        |
| 3.8 Conducted Spurious Emission .....                        | 16        |
| 3.9 Frequency Stability .....                                | 17        |
| <b>4 RADIATED TEST ITEMS .....</b>                           | <b>18</b> |
| 4.1 Measuring Instruments .....                              | 18        |
| 4.2 Test Setup .....                                         | 18        |
| 4.3 Test Result of Radiated Test .....                       | 19        |
| 4.4 Radiated Spurious Emission .....                         | 20        |
| <b>5 LIST OF MEASURING EQUIPMENT .....</b>                   | <b>21</b> |
| <b>6 MEASUREMENT UNCERTAINTY .....</b>                       | <b>22</b> |
| <b>APPENDIX A. TEST RESULTS OF CONDUCTED TEST</b>            |           |
| <b>APPENDIX B. TEST RESULTS OF RADIATED TEST</b>             |           |
| <b>APPENDIX C. TEST SETUP PHOTOGRAPHS</b>                    |           |



REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE  |
|--------------|---------|-------------------------|--------------|
| FG3D0613-02C | Rev. 01 | Initial issue of report | May 22, 2024 |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |
|              |         |                         |              |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                   | Description                                  | Limit                               | Result | Remark                                       |
|----------------|----------------------------|----------------------------------------------|-------------------------------------|--------|----------------------------------------------|
| 3.4            | §2.1046                    | Conducted Output Power                       | Reporting Only                      | PASS   | -                                            |
|                | §27.50(h)(2)               | Equivalent Isotropic Radiated Power          | EIRP < 2Watt                        |        |                                              |
| 3.5            | §24.232(d)<br>§27.50(j)(4) | Peak-to-Average Ratio                        | <13 dB                              | PASS   | -                                            |
| 3.6            | §2.1049                    | Occupied Bandwidth                           | Reporting Only                      | PASS   | -                                            |
| 3.7            | §27.53(m)(4)               | Conducted Band Edge Measurement              | §27.53(m)(4)                        | PASS   |                                              |
| 3.8            | §2.1051<br>§27.53(m)(4)    | Conducted Spurious Emission                  | < 55+10log <sub>10</sub> (P[Watts]) | PASS   |                                              |
| 3.9            | §24.235<br>§27.54          | Frequency Stability<br>Temperature & Voltage | Within Authorized Band              | PASS   | -                                            |
| 4.4            | §2.1053<br>§27.53(m)(4)    | Radiated Spurious Emission                   | < 55+10log <sub>10</sub> (P[Watts]) | PASS   | Under limit<br>24.27 dB at<br>7626.00<br>MHz |

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

# 1 General Description

## 1.1 Applicant

FCNT LLC.

Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

## 1.2 Manufacturer

FCNT LLC.

Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan

## 1.3 Product Feature of Equipment Under Test

| Product Feature |                                                                                            |
|-----------------|--------------------------------------------------------------------------------------------|
| Equipment       | Mobile cellular phone                                                                      |
| Brand Name      | arrows We2                                                                                 |
| Model Name      | FCG02                                                                                      |
| FCC ID          | 2BEPUFMP196                                                                                |
| IMEI Code       | Conducted : 353726530010209/353726530010217<br>Radiation : 353726530035040/353726530035057 |
| HW Version      | V4                                                                                         |
| SW Version      | sys_miss_yamato-userdebug 14 UP1A.231005.007 258 release-keys                              |
| EUT Stage       | Identical Prototype                                                                        |

## 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                 |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|
| Tx Frequency                            | 5G NR n41 : 2496 MHz ~ 2690 MHz                                                                 |
| Rx Frequency                            | 5G NR n41 : 2496 MHz ~ 2690 MHz                                                                 |
| Bandwidth                               | 5G NR n41 : 20MHz / 30MHz                                                                       |
| SCS                                     | 30kHz                                                                                           |
| Antenna Gain                            | 5G NR n41 : -2.67 dBi                                                                           |
| Type of Modulation                      | CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM<br>DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM |

Remark: 5G NR n41 support SA mode only.

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Maximum EIRP and Emission Designator

| 5G NR n41 |                       | PI/2 BPSK / QPSK |                              | 16QAM / 64QAM / 256QAM |                              |
|-----------|-----------------------|------------------|------------------------------|------------------------|------------------------------|
| BW (MHz)  | Frequency Range (MHz) | Maximum EIRP(W)  | Emission Designator (99%OBW) | Maximum EIRP(W)        | Emission Designator (99%OBW) |
| 30        | 2511.00 ~ 2674.98     | 0.0294           | 27M9G7D                      | 0.0278                 | 27M9W7D                      |

**Note:** All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

## 1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

|                    |                                                                                                                                                |                     |                                |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|--------------------------------|
| Test Firm          | Sporton International Inc. (Kunshan)                                                                                                           |                     |                                |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone<br>Jiangsu Province 215300 People's Republic of China<br>TEL : +86-512-57900158 |                     |                                |
| Test Site No.      | Sporton Site No.                                                                                                                               | FCC Designation No. | FCC Test Firm Registration No. |
|                    | 03CH04-KS<br>TH01-KS                                                                                                                           | CN1257              | 314309                         |

## 1.8 Test Software

| Item | Site      | Manufacture | Name                      | Version |
|------|-----------|-------------|---------------------------|---------|
| 1.   | TH01-KS   | SPORTON     | FCC_5GNR_China_2<br>01027 | 1.0     |
| 2.   | 03CH04-KS | AUDIX       | E3                        | 210616  |



## **1.9 Applicable Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

| Orthogonal<br>Planes of EUT | X Plane | Y Plane | Z Plane |
|-----------------------------|---------|---------|---------|
|                             |         |         |         |

| Test Items                  | 5G NR                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Bandwidth (MHz) |    |    |    |    |    |    |    |    |    |    |    |     | Modulation |      |       |       |        | RB # |      | Test Channel |   |   |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|----|----|----|----|----|----|----|----|----|----|----|-----|------------|------|-------|-------|--------|------|------|--------------|---|---|
|                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 5               | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 70 | 80 | 90 | 100 | PI/2 BPSK  | QPSK | 16QAM | 64QAM | 256QAM | 1    | Full | L            | M | H |
| Max. Output Power           | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  | v  | -  | -  | -  | -  | -  | -  | -   | v          | v    | v     | v     | v      | v    | v    | v            | v |   |
| Peak-to-Average Ratio       | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  |    | -  | -  | -  | -  | -  | -  | -   | v          | v    |       |       |        | v    | v    |              | v |   |
| 26dB and 99% Bandwidth      | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  | v  | -  | -  | -  | -  | -  | -  | -   |            | v    | v     | v     | v      |      | v    |              | v |   |
| Conducted Band Edge         | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  | v  | -  | -  | -  | -  | -  | -  | -   | v          | v    |       |       |        | v    | v    | v            |   | v |
| Conducted Spurious Emission | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  | v  | -  | -  | -  | -  | -  | -  | -   | v          | v    |       |       |        | v    |      | v            | v | v |
| Frequency Stability         | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  |    | -  | -  | -  | -  | -  | -  | -   |            | v    |       |       |        |      | v    |              | v |   |
| E.I.R.P.                    | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -               | -  | -  | v  | -  | v  | -  | -  | -  | -  | -  | -  | -   | v          | v    | v     | v     | v      | v    | v    | v            | v |   |
| Radiated Spurious Emission  | n41                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Worst Case      |    |    |    |    |    |    |    |    |    |    |    |     |            |      |       |       |        |      |      |              | v |   |
| Note                        | 1. The mark “v ” means that this configuration is chosen for testing<br>2. The mark “-” means that this bandwidth is not supported.<br>3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.<br>4. Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.40V. ; High Voltage =4.48V |                 |    |    |    |    |    |    |    |    |    |    |    |     |            |      |       |       |        |      |      |              |   |   |

## 2.2 Connection Diagram of Test System

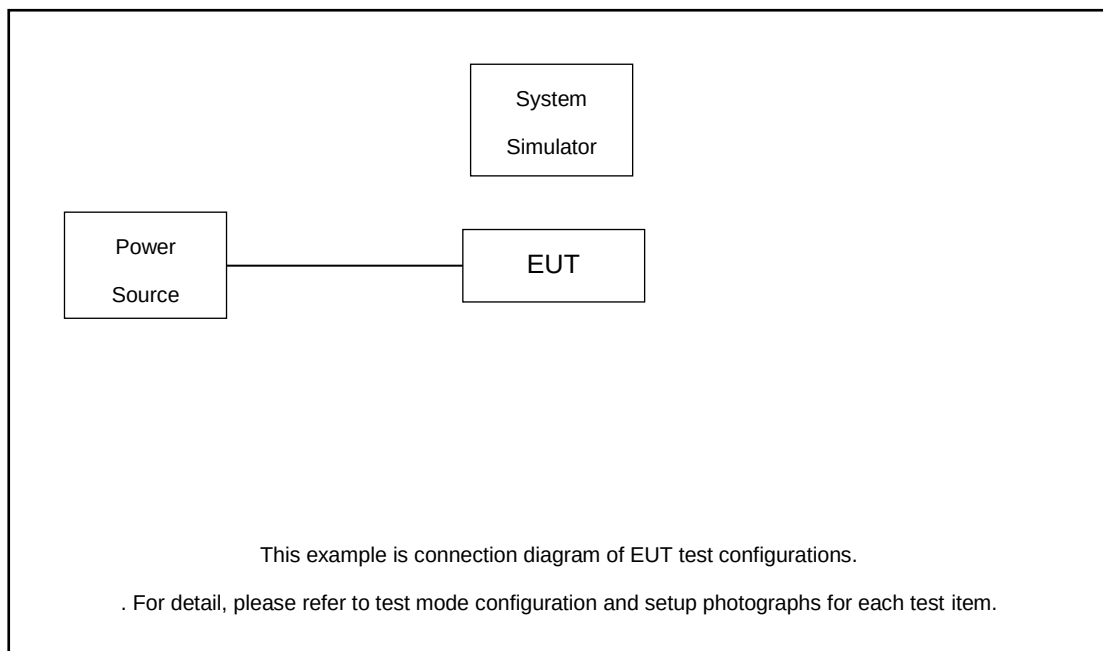

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

## 2.3 Support Unit used in test configuration and system

| Item | Equipment       | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|-----------------|------------|-----------|--------|------------|-------------------|
| 1.   | DC Power Supply | GW         | GPS-3030D | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | NR Base Station | Anritsu    | MT8000A   | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 6.0 dB and 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6.0 + 20 = 26.0 \text{ (dB)}\end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

| 5G NR n41 Channel and Frequency List |                        |         |         |         |
|--------------------------------------|------------------------|---------|---------|---------|
| BW [MHz]                             | Channel/Frequency(MHz) | Lowest  | Middle  | Highest |
| 30                                   | Channel                | 502200  | 518598  | 534996  |
|                                      | Frequency              | 2511    | 2592.99 | 2674.98 |
| 20                                   | Channel                | 501204  | 518598  | 535998  |
|                                      | Frequency              | 2506.02 | 2592.99 | 2679.99 |


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

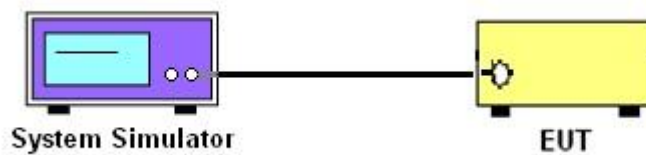

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

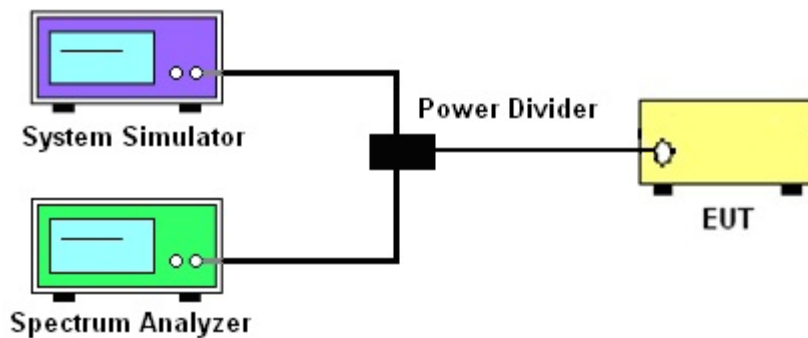

##### 3.2.3 Frequency Stability

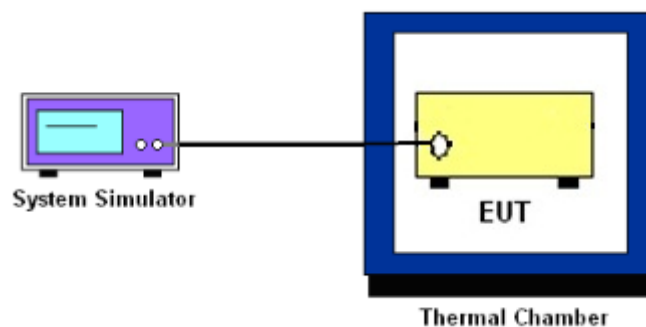

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.

### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n41..

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

## 3.5 Peak-to-Average Ratio

### 3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

## 3.6 Occupied Bandwidth

### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

## 3.7 Conducted Band Edge

### 3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq 1\%$  EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
9. For 5G NR n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For 5G NR n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. For 5G NR n41

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)

=  $P(W) - [55 + 10\log(P)]$  (dB)

=  $[30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)

= -25dBm.

### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

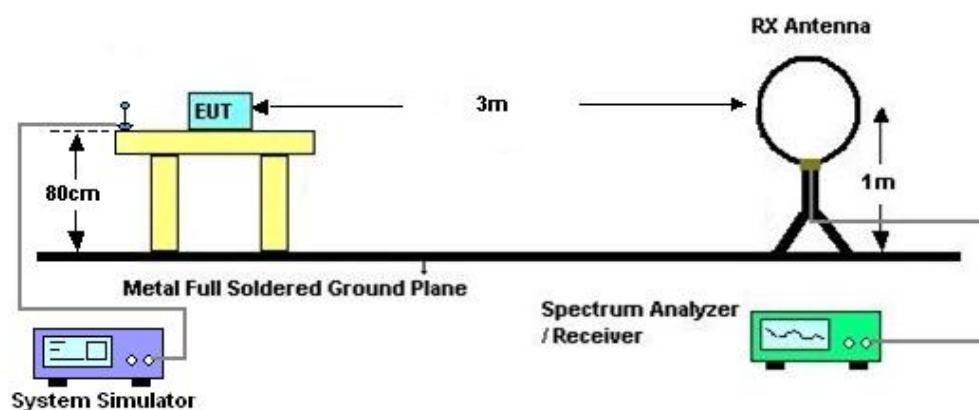

#### 4.2.2 For radiated test from 30MHz to 1GHz

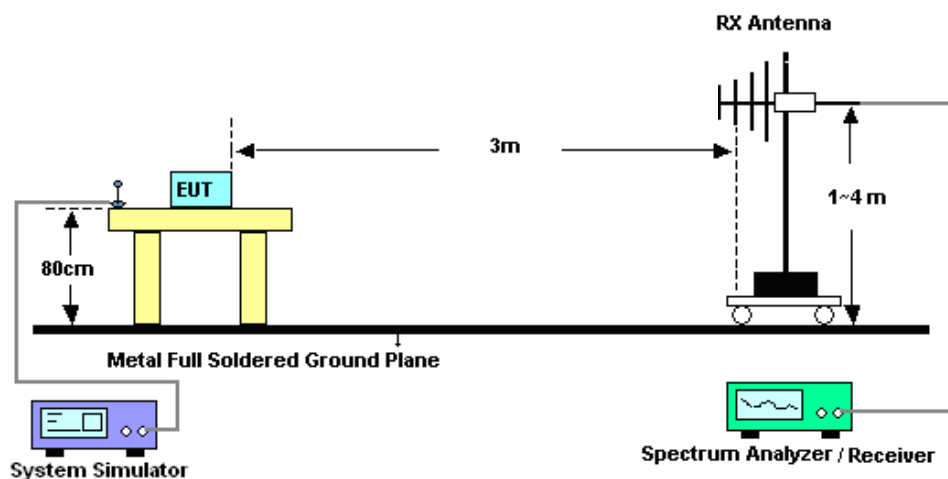

#### 4.2.3 For radiated test above 1GHz

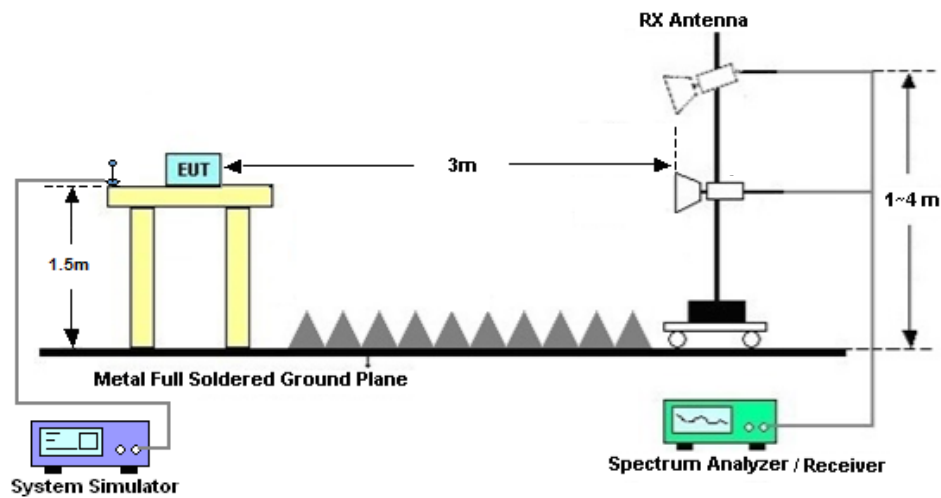

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## **4.4 Radiated Spurious Emission**

### **4.4.1 Description of Radiated Spurious Emission**

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

For 5G NR n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### **4.4.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. For 5G NR n41:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

| Instrument                     | Manufacturer | Model No.   | Serial No.  | Characteristics         | Calibration Date | Test Date     | Due Date      | Remark                |
|--------------------------------|--------------|-------------|-------------|-------------------------|------------------|---------------|---------------|-----------------------|
| Spectrum Analyzer              | R&S          | FSV40       | 101040      | 10Hz~40GHz              | Oct. 11, 2023    | Feb. 27, 2024 | Oct. 10, 2024 | Conducted (TH01-KS)   |
| Power divider                  | STI          | STI08-0055  | -           | 0.5~40GHz               | NCR              | Feb. 27, 2024 | NCR           | Conducted (TH01-KS)   |
| Temperature & humidity chamber | Hongzhan     | LP-150U     | H2014011440 | -40~+150°C<br>20%~95%RH | Jul. 06, 2023    | Feb. 27, 2024 | Jul. 05, 2024 | Conducted (TH01-KS)   |
| EXA Spectrum Analyzer          | Keysight     | N9010B      | MY57471079  | 10Hz-44G,MAX 30dB       | Oct. 10, 2023    | Apr. 07, 2024 | Oct. 09, 2024 | Radiation (03CH04-KS) |
| Loop Antenna                   | R&S          | HFH2-Z2E    | 101125      | 9kHz~30MHz              | Sep. 11 2023     | Apr. 07, 2024 | Sep. 10, 2024 | Radiation (03CH04-KS) |
| Bilog Antenna                  | TeseQ        | CBL6111D    | 49922       | 30MHz-1GHz              | Apr. 09, 2023    | Apr. 07, 2024 | Apr. 08, 2024 | Radiation (03CH04-KS) |
| Double Ridge Horn Antenna      | ETS-Lindgren | 3117        | 00251694    | 1GHz~18GHz              | Jul. 12, 2023    | Apr. 07, 2024 | Jul. 11, 2024 | Radiation (03CH04-KS) |
| SHF-EHF Horn                   | Com-power    | AH-840      | 101070      | 18GHz~40GHz             | Jan. 05, 2024    | Apr. 07, 2024 | Jan. 04, 2025 | Radiation (03CH04-KS) |
| Amplifier                      | SONOMA       | 310N        | 380827      | 9KHz-1GHz               | Jul. 06, 2023    | Apr. 07, 2024 | Jul. 05, 2024 | Radiation (03CH04-KS) |
| Amplifier                      | MITEQ        | EM18G40G GA | 060728      | 18~40GHz                | Jan. 05, 2024    | Apr. 07, 2024 | Jan. 04, 2025 | Radiation (03CH04-KS) |
| high gain Amplifier            | EM           | EM01G18G A  | 060840      | 1Ghz-18Ghz              | Oct. 10, 2023    | Apr. 07, 2024 | Oct. 09, 2024 | Radiation (03CH04-KS) |
| Amplifier                      | Agilent      | 8449B       | 3008A02370  | 1Ghz-18Ghz              | Oct. 10, 2023    | Apr. 07, 2024 | Oct. 09, 2024 | Radiation (03CH04-KS) |
| AC Power Source                | Chroma       | 61601       | F104090004  | N/A                     | NCR              | Apr. 07, 2024 | NCR           | Radiation (03CH04-KS) |
| Turn Table                     | ChamPro      | EM 1000-T   | 060762-T    | 0~360 degree            | NCR              | Apr. 07, 2024 | NCR           | Radiation (03CH04-KS) |
| Antenna Mast                   | ChamPro      | EM 1000-A   | 060762-A    | 1 m~4 m                 | NCR              | Apr. 07, 2024 | NCR           | Radiation (03CH04-KS) |

NCR: No Calibration Required

## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

|                                        |          |
|----------------------------------------|----------|
| Conducted Spurious Emission & Bandedge | ±2.26 dB |
| Occupied Channel Bandwidth             | ±0.1%    |
| Conducted Power                        | ±0.46 dB |
| Peak to Average Ratio                  | ±0.46 dB |
| Frequency Stability                    | ±0.4 Hz  |

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                     |         |
|---------------------------------------------------------------------|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.82 dB |
|---------------------------------------------------------------------|---------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

|                                                                     |         |
|---------------------------------------------------------------------|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.56 dB |
|---------------------------------------------------------------------|---------|

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

|                                                                     |         |
|---------------------------------------------------------------------|---------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 3.54 dB |
|---------------------------------------------------------------------|---------|

----- THE END -----



## Appendix A. Test Results of Conducted Test

|                 |            |                     |         |
|-----------------|------------|---------------------|---------|
| Test Engineer : | Simle Wang | Temperature :       | 22~23°C |
|                 |            | Relative Humidity : | 40~42%  |

### Conducted Output Power(Average power) and EIRP

| BW [MHz]        | Modulation | RB Size | RB Offset | Power Low Ch. / Freq. | Power Middle Ch. / Freq. | Power High Ch. / Freq. | EIRP (W) |        |        |
|-----------------|------------|---------|-----------|-----------------------|--------------------------|------------------------|----------|--------|--------|
| Channel         |            |         |           | 502200                | 518598                   | 534996                 | L        | M      | H      |
| Frequency (MHz) |            |         |           | 2511                  | 2592.99                  | 2674.98                |          |        |        |
| 30              | QPSK       | 1       | 1         | 17.17                 | 17.35                    | 16.98                  | 0.0282   | 0.0294 | 0.0270 |
| 30              | QPSK       | 1       | 39        | 17.04                 | 17.17                    | 17.04                  | 0.0274   | 0.0282 | 0.0274 |
| 30              | QPSK       | 1       | 76        | 17.23                 | 17.18                    | 17.19                  | 0.0286   | 0.0282 | 0.0283 |
| 30              | QPSK       | 36      | 0         | 17.08                 | 17.24                    | 17.12                  | 0.0276   | 0.0286 | 0.0279 |
| 30              | QPSK       | 36      | 18        | 17.13                 | 17.30                    | 17.09                  | 0.0279   | 0.0290 | 0.0277 |
| 30              | QPSK       | 36      | 39        | 17.05                 | 17.27                    | 17.06                  | 0.0274   | 0.0288 | 0.0275 |
| 30              | QPSK       | 75      | 0         | 17.17                 | 17.20                    | 17.11                  | 0.0282   | 0.0284 | 0.0278 |
| 30              | 16QAM      | 1       | 1         | 17.02                 | 17.11                    | 16.96                  | 0.0272   | 0.0278 | 0.0269 |
| 30              | 64QAM      | 1       | 1         | 16.89                 | 16.95                    | 16.85                  | 0.0264   | 0.0268 | 0.0262 |
| 30              | 256QAM     | 1       | 1         | 16.84                 | 16.88                    | 16.82                  | 0.0261   | 0.0264 | 0.0260 |
| Channel         |            |         |           | 501204                | 518598                   | 535998                 | L        | M      | H      |
| Frequency (MHz) |            |         |           | 2506.02               | 2592.99                  | 2679.99                |          |        |        |
| 20              | QPSK       | 1       | 1         | 17.17                 | 17.32                    | 16.98                  | 0.0282   | 0.0292 | 0.0270 |

# FR1 N41

## Frequency Stability

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB   | Deviation (ppm) | Verdict | Environment |
|---------|-----------|-----------------|--------|------------|-----------------|------|-----------------|---------|-------------|
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0013          | PASS    | NV          |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0026          | PASS    | LV          |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | -0.0017         | PASS    | HV          |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0011          | PASS    | -30℃        |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0023          | PASS    | -20℃        |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0021          | PASS    | -10℃        |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | -0.0015         | PASS    | 0℃          |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0014          | PASS    | 10℃         |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0031          | PASS    | 20℃         |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0028          | PASS    | 30℃         |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | -0.0041         | PASS    | 40℃         |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 0.0024          | PASS    | 50℃         |

Peak to Average Ratio

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB   | Result (dB) | Limit (dB) | Verdict |
|---------|-----------|-----------------|--------|------------|-----------------|------|-------------|------------|---------|
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM BPSK | 50@0 | 7.56        | 13         | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM BPSK | 1@0  | 6.46        | 13         | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 50@0 | 7.55        | 13         | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM QPSK | 1@0  | 7.41        | 13         | PASS    |

N41(20M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH



N41(20M)\_DFT-s -  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH



N41(20M)\_DFT-s -OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH




N41(20M)\_DFT-s -OFDM\_16  
QAM\_Edge\_1RB\_Left\_Mid\_CH




## Occupied Bandwidth

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation      | RB   | OBW (MHz) | 26dB BW (MHz) |
|---------|-----------|-----------------|--------|------------|-----------------|------|-----------|---------------|
| 41      | 30        | 20              | 518598 | 2592.99    | CP-OFDM QPSK    | 51@0 | 18.177    | 19.47         |
| 41      | 30        | 20              | 518598 | 2592.99    | CP-OFDM 16 QAM  | 51@0 | 18.224    | 18.95         |
| 41      | 30        | 20              | 518598 | 2592.99    | CP-OFDM 64 QAM  | 51@0 | 18.179    | 19.14         |
| 41      | 30        | 20              | 518598 | 2592.99    | CP-OFDM 256 QAM | 51@0 | 18.135    | 19.25         |
| 41      | 30        | 30              | 518598 | 2592.99    | CP-OFDM QPSK    | 78@0 | 27.883    | 28.77         |
| 41      | 30        | 30              | 518598 | 2592.99    | CP-OFDM 16 QAM  | 78@0 | 27.85     | 28.9          |
| 41      | 30        | 30              | 518598 | 2592.99    | CP-OFDM 64 QAM  | 78@0 | 27.835    | 29.13         |
| 41      | 30        | 30              | 518598 | 2592.99    | CP-OFDM 256 QAM | 78@0 | 27.847    | 29.26         |


N41(20M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

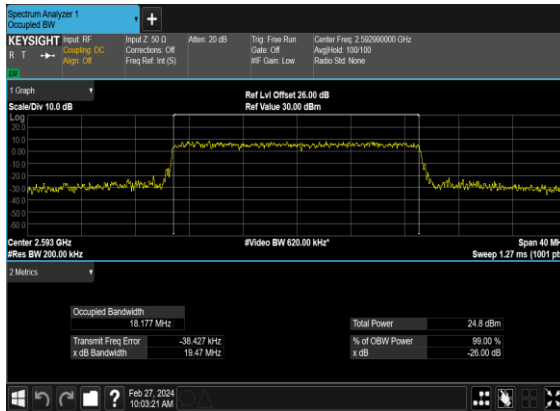


N41(20M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH

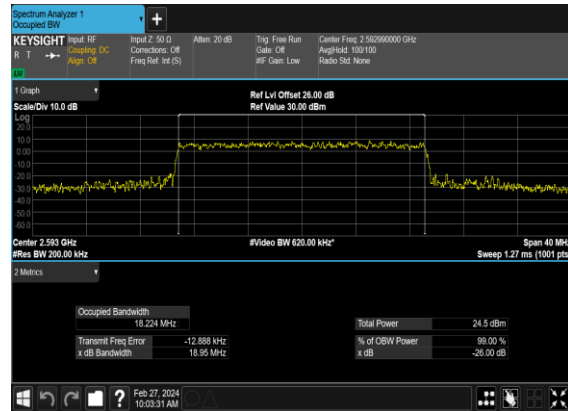


N41(20M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

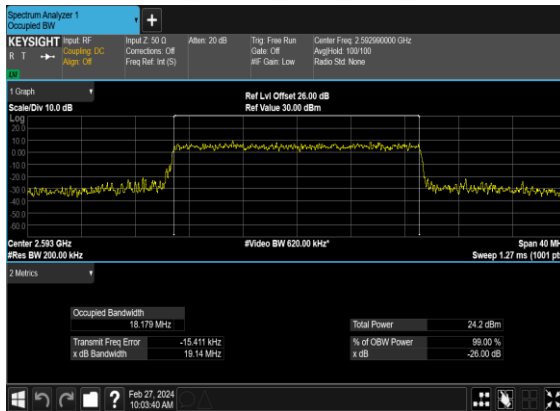


N41(20M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

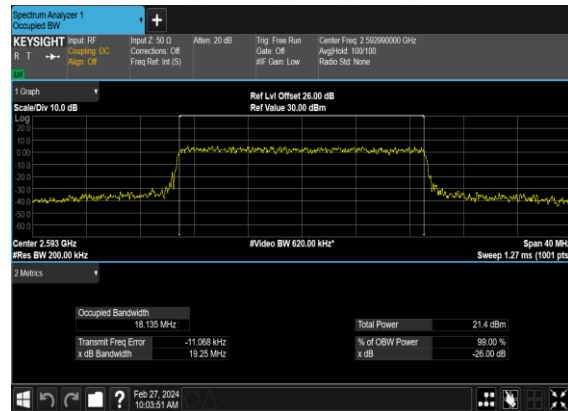


N41(30M)\_CP-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

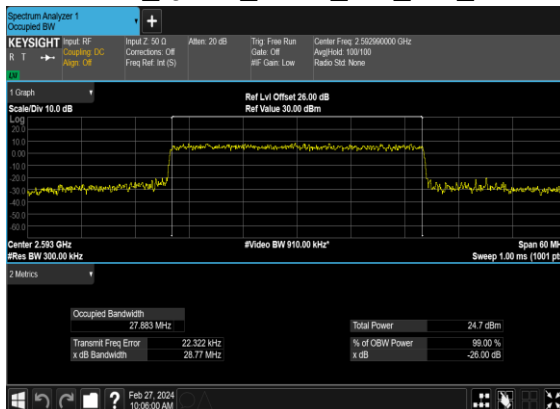


N41(30M)\_CP-OFDM\_16  
QAM\_Outer\_Full\_Mid\_CH

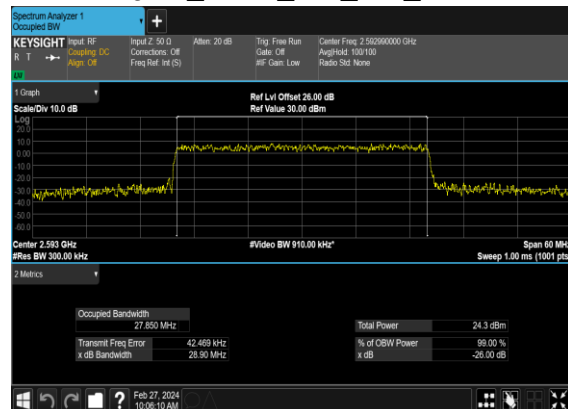

N41(30M)\_CP-OFDM\_64  
QAM\_Outer\_Full\_Mid\_CH

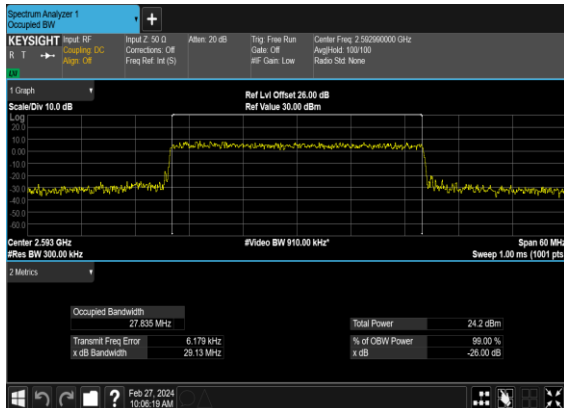

N41(30M)\_CP-OFDM\_256  
QAM\_Outer\_Full\_Mid\_CH

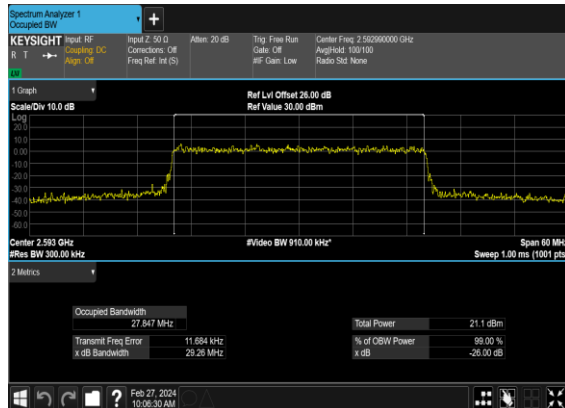


## Conducted Spurious Emissions


| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation         | RB  | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|--------------------|-----|-----------|---------|
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 518598 | 2592.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | ---     |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>BPSK | 1@0 | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>QPSK | 1@0 | see graph | ---     |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>QPSK | 1@0 | see graph | PASS    |

|    |    |    |        |         |                 |     |           |      |
|----|----|----|--------|---------|-----------------|-----|-----------|------|
| 41 | 30 | 30 | 502200 | 2511.0  | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 518598 | 2592.99 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM BPSK | 1@0 | see graph | ---  |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM BPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM QPSK | 1@0 | see graph | ---  |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |
| 41 | 30 | 30 | 534996 | 2674.98 | DFT-s-OFDM QPSK | 1@0 | see graph | PASS |


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

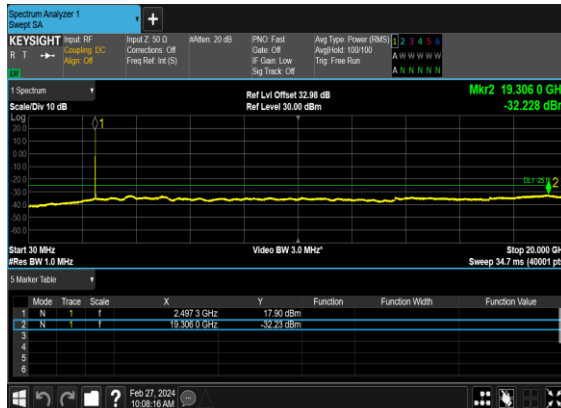


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

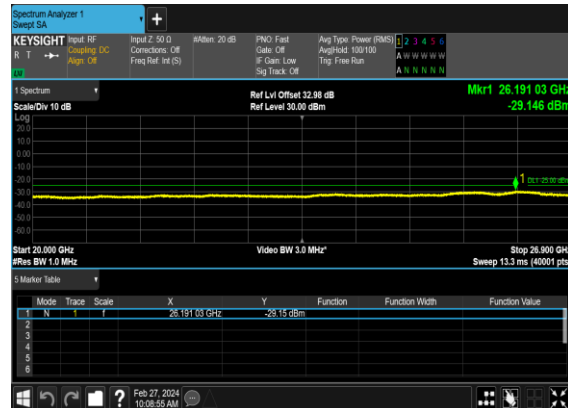


N41(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

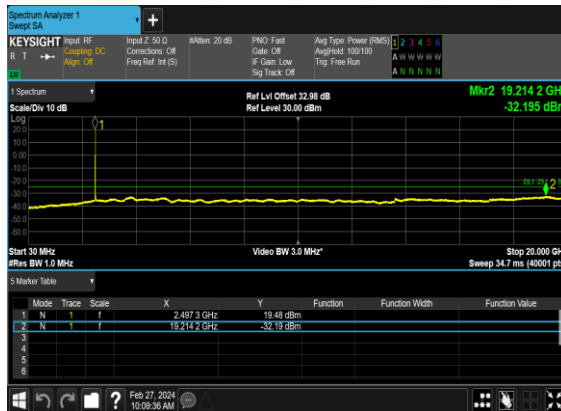


N41(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

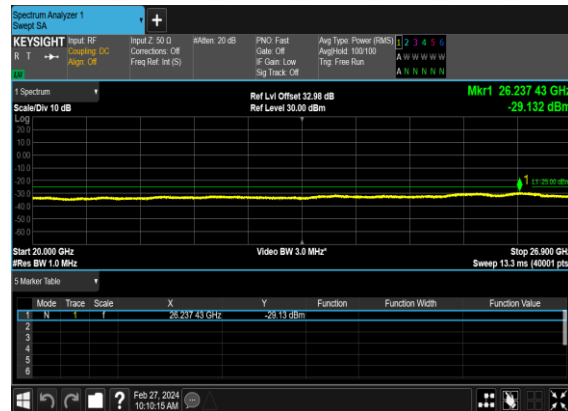


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

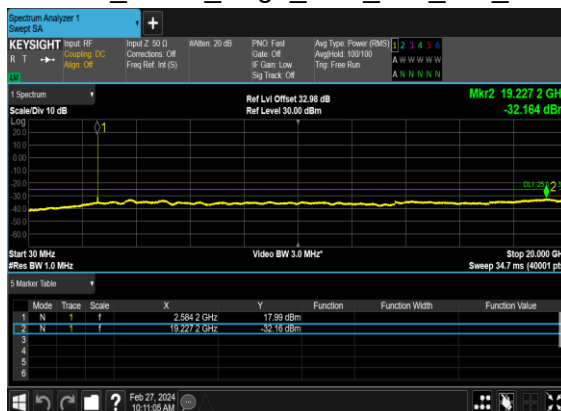


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

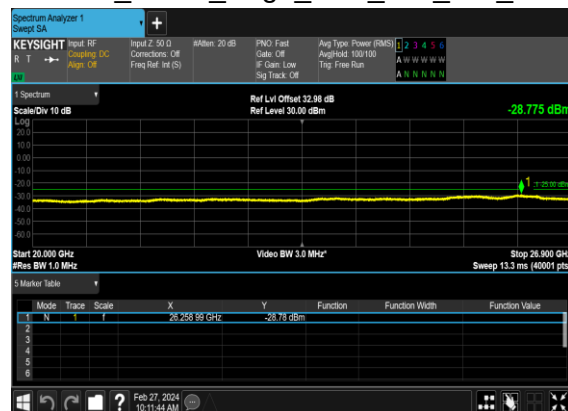


# N41(20M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

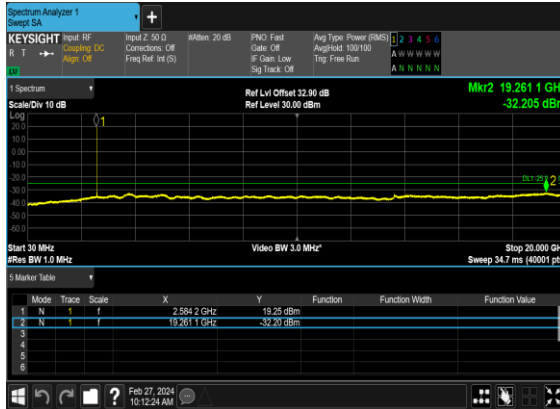


# N41(20M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

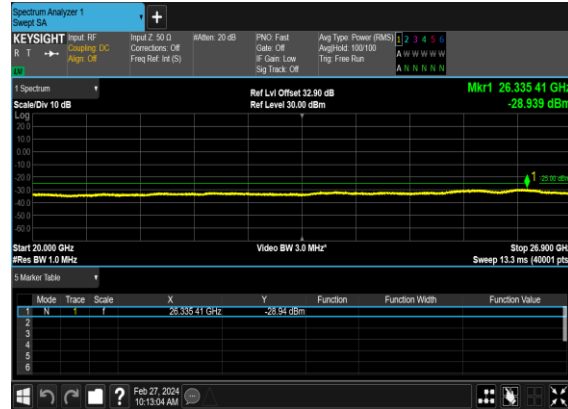


# N41(20M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

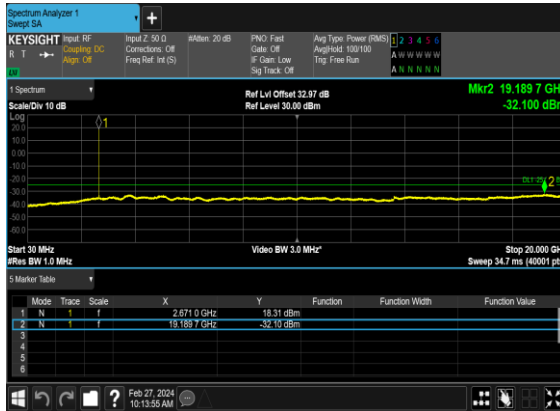


# N41(20M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

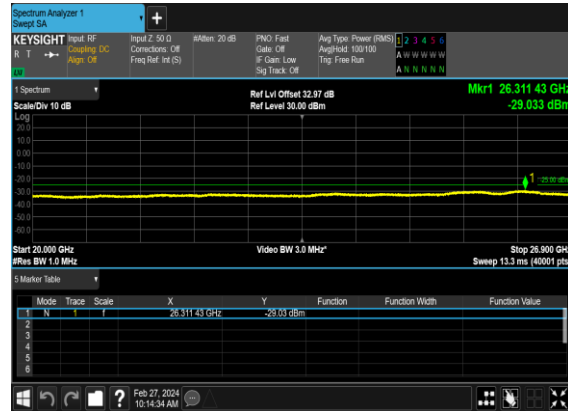


# N41(20M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

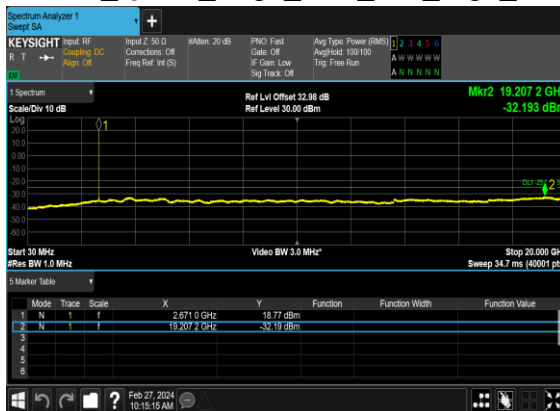


# N41(20M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

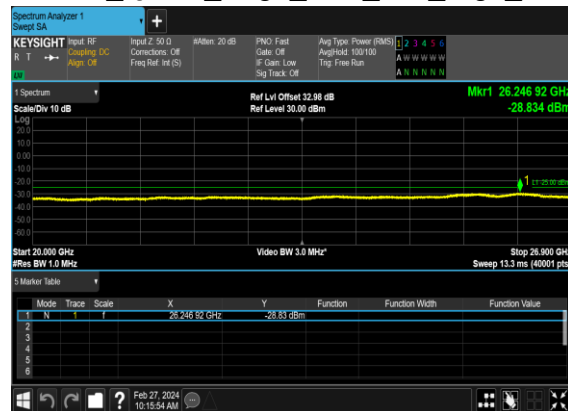


# N41(30M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

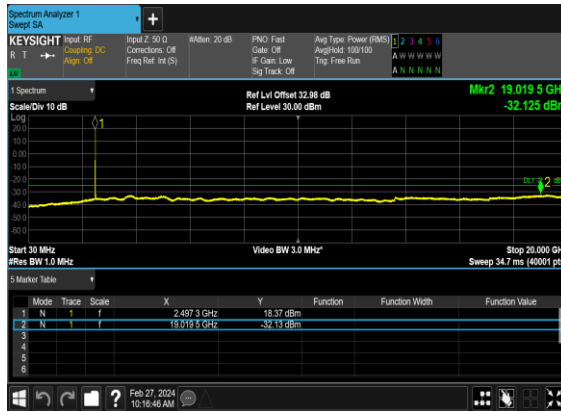


# N41(30M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

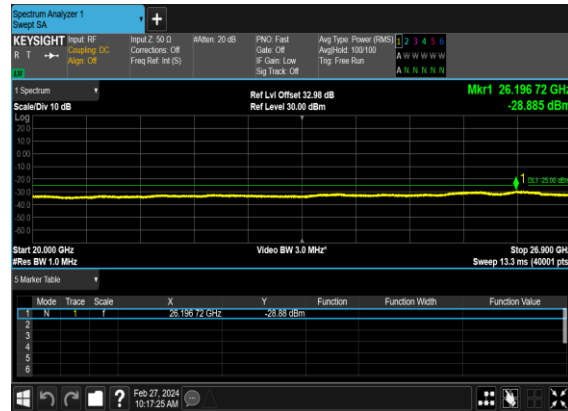


# N41(30M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

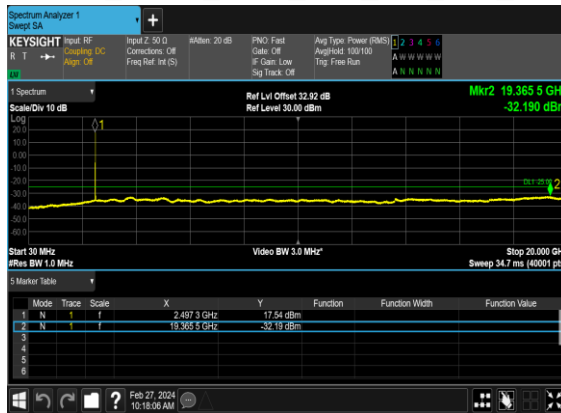


# N41(30M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

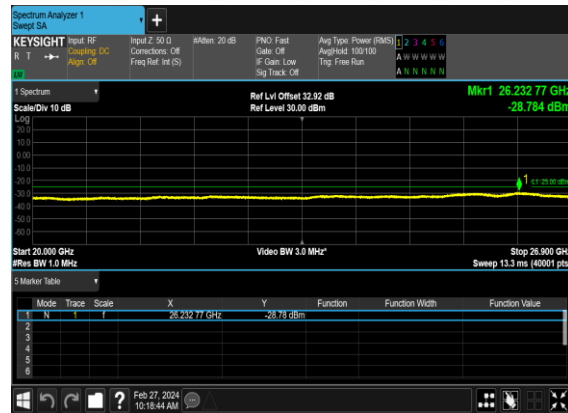


# N41(30M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

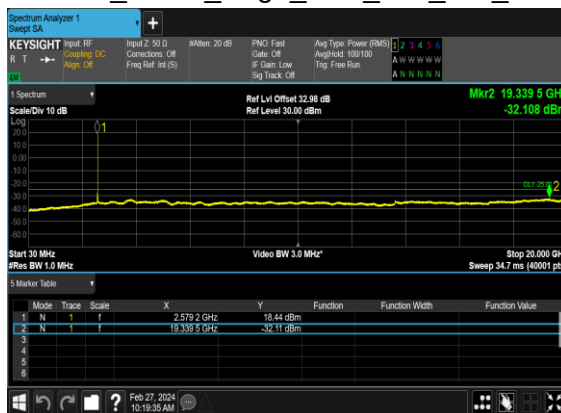


# N41(30M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

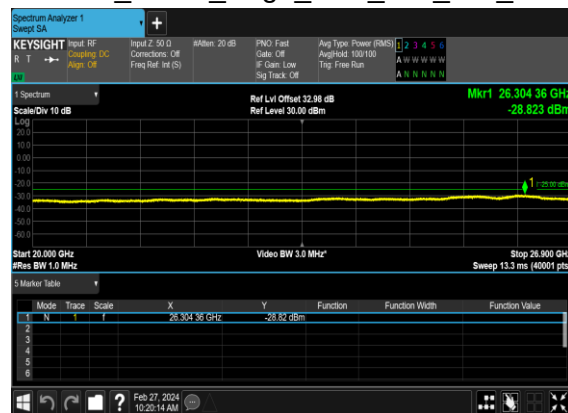


N41(30M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

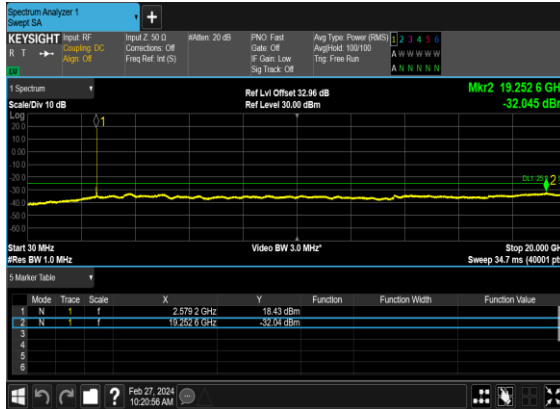


N41(30M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

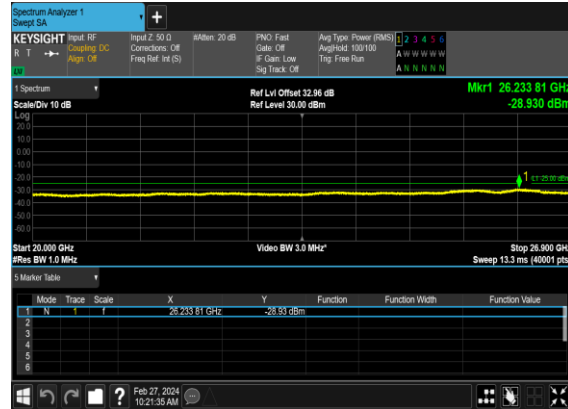


N41(30M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

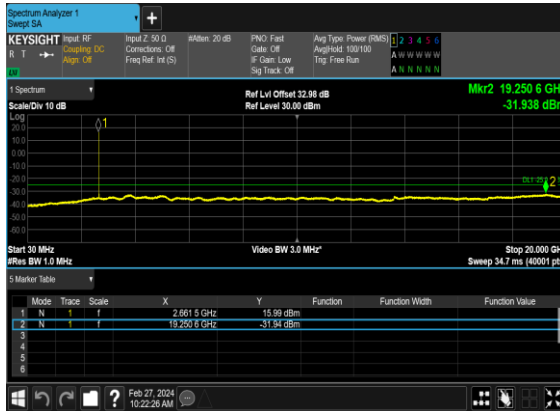


N41(30M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

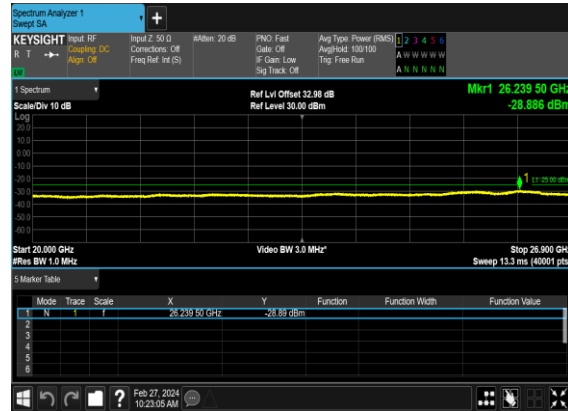

N41(30M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

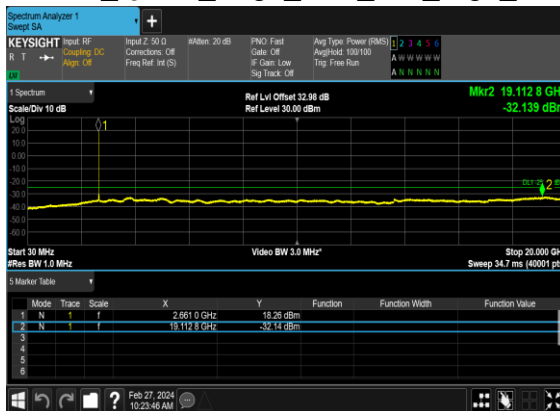


N41(30M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

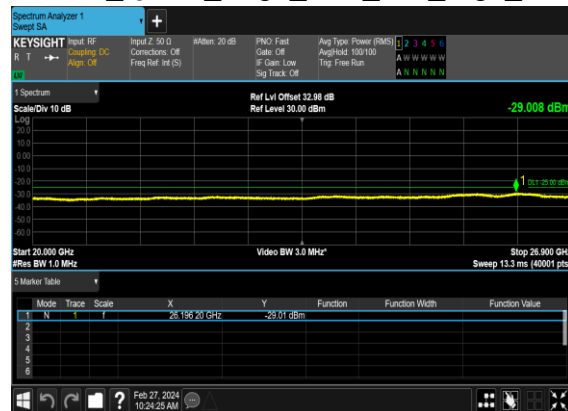


## Conducted Band Edge

| NR Band | SCS (kHz) | Bandwidth (MHz) | Arfcn  | Freq (MHz) | Modulation         | RB   | Result    | Verdict |
|---------|-----------|-----------------|--------|------------|--------------------|------|-----------|---------|
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>BPSK | 1@0  | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>QPSK | 1@0  | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>BPSK | 50@0 | see graph | PASS    |
| 41      | 30        | 20              | 501204 | 2506.02    | DFT-s-OFDM<br>QPSK | 50@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>BPSK | 1@50 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>QPSK | 1@50 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>BPSK | 50@0 | see graph | PASS    |
| 41      | 30        | 20              | 535998 | 2679.99    | DFT-s-OFDM<br>QPSK | 50@0 | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>BPSK | 1@0  | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>QPSK | 1@0  | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>BPSK | 75@0 | see graph | PASS    |
| 41      | 30        | 30              | 502200 | 2511.0     | DFT-s-OFDM<br>QPSK | 75@0 | see graph | PASS    |
| 41      | 30        | 30              | 534996 | 2674.98    | DFT-s-OFDM<br>BPSK | 1@77 | see graph | PASS    |
| 41      | 30        | 30              | 534996 | 2674.98    | DFT-s-OFDM<br>QPSK | 1@77 | see graph | PASS    |
| 41      | 30        | 30              | 534996 | 2674.98    | DFT-s-OFDM<br>BPSK | 75@0 | see graph | PASS    |
| 41      | 30        | 30              | 534996 | 2674.98    | DFT-s-OFDM<br>QPSK | 75@0 | see graph | PASS    |


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

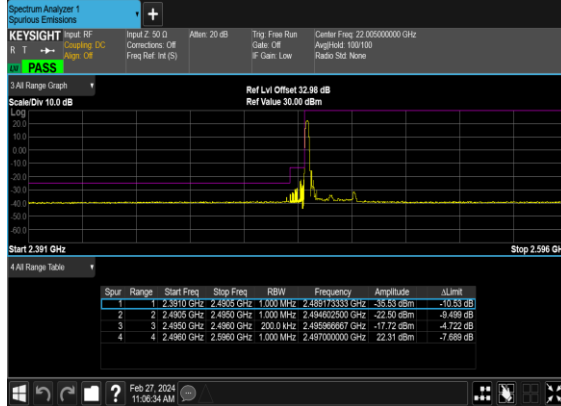


N41(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

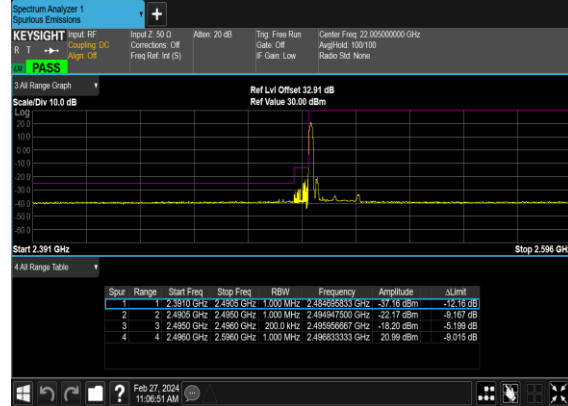


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Low\_CH

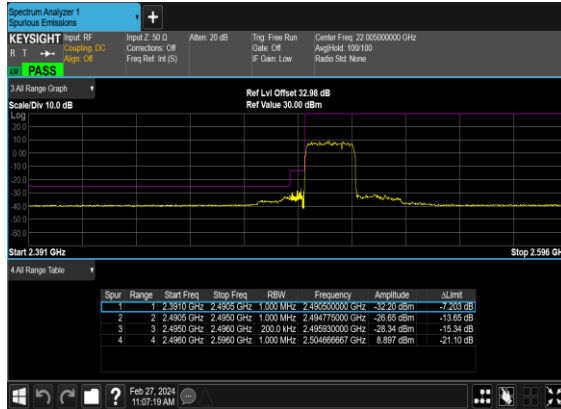


N41(20M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

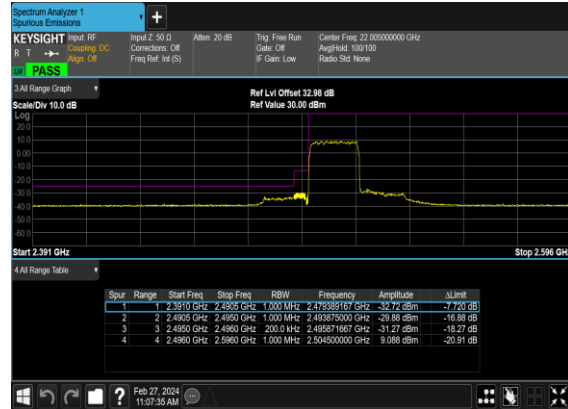


N41(20M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

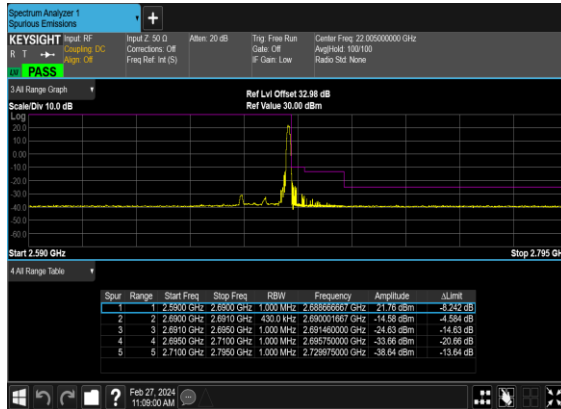


N41(20M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

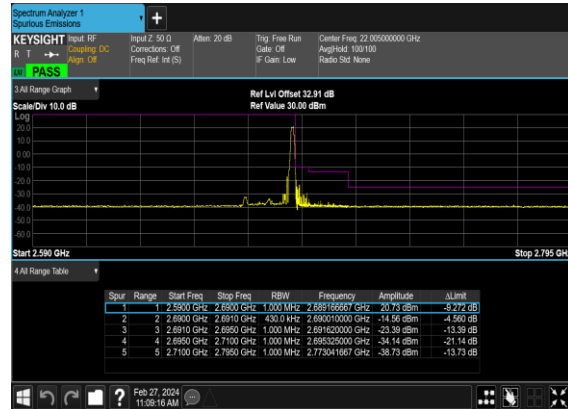


### N41(20M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

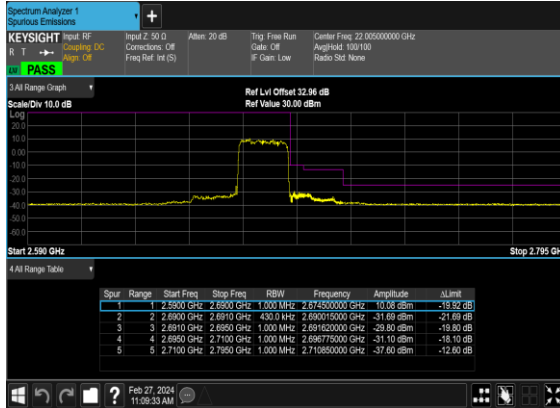


### N41(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

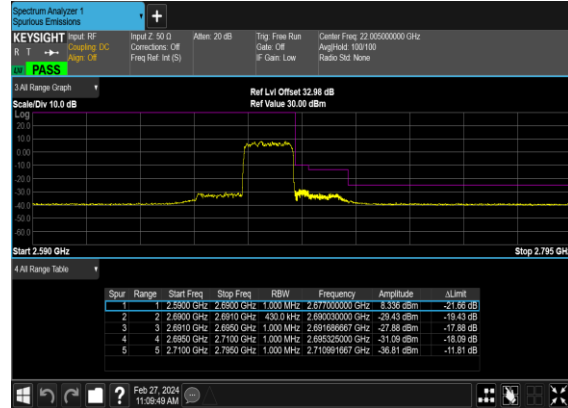


### N41(30M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

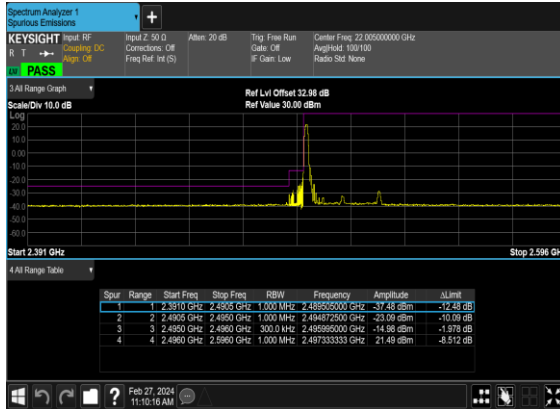


### N41(30M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

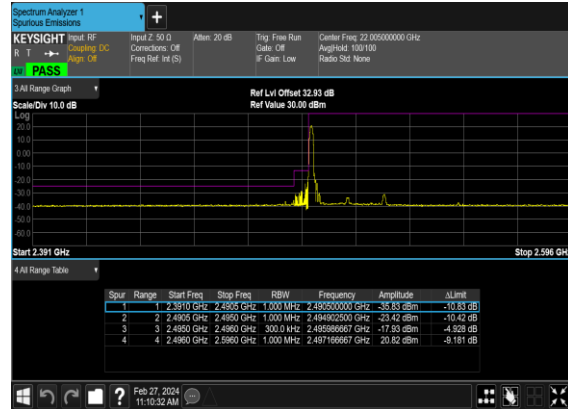


### N41(30M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

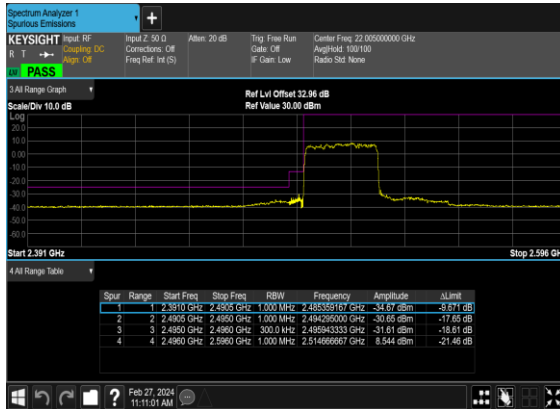


### N41(30M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

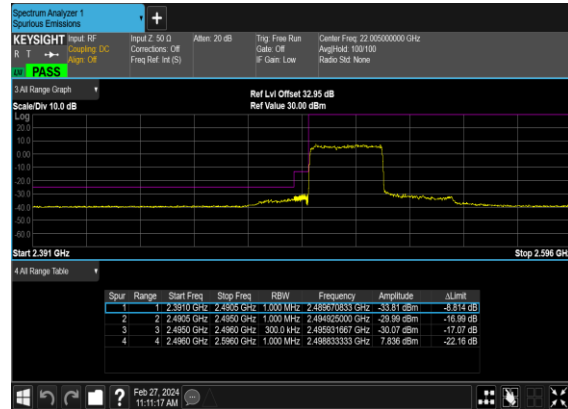


# N41(30M)\_DFT-s- OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

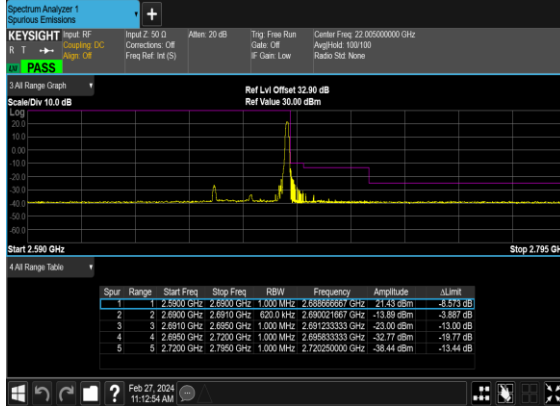


# N41(30M)\_DFT-s- OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

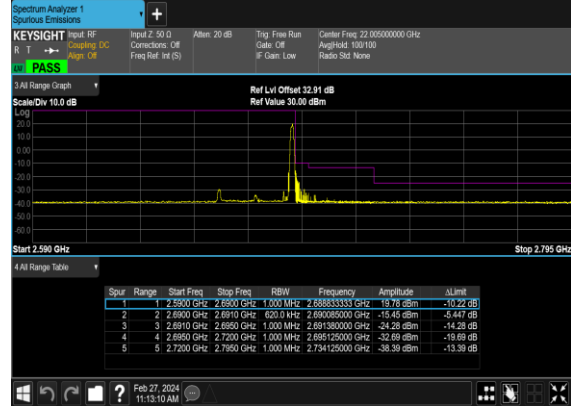

# N41(30M)\_DFT-s- OFDM\_BPSK\_Outer\_Full\_High\_CH

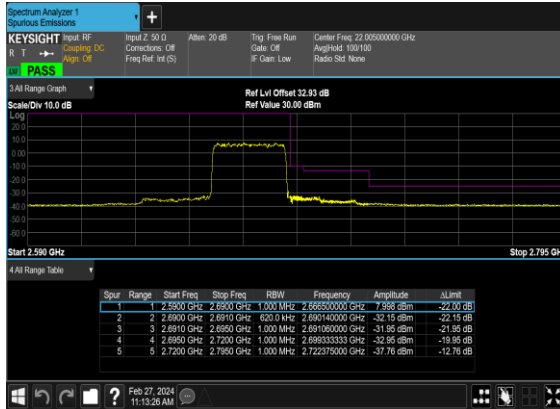

# N41(30M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_High\_CH

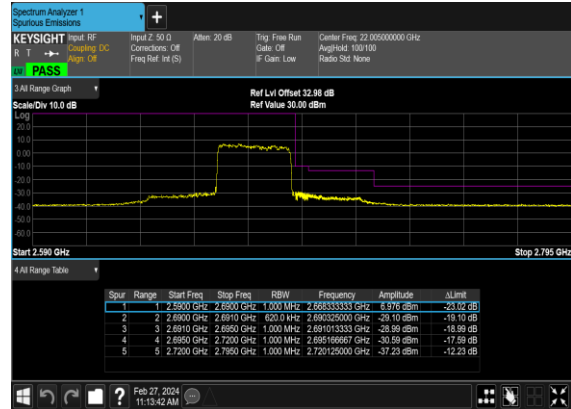



## Appendix B. Test Results of Radiated Test

### Radiated Spurious Emission

|                 |       |                     |         |
|-----------------|-------|---------------------|---------|
| Test Engineer : | Bruce | Temperature :       | 23~25°C |
|                 |       | Relative Humidity : | 41~42%  |

| n41 SA / NR 30MHz / QPSK |                      |                 |                  |                         |                          |                            |                             |                       |
|--------------------------|----------------------|-----------------|------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|
| Channel                  | Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) |
| Middle                   | 5092                 | -61.51          | -25              | -36.51                  | -71.72                   | 3.03                       | 13.24                       | H                     |
|                          | 7626                 | -49.27          | -25              | -24.27                  | -58.72                   | 3.56                       | 13.01                       | H                     |
|                          | 10174                | -57.45          | -25              | -32.45                  | -66.97                   | 3.92                       | 13.44                       | H                     |
|                          | 5092                 | -61.49          | -25              | -36.49                  | -71.70                   | 3.03                       | 13.24                       | V                     |
|                          | 7626                 | -52.13          | -25              | -27.13                  | -61.58                   | 3.56                       | 13.01                       | V                     |
|                          | 10174                | -61.68          | -25              | -36.68                  | -71.20                   | 3.92                       | 13.44                       | V                     |