

TEST REPORT

Application No.: SUCR2601000057WM
FCC ID: 2BEPUFMP204
Applicant: FCNT LLC.
Address of Applicant: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Manufacturer: FCNT LLC.
Address of Manufacturer: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Equipment Under Test (EUT):
EUT Name: Mobile Cellular Phone
Model No.: F-52G,M09 ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: arrows We3
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2026-01-22
Date of Test: 2026-01-23 to 2026-02-05
Date of Issue: 2026-03-23

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2026-02-27	/
01	1.Update test date This report is an updated version, replacing the report issued on February 27, 2026.	2026-03-23	/

Authorized for issue by:			
Tested By		<i>Nature Shen</i>	
		Nature Shen/Project Engineer	
Approved By		<i>Cedar cheng</i>	
		Cedar Cheng /Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4-2014	15.107(a);Class B	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.4-2014	15.109(a);Class B	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.4-2014	15.109(g);Class B	Pass

Remark: F-52G and M09 are the same product with identical prototypes, and only different model names are used for adaptation to different operators. This test involves two samples, and the differences between the prototypes can be referred to the Operational Description of Product Equality Declaration submitted separately. We selected Sample 1 to conduct a full test and completed the verification of Sample 2 against the differential points.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty & Decision Rule	5
4.4 Test Location	6
4.5 Test Facility	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions.....	6
5 Equipment List	7
6 Emission Test Results.....	9
6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz).....	9
6.2 Radiated Emissions (30MHz-1GHz)	13
6.3 Radiated Emissions (Above 1GHz).....	19
7 Test Setup Photo	25
8 EUT Constructional Details (EUT Photos).....	25

4 General Information

4.1 Details of E.U.T.

Hardware Version:	DVT2
Software Version:	sbuya_jp_sys-userdebug 16 W3WG36.28 0b7a4-0a61df intcfg,test-keys MW-368
IMEI:	Sample(1):355777680015116/355777650015124 Sample(2):355156190062084/355156190062092

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smauwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.3 Measurement Uncertainty & Decision Rule

Test Item	Measurement Uncertainty
Conducted Emissions (9kHz-150KHz)	± 2.4dB
Conducted Emissions (150kHz-30MHz)	± 2.9dB
Conducted Emission at telecommunication port using AAN	± 4.0 dB
Radiated Power	±3.2dB
Radiated Emissions (30MHz-1GHz)	± 4.8dB
Radiated Emissions (Above 1GHz)	±4.8dB
Voltage Fluctuations and Flicker	± 0.12%
Remark: The U_{lab} (lab Uncertainty) is less than $U_{CISPR/ETSI}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2025/2/13	2026/2/12
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2025/5/8	2026/5/7
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2025/5/8	2026/5/7
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR

Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2025/2/13	2026/2/12
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2024/8/22	2026/8/21
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2026/1/14	2027/1/13
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2025/2/13	2026/2/12
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2026/1/14	2027/1/13
Amplifier	Tonscend	TAP18040048	SUWI-01-14-	2026/1/14	2027/1/13

			03		
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

0.15MHz-0.5MHz: 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average

0.5MHz-5MHz: 56dB(μV) quasi-peak, 46dB(μV) average

5MHz-30MHz: 60dB(μV) quasi-peak, 50dB(μV) average

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1001 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	14	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	15	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	16	sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Pre-scan	17	sample(1)+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	18	sample(2)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid

6.1.3 Test Setup Diagram

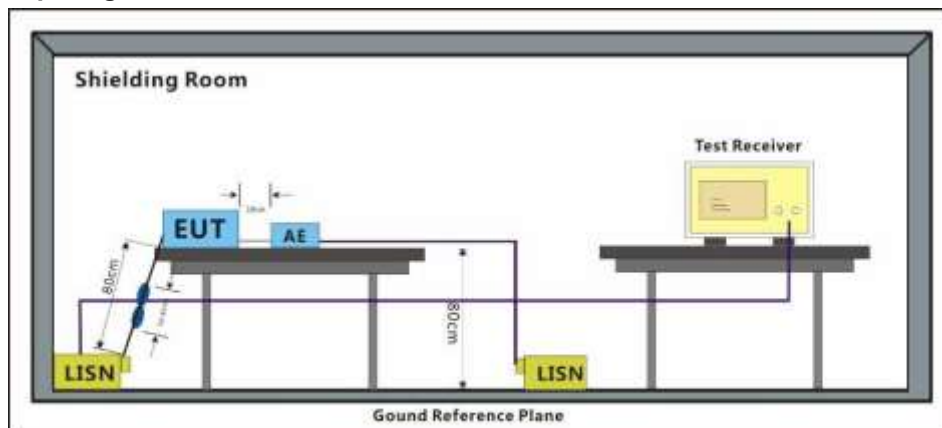


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Remark : $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{LISN Factor}$


Test Mode: 13; Line: Live line

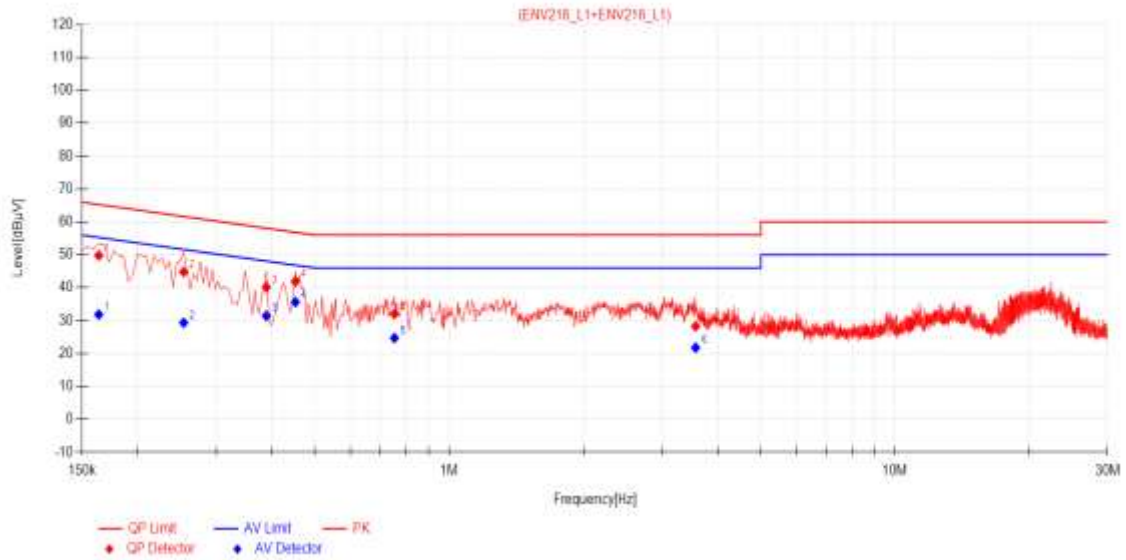

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1635	9.95	39.87	49.82	65.28	15.46	21.91	31.86	55.28	23.42	PASS
2	0.2535	9.97	34.84	44.81	61.64	16.83	19.39	29.36	51.64	22.28	PASS
3	0.3885	9.96	30.20	40.16	58.10	17.94	21.49	31.45	48.10	16.65	PASS
4	0.4515	9.95	31.99	41.94	56.85	14.91	25.68	35.63	46.85	11.22	PASS
5	0.7530	9.95	22.10	32.05	56.00	23.95	14.77	24.72	46.00	21.28	PASS
6	3.5700	10.37	17.93	28.30	56.00	27.70	11.41	21.78	46.00	24.22	PASS

Test Mode: 13; Line: Neutral Line

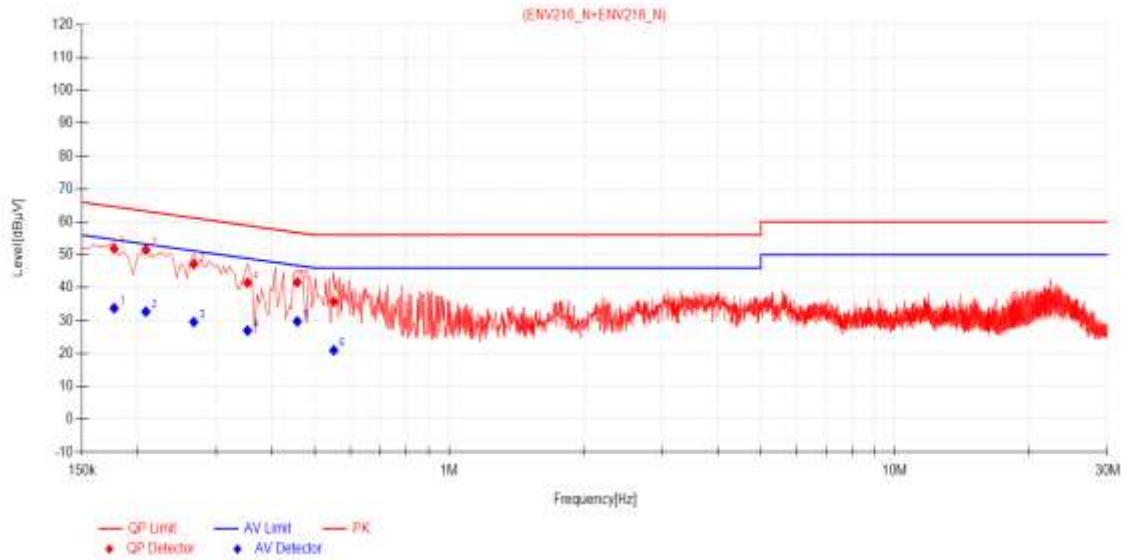

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1770	9.97	41.93	51.90	64.63	12.73	23.82	33.79	54.63	20.84	PASS
2	0.2085	9.97	41.53	51.50	63.26	11.76	22.76	32.73	53.26	20.53	PASS
3	0.2670	9.96	37.20	47.16	61.21	14.05	19.61	29.57	51.21	21.64	PASS
4	0.3525	9.95	31.60	41.55	58.90	17.35	17.01	26.96	48.90	21.94	PASS
5	0.4560	9.92	31.74	41.66	56.77	15.11	19.84	29.76	46.77	17.01	PASS
6	0.5505	9.91	25.86	35.77	56.00	20.23	11.09	21.00	46.00	25.00	PASS

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class B

Test Distance: 3m

30MHz -88MHz 40.0(dBμV/m) quasi-peak

88MHz-216MHz 43.5(dBμV/m) quasi-peak

216MHz-960MHz 46.0(dBμV/m) quasi-peak

960MHz-1000MHz 54.0(dBμV/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

Class B

Test Distance: 10m

30MHz -88MHz 29.5(dBμV/m) quasi-peak

88MHz-216MHz 33.1(dBμV/m) quasi-peak

216MHz-960MHz 35.6(dBμV/m) quasi-peak

960MHz-1000MHz 43.5(dBμV/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1001 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	14	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	15	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	16	sample(1)+dapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Final test	17	sample(1)+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	18	sample(2)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid

6.2.3 Test Setup Diagram

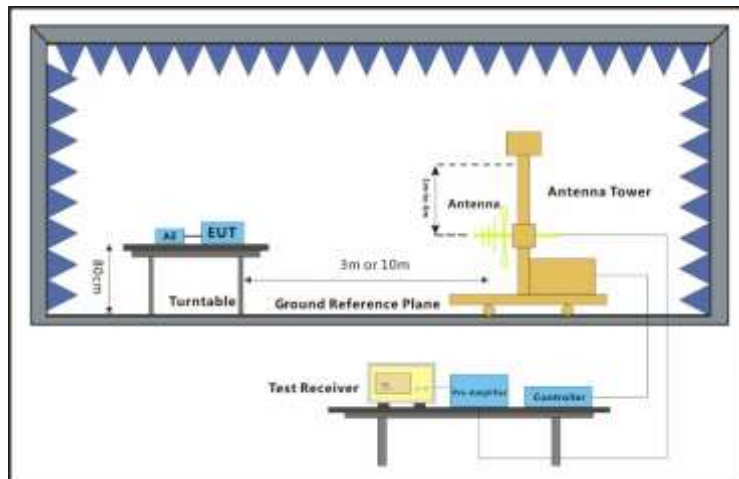


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Test Mode: 13; Polarity: Horizontal

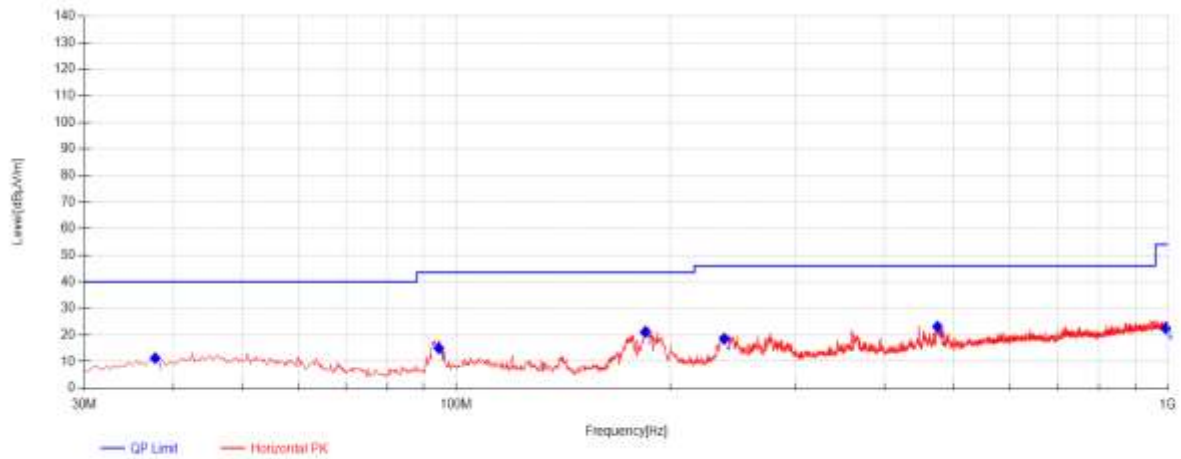

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.76	40.11	12.38	-41.23	11.26	40.00	28.74	123	198	Horizontal
2	94.505	45.31	10.15	-40.42	15.04	43.50	28.46	164	198	Horizontal
3	184.23	50.05	10.32	-39.32	21.05	43.50	22.45	157	206	Horizontal
4	238.065	44.94	12.42	-38.78	18.58	46.00	27.42	181	304	Horizontal
5	474.26	44.19	16.09	-37.12	23.16	46.00	22.84	144	274	Horizontal
6	992.4825	34.28	21.95	-33.77	22.46	54.00	31.54	190	243	Horizontal


Test Mode: 13; Polarity: Vertical

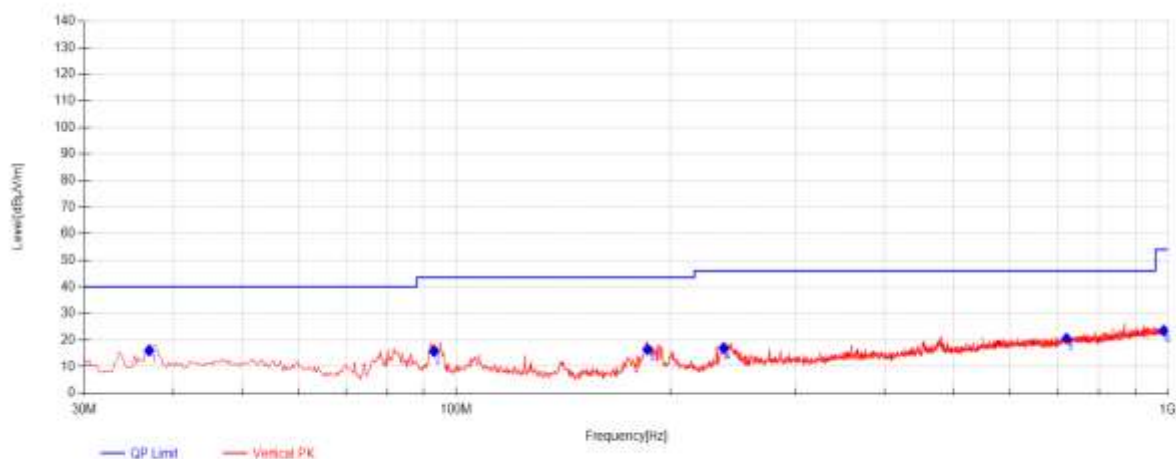

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.0325	45.22	12.02	-41.25	15.99	40.00	24.01	122	86	Vertical
2	93.05	46.49	9.61	-40.42	15.68	43.50	27.82	136	253	Vertical
3	185.685	45.28	10.47	-39.33	16.42	43.50	27.08	158	184	Vertical
4	237.58	43.33	12.40	-38.80	16.93	46.00	29.07	194	139	Vertical
5	720.155	37.05	19.01	-35.54	20.52	46.00	25.48	172	20	Vertical
6	985.935	35.32	21.90	-33.80	23.42	54.00	30.58	148	192	Vertical


Test Mode: 17; Polarity: Horizontal

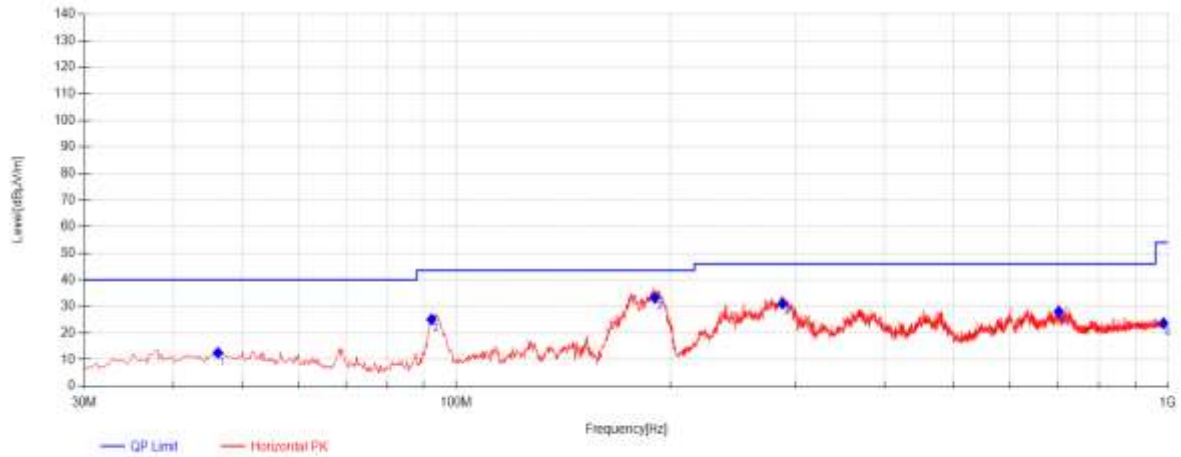

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.2475	39.29	14.25	-41.06	12.48	40.00	27.52	154	99	Horizontal
2	92.3225	55.75	9.74	-40.42	25.07	43.50	18.43	162	196	Horizontal
3	190.05	61.96	10.60	-39.36	33.20	43.50	10.30	130	219	Horizontal
4	287.535	56.45	12.95	-38.37	31.03	46.00	14.97	193	188	Horizontal
5	702.4525	45.22	18.45	-35.64	28.03	46.00	17.97	169	128	Horizontal
6	985.6925	35.49	21.90	-33.80	23.59	54.00	30.41	111	173	Horizontal

Test Mode: 17; Polarity: Vertical

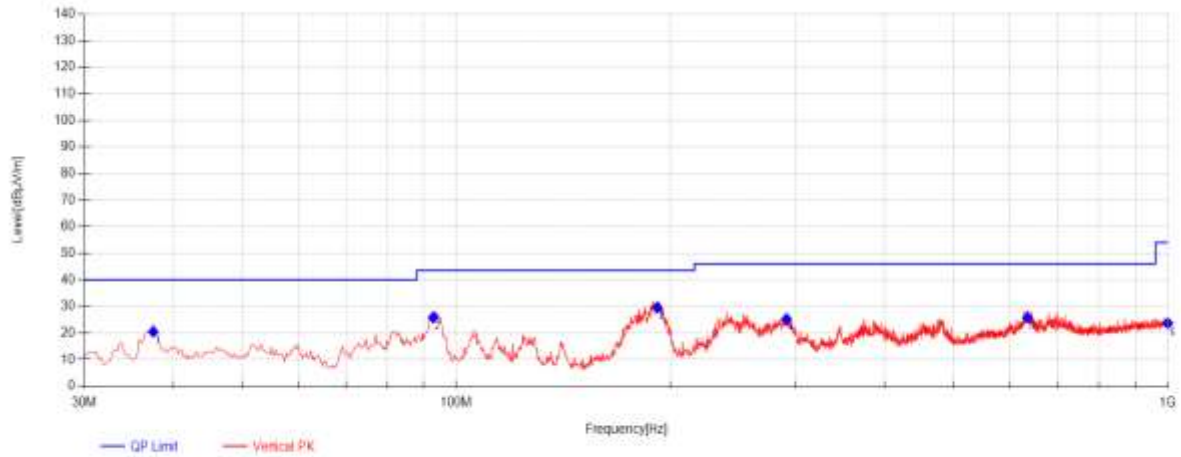

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	37.5175	49.45	12.26	-41.24	20.47	40.00	19.53	127	6	Vertical
2	92.8075	56.57	9.64	-40.42	25.79	43.50	17.71	104	268	Vertical
3	191.7475	58.09	10.75	-39.34	29.50	43.50	14.00	183	171	Vertical
4	290.93	50.51	13.04	-38.36	25.19	46.00	20.81	135	59	Vertical
5	634.5525	43.06	18.70	-35.97	25.79	46.00	20.21	176	2	Vertical
6	1000	35.31	22.00	-33.68	23.63	54.00	30.37	115	216	Vertical

6.3 Radiated Emissions (Above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class B

Above 1GHz 74(dB μ V/m) peak, 54(dB μ V/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to 18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	13	sample(1)+adapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	14	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	15	sample(1)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	16	sample(1)+dapter+usb Cable+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Final test	17	sample(1)+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	18	sample(2)+adapter+usb Cable+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid

6.3.3 Test Setup Diagram

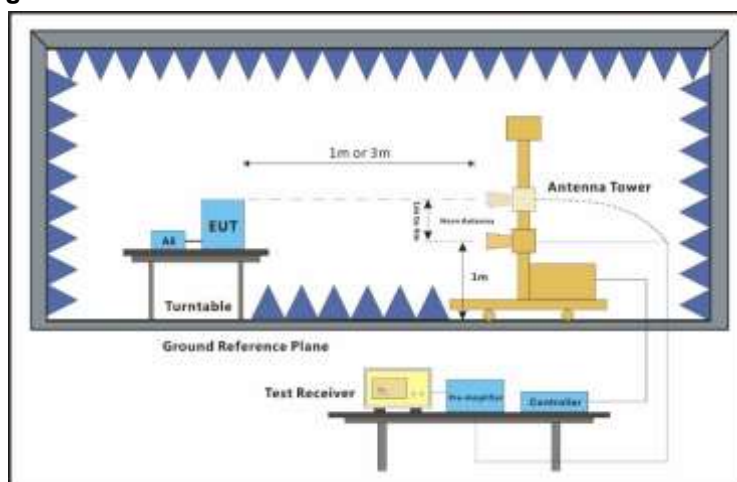


6.3.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.


Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Test Mode: 13; Polarity: Horizontal

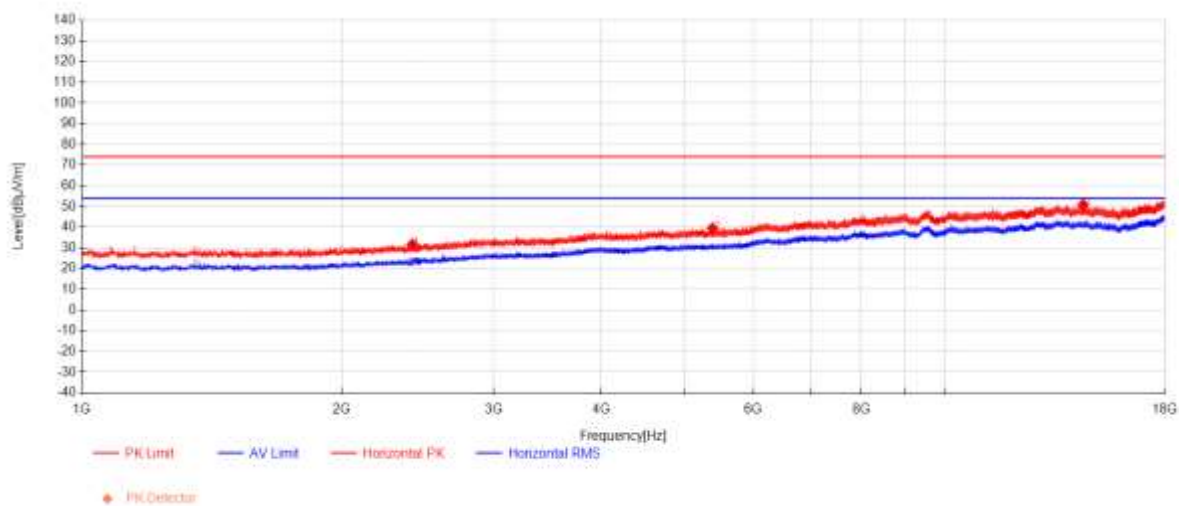


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2414.825	52.53	27.36	-48.10	31.79	74.00	42.21	Horizontal
2	5377.5	51.38	33.02	-44.86	39.54	74.00	34.46	Horizontal
3	14458.9	45.72	40.12	-34.97	50.87	74.00	23.13	Horizontal

Test Mode: 13; Polarity: Vertical

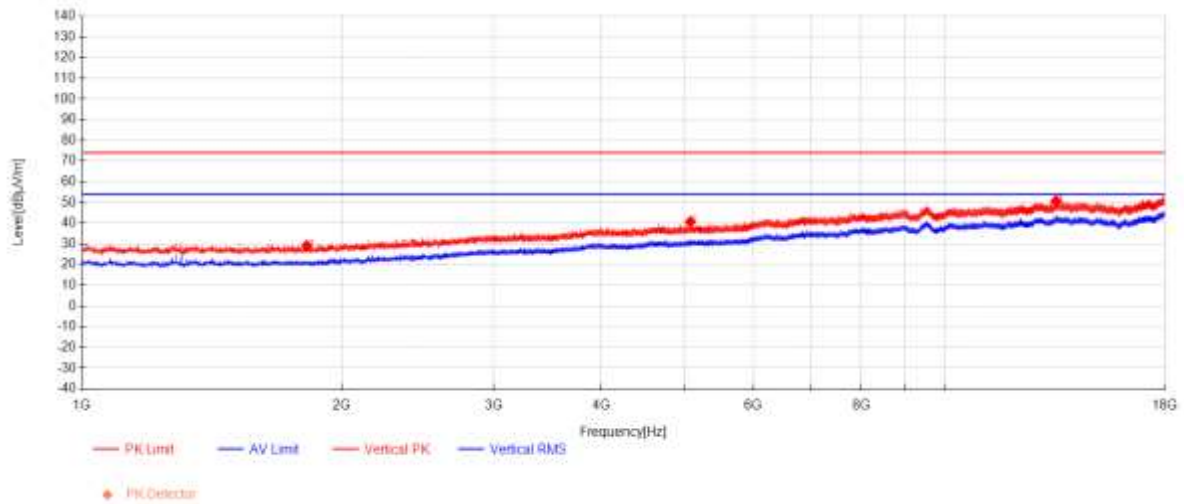


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1821.95	53.07	25.13	-49.04	29.16	74.00	44.84	Vertical
2	5069.8	52.78	33.09	-45.17	40.70	74.00	33.30	Vertical
3	13449.95	45.63	40.12	-35.07	50.68	74.00	23.32	Vertical

Test Mode: 17; Polarity: Horizontal

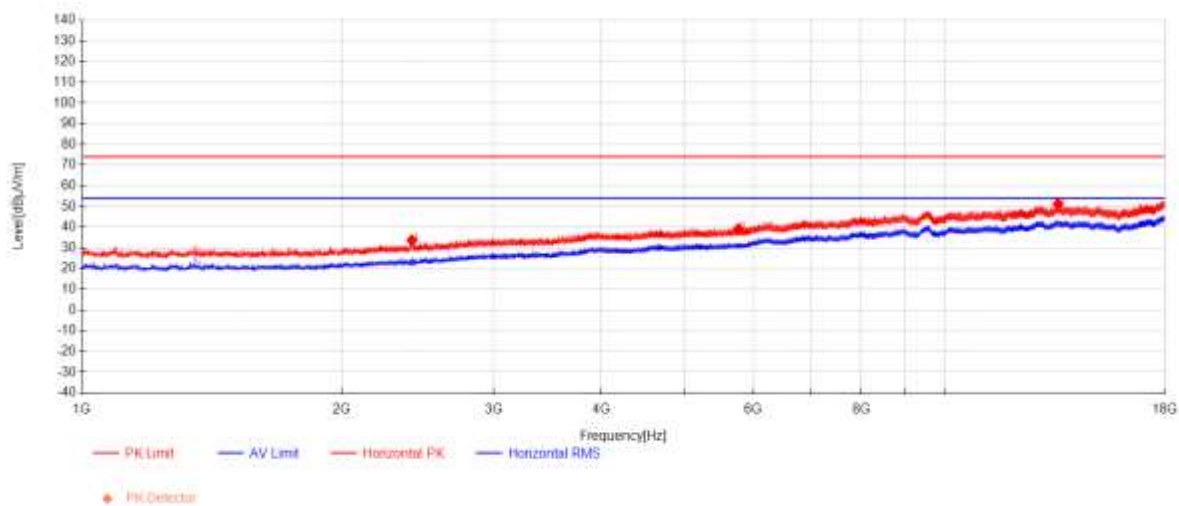

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2411.85	54.49	27.35	-48.11	33.73	74.00	40.27	Horizontal
2	5766.8	49.82	33.80	-44.34	39.28	74.00	34.72	Horizontal
3	13528.575	45.88	40.16	-34.77	51.27	74.00	22.73	Horizontal

Test Mode: 17; Polarity: Vertical

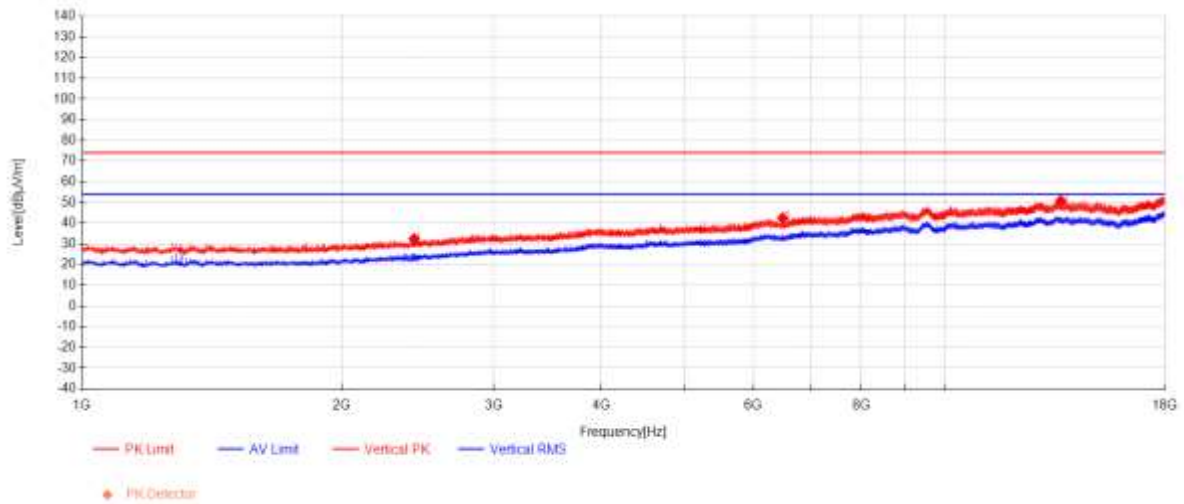

Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2425.45	53.08	27.39	-48.05	32.43	74.00	41.57	Vertical
2	6486.325	50.90	35.47	-43.89	42.48	74.00	31.52	Vertical
3	13621.225	45.91	40.21	-35.31	50.81	74.00	23.19	Vertical

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2601000057WM

8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SUCR2601000057WM

- End of the Report -