



11ax(HE20)_Partial_RU26_TX_CH_01_Vertical_Peak

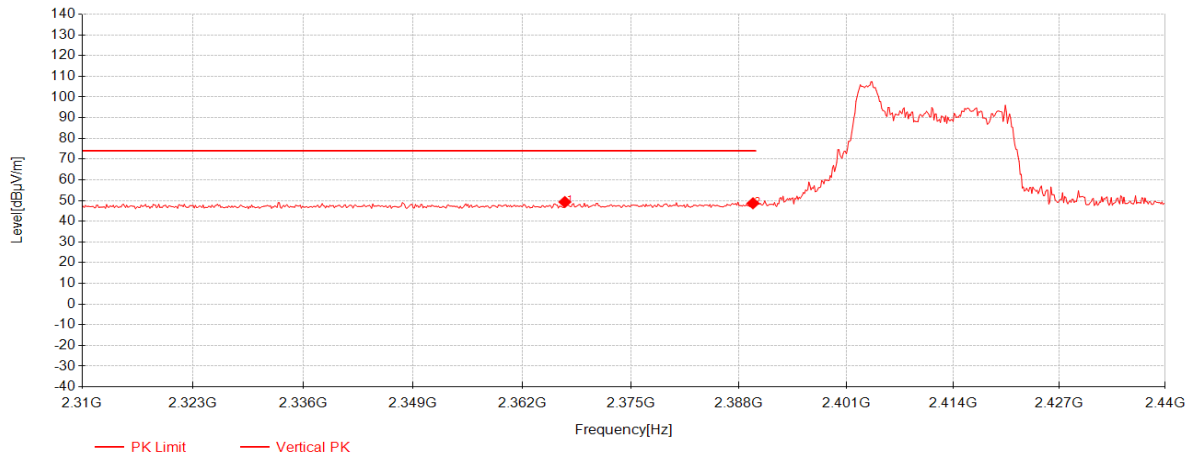


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2367.07	46.90	27.23	-24.83	49.29	74.00	24.71	Vertical
2	2389.69	46.21	27.29	-24.82	48.68	74.00	25.32	Vertical

11ax(HE20)_Partial_RU26_TX_CH_01_Vertical_Average

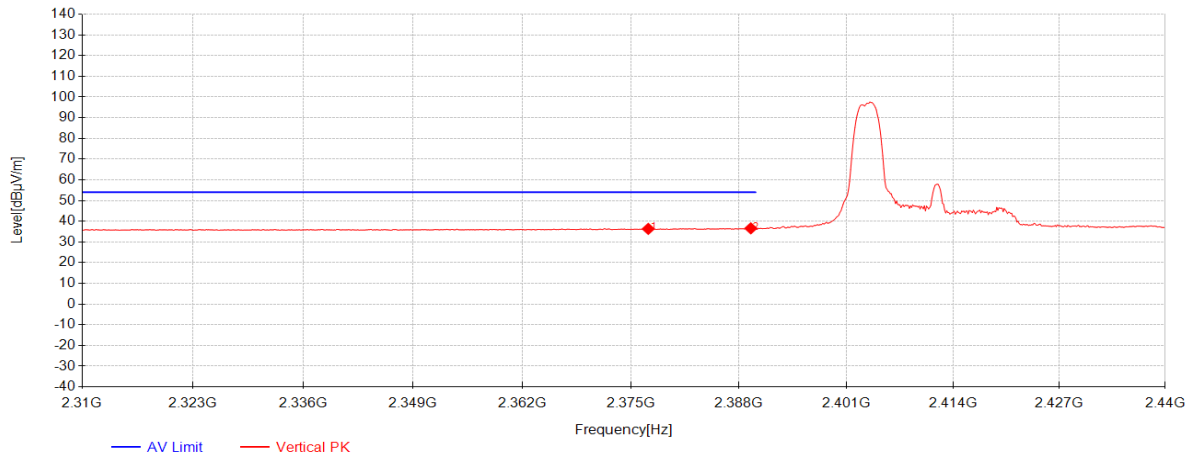


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2377.08	33.89	27.26	-24.83	36.32	54.00	17.68	Vertical
2	2389.43	34.11	27.29	-24.82	36.58	54.00	17.42	Vertical

11ax(HE20)_Partial_RU26_TX_CH_11_Horizontal_Peak

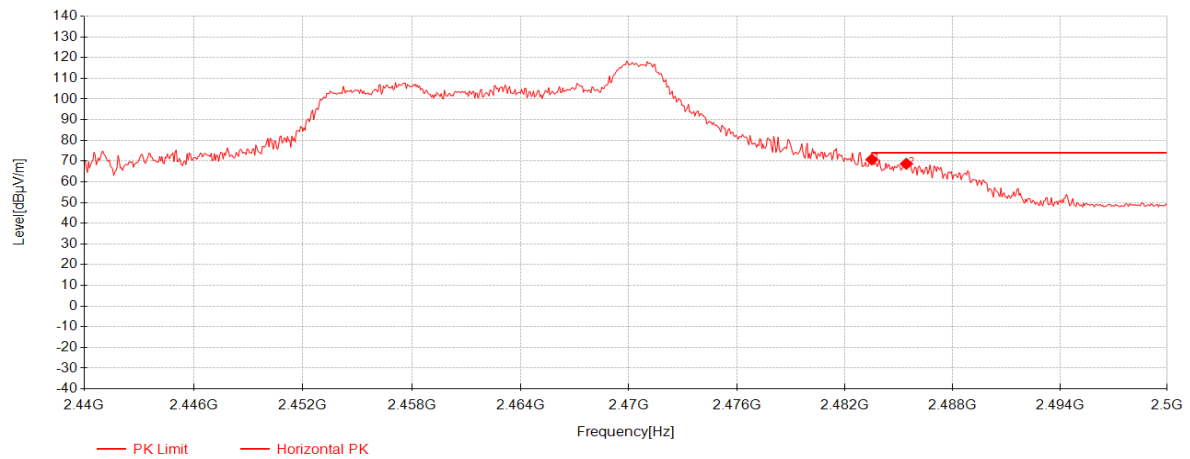


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.5	67.88	27.55	-24.63	70.80	74.00	3.20	Horizontal
2	2485.42	65.79	27.56	-24.63	68.72	74.00	5.28	Horizontal

11ax(HE20)_Partial_RU26_TX_CH_11_Horizontal_Average

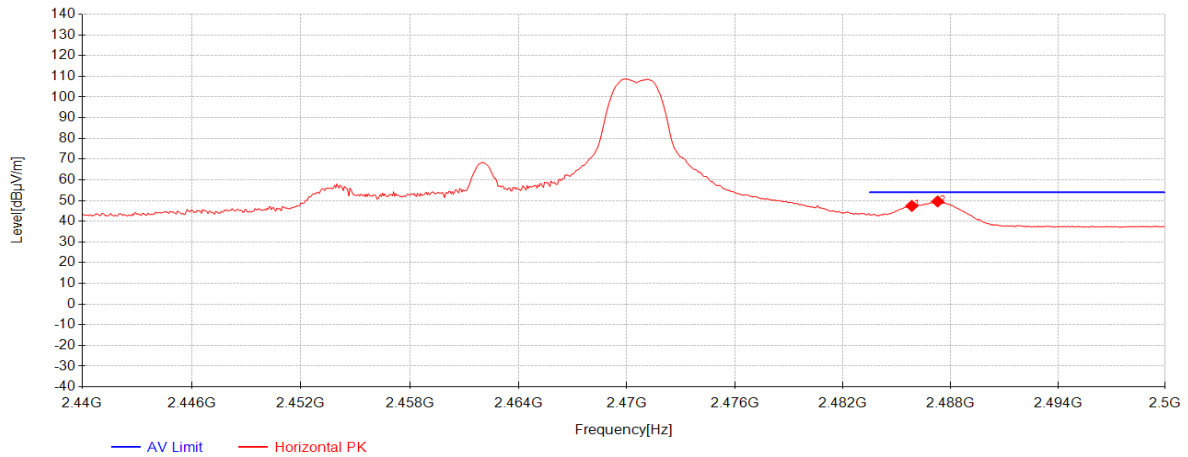


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2485.84	44.47	27.56	-24.63	47.40	54.00	6.60	Horizontal
2	2487.28	46.64	27.56	-24.63	49.58	54.00	4.42	Horizontal

11ax(HE20)_Partial_RU26_TX_CH_11_Vertical_Peak

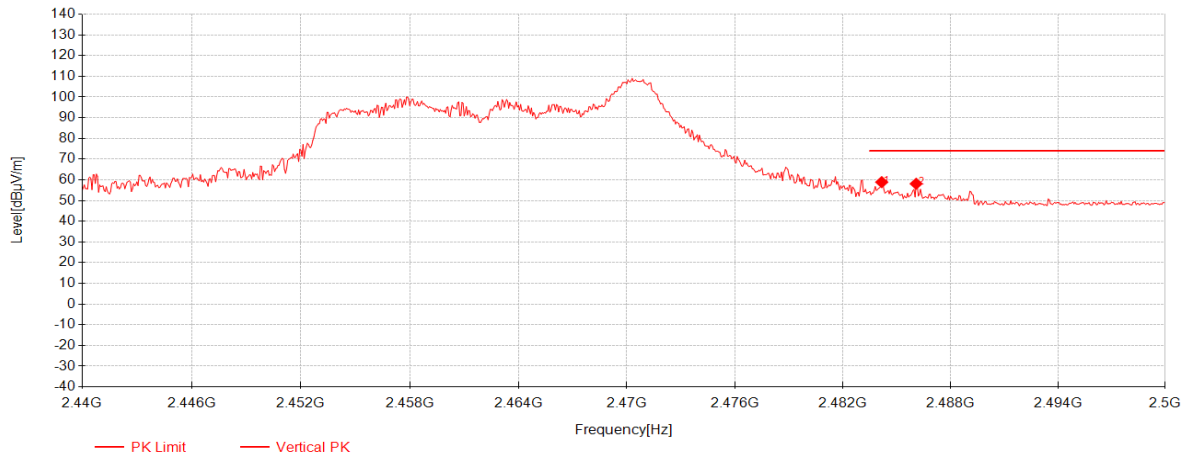

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.16	55.98	27.56	-24.63	58.90	74.00	15.10	Vertical
2	2486.08	55.19	27.56	-24.63	58.12	74.00	15.88	Vertical

11ax(HE20)_Partial_RU26_TX_CH_11_Vertical_Average

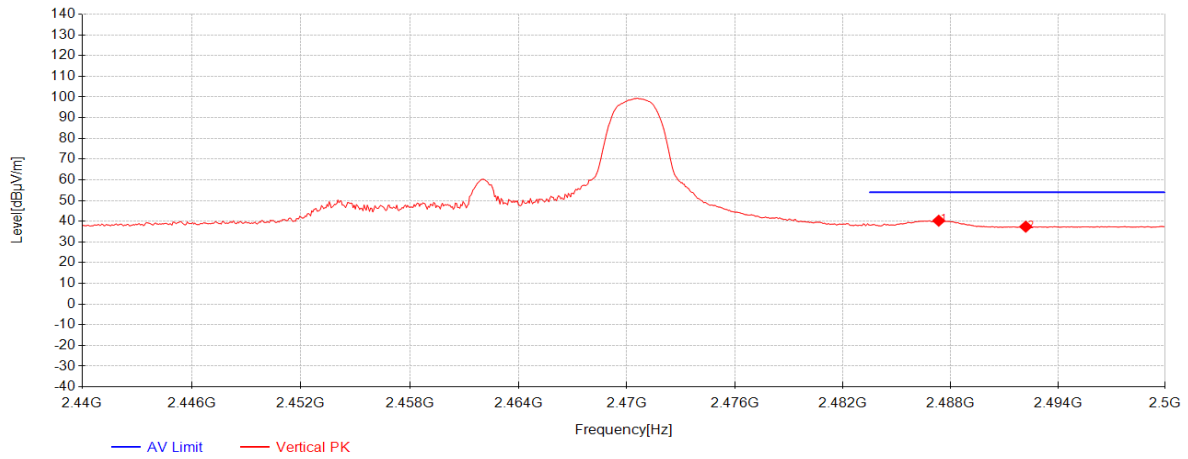

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2487.34	37.31	27.56	-24.63	40.25	54.00	13.75	Vertical
2	2492.2	34.43	27.58	-24.62	37.39	54.00	16.61	Vertical

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength (dB μ V/m@3m)
0.009-0.490	2400/F(kHz)	300	128.5 to 93.8
0.490-1.705	24000/F(kHz)	30	73.8 to 62.9
1.705-30.0	30	30	69.60
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
960-1000	500	3	54.0

Note : The above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 41 % RH

Atmospheric Pressure: 1001 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

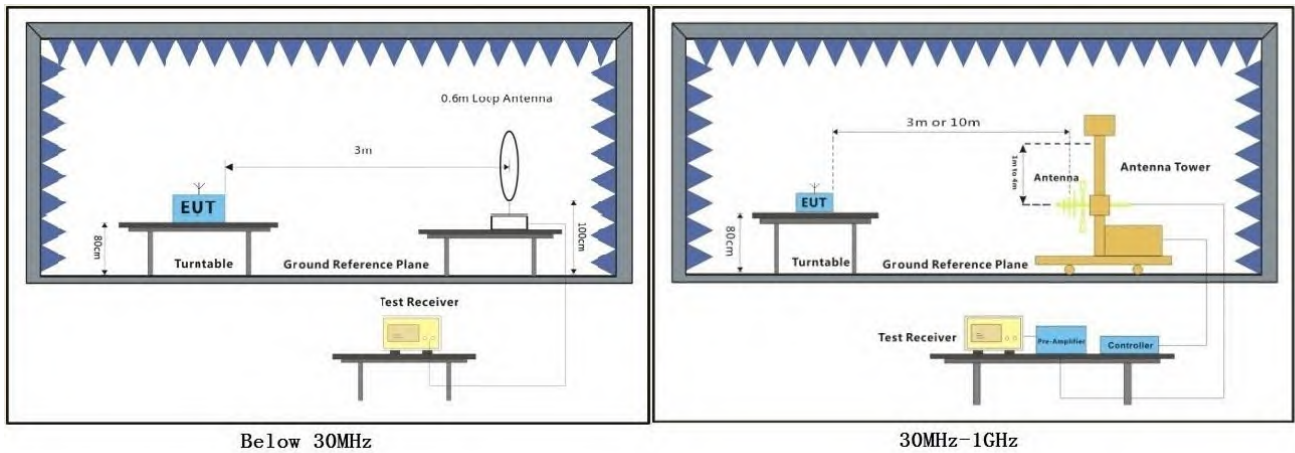

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.


EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.


Test Mode: 04; Polarity: Horizontal

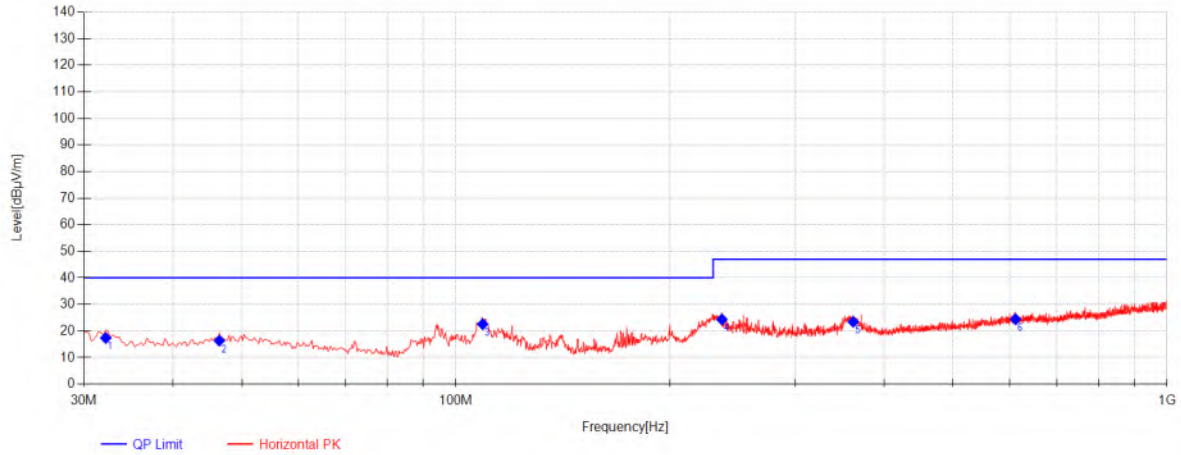

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.1825	41.7	17.02	-41.35	17.37	40.00	22.63	198	89	Horizontal
2	46.49	37.1	20.30	-41.05	16.35	40.00	23.65	105	340	Horizontal
3	109.055	43.86	18.87	-40.16	22.57	40.00	17.43	103	294	Horizontal
4	236.61	45.04	18.13	-38.82	24.35	47.00	22.65	114	124	Horizontal
5	361.9825	40.8	20.52	-37.88	23.44	47.00	23.56	127	124	Horizontal
6	612.2425	35.98	24.61	-36.19	24.40	47.00	22.60	177	327	Horizontal

Test Mode: 04; Polarity: Vertical

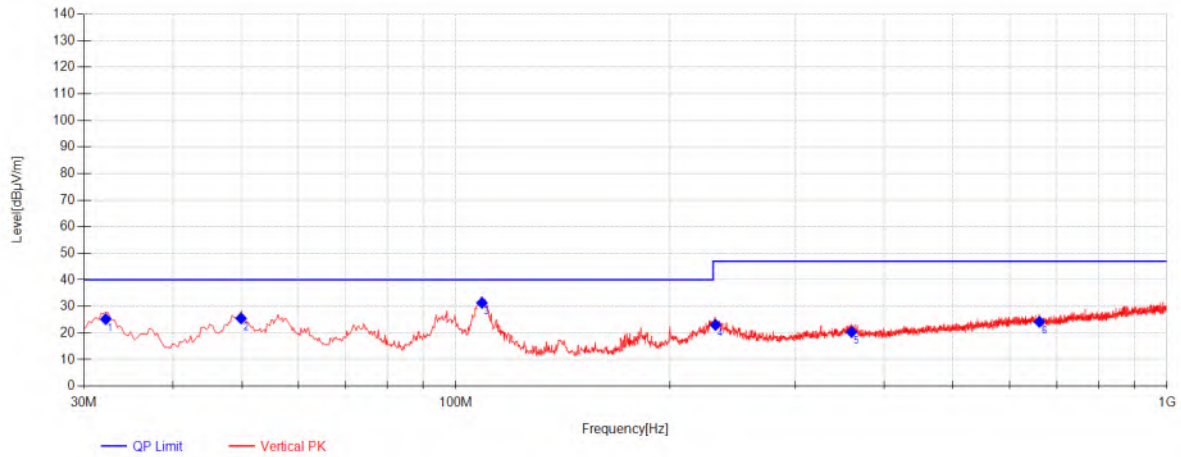

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.1825	49.54	17.02	-41.35	25.21	40.00	14.79	104	116	Vertical
2	49.885	46.22	20.24	-40.98	25.48	40.00	14.52	106	70	Vertical
3	108.8125	52.6	18.90	-40.17	31.33	40.00	8.67	113	247	Vertical
4	231.76	44.28	17.71	-38.95	23.04	47.00	23.96	128	216	Vertical
5	360.0425	37.65	20.60	-37.90	20.35	47.00	26.65	191	180	Vertical
6	661.47	35.37	24.57	-35.75	24.19	47.00	22.81	136	38	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 41 % RH

Atmospheric Pressure: 1001 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode(2.4G)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

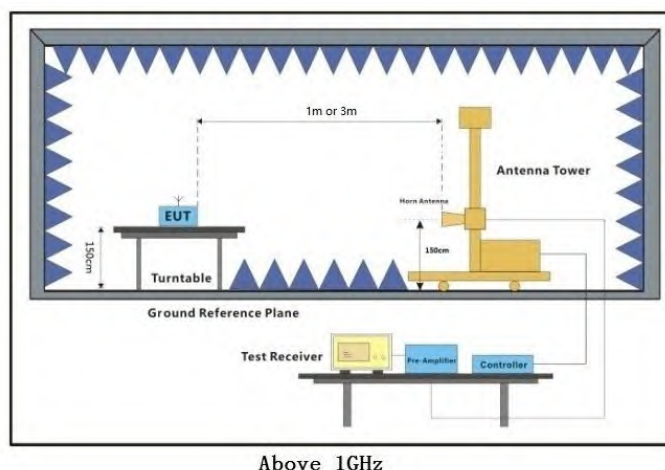

Above 1GHz


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- b. The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- g. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- h. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
2. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
3. For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
4. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s).

11b_TX_CH_01_Horizontal

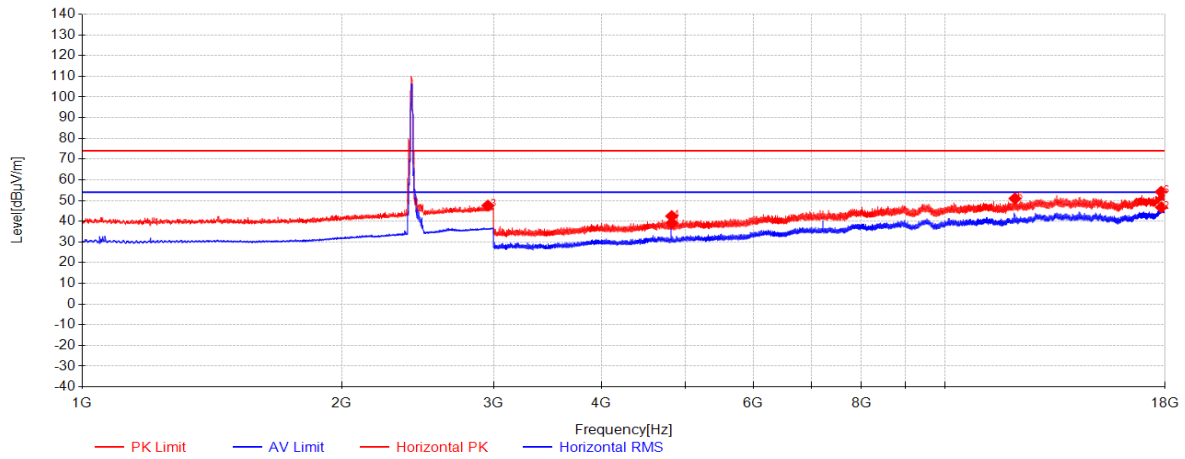


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824.375	51.57	32.68	-45.09	39.16	54.00	14.84	Horizontal
2	17827.5	36.18	41.20	-30.66	46.72	54.00	7.28	Horizontal
3	2953.5	41.63	29.41	-23.49	47.56	74.00	26.44	Horizontal
4	4824	54.88	32.68	-45.09	42.47	74.00	31.53	Horizontal
5	12058.5	47.63	38.77	-35.44	50.96	74.00	23.04	Horizontal
6	17815.5	43.62	41.16	-30.59	54.20	74.00	19.80	Horizontal

11b_TX_CH_01_Vertical

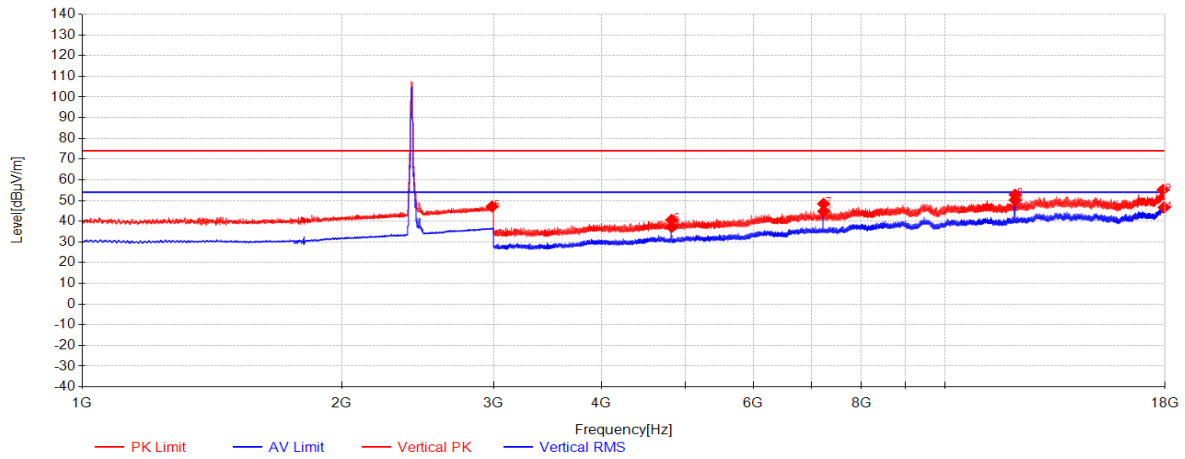


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4824.375	49.67	32.68	-45.09	37.26	54.00	16.74	Vertical
2	7237.875	50.90	36.30	-42.38	44.82	54.00	9.18	Vertical
3	12061.875	46.89	38.77	-35.40	50.26	54.00	3.74	Vertical
4	17952.375	36.19	41.56	-31.06	46.69	54.00	7.31	Vertical
5	2986.5	41.04	29.55	-23.47	47.12	74.00	26.88	Vertical
6	4824	53.06	32.68	-45.09	40.65	74.00	33.35	Vertical
7	7234.875	54.52	36.30	-42.40	48.42	74.00	25.58	Vertical
8	12061.5	49.47	38.77	-35.41	52.84	74.00	21.16	Vertical
9	17897.625	44.82	41.40	-31.10	55.13	74.00	18.87	Vertical

11b_TX_CH_06_Horizontal

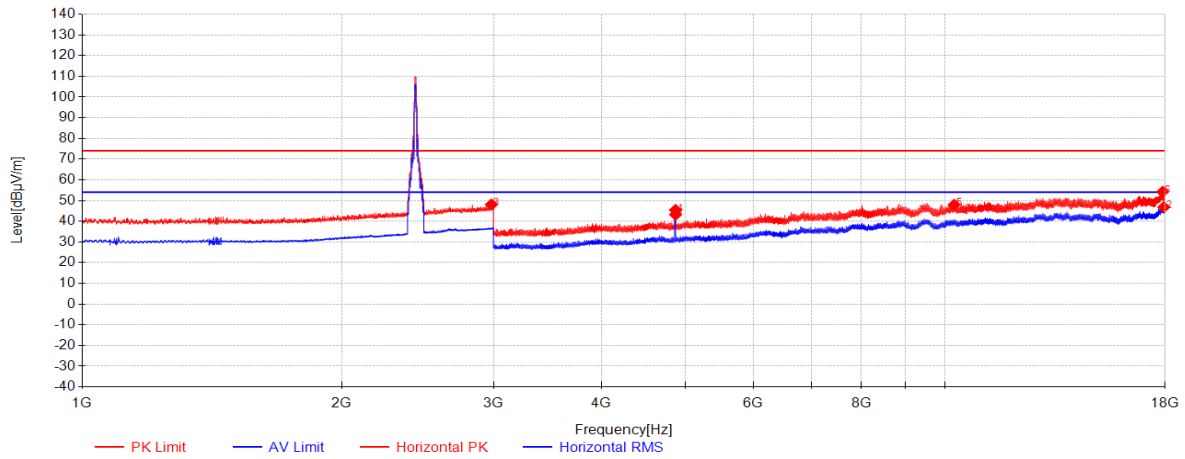


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4874.25	55.32	32.80	-44.92	43.20	54.00	10.80	Horizontal
2	17940	36.38	41.53	-31.07	46.83	54.00	7.17	Horizontal
3	2982	42.02	29.53	-23.47	48.08	74.00	25.92	Horizontal
4	4873.875	57.59	32.80	-44.92	45.47	74.00	28.53	Horizontal
5	10251.75	46.70	38.40	-37.14	47.97	74.00	26.03	Horizontal
6	17881.875	43.87	41.36	-31.00	54.23	74.00	19.77	Horizontal

11b_TX_CH_06_Vertical

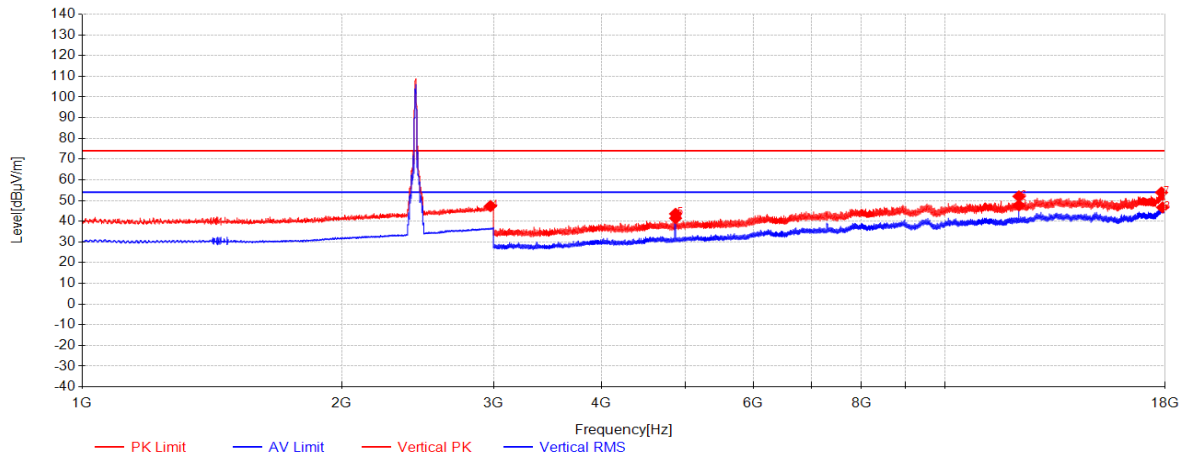


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4874.25	53.59	32.80	-44.92	41.47	54.00	12.53	Vertical
2	12186.75	44.25	38.92	-35.49	47.68	54.00	6.32	Vertical
3	17881.125	36.33	41.36	-30.99	46.69	54.00	7.31	Vertical
4	2974	41.32	29.50	-23.48	47.34	74.00	26.66	Vertical
5	4873.875	55.69	32.80	-44.92	43.57	74.00	30.43	Vertical
6	12186.75	48.56	38.92	-35.49	51.99	74.00	22.01	Vertical
7	17832.375	43.37	41.21	-30.69	53.89	74.00	20.11	Vertical

11b_TX_CH_11_Horizontal

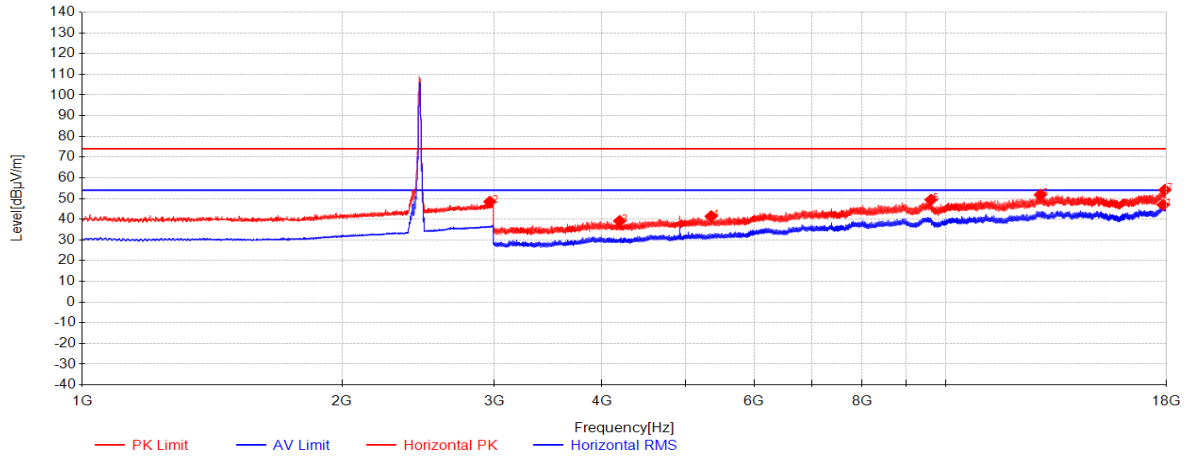


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17861.25	36.52	41.30	-30.87	46.95	54.00	7.05	Horizontal
2	2966	42.52	29.46	-23.48	48.50	74.00	25.50	Horizontal
3	4192.5	52.77	31.41	-45.03	39.15	74.00	34.85	Horizontal
4	5351.625	53.18	33.03	-44.74	41.47	74.00	32.53	Horizontal
5	9619.125	49.57	38.06	-38.22	49.41	74.00	24.59	Horizontal
6	12876	47.26	39.75	-35.20	51.81	74.00	22.19	Horizontal
7	17949	43.71	41.55	-31.07	54.20	74.00	19.80	Horizontal

11b_TX_CH_11_Vertical

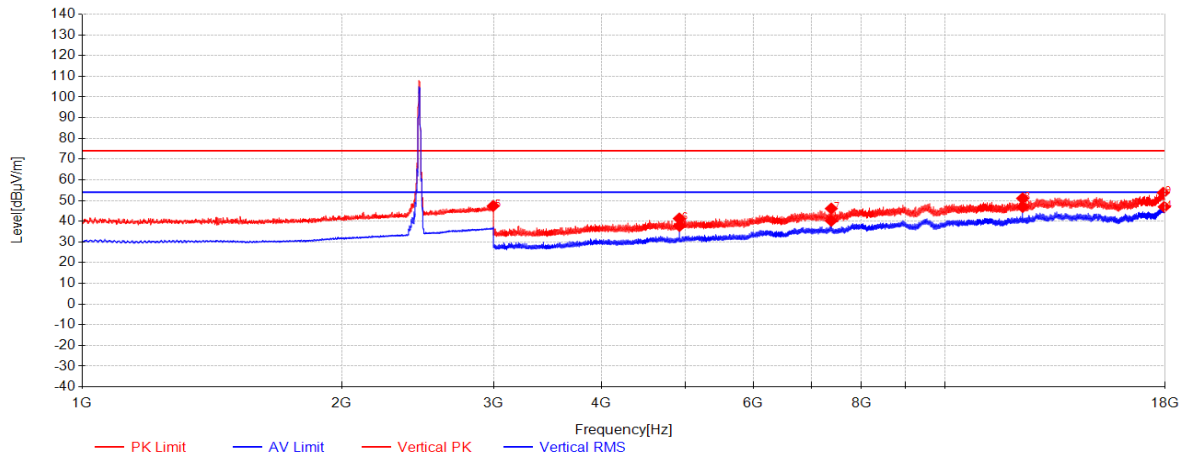


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4924.5	49.65	32.92	-44.84	37.73	54.00	16.27	Vertical
2	7384.875	46.34	36.30	-42.43	40.21	54.00	13.79	Vertical
3	12309	42.59	39.07	-34.77	46.89	54.00	7.11	Vertical
4	17961	36.42	41.59	-31.06	46.95	54.00	7.05	Vertical
5	2995.5	41.26	29.58	-23.46	47.38	74.00	26.62	Vertical
6	4923.75	53.22	32.92	-44.84	41.30	74.00	32.70	Vertical
7	7386.375	52.27	36.30	-42.44	46.13	74.00	27.87	Vertical
8	12308.25	46.75	39.07	-34.77	51.05	74.00	22.95	Vertical
9	17911.5	43.39	41.44	-31.10	53.73	74.00	20.27	Vertical

11n(HT20)_TX_CH_01_Horizontal

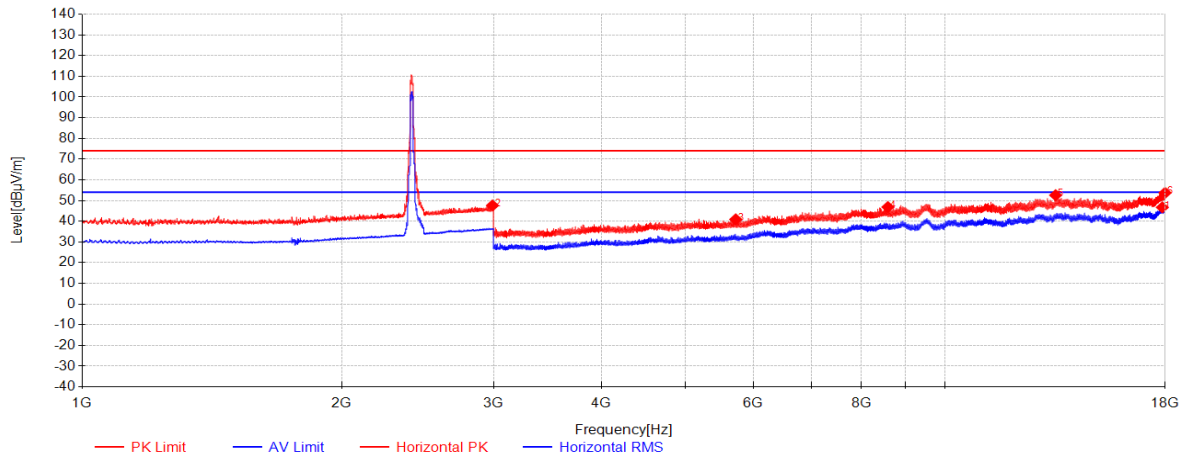


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17870.25	36.30	41.32	-30.93	46.70	54.00	7.30	Horizontal
2	2990	41.51	29.56	-23.47	47.60	74.00	26.40	Horizontal
3	5722.5	51.26	33.67	-44.03	40.89	74.00	33.11	Horizontal
4	8590.875	49.17	37.71	-40.05	46.84	74.00	27.16	Horizontal
5	13440	47.52	40.12	-35.07	52.57	74.00	21.43	Horizontal
6	17998.5	43.04	41.70	-31.02	53.71	74.00	20.29	Horizontal

11n(HT20)_TX_CH_01_Vertical

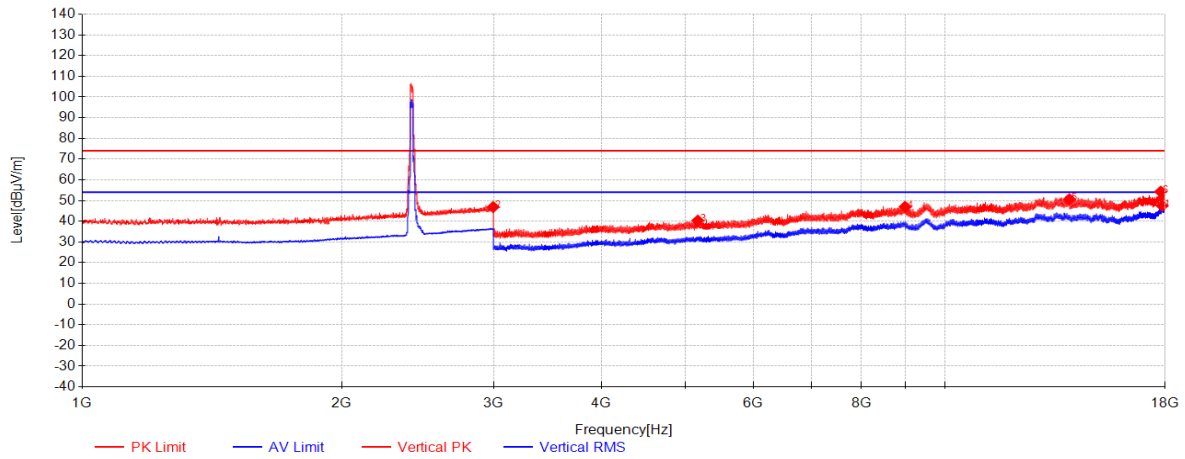


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17860.125	37.07	41.29	-30.86	47.50	54.00	6.50	Vertical
2	2995.5	40.75	29.58	-23.46	46.87	74.00	27.13	Vertical
3	5172.375	52.04	33.07	-44.76	40.34	74.00	33.66	Vertical
4	8994	48.36	38.00	-39.38	46.98	74.00	27.02	Vertical
5	13944.375	45.20	40.37	-34.96	50.61	74.00	23.39	Vertical
6	17791.125	43.76	41.09	-30.58	54.28	74.00	19.72	Vertical

11n(HT20)_TX_CH_06_Horizontal

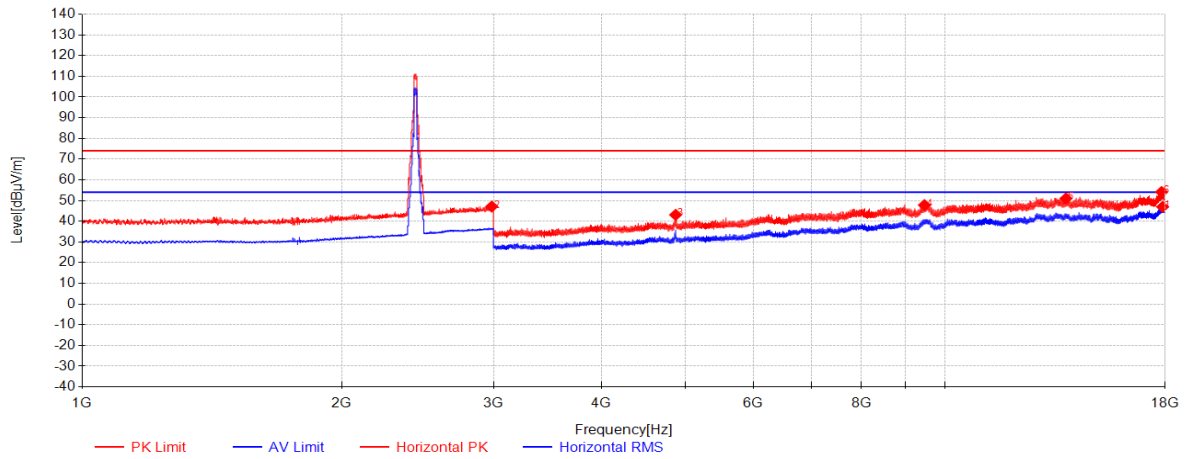


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17883	36.59	41.36	-31.00	46.95	54.00	7.05	Horizontal
2	2984	41.03	29.54	-23.47	47.10	74.00	26.90	Horizontal
3	4875	55.21	32.80	-44.92	43.09	74.00	30.91	Horizontal
4	9470.25	48.46	38.05	-38.71	47.79	74.00	26.21	Horizontal
5	13815.75	45.93	40.31	-35.25	50.99	74.00	23.01	Horizontal
6	17835.375	43.61	41.22	-30.71	54.12	74.00	19.88	Horizontal

11n(HT20)_TX_CH_06_Vertical

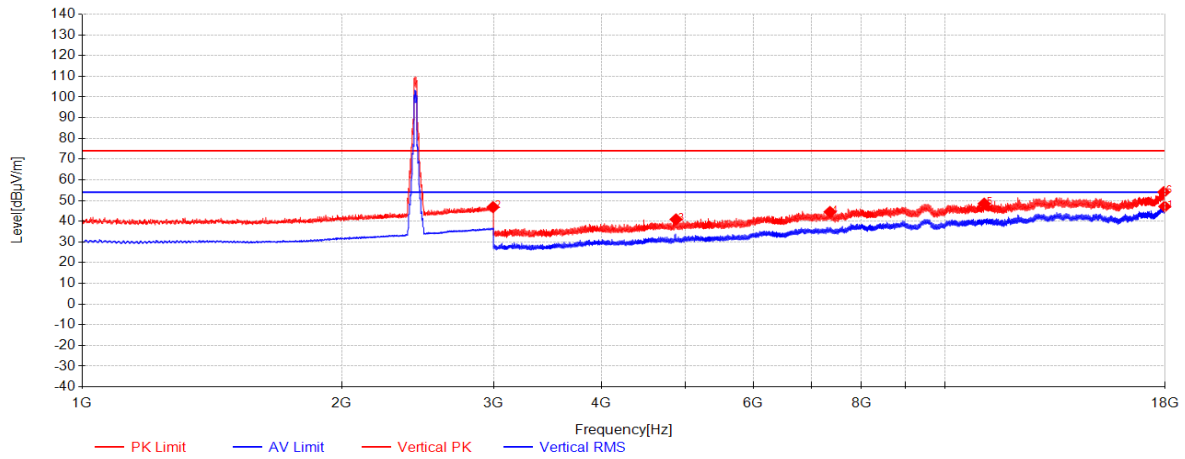


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17984.25	36.50	41.65	-31.03	47.12	54.00	6.88	Vertical
2	2994	40.72	29.58	-23.46	46.83	74.00	27.17	Vertical
3	4879.875	52.99	32.81	-44.90	40.90	74.00	33.10	Vertical
4	7360.125	50.53	36.30	-42.32	44.51	74.00	29.49	Vertical
5	11109.375	45.31	39.23	-36.03	48.51	74.00	25.49	Vertical
6	17941.125	43.62	41.53	-31.07	54.08	74.00	19.92	Vertical

11n(HT20)_TX_CH_11_Horizontal

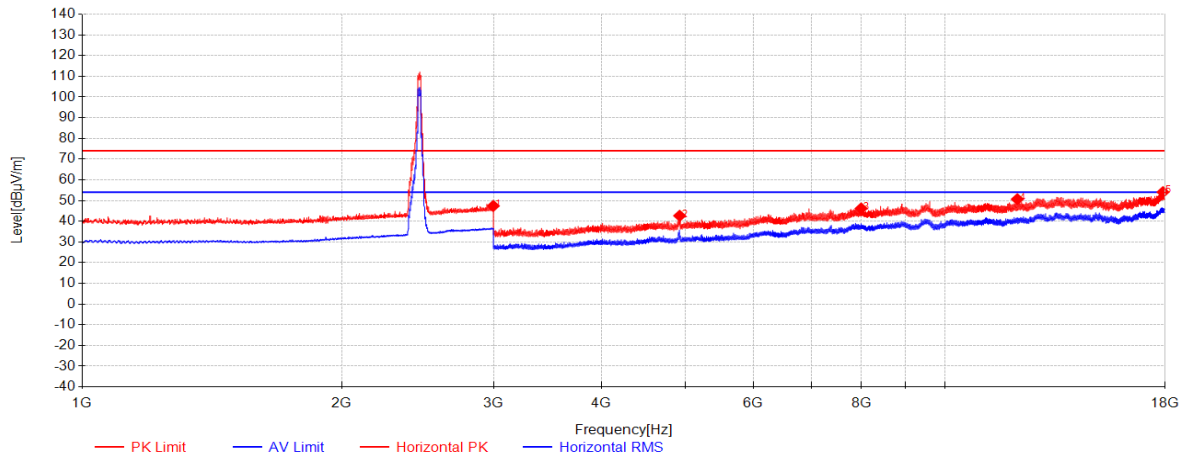


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2996.5	41.27	29.59	-23.46	47.39	74.00	26.61	Horizontal
2	4927.875	54.56	32.93	-44.84	42.65	74.00	31.35	Horizontal
3	7999.125	50.10	37.30	-41.22	46.18	74.00	27.82	Horizontal
4	12134.25	47.00	38.86	-35.21	50.65	74.00	23.35	Horizontal
5	17902.5	43.77	41.42	-31.11	54.08	74.00	19.92	Horizontal

11n(HT20)_TX_CH_11_Vertical

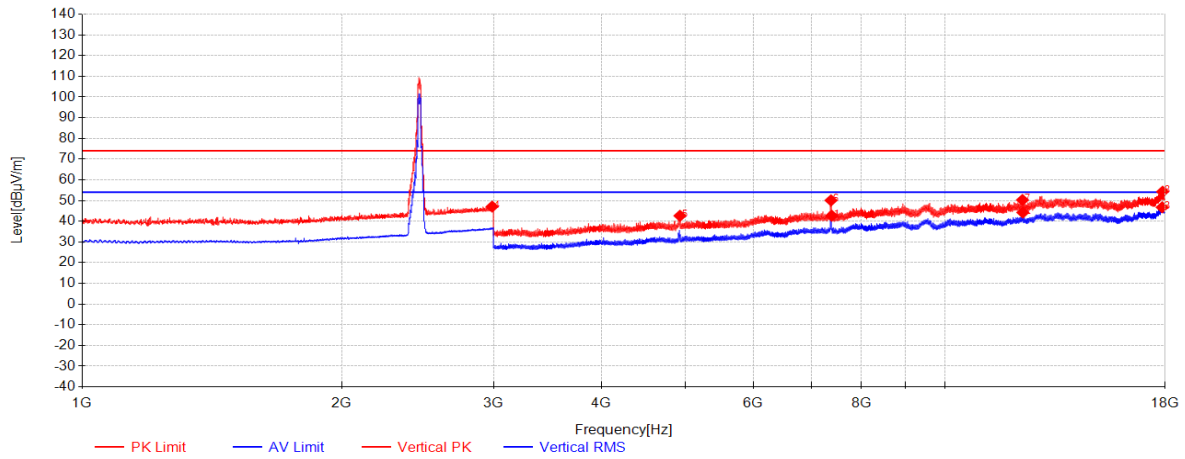


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7394.25	48.83	36.30	-42.47	42.66	54.00	11.34	Vertical
2	12314.25	39.96	39.08	-34.80	44.24	54.00	9.76	Vertical
3	17864.625	36.31	41.31	-30.89	46.73	54.00	7.27	Vertical
4	2987.5	41.01	29.55	-23.47	47.09	74.00	26.91	Vertical
5	4931.625	54.55	32.94	-44.84	42.65	74.00	31.35	Vertical
6	7380.75	56.19	36.30	-42.41	50.08	74.00	23.92	Vertical
7	12303.375	45.96	39.06	-34.75	50.28	74.00	23.72	Vertical
8	17883.375	43.94	41.36	-31.01	54.29	74.00	19.71	Vertical

11n(HT40)_TX_CH_03_Horizontal

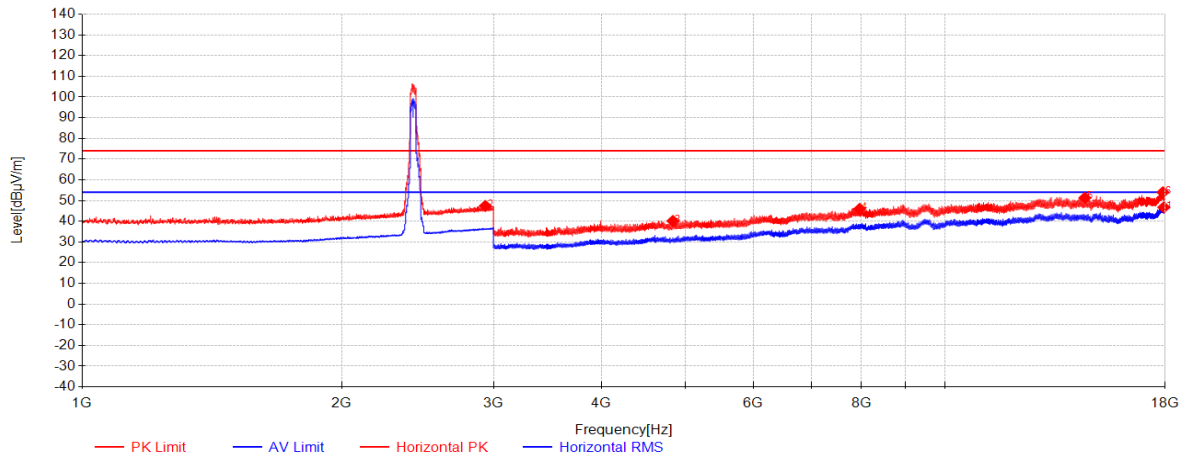


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17941.125	36.27	41.53	-31.07	46.73	54.00	7.27	Horizontal
2	2933.5	41.56	29.33	-23.50	47.39	74.00	26.61	Horizontal
3	4839.375	52.45	32.71	-45.04	40.13	74.00	33.87	Horizontal
4	7967.625	50.02	37.24	-41.28	45.97	74.00	28.03	Horizontal
5	14533.875	46.28	40.08	-35.06	51.30	74.00	22.70	Horizontal
6	17898	43.68	41.40	-31.10	53.99	74.00	20.01	Horizontal

11n(HT40)_TX_CH_03_Vertical

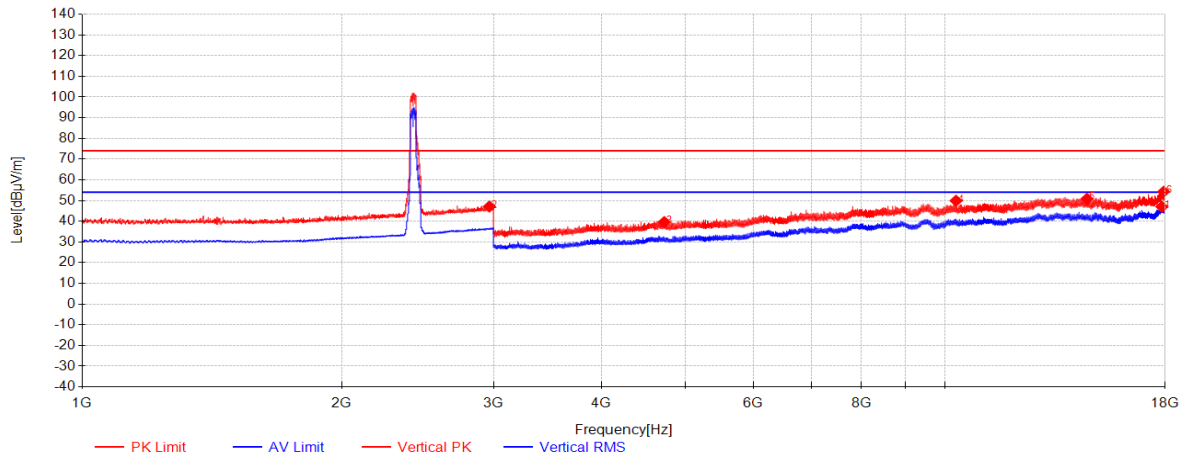


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17848.875	36.56	41.26	-30.79	47.03	54.00	6.97	Vertical
2	2965.5	41.12	29.46	-23.48	47.10	74.00	26.90	Vertical
3	4728.75	52.11	32.45	-44.93	39.63	74.00	34.37	Vertical
4	10303.875	48.75	38.46	-37.30	49.91	74.00	24.09	Vertical
5	14613.75	45.41	40.03	-34.60	50.84	74.00	23.16	Vertical
6	17931.75	43.86	41.50	-31.08	54.28	74.00	19.72	Vertical

11n(HT40)_TX_CH_06_Horizontal

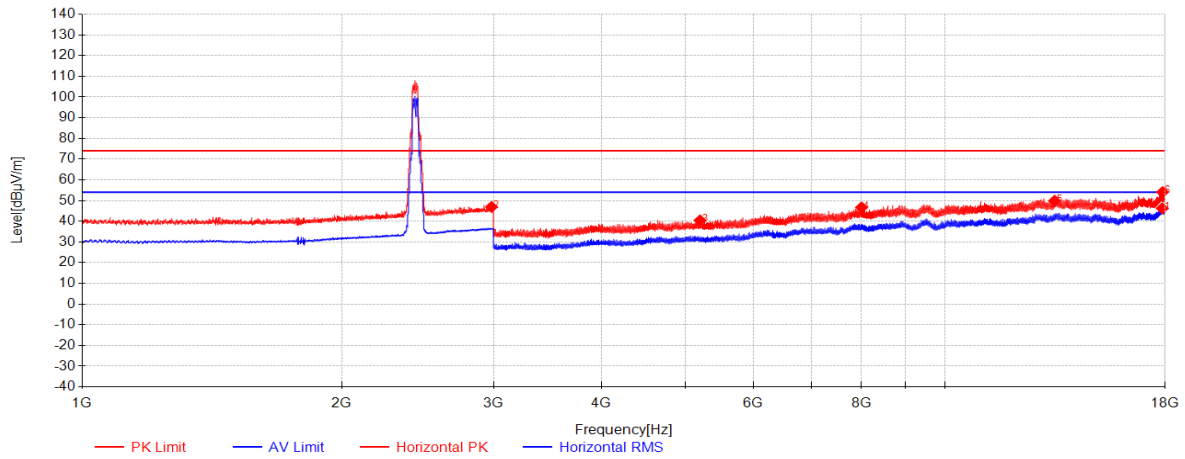


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17869.875	35.83	41.32	-30.92	46.23	54.00	7.77	Horizontal
2	2982.5	40.86	29.53	-23.47	46.92	74.00	27.08	Horizontal
3	5203.5	52.03	33.06	-44.69	40.39	74.00	33.61	Horizontal
4	8007.75	50.58	37.31	-41.21	46.68	74.00	27.32	Horizontal
5	13403.25	45.19	40.10	-35.42	49.87	74.00	24.13	Horizontal
6	17881.125	43.70	41.36	-30.99	54.06	74.00	19.94	Horizontal

11n(HT40)_TX_CH_06_Vertical

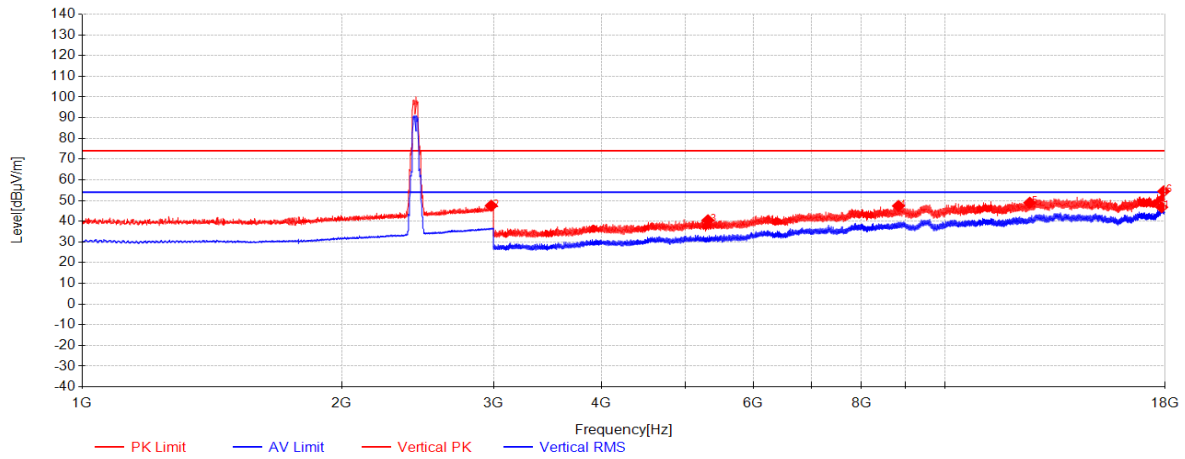


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17839.875	36.27	41.24	-30.74	46.77	54.00	7.23	Vertical
2	2980.5	41.47	29.52	-23.47	47.52	74.00	26.48	Vertical
3	5313.75	52.24	33.04	-44.80	40.48	74.00	33.52	Vertical
4	8835.75	49.34	37.89	-39.83	47.40	74.00	26.60	Vertical
5	12543.375	45.11	39.35	-35.54	48.92	74.00	25.08	Vertical
6	17936.25	44.04	41.52	-31.08	54.48	74.00	19.52	Vertical

11n(HT40)_TX_CH_09_Horizontal

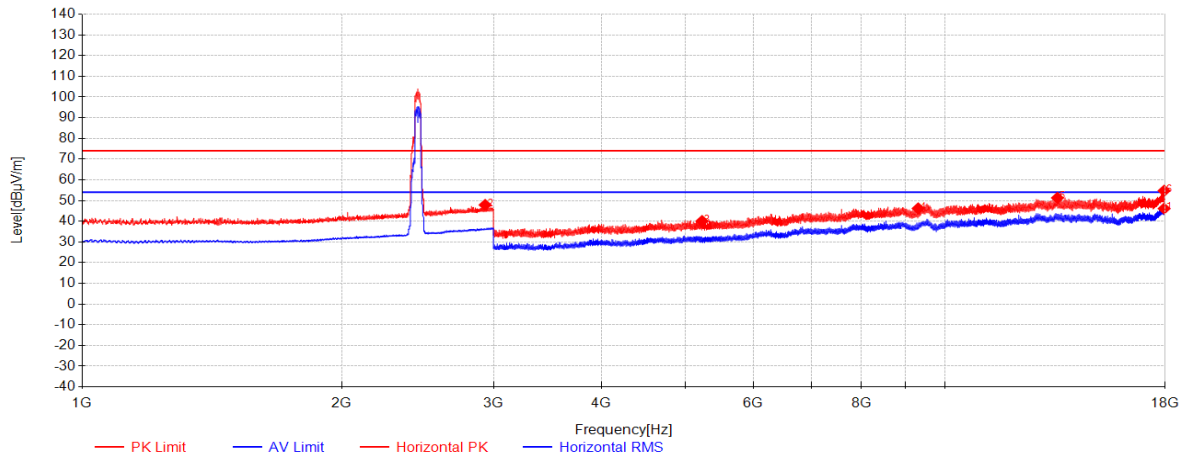

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17955.375	35.62	41.57	-31.06	46.13	54.00	7.87	Horizontal
2	2932	42.04	29.33	-23.50	47.87	74.00	26.13	Horizontal
3	5231.25	51.79	33.05	-44.73	40.11	74.00	33.89	Horizontal
4	9314.625	47.32	38.03	-39.15	46.20	74.00	27.80	Horizontal
5	13507.125	45.67	40.15	-34.54	51.29	74.00	22.71	Horizontal
6	17955	44.23	41.57	-31.06	54.74	74.00	19.26	Horizontal

11n(HT40)_TX_CH_09_Vertical

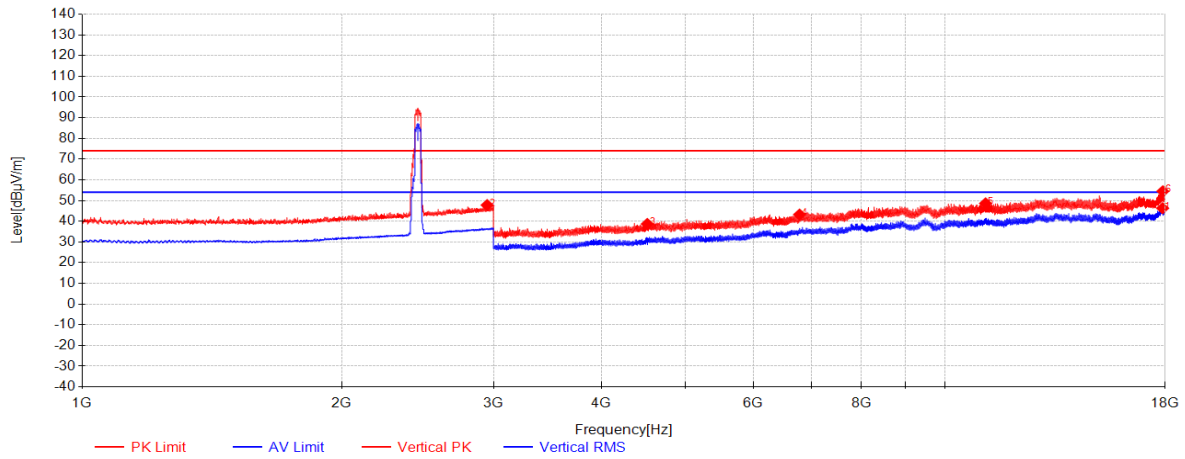

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	17883.75	35.96	41.36	-31.01	46.31	54.00	7.69	Vertical
2	2948	41.90	29.39	-23.49	47.80	74.00	26.20	Vertical
3	4519.5	51.94	31.95	-45.21	38.68	74.00	35.32	Vertical
4	6786	50.43	35.96	-43.16	43.23	74.00	30.77	Vertical
5	11149.5	45.33	39.21	-35.93	48.61	74.00	25.39	Vertical
6	17895.75	44.17	41.40	-31.08	54.48	74.00	19.52	Vertical