

TEST REPORT

Application No.: SUCR2604000342WM
FCC ID: 2BEPUFMP205
Applicant: FCNT LLC.
Address of Applicant: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Manufacturer: FCNT LLC.
Address of Manufacturer: Sanki Yamato Bldg. 3F, 7-10-1, Chuorinkan, Yamato-shi, Kanagawa, 242-0007, Japan
Equipment Under Test (EUT):
EUT Name: Mobile Cellular Phone
Model No.: F-51G;M10 ♣
♣ Please refer to summary of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: FCNT.LLC
Standard(s) : 47 CFR Part 15, Subpart B
Date of Receipt: 2026-04-10
Date of Test: 2026-05-10 to 2026-05-18
Date of Issue: 2026-05-21

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Revision Record			
Version	Description	Date	Remark
00	Original	2026-05-21	/

Authorized for issue by:			
Tested By		Nature Shen	
		Nature_Shen/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	

2 Test Summary

Emission Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at Mains Terminals (150kHz-30MHz)	47 CFR Part 15, Subpart B	ANSI C63.4-2014	15.107(a); Class B	Pass
Radiated Emissions (30MHz-1GHz)		ANSI C63.4-2014	15.109(a); Class B	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.4-2014	15.109(g); Class B	Pass

Remark: F-51G and M10 are the same product with identical prototypes, and only different model names are used for adaptation to different operators. This test involves two samples, and the differences between the prototypes can be referred to the Operational Description of Product Equality Declaration submitted separately. We selected Sample 1 to conduct a full test and completed the verification of Sample 2 against the differential points.

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary	3
3 Contents.....	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Description of Support Units	5
4.3 Measurement Uncertainty & Decision Rule	5
4.4 Test Location	6
4.5 Test Facility	6
4.6 Deviation from Standards.....	6
4.7 Abnormalities from Standard Conditions.....	6
5 Equipment List	7
6 Emission Test Results.....	8
6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz).....	8
6.2 Radiated Emissions (30MHz-1GHz)	12
6.3 Radiated Emissions (Above 1GHz).....	18
7 Test Setup Photo	24
8 EUT Constructional Details (EUT Photos).....	24

4 General Information

4.1 Details of E.U.T.

Hardware Version:	DVT2
Software Version:	fastboot_fujilt_dcm_sys_userdebug_16_W1WK36.0-64_b5b839-7dcc3a_intcfg-test-keys_global_JP
IMEI:	Sample 1:354986620024044 Sample 2:354986620030843

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Mouse	Lenovo	3D optical Mouse	N/A
Router	Smauwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.3 Measurement Uncertainty & Decision Rule

Test Item	Measurement Uncertainty
Conducted Emissions (9kHz-150KHz)	$\pm 2.4\text{dB}$
Conducted Emissions (150kHz-30MHz)	$\pm 2.9\text{dB}$
Conducted Emission at telecommunication port using AAN	$\pm 4.0\text{ dB}$
Radiated Power	$\pm 3.2\text{dB}$
Radiated Emissions (30MHz-1GHz)	$\pm 4.8\text{dB}$
Radiated Emissions (Above 1GHz)	$\pm 4.8\text{dB}$
Voltage Fluctuations and Flicker	$\pm 0.12\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

- 1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
- 2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at Mains Terminals (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
EMI Test Receive	R&S	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
LISN	R&S	ENV216	SUWI-01-19-03	2026/4/22	2027/4/21
LISN	Schwarzbeck	ENV216	SUWI-01-19-04	2026/4/22	2027/4/21
Test Software	Tonscend	JS32-CE_4.0.0.2	SUWI-02-09-05	N.C.R	N.C.R
Radiated Emissions (30MHz-1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2026/2/11	2027/2/10
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2026/1/14	2027/1/13
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2025/11/29	2027/11/28
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2026/1/14	2027/1/13
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR
Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/6/3	2026/6/2
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2026/2/11	2027/2/10
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2026/1/14	2027/1/13
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/5/7	2027/5/6
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/5/7	2027/5/6
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2026/1/14	2027/1/13
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2026/1/14	2027/1/13
Measurement Software	Tonscend	JS32-RE	SUWI-02-09-04	NCR	NCR

6 Emission Test Results

6.1 Conducted Emissions at Mains Terminals (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Measurement Distance: 3m

Limit:

0.15MHz-0.5MHz: 66dB(μV)-56dB(μV) quasi-peak, 56dB(μV)-46dB(μV) average

0.5MHz-5MHz: 56dB(μV) quasi-peak, 46dB(μV) average

5MHz-30MHz: 60dB(μV) quasi-peak, 50dB(μV) average

Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	15	EUT1+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	16	EUT1+usb Cable+BT(Idle)+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	17	EUT1+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	18	EUT1+usb Cable+BT(Idle)+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Pre-scan	19	EUT1r+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+GNSS+SA Band 77 (RX) Mid
Pre-scan	20	EUT1+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	21	EUT2+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High

6.1.3 Test Setup Diagram

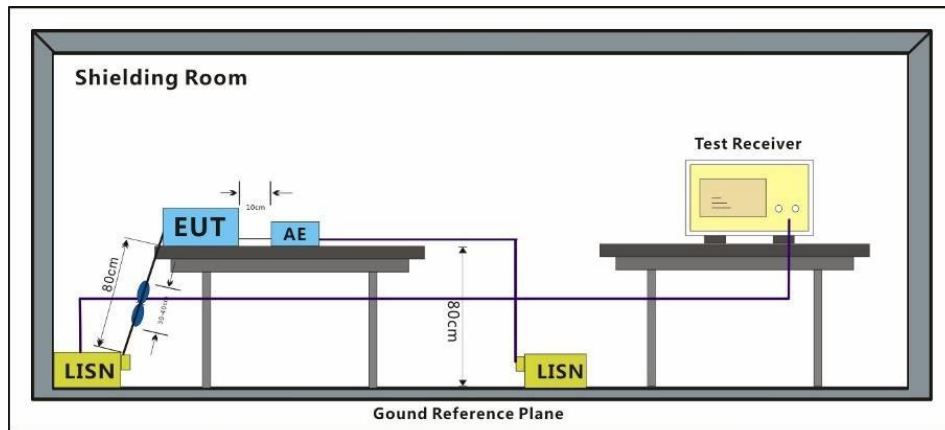


6.1.4 Measurement Procedure and Data

An initial pre-scan was performed with peak detector. Quasi-Peak or Average measurement were performed at the frequencies with maximized peak emission were detected.

Remark : Level= Read Level+ Cable Loss+ LISN Factor


Test Mode: 15; Line: Live line

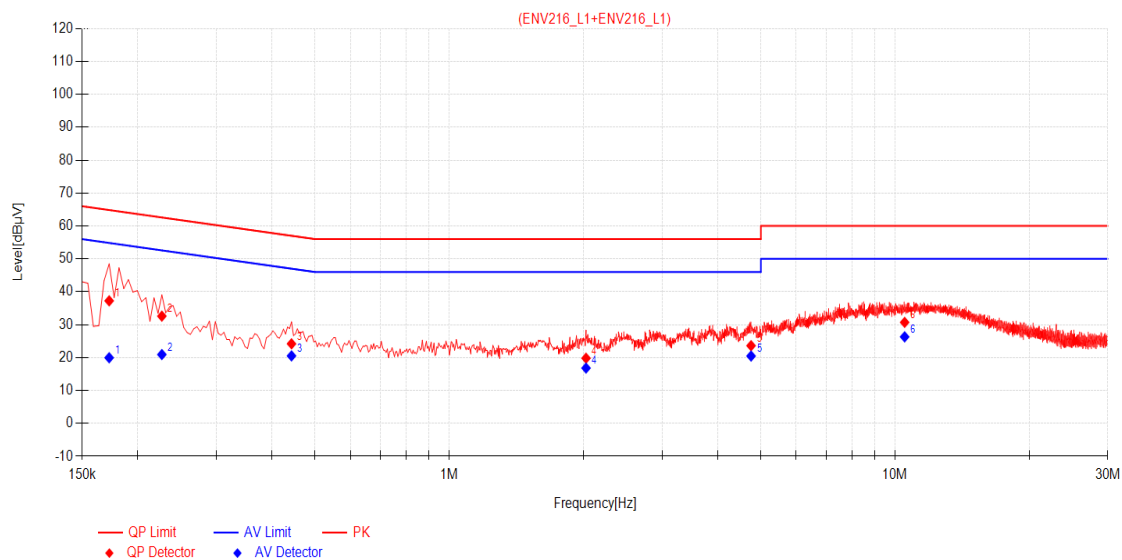

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1725	9.95	27.30	37.25	64.84	27.59	10.01	19.96	54.84	34.88	PASS
2	0.2265	9.96	22.64	32.60	62.58	29.98	10.97	20.93	52.58	31.65	PASS
3	0.4425	9.95	14.24	24.19	57.01	32.82	10.56	20.51	47.01	26.50	PASS
4	2.0265	9.94	9.88	19.82	56.00	36.18	6.87	16.81	46.00	29.19	PASS
5	4.7535	10.29	13.33	23.62	56.00	32.38	10.18	20.47	46.00	25.53	PASS
6	10.5090	10.31	20.40	30.71	60.00	29.29	16.00	26.31	50.00	23.69	PASS

Test Mode: 15; Line: Neutral Line

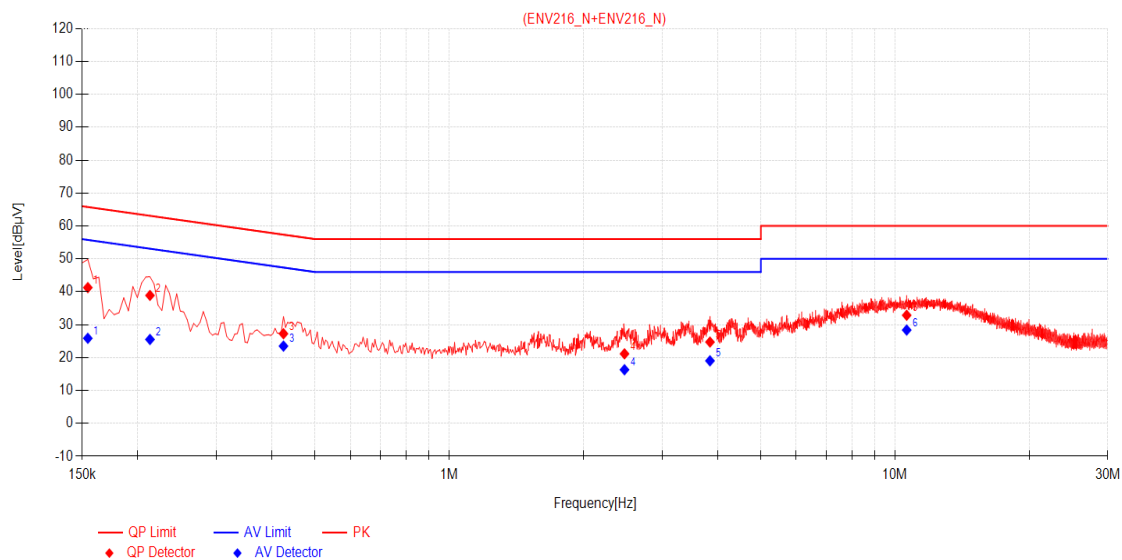

Final Data List

NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1545	9.96	31.30	41.26	65.75	24.49	15.90	25.86	55.75	29.89	PASS
2	0.2130	9.97	28.91	38.88	63.09	24.21	15.54	25.51	53.09	27.58	PASS
3	0.4245	9.93	17.32	27.25	57.36	30.11	13.56	23.49	47.36	23.87	PASS
4	2.4720	10.15	10.99	21.14	56.00	34.86	6.16	16.31	46.00	29.69	PASS
5	3.8445	10.38	14.35	24.73	56.00	31.27	8.64	19.02	46.00	26.98	PASS
6	10.6215	10.51	22.35	32.86	60.00	27.14	17.86	28.37	50.00	21.63	PASS

6.2 Radiated Emissions (30MHz-1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class B

Test Distance: 3m

30MHz -88MHz 40.0(dBμV/m) quasi-peak

88MHz-216MHz 43.5(dBμV/m) quasi-peak

216MHz-960MHz 46.0(dBμV/m) quasi-peak

960MHz-1000MHz 54.0(dBμV/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

Class B

Test Distance: 10m

30MHz -88MHz 29.5(dBμV/m) quasi-peak

88MHz-216MHz 33.1(dBμV/m) quasi-peak

216MHz-960MHz 35.6(dBμV/m) quasi-peak

960MHz-1000MHz 43.5(dBμV/m) quasi-peak

Detector: Peak for pre-scan (120kHz resolution bandwidth) 30MHz to1000MHz

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C


Humidity: 43 % RH

Atmospheric Pressure: 1001 mbar

6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	15	EUT1+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	16	EUT1+usb Cable+BT(Idle)+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	17	EUT1+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	18	EUT1+usb Cable+BT(Idle)+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Pre-scan	19	EUT1r+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+GNSS+SA Band 77 (RX) Mid
Final test	20	EUT1+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	21	EUT2+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High

6.2.3 Test Setup Diagram

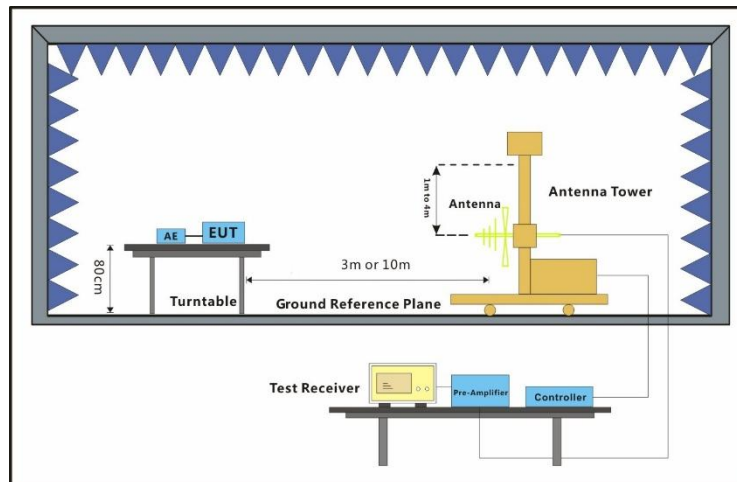


6.2.4 Measurement Procedure and Data

An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by BiConiLog antenna with 2 orthogonal polarities.

Remark: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$


Test Mode: 15; Polarity: Horizontal

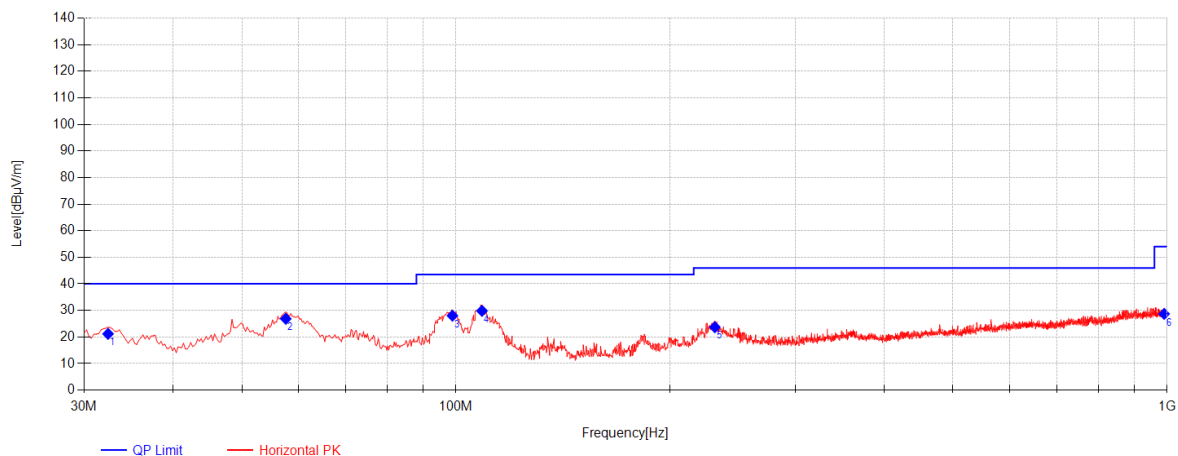

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.425	45.48	17.04	-41.34	21.18	40.00	18.82	127	64	Horizontal
2	57.645	48.87	18.94	-40.96	26.85	40.00	13.15	136	126	Horizontal
3	98.87	51.37	17.05	-40.40	28.02	43.50	15.48	128	244	Horizontal
4	108.8125	51.11	18.90	-40.17	29.84	43.50	13.66	143	236	Horizontal
5	231.275	44.97	17.68	-38.97	23.68	46.00	22.32	101	236	Horizontal
6	990.5425	34.75	27.74	-33.79	28.70	54.00	25.30	200	216	Horizontal


Test Mode: 15; Polarity: Vertical

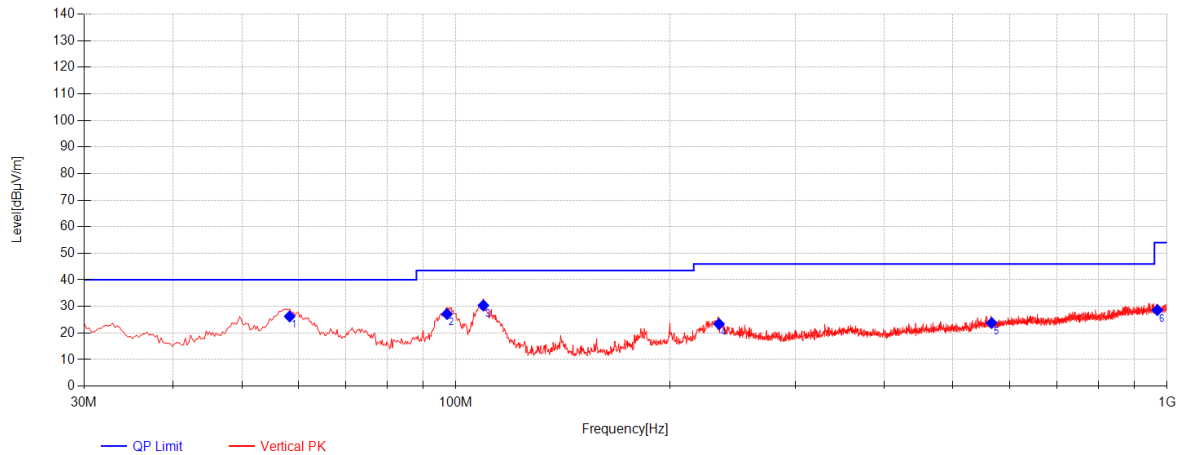

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.3725	48.5	18.68	-40.95	26.23	40.00	13.77	130	158	Vertical
2	97.1725	51.1	16.45	-40.41	27.14	43.50	16.36	124	228	Vertical
3	109.2975	51.82	18.72	-40.16	30.38	43.50	13.12	110	266	Vertical
4	234.4275	44.39	17.87	-38.88	23.38	46.00	22.62	117	290	Vertical
5	566.6525	36.76	23.40	-36.40	23.76	46.00	22.24	108	188	Vertical
6	968.96	34.7	27.70	-33.78	28.62	54.00	25.38	194	92	Vertical


Test Mode: 20; Polarity: Horizontal

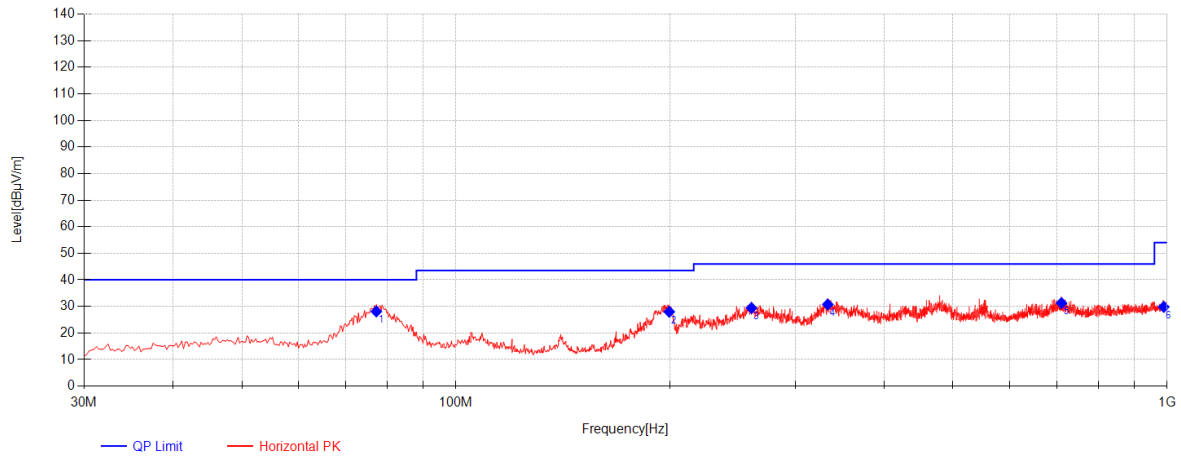

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	77.2875	54.31	14.43	-40.64	28.10	40.00	11.90	190	342	Horizontal
2	199.5075	47.19	20.07	-39.27	27.99	43.50	15.51	115	151	Horizontal
3	260.375	49.19	19.00	-38.77	29.42	46.00	16.58	109	135	Horizontal
4	333.3675	48.59	20.23	-38.08	30.74	46.00	15.26	118	206	Horizontal
5	710.455	42.2	24.67	-35.61	31.26	46.00	14.74	134	135	Horizontal
6	989.33	35.97	27.67	-33.80	29.84	54.00	24.16	189	52	Horizontal

Test Mode: 20; Polarity: Vertical

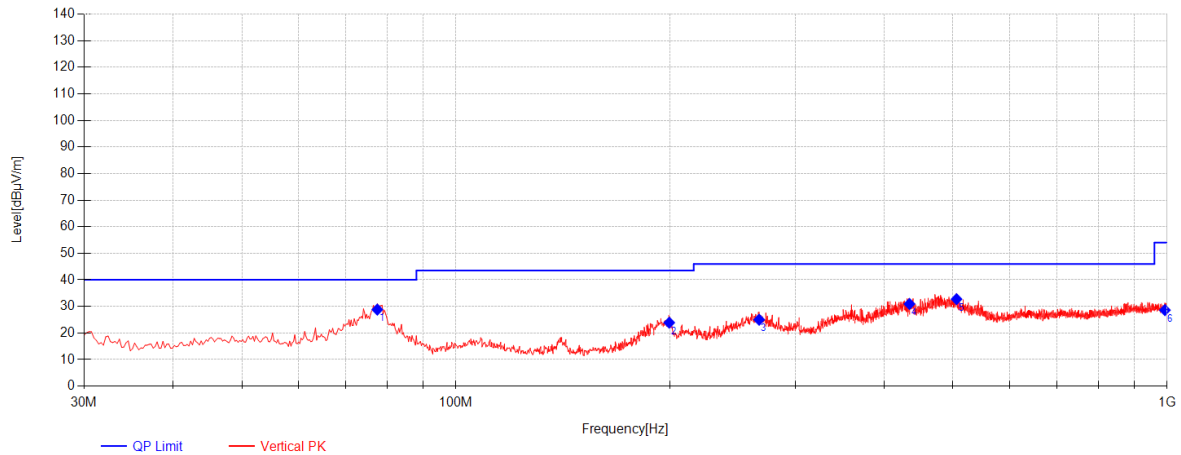

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	77.53	55	14.45	-40.63	28.82	40.00	11.18	137	87	Vertical
2	199.5075	43.08	20.07	-39.27	23.88	43.50	19.62	108	166	Vertical
3	266.9225	44.63	19.04	-38.67	25.00	46.00	21.00	191	349	Vertical
4	434.2475	46.85	21.36	-37.29	30.92	46.00	15.08	145	150	Vertical
5	505.785	47.01	22.64	-36.90	32.75	46.00	13.25	167	166	Vertical
6	992.9675	34.44	27.94	-33.76	28.62	54.00	25.38	150	318	Vertical

6.3 Radiated Emissions (Above 1GHz)

Test Requirement: 47 CFR Part 15, Subpart B

Test Method: ANSI C63.4-2014

Limit:

Class B

Above 1GHz 74(dBμV/m) peak, 54(dBμV/m) average

Detector: Peak for pre-scan (1000kHz resolution bandwidth) 1000M to18000MHz

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 21 °C


Humidity: 42 % RH

Atmospheric Pressure: 1001 mbar

6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	15	EUT1+usb Cable+BT(Idle)+2.4GWLAN(Idle)+Camera(Rear)+GSM850 (RX) Low
Pre-scan	16	EUT1+usb Cable+BT(Idle)+BT(Idle)+5GWLAN(Idle)+Camera(Front)+WCDMA Band 5(RX) Mid
Pre-scan	17	EUT1+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+MP4+LTE Band 5 (RX) High
Pre-scan	18	EUT1+usb Cable+BT(Idle)+BT(Idle)+2.4GWLAN(Idle)+NFC ON+LTE Band 12 (RX) Low
Pre-scan	19	EUT1r+usb Cable+BT(Idle)+BT(Idle)+WLAN6E(Idle)+GNSS+SA Band 77 (RX) Mid
Final test	20	EUT1+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High
Pre-scan	21	EUT2+Transfer data between the EUT and the PC+USB cable+BT(Idle)+5GWLAN(Idle)+LTE Band 41 (RX) High

6.3.3 Test Setup Diagram

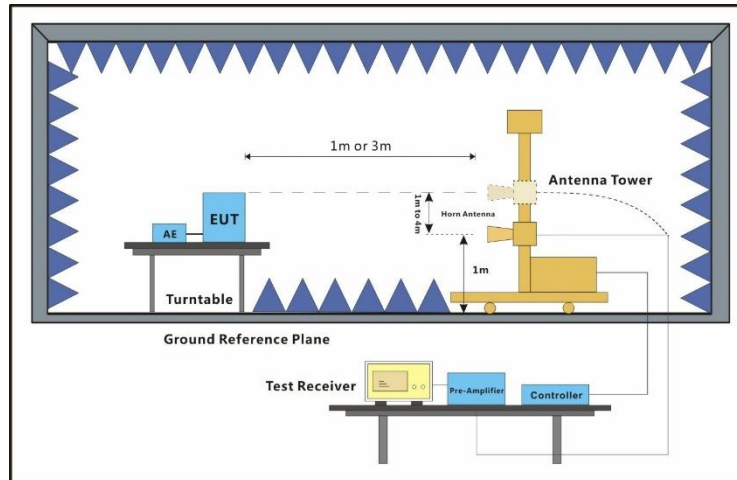

6.3.4 Measurement Procedure and Data


An initial pre-scan was performed in the chamber using the spectrum analyser in peak detection mode. Average measurements were conducted based on the peak sweep graph. The EUT was measured by Horn antenna with 2 orthogonal polarities.

The red line show in graphic is the limit in standard used in this section.

Remark: 1. Level = Read Level + Cable Loss + Antenna Factor - Preamp Factor


2. Scan above 18GHz, the disturbance in this frequency range was very low. Spurious emissions from the radiator that are attenuated more than 20 dB below the limit need not be reported.

Test Mode: 15; Polarity: Horizontal

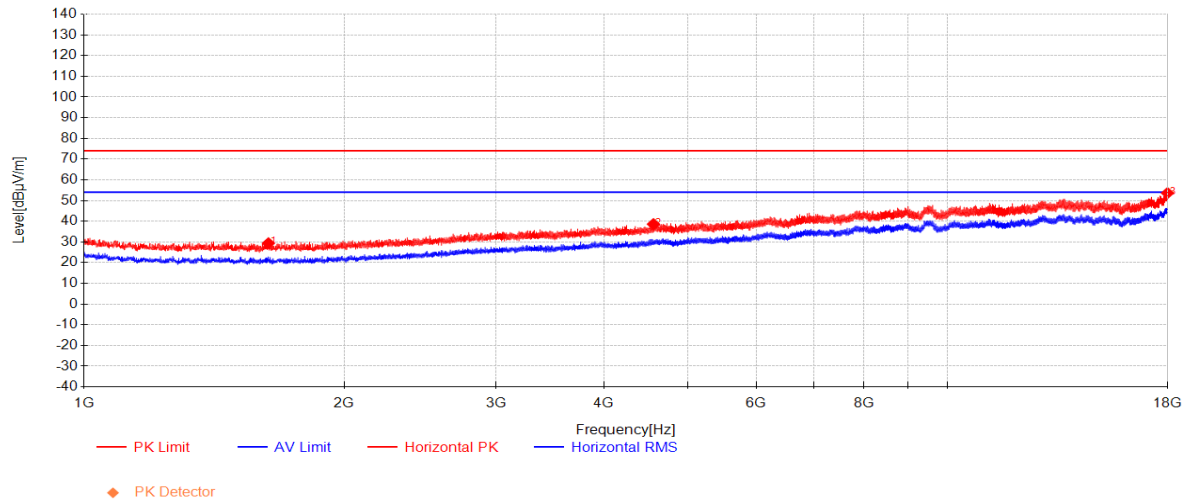


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1634.525	53.19	24.92	-48.72	29.39	74.00	44.61	Horizontal
2	4563.625	51.80	32.05	-45.25	38.61	74.00	35.39	Horizontal
3	17977.9	41.93	41.64	-29.95	53.61	74.00	20.39	Horizontal

Test Mode: 15; Polarity: Vertical

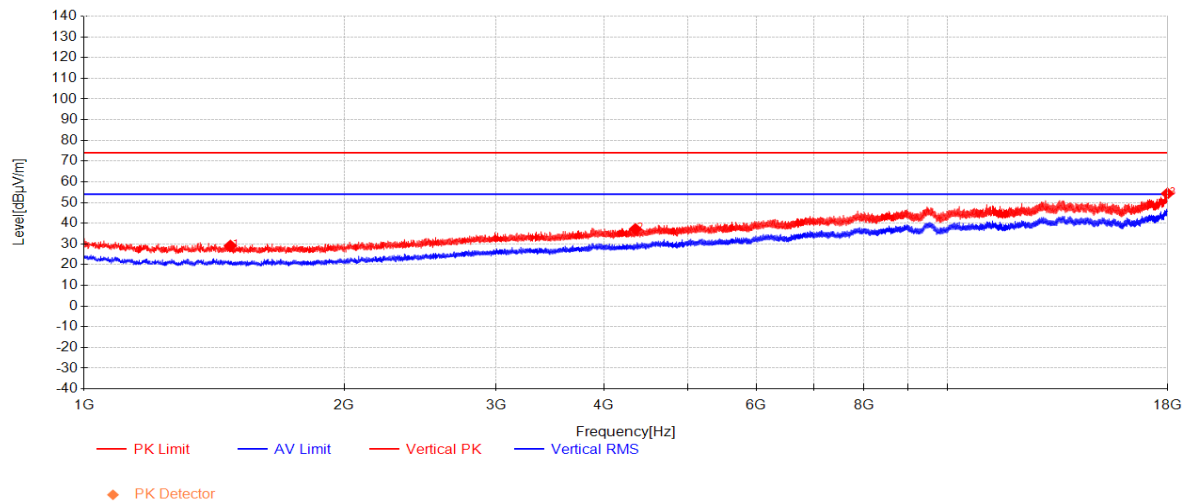


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1476.85	53.09	25.15	-49.09	29.15	74.00	44.85	Vertical
2	4349	50.91	31.66	-45.38	37.19	74.00	36.81	Vertical
3	17976.2	42.68	41.63	-29.97	54.35	74.00	19.65	Vertical

Test Mode: 20; Polarity: Horizontal

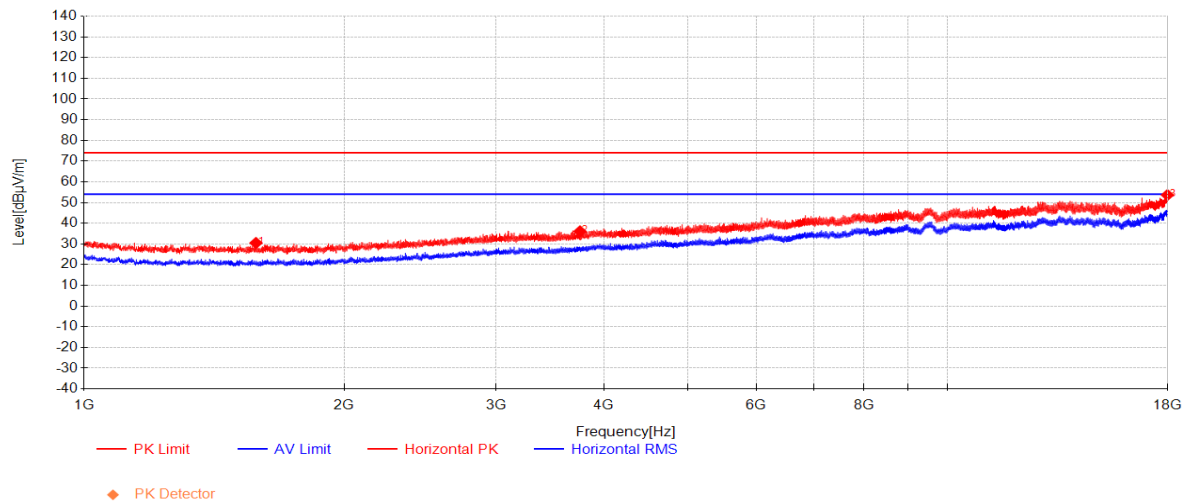

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1580.975	54.40	24.94	-48.85	30.49	74.00	43.51	Horizontal
2	3751.45	51.33	30.21	-45.42	36.11	74.00	37.89	Horizontal
3	17972.8	42.00	41.62	-29.99	53.64	74.00	20.36	Horizontal

Test Mode: 20; Polarity: Vertical

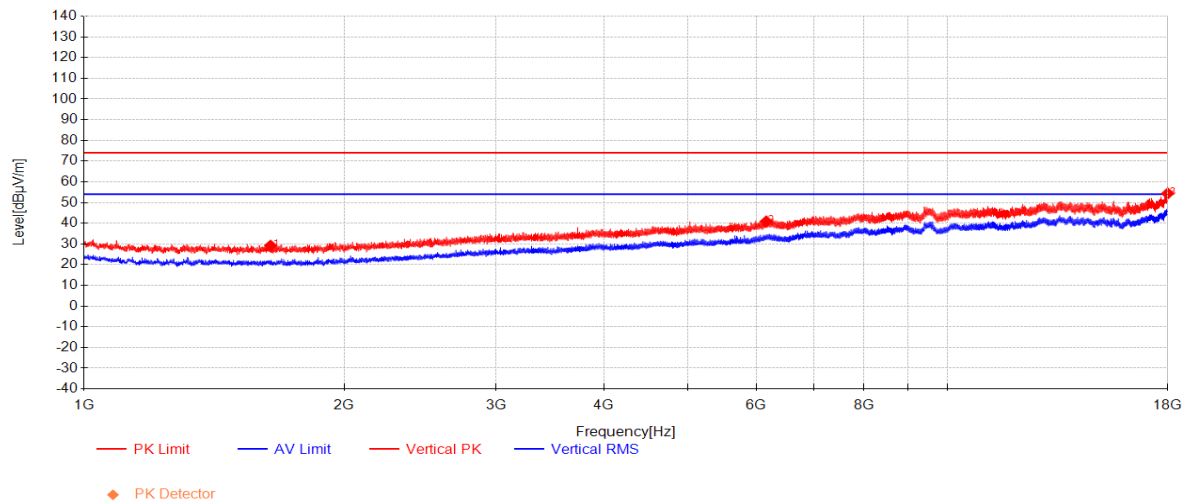

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	1643.875	52.96	24.92	-48.70	29.18	74.00	44.82	Vertical
2	6165.875	49.98	34.83	-43.95	40.86	74.00	33.14	Vertical
3	17986.825	42.62	41.66	-29.90	54.38	74.00	19.62	Vertical

7 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2604000342WM

8 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for SUCR2604000342WM

- End of the Report -