

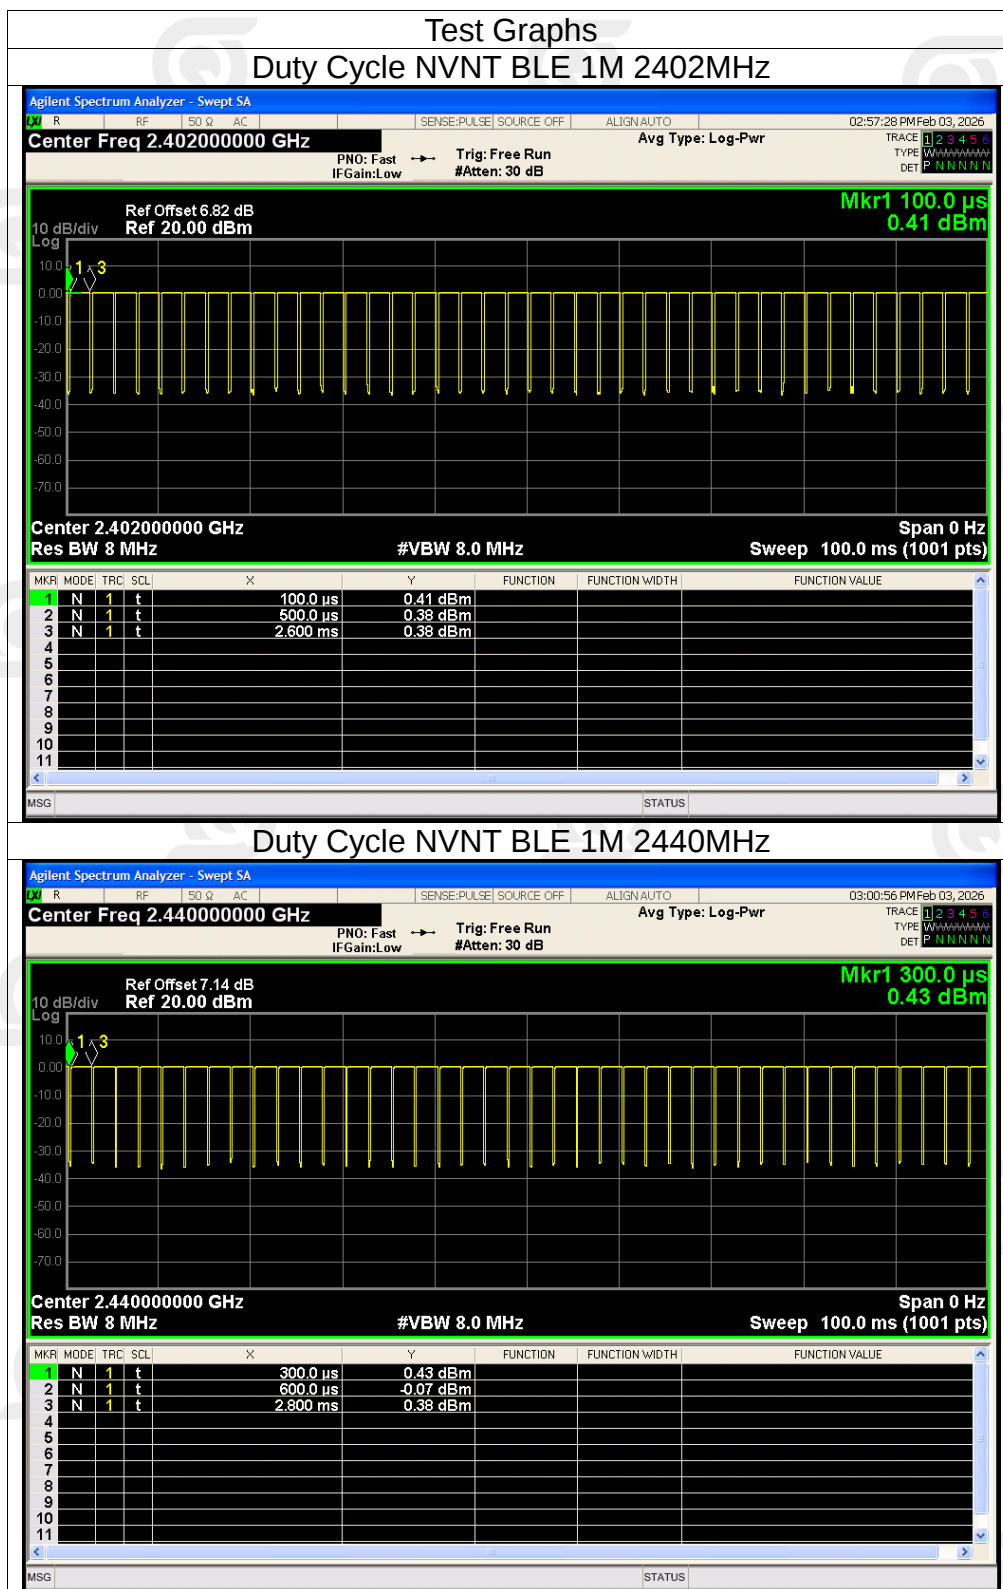



Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	BLE 1M	2402	88.01	0.55
NVNT	BLE 1M	2440	92.01	0.36
NVNT	BLE 1M	2480	88.01	0.55
NVNT	BLE 2M	2402	62.34	2.05
NVNT	BLE 2M	2440	64.14	1.93
NVNT	BLE 2M	2480	62.54	2.04

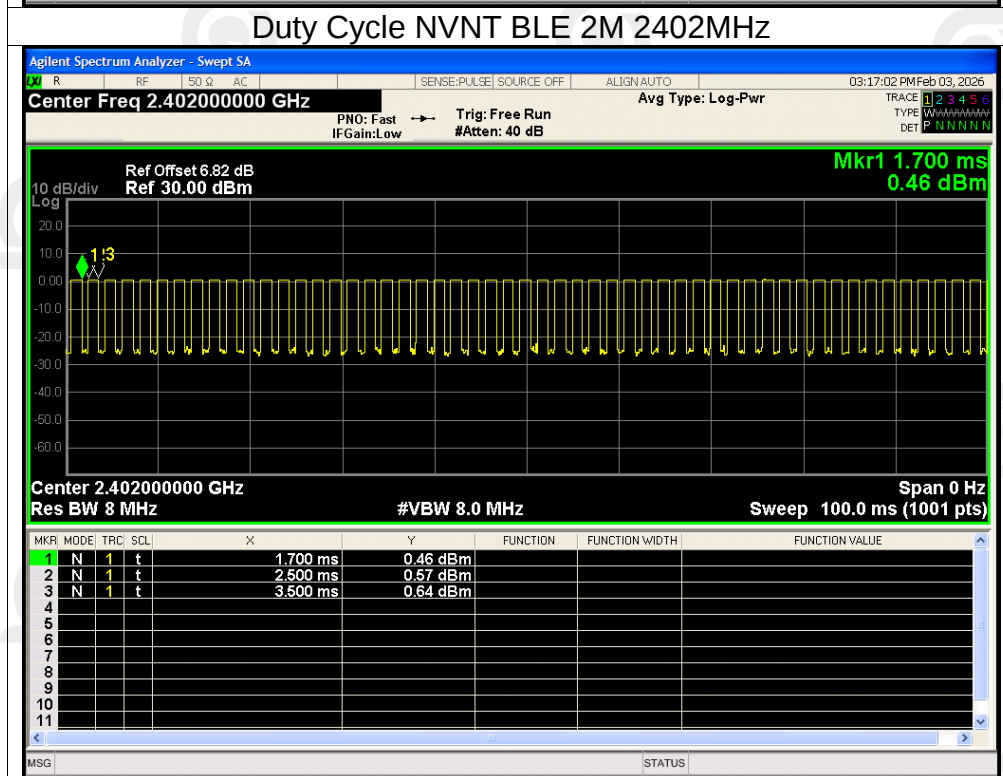


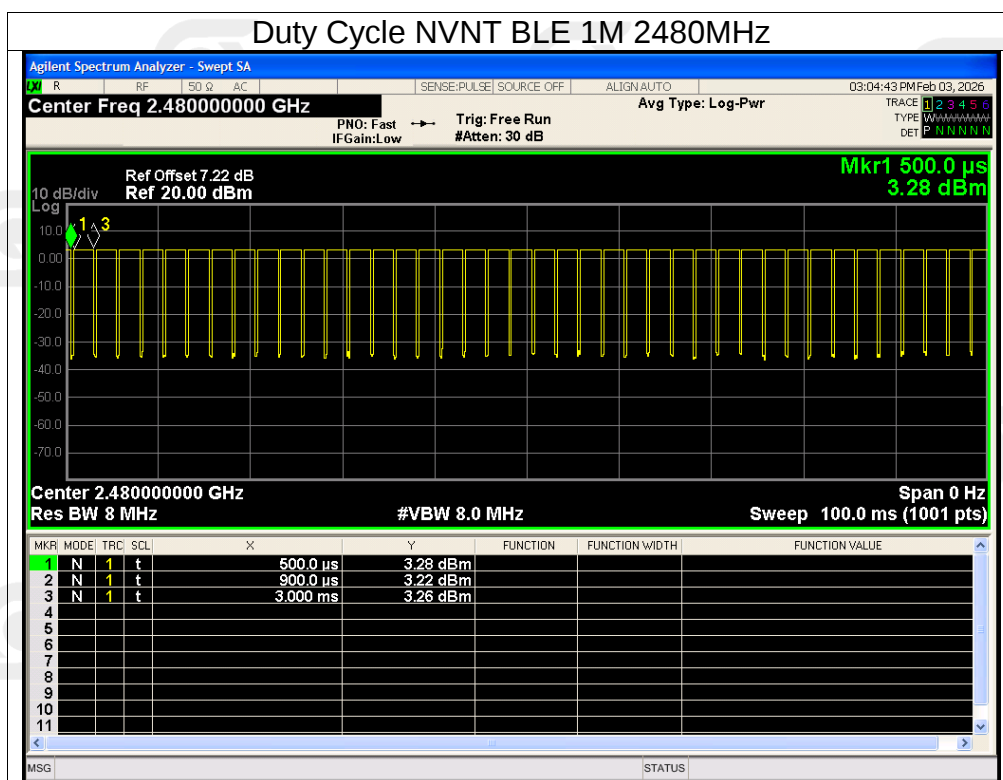

Duty Cycle NVNT BLE 2M 2440MHz

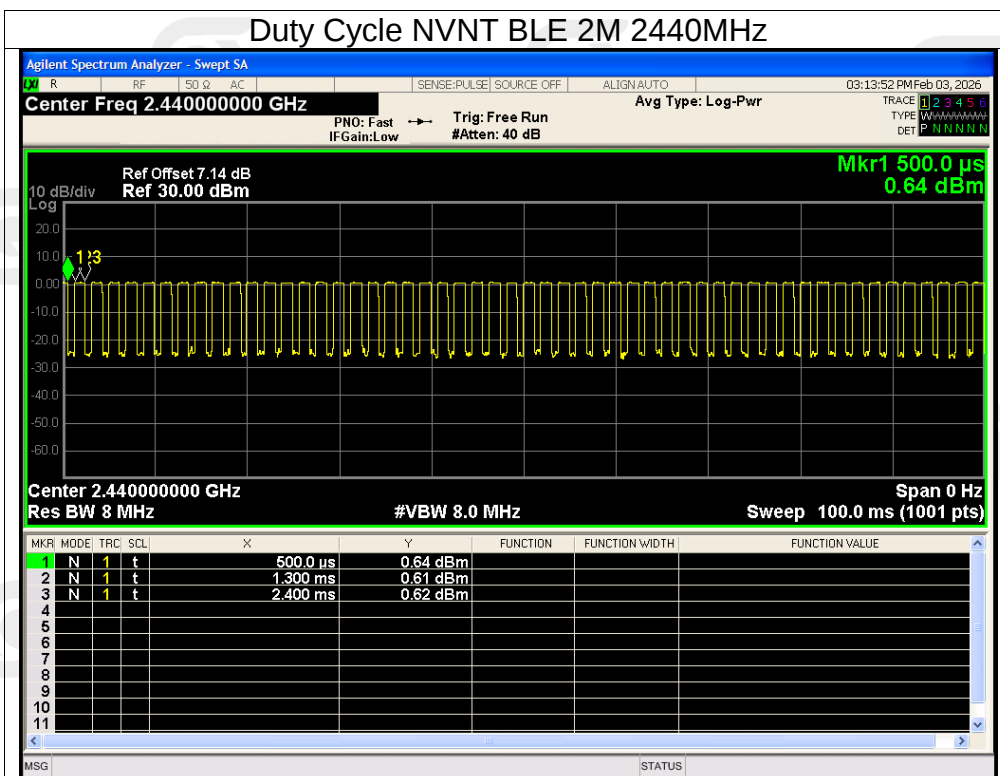


Duty Cycle NVNT BLE 2M 2480MHz

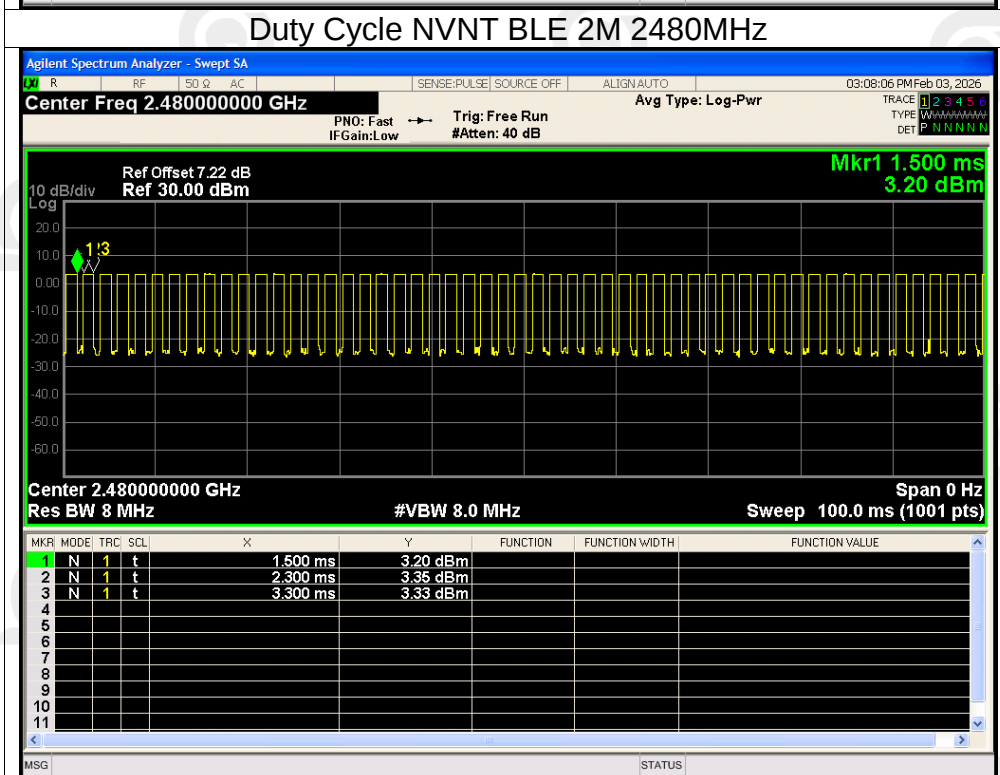


Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-0.26	30	Pass
NVNT	BLE 1M	2440	-0.29	30	Pass
NVNT	BLE 1M	2480	2.58	30	Pass
NVNT	BLE 2M	2402	0.27	30	Pass
NVNT	BLE 2M	2440	0.32	30	Pass
NVNT	BLE 2M	2480	3.15	30	Pass


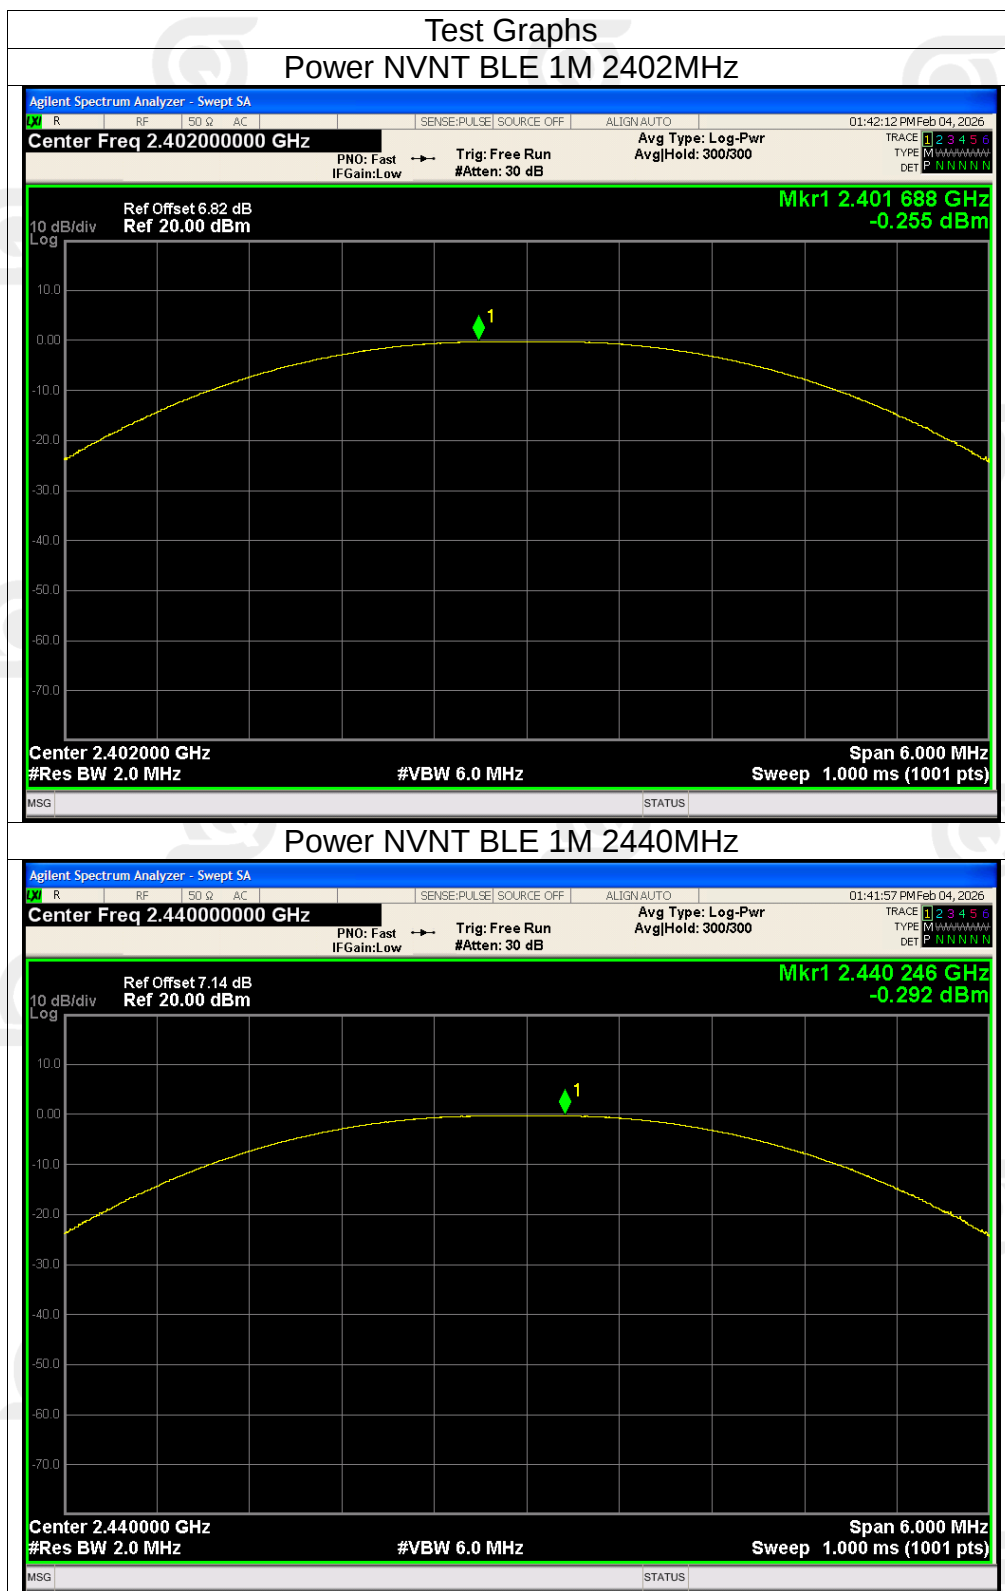


Power NVNT BLE 1M 2480MHz

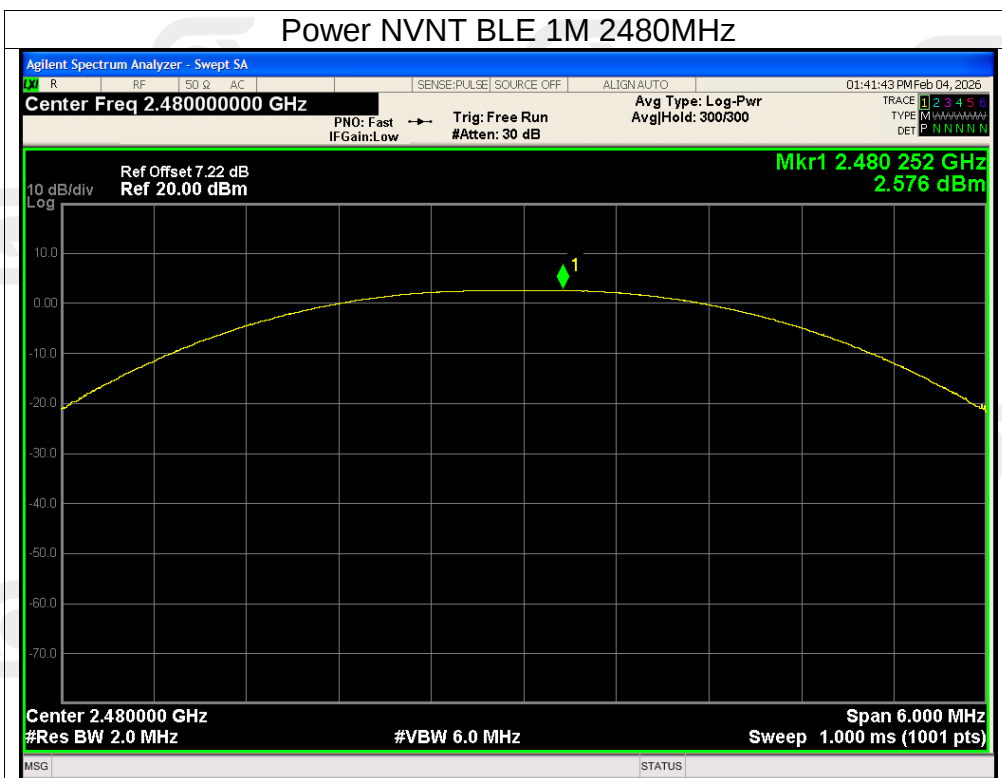


Power NVNT BLE 2M 2402MHz


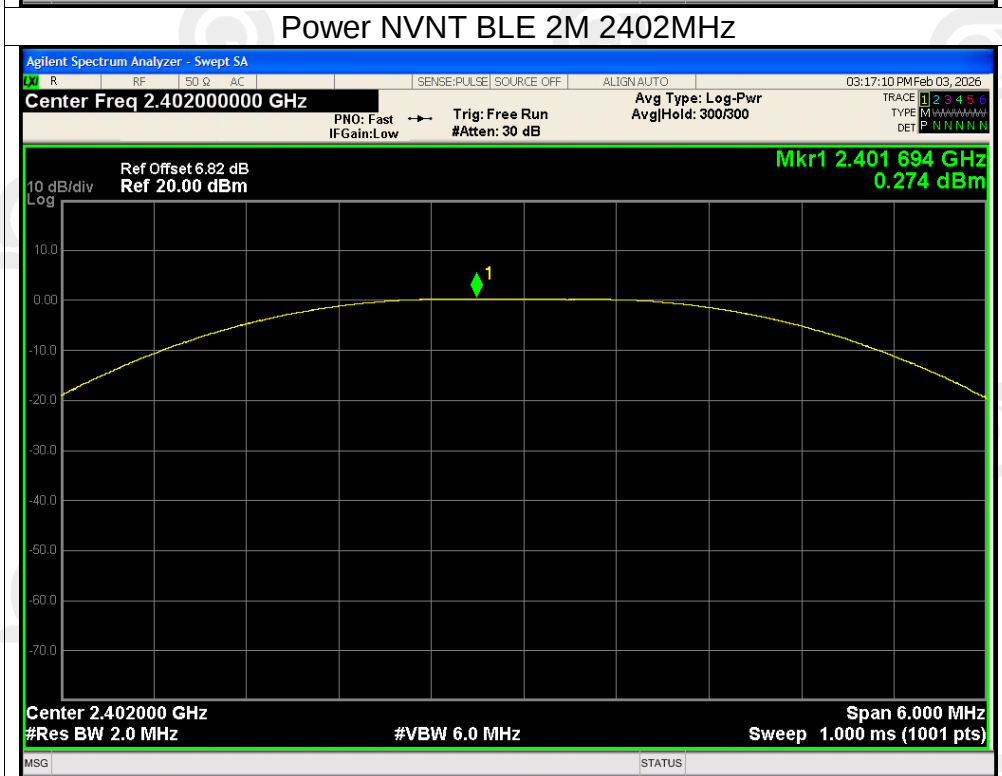


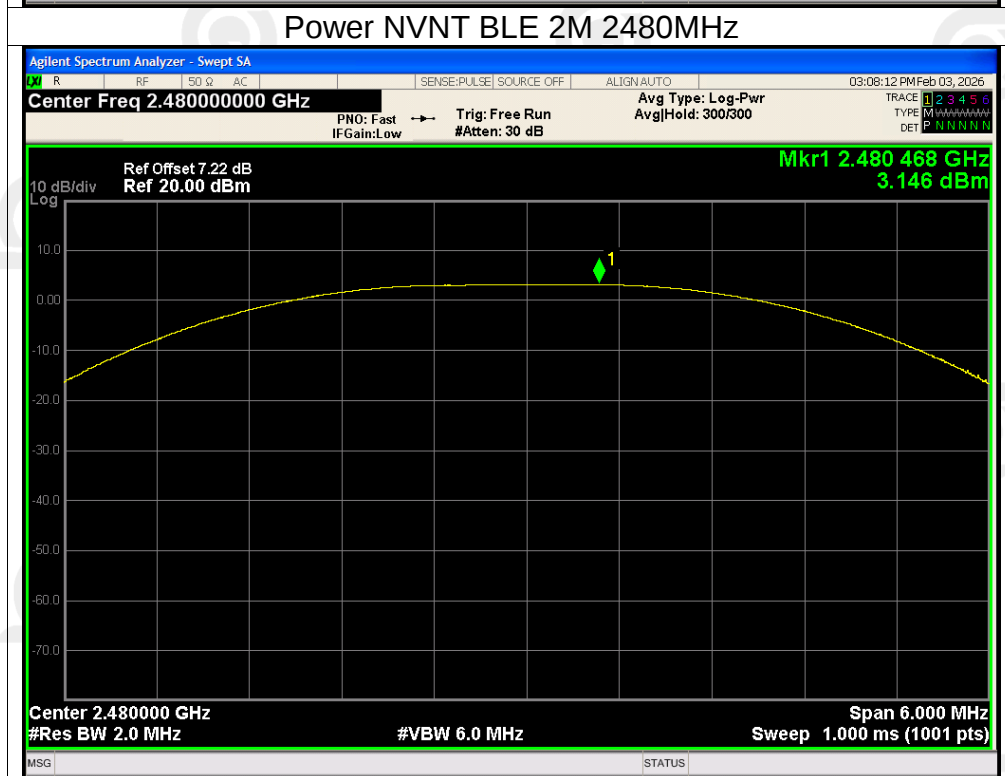
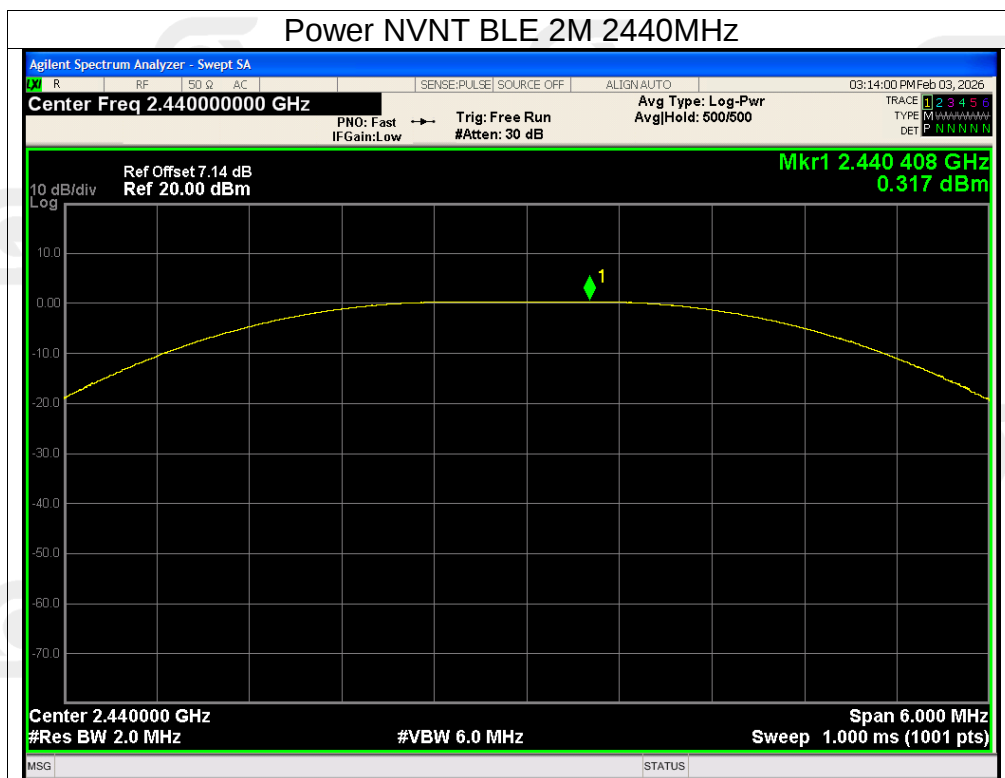


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.661	0.5	Pass
NVNT	BLE 1M	2440	0.659	0.5	Pass
NVNT	BLE 1M	2480	0.663	0.5	Pass
NVNT	BLE 2M	2402	1.140	0.5	Pass
NVNT	BLE 2M	2440	1.137	0.5	Pass
NVNT	BLE 2M	2480	1.136	0.5	Pass

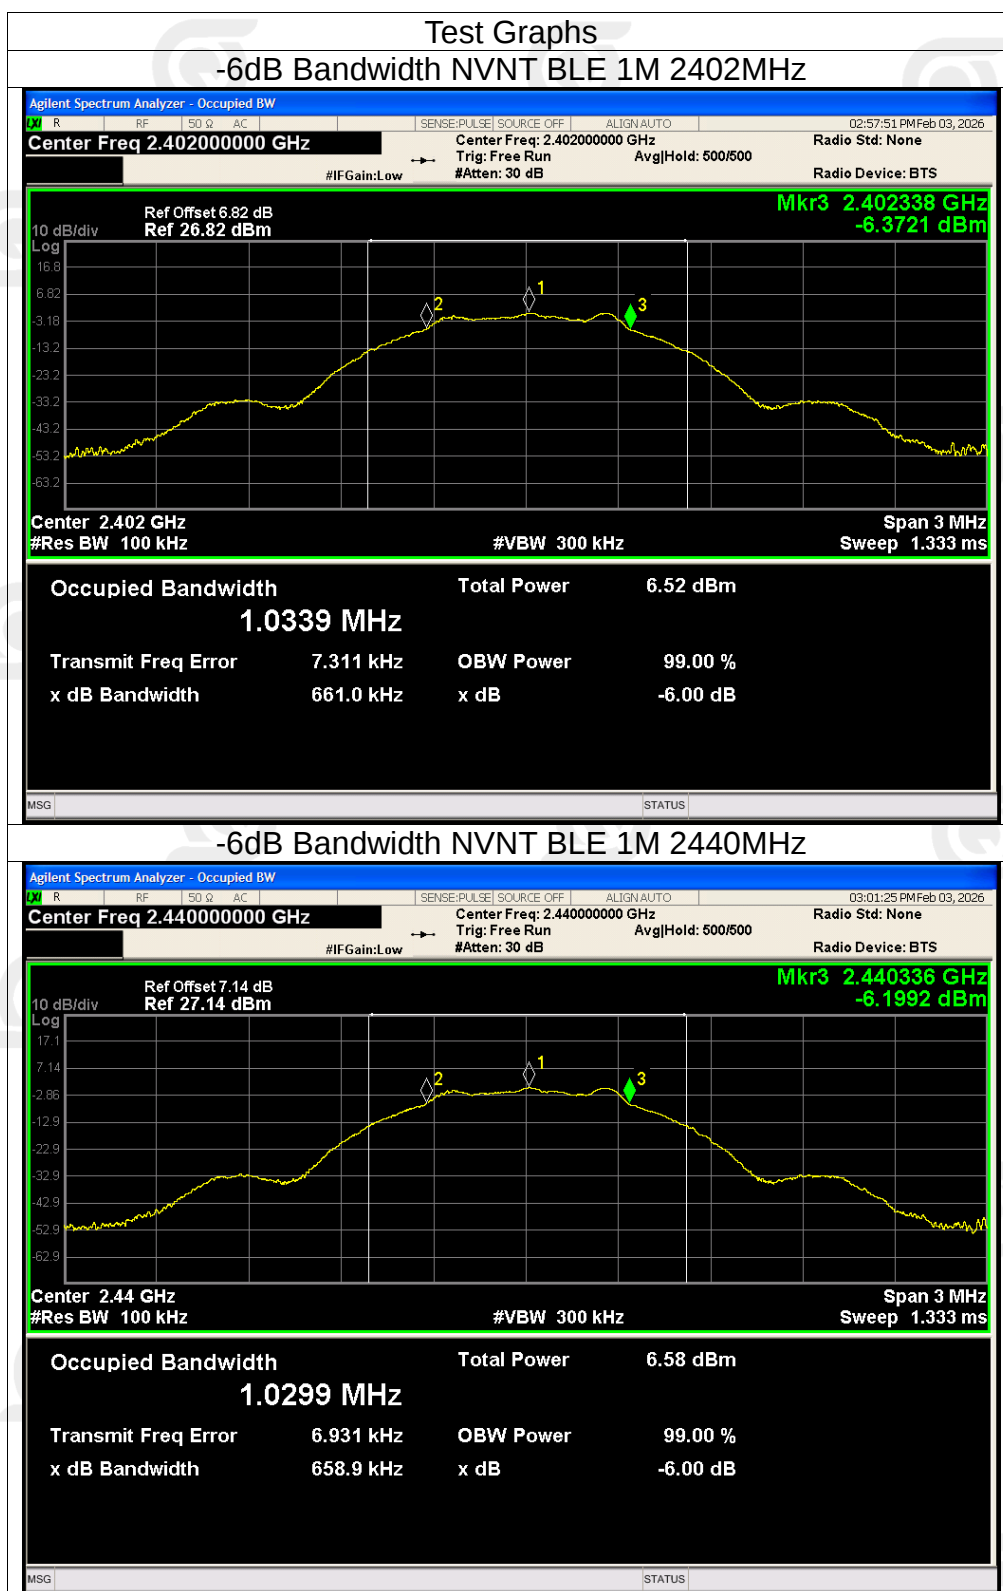


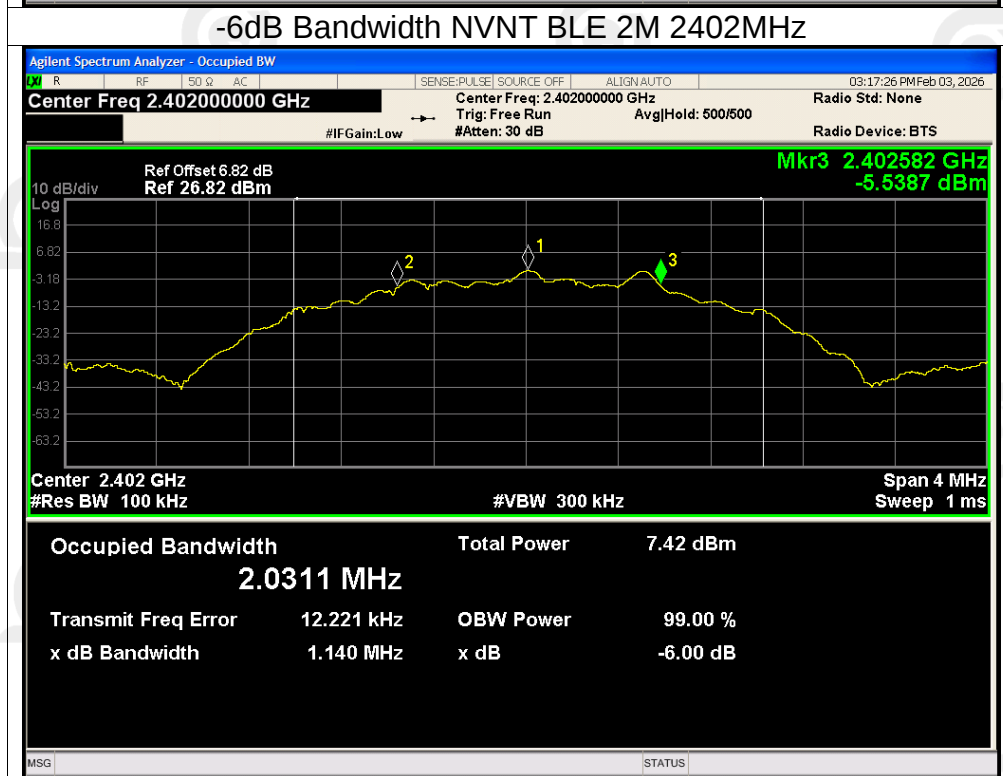
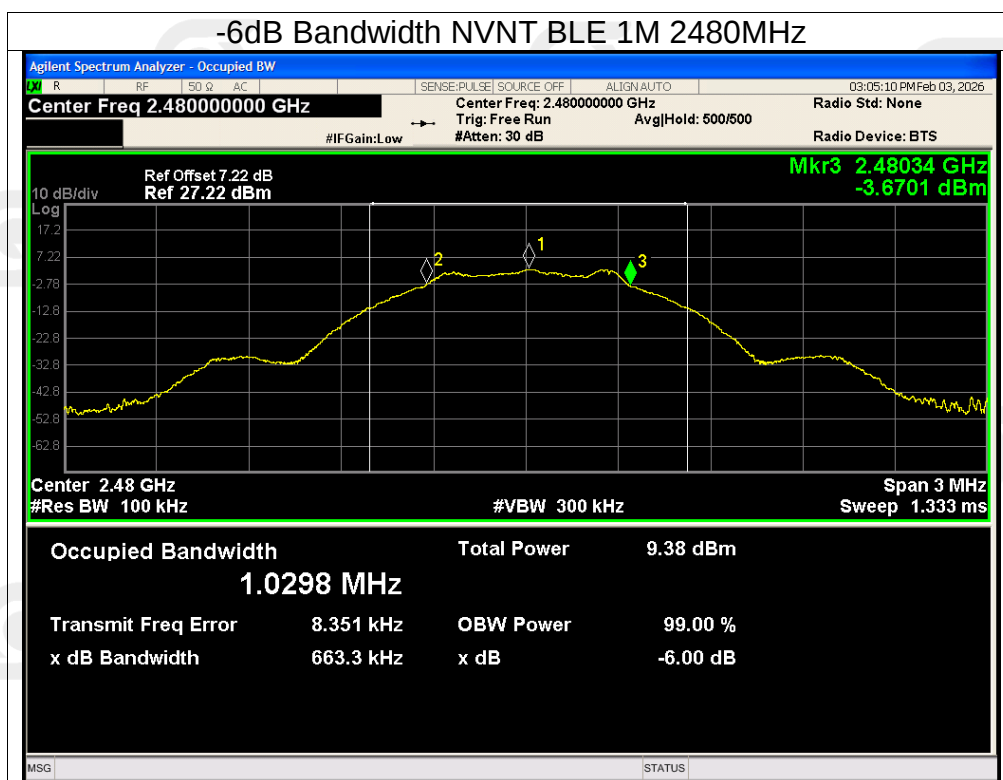


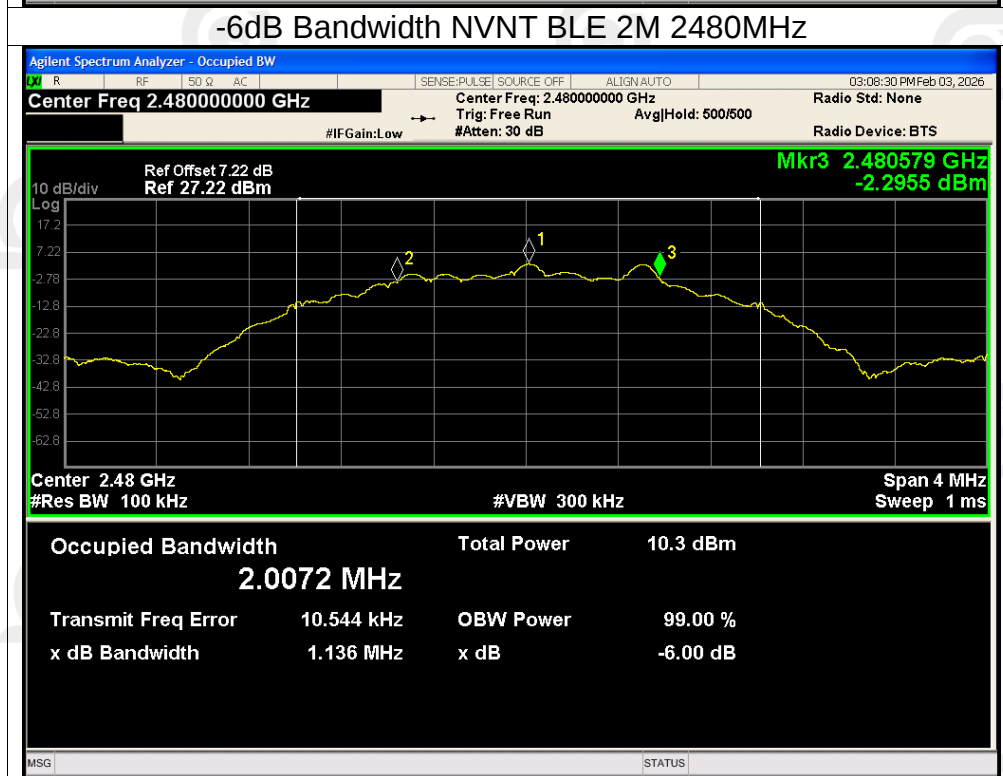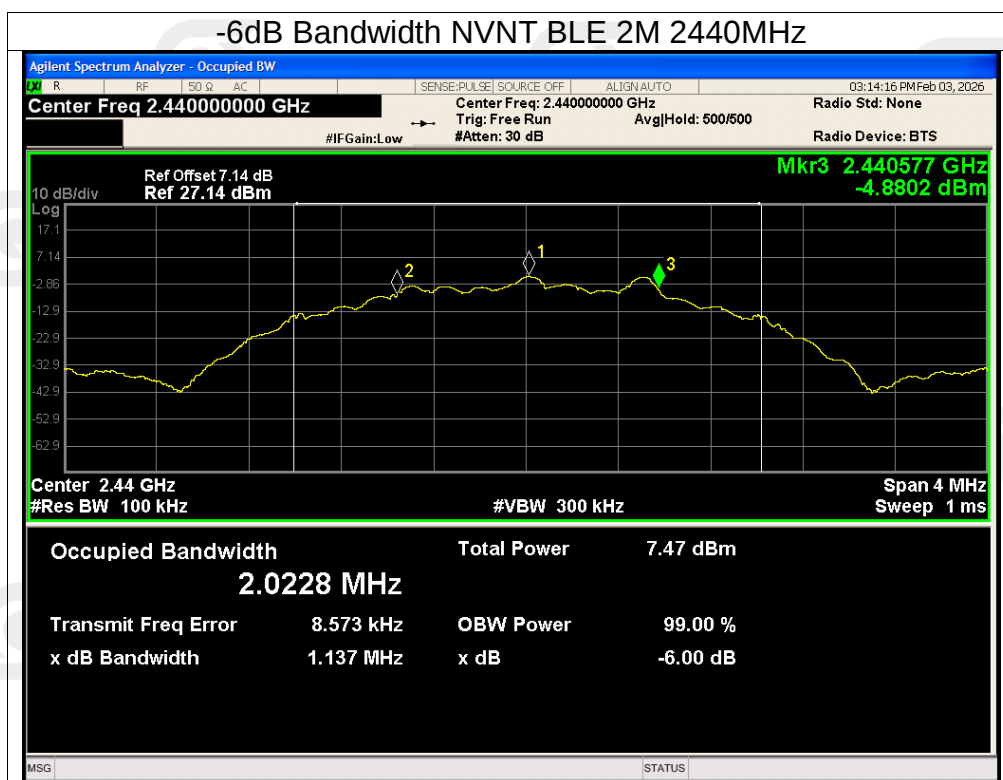

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	BLE 1M	2402	1.025
NVNT	BLE 1M	2440	1.016
NVNT	BLE 1M	2480	1.017
NVNT	BLE 2M	2402	2.017
NVNT	BLE 2M	2440	2.009
NVNT	BLE 2M	2480	2.006

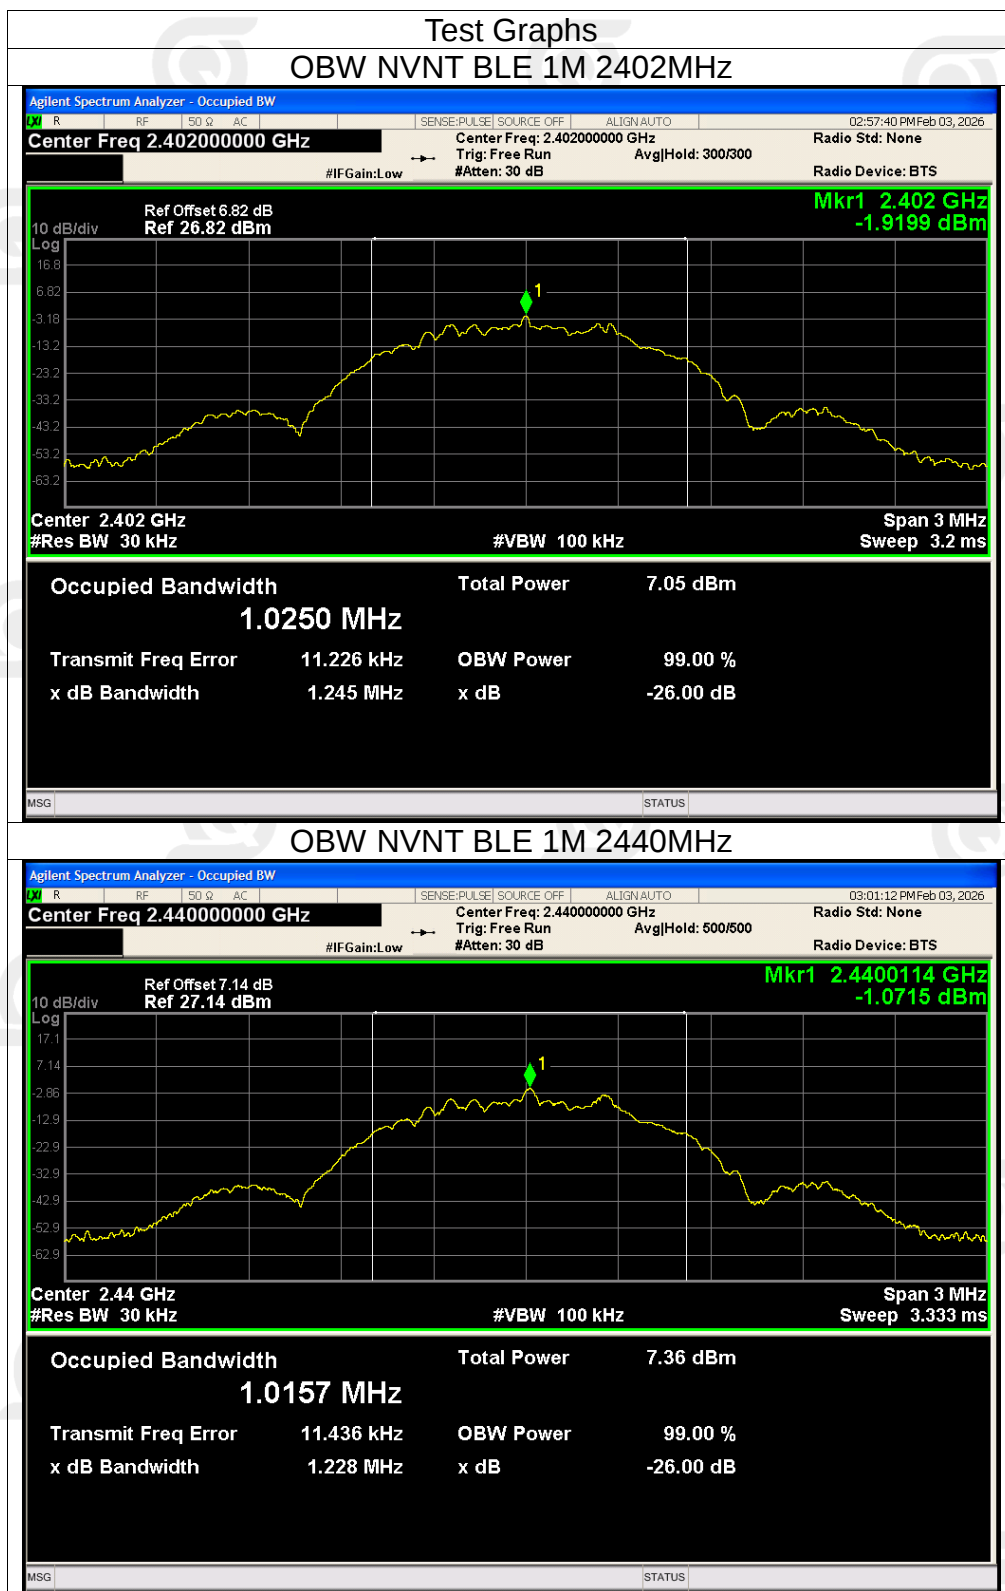


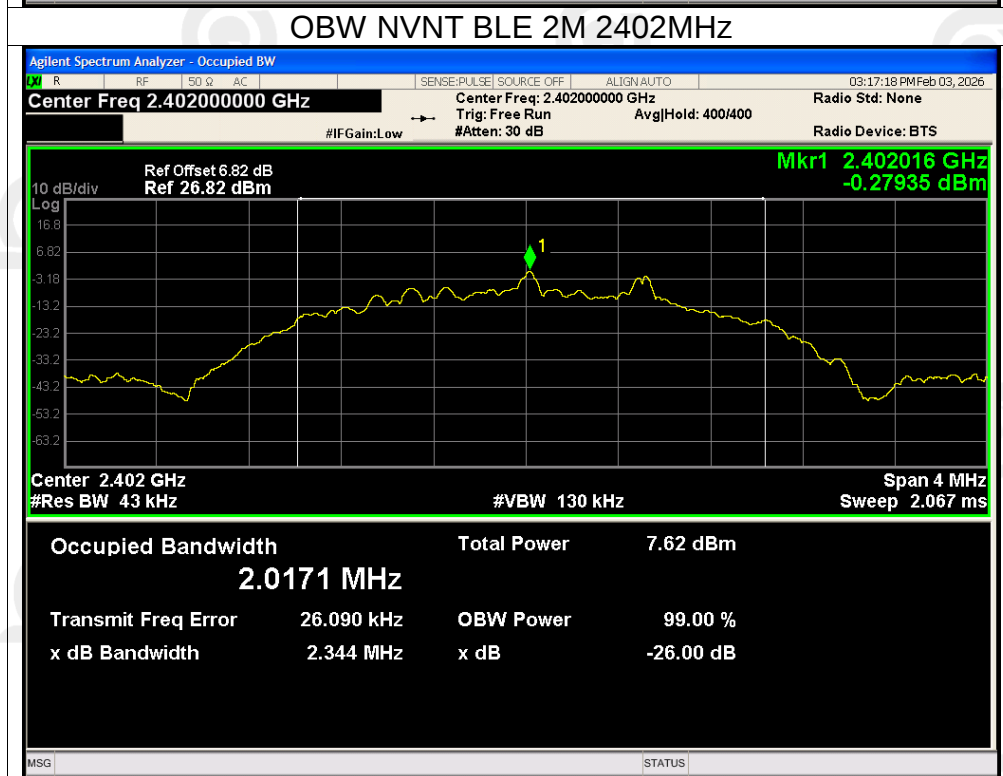
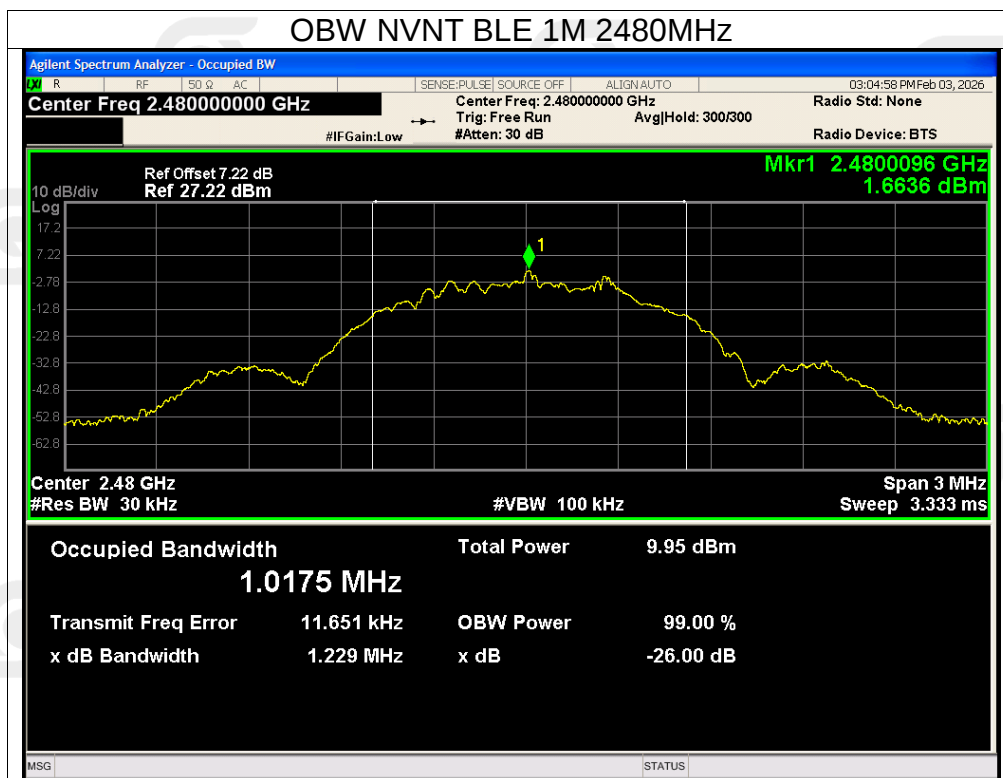





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-15.07	8	Pass
NVNT	BLE 1M	2440	-16.04	8	Pass
NVNT	BLE 1M	2480	-12.36	8	Pass
NVNT	BLE 2M	2402	-16.76	8	Pass
NVNT	BLE 2M	2440	-16.68	8	Pass
NVNT	BLE 2M	2480	-13.90	8	Pass

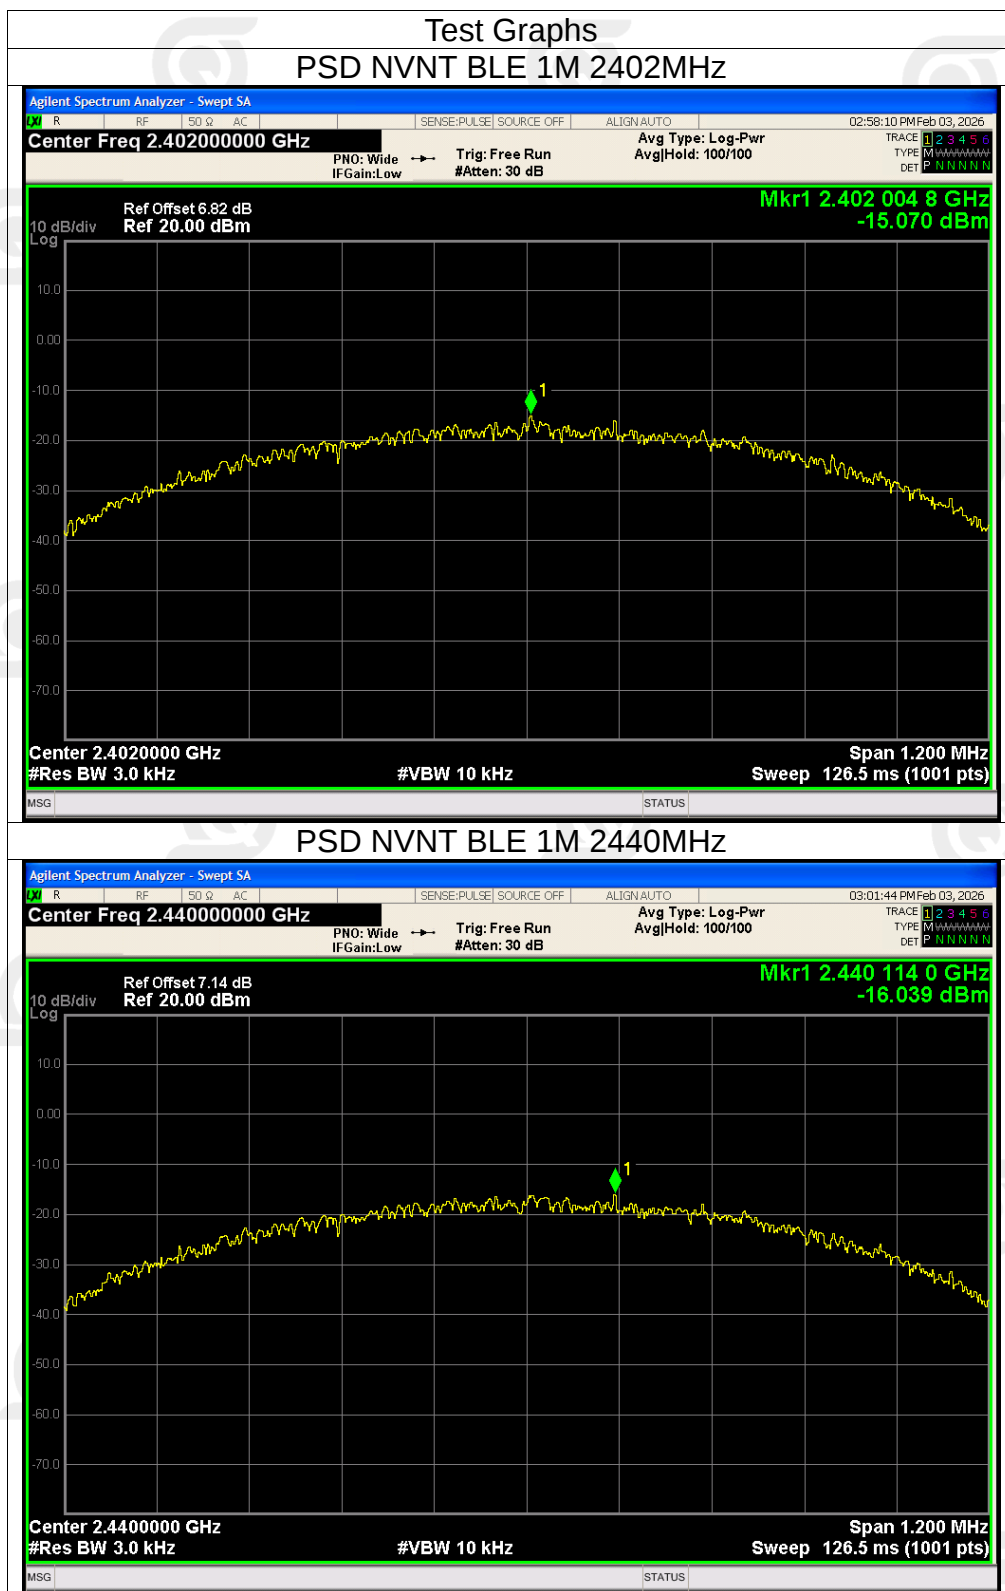


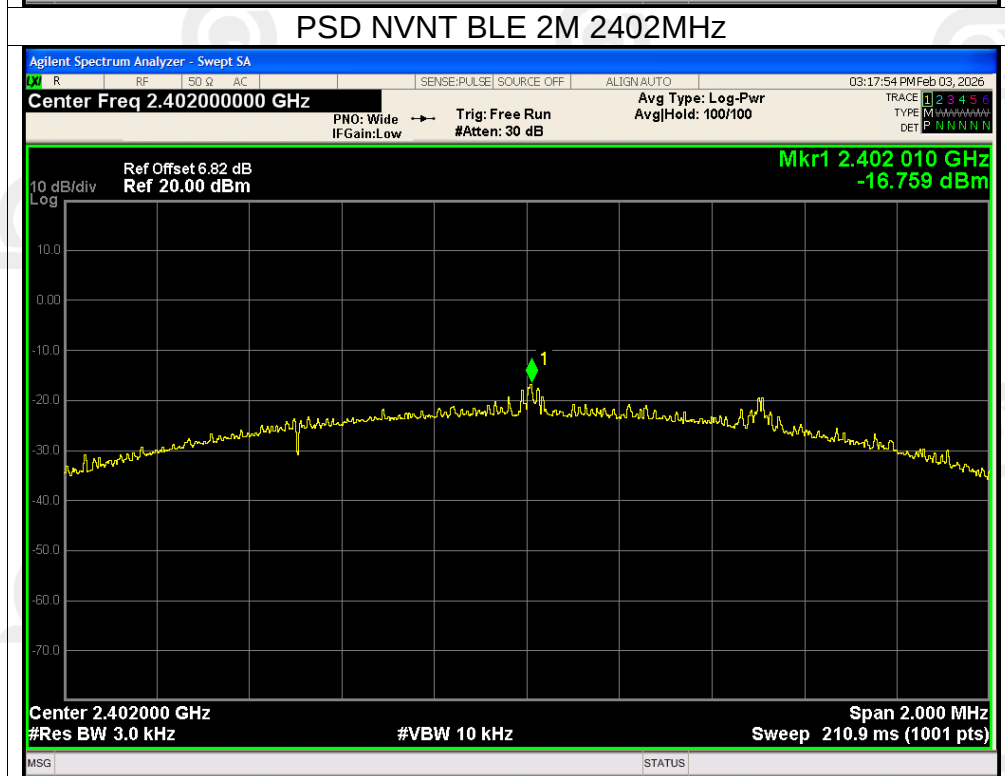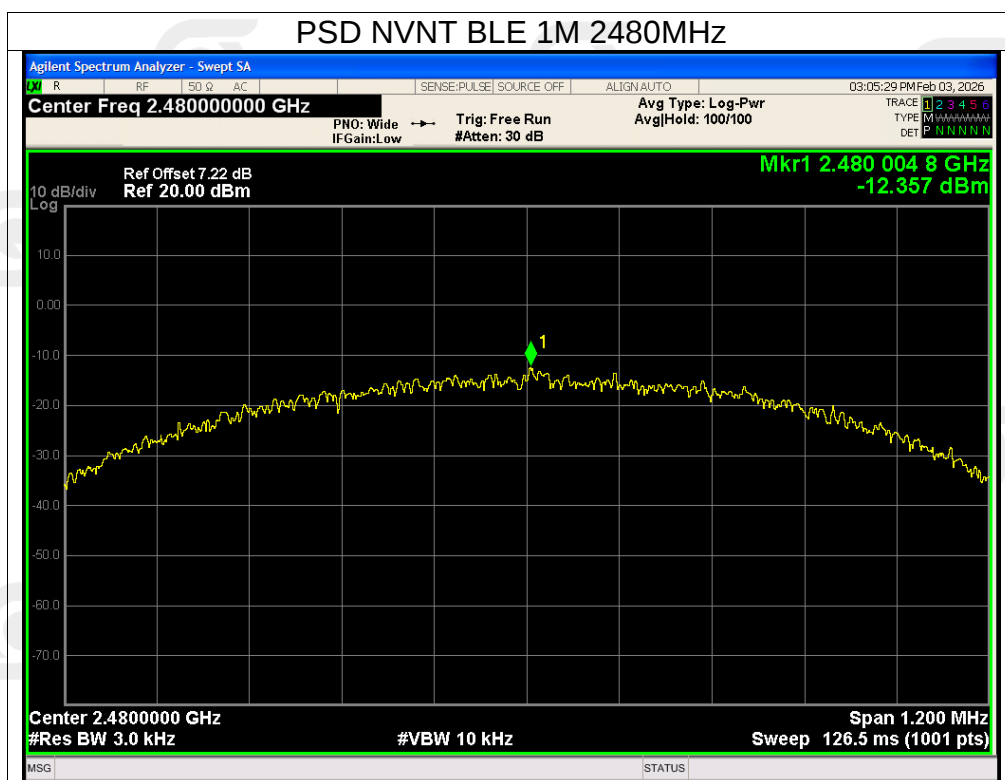


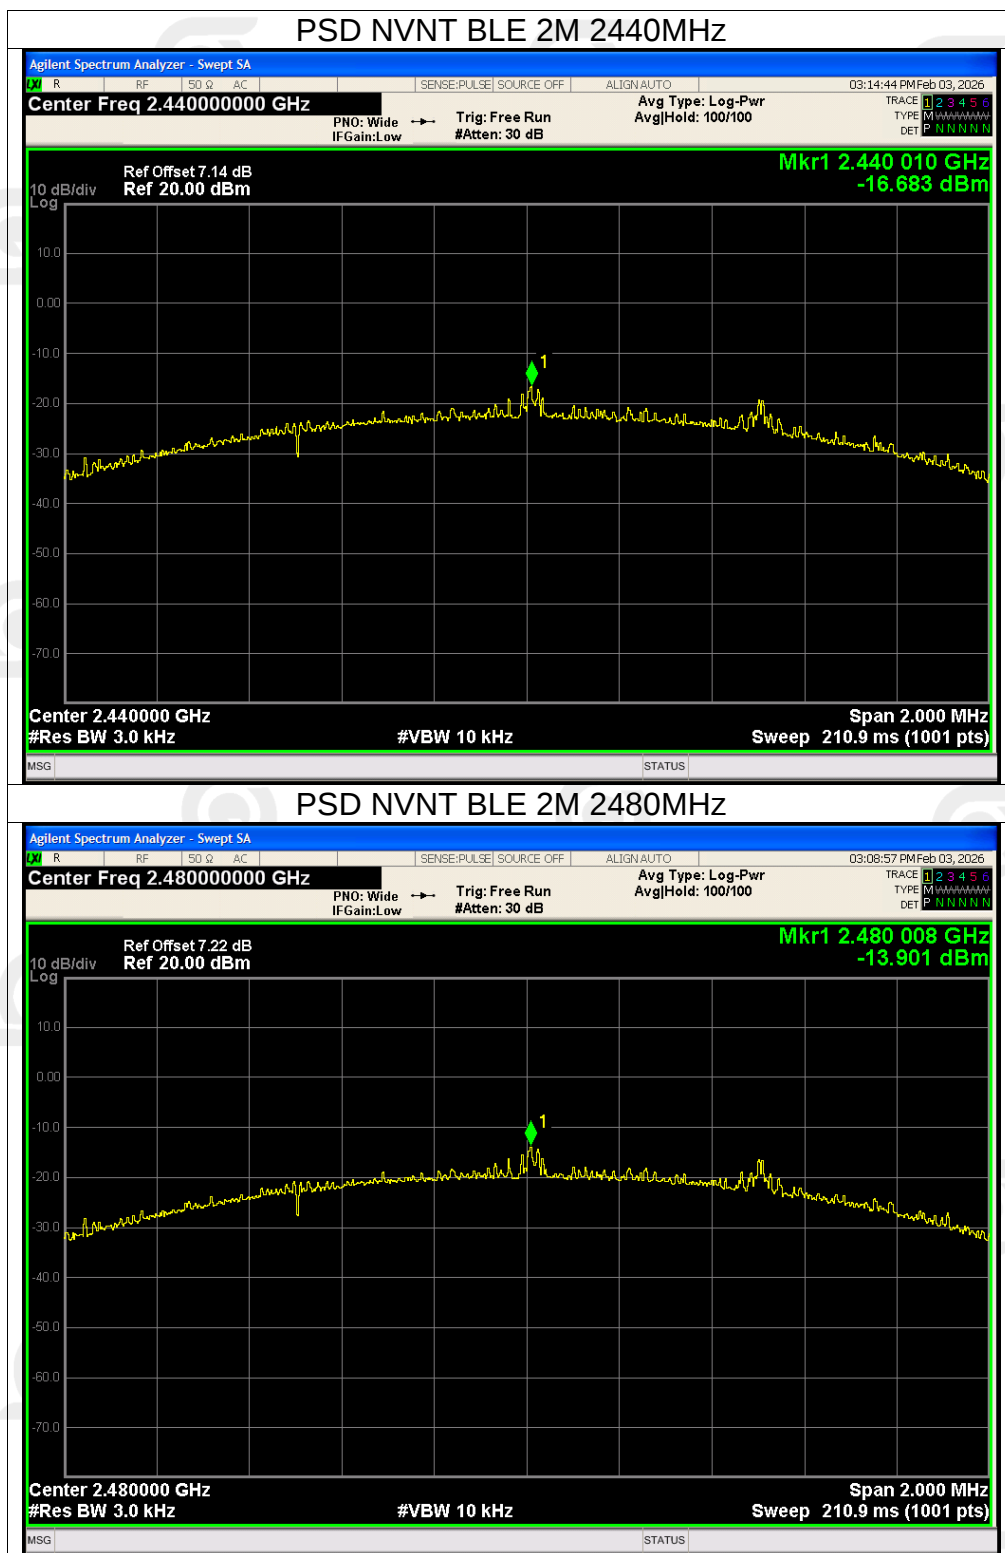


Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-51.10	-20	Pass
NVNT	BLE 1M	2480	-52.76	-20	Pass
NVNT	BLE 2M	2402	-50.54	-20	Pass
NVNT	BLE 2M	2480	-52.28	-20	Pass

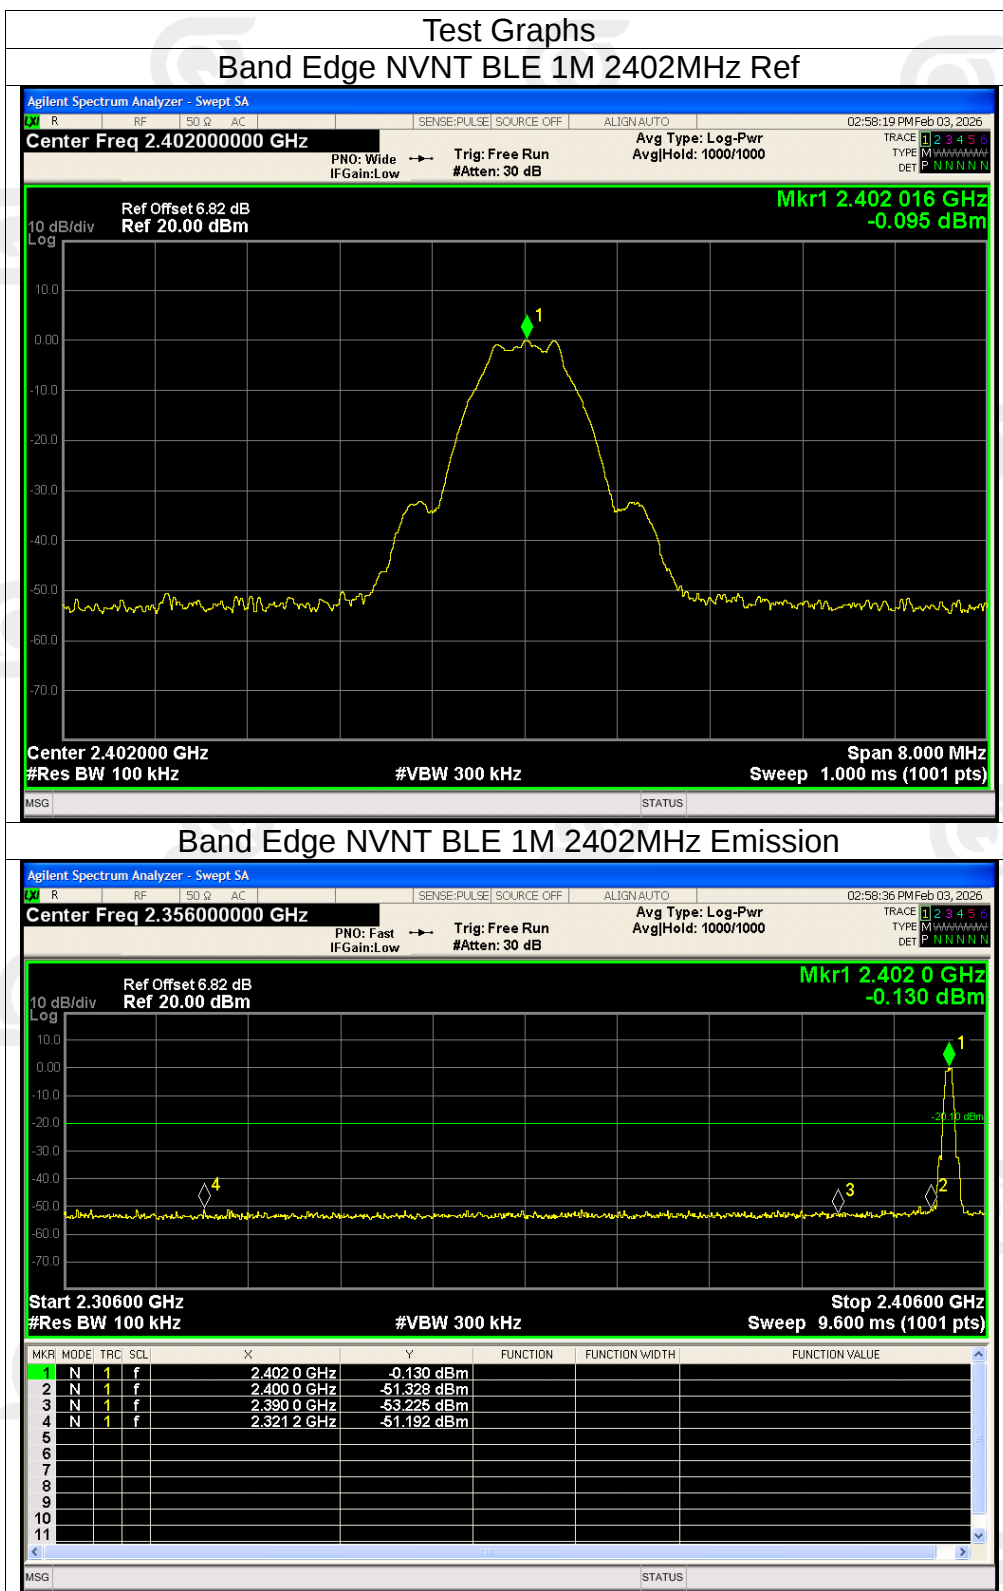

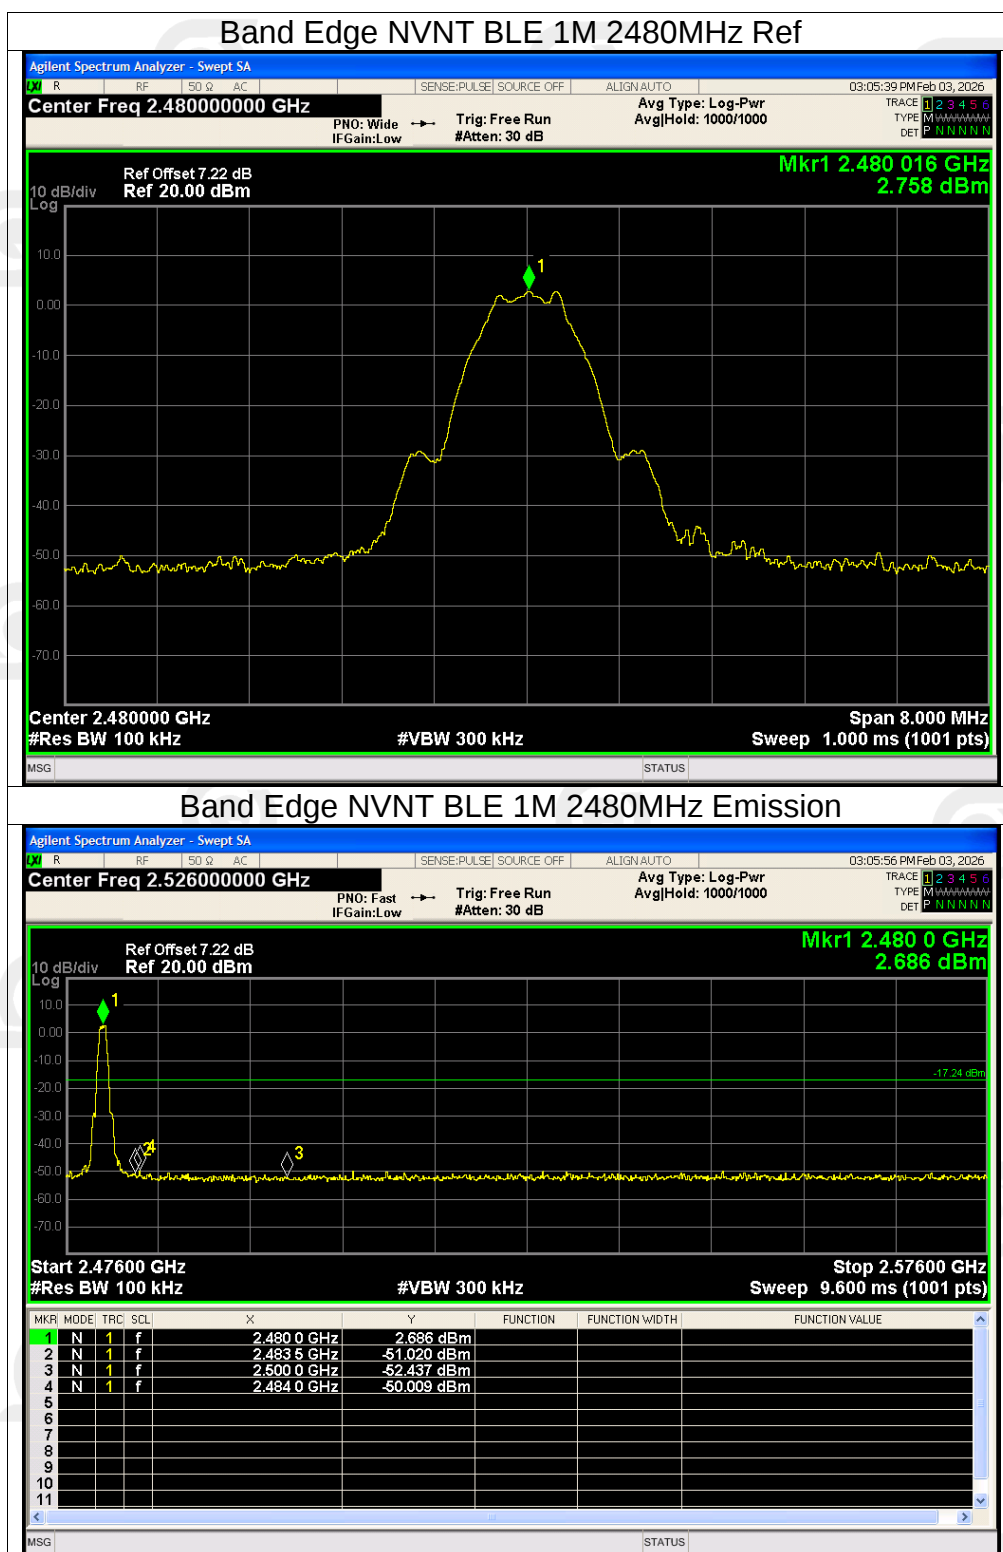






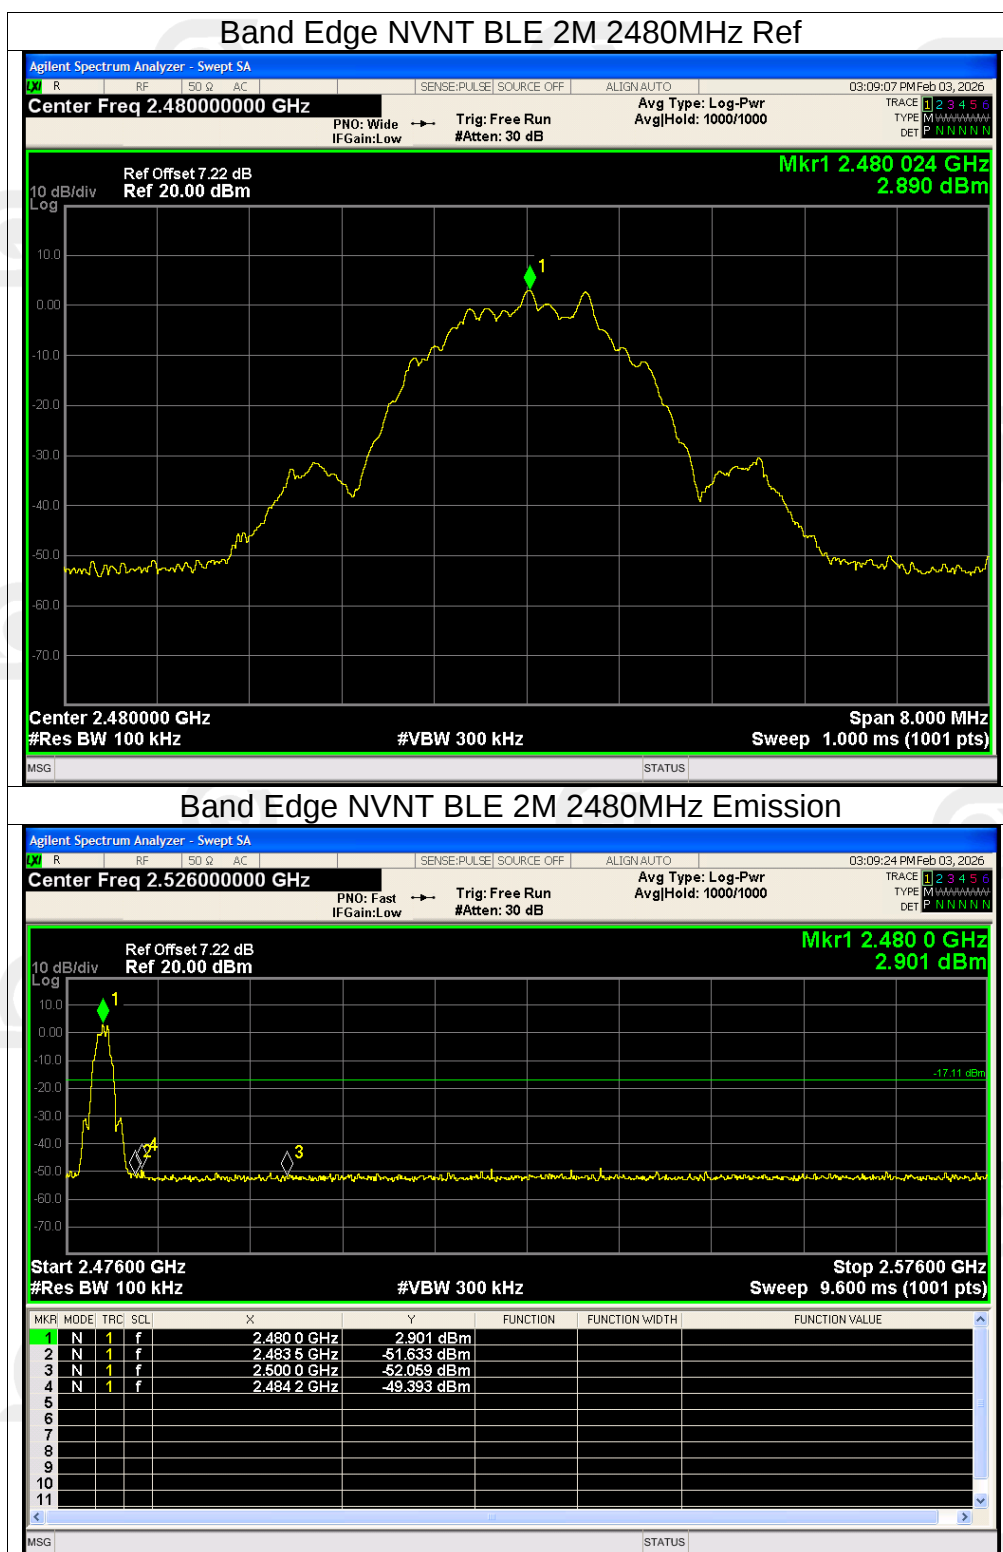



Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-38.95	-20	Pass
NVNT	BLE 1M	2440	-38.91	-20	Pass
NVNT	BLE 1M	2480	-42.02	-20	Pass
NVNT	BLE 2M	2402	-38.48	-20	Pass
NVNT	BLE 2M	2440	-38.50	-20	Pass
NVNT	BLE 2M	2480	-41.18	-20	Pass

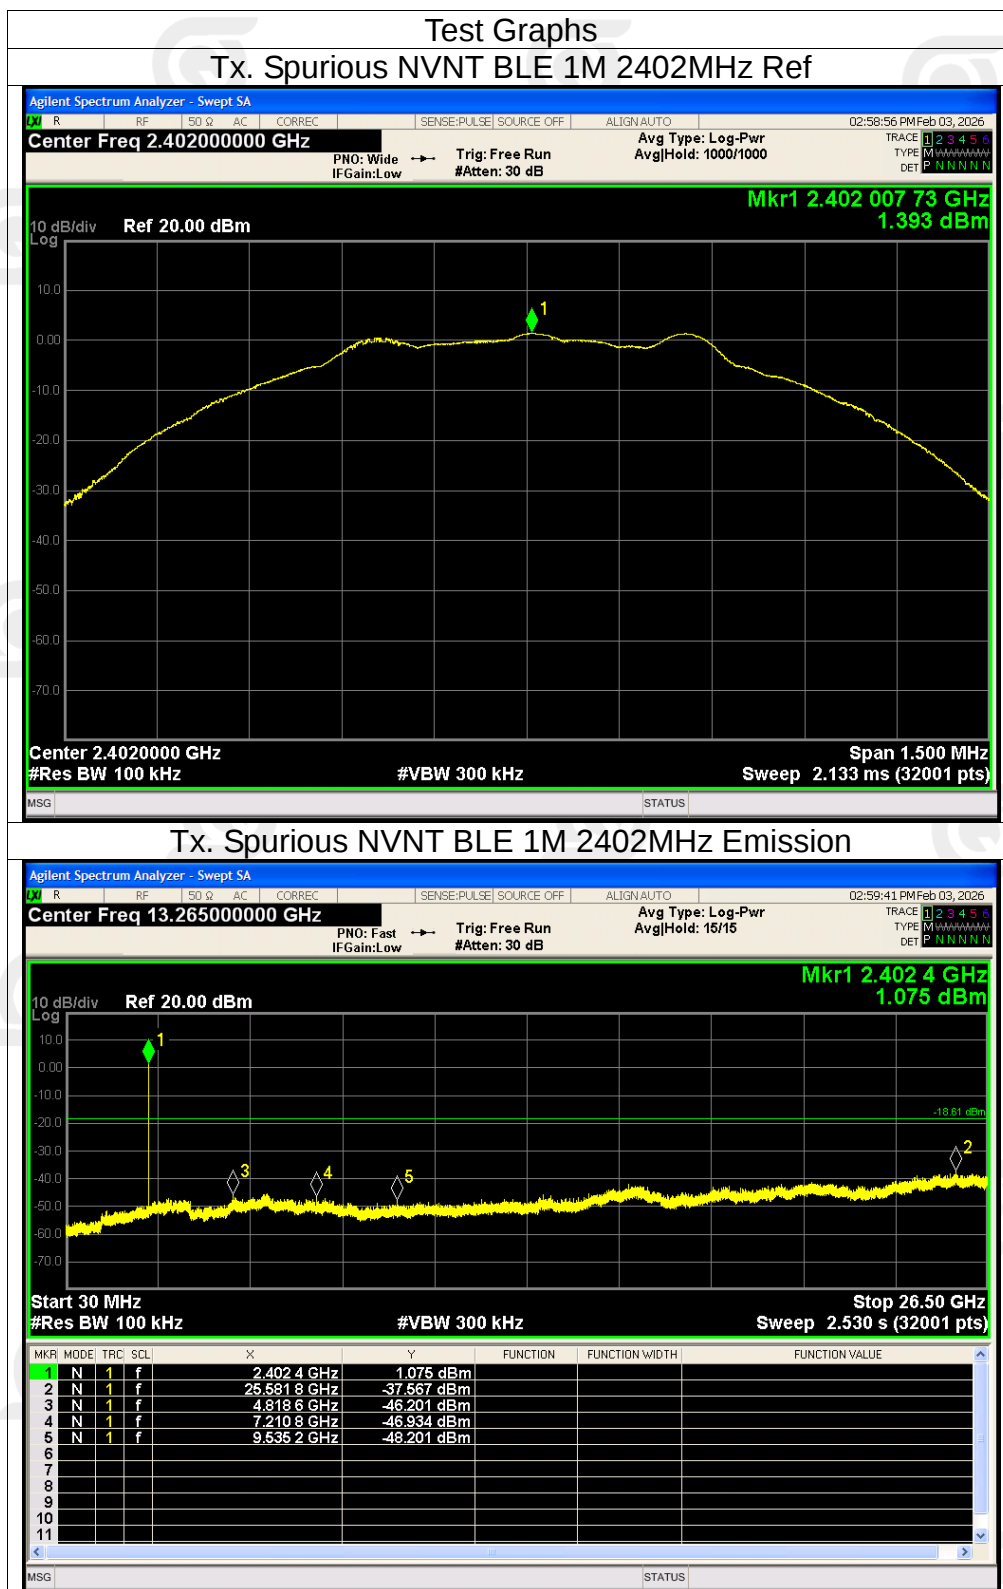


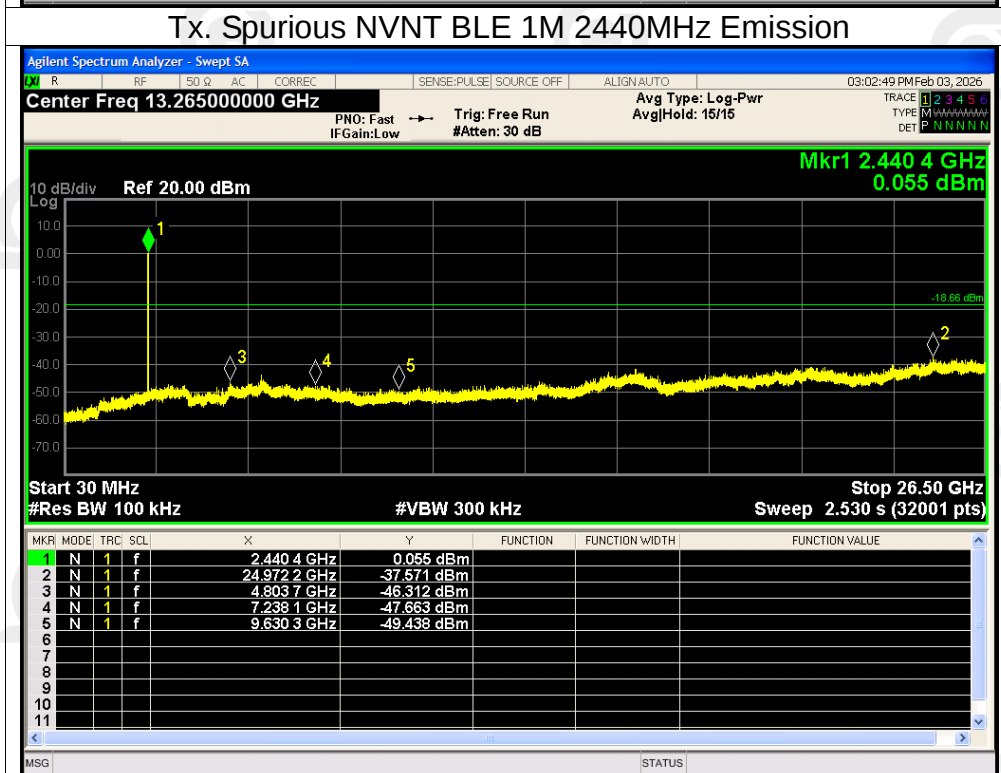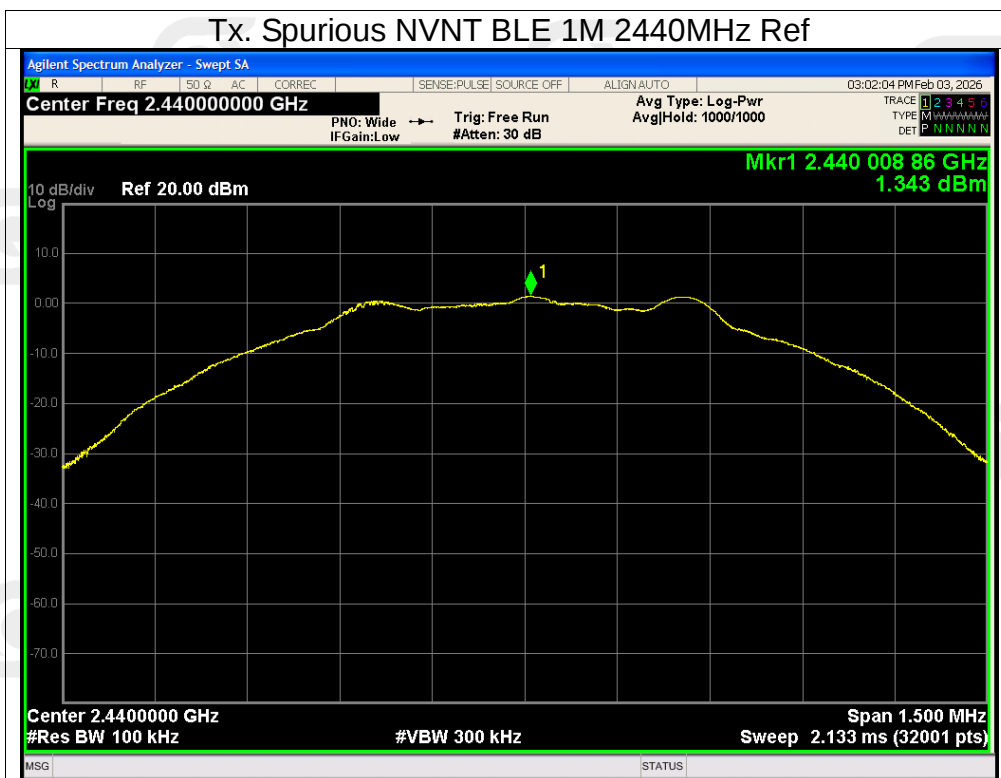

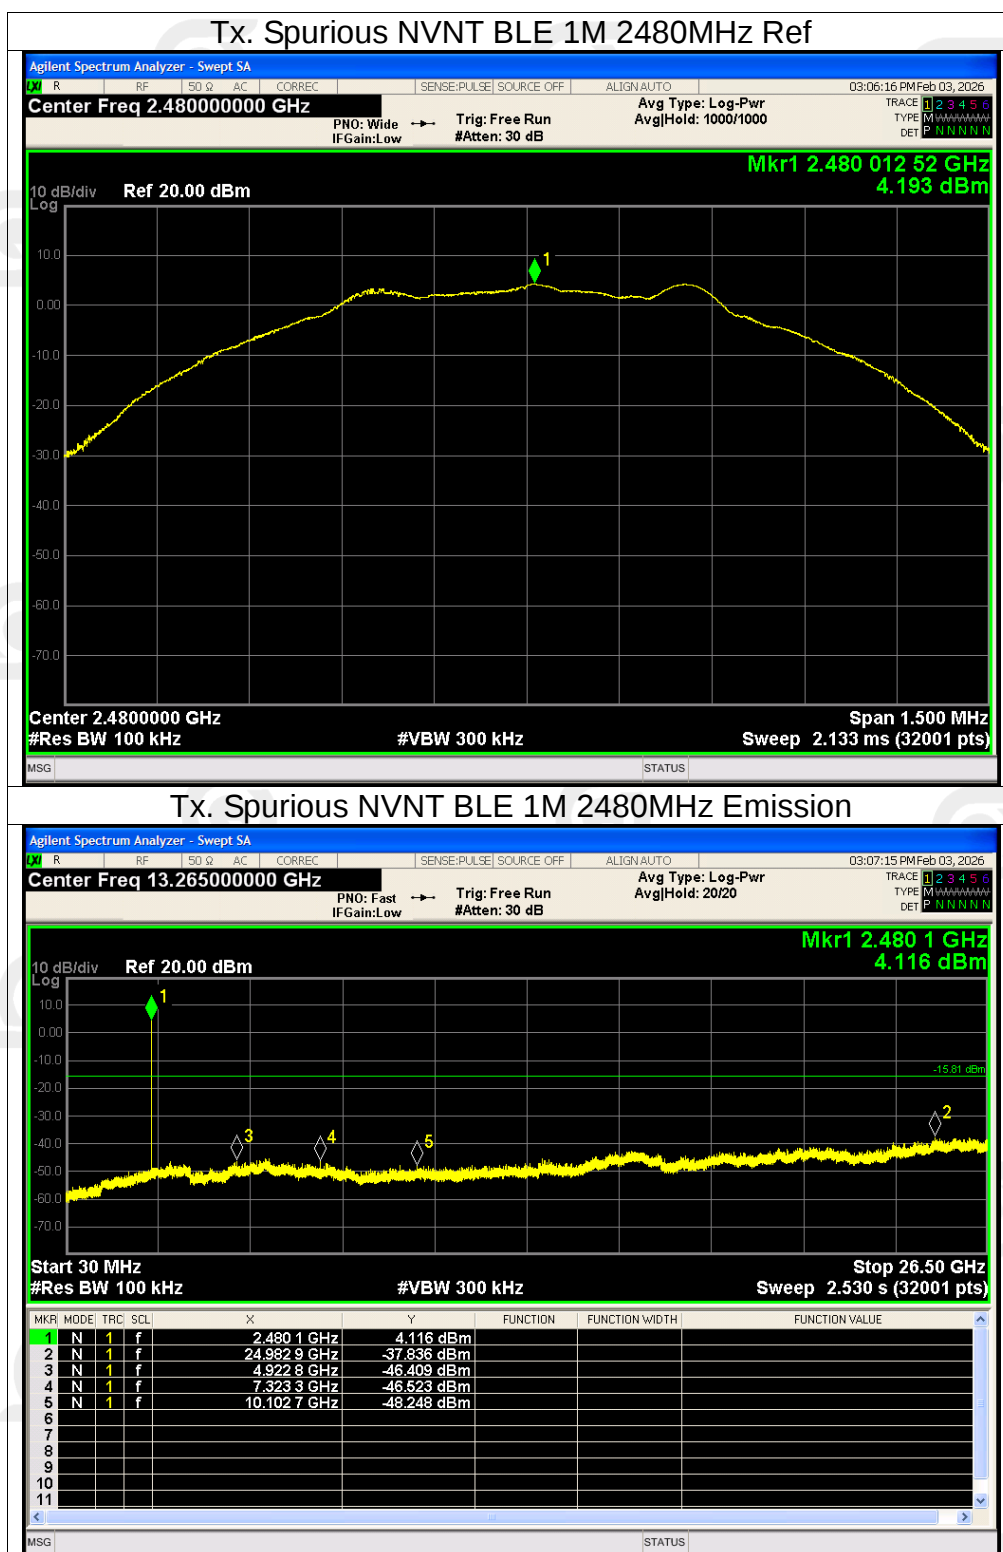

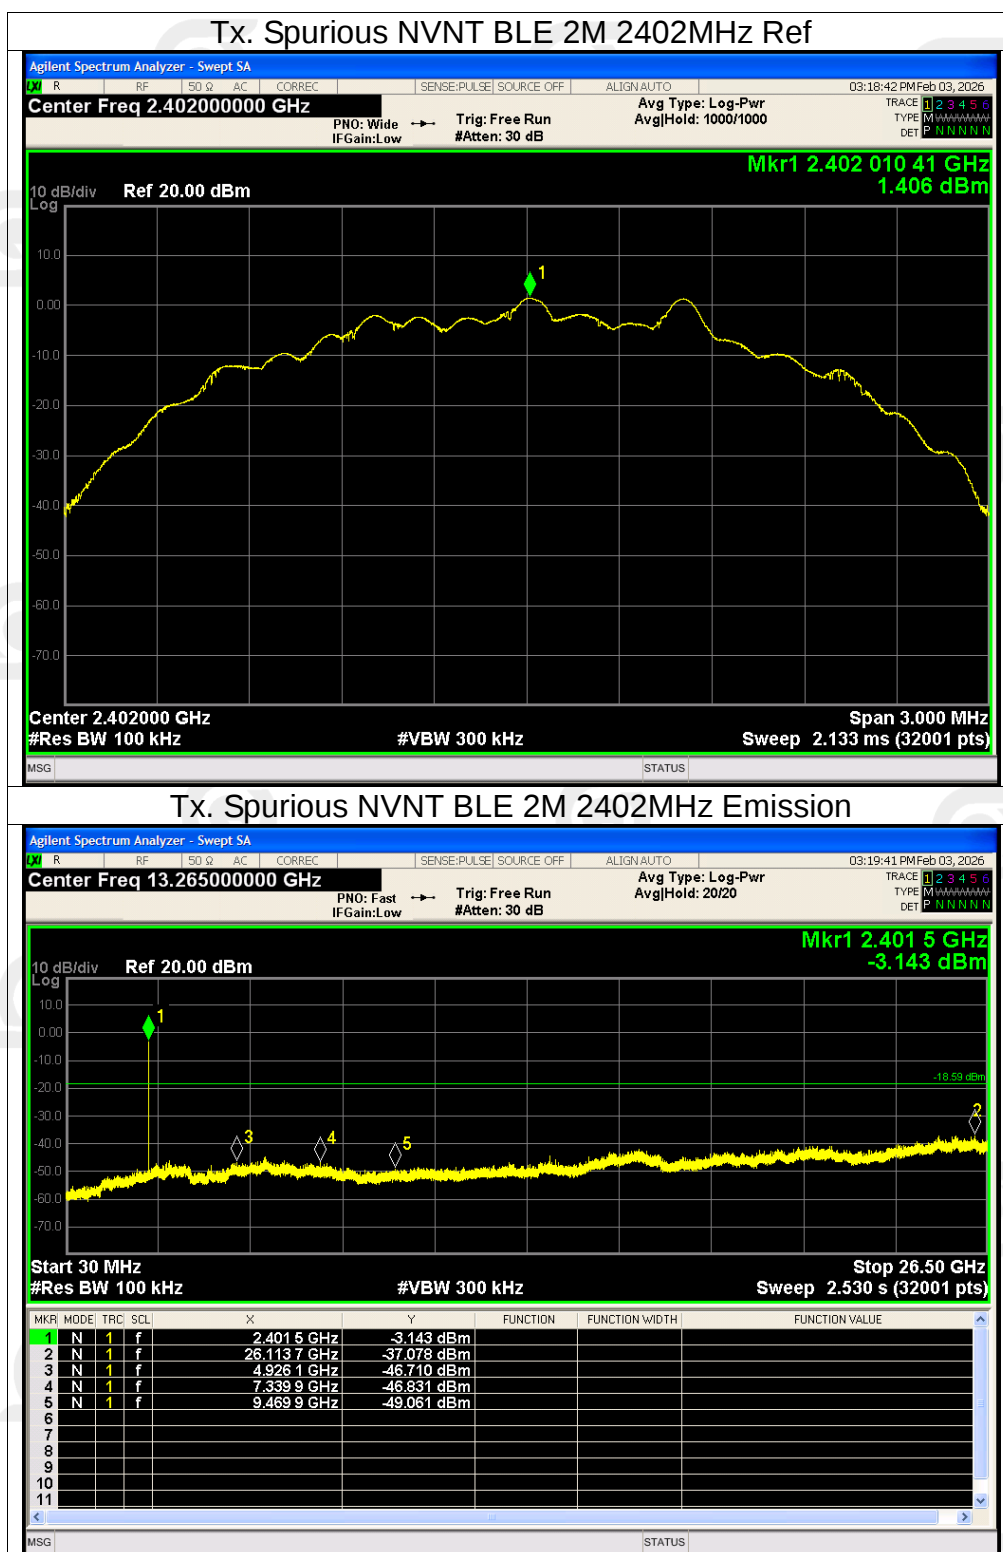

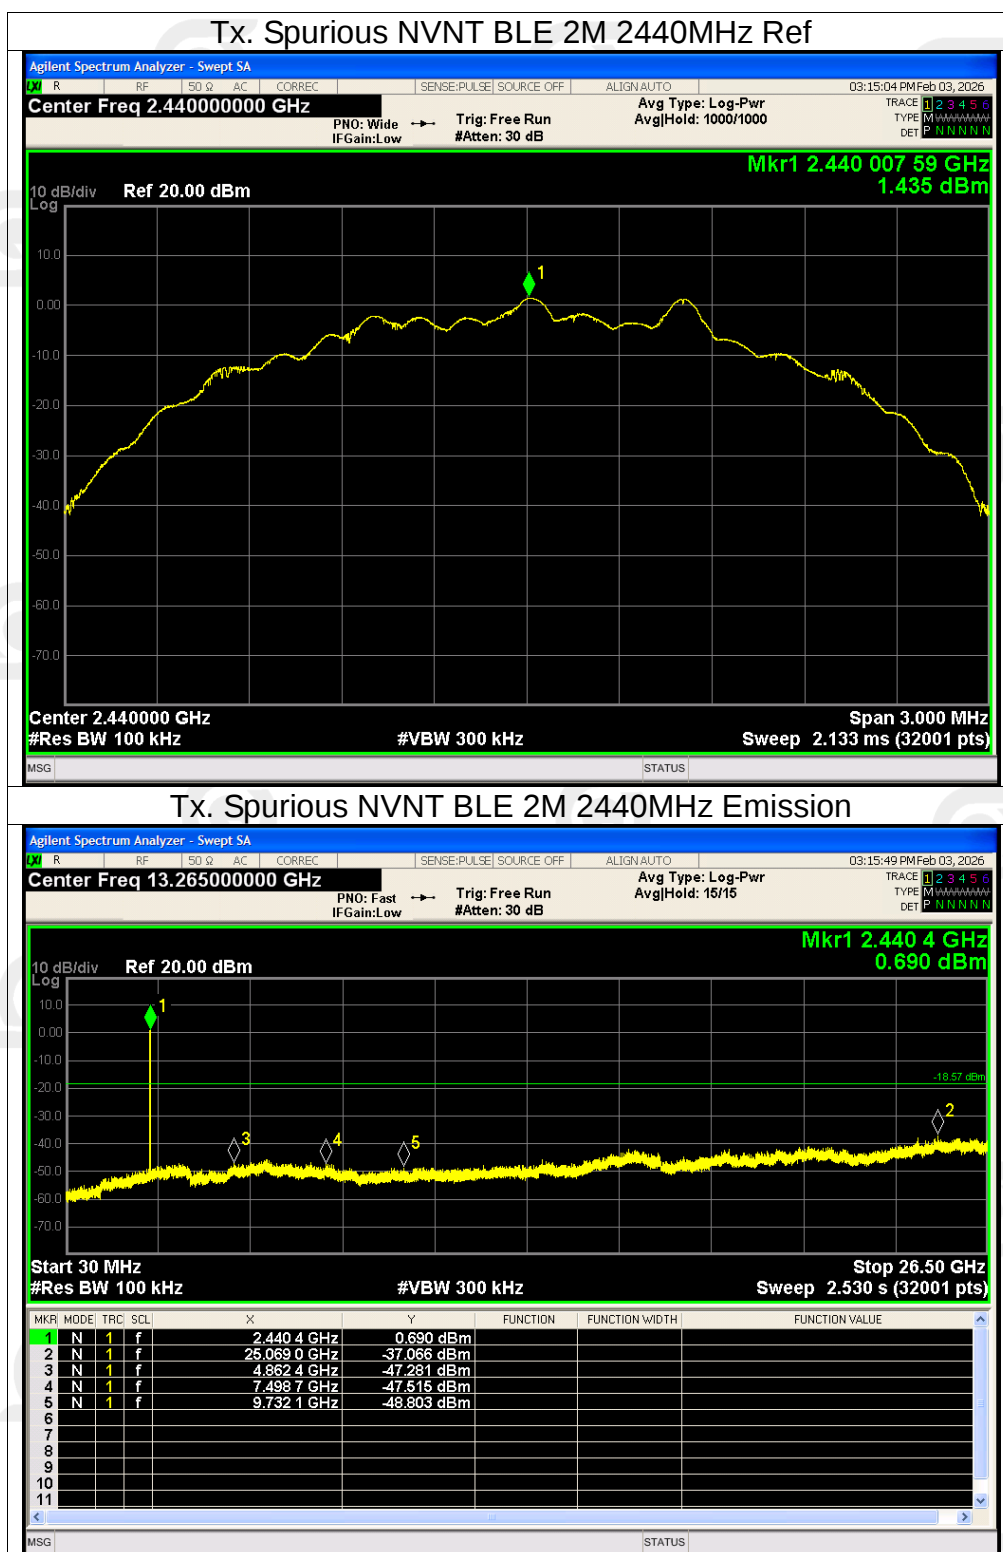

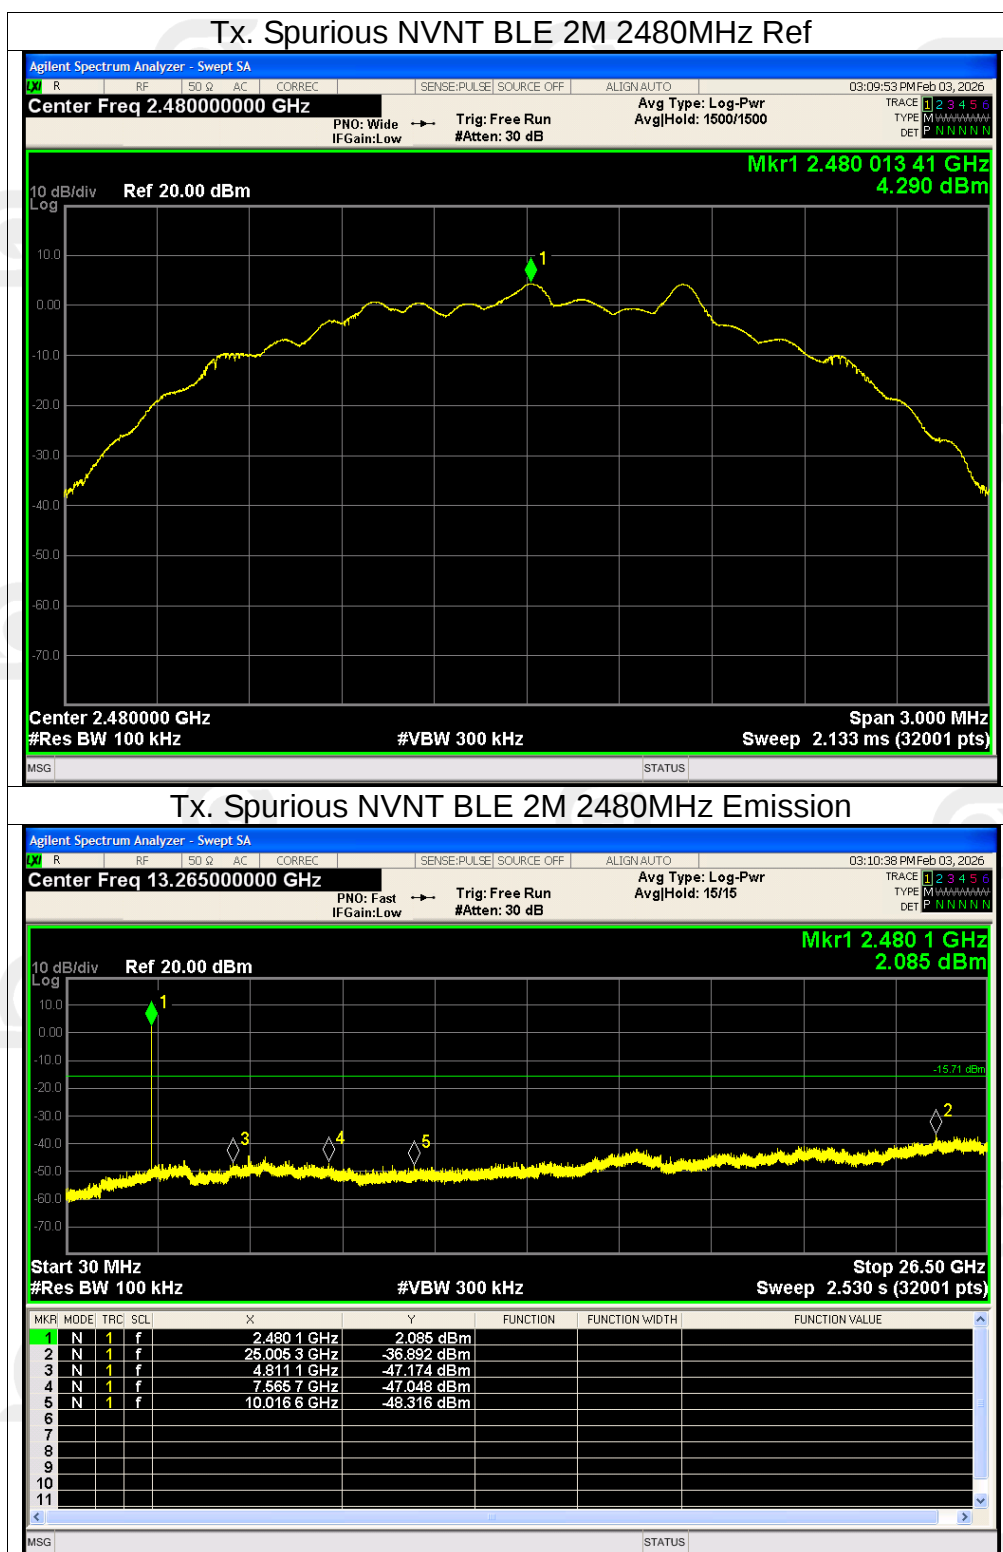

▶▶▶ END ◀◀◀