



线性尺寸的极限偏差数值mm(GB/T 1804-2000)									角度尺寸的极限偏差数值				
公差等级	基本尺寸分段,mm								角度短边长度尺寸分段,mm				
	0.5~3	>3~6	>6~30	>30~120	>120~400	>400~1000	>1000~3000	>2000~4000	~10	>10~50	>50~120	>120~400	>400
精密f	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5		±1°	±30′	±20′	±10′	±5′
中等m	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2					
粗糙c	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	±1°30′	±1°	±20′	±15′	±10′
最粗v		±0.5	±1	±1.5	±2.5	±4	±6	±8	±3°	±2°	±1°	±30′	±20′

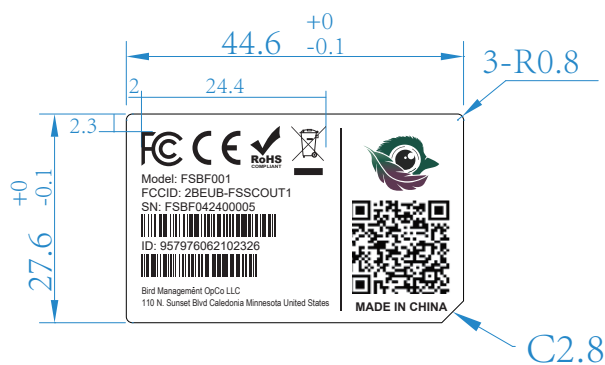

(Max) D=2.5L/1000 仅限于注塑件													
序号		名称		图号		材料基色		涂覆颜色		备注			
BC20-label						TZ-XX-XXXXXX						版本	
												V1.0	
更改标记		数量		更改单号		签名		日期					
设计		HBQ 1/18/2024											
审核		XX 1/18/2024											
工艺													
标准化													
批准		LHE 1/18/2024											
材料						第 1 张						重 量	比 例
						共 1 张						1:1	
						ATEL™ 德明通讯(上海)股份有限公司							