



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.546	0.377	0.241	0.168	0.117	0.086	0.064

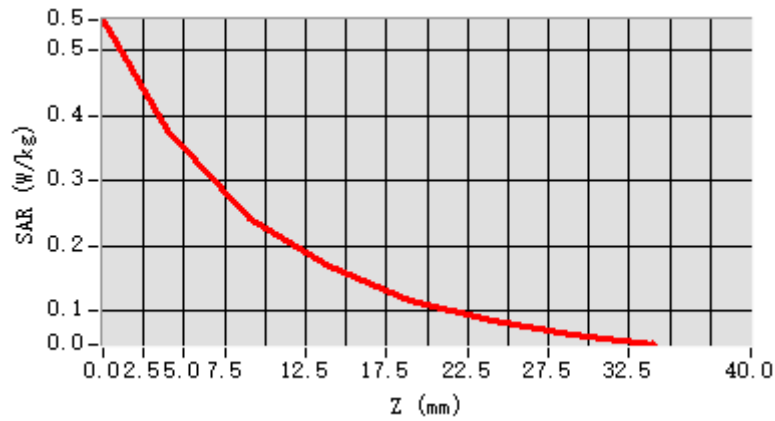

F. 3D Image

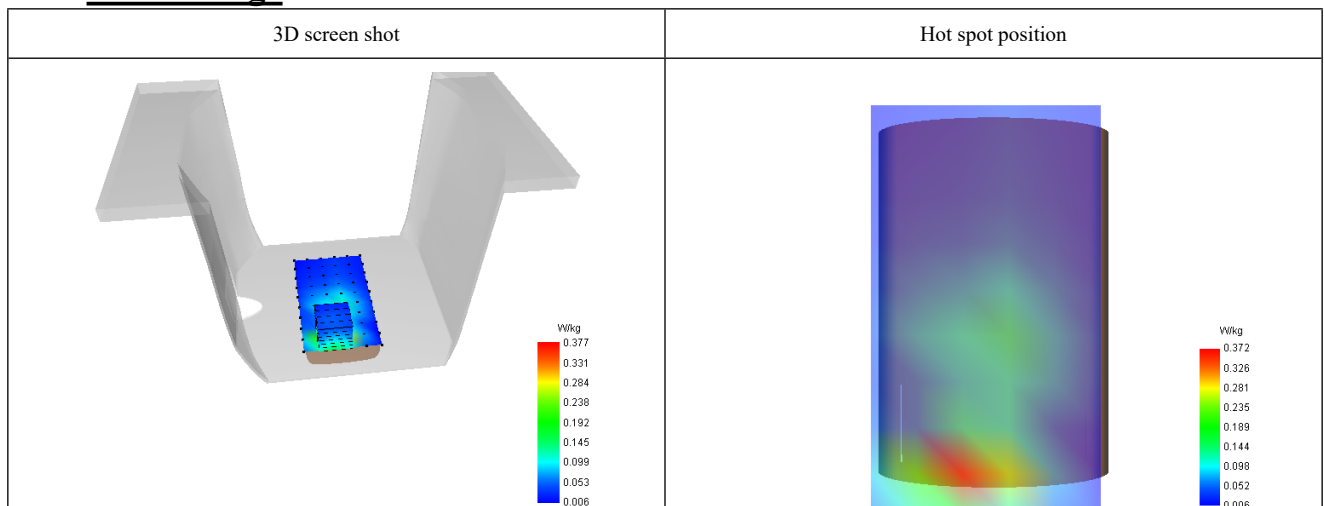

#5

Date of measurement: 27/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

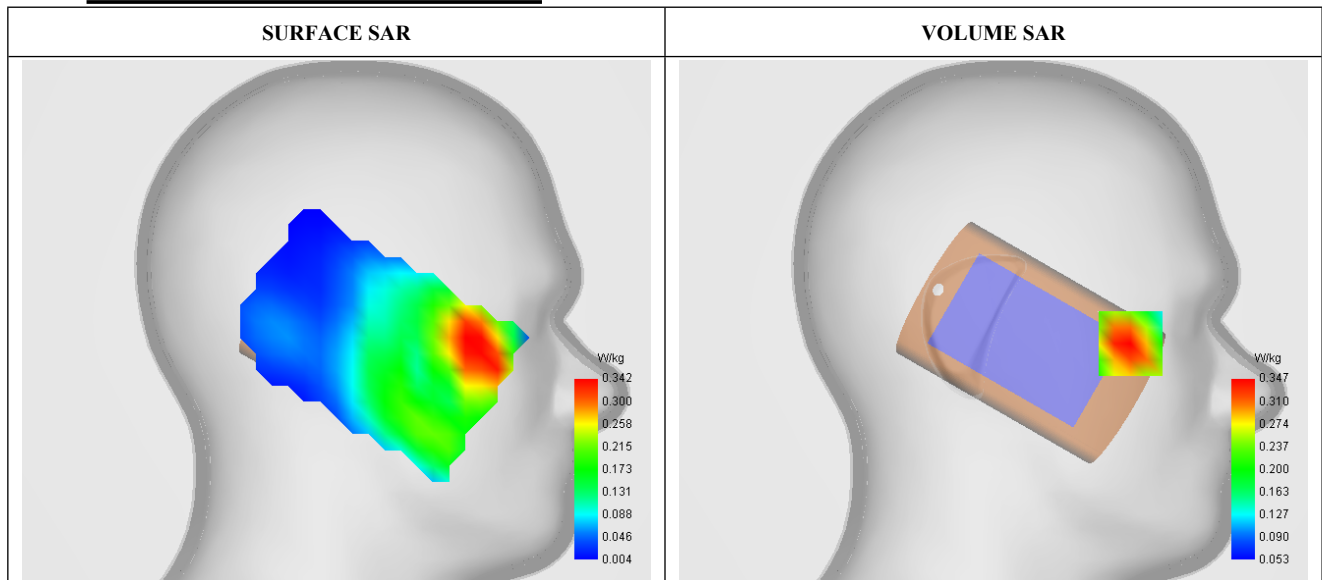


Maximum location: X=-68.00, Y=-11.00 ; SAR Peak: 0.43 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.257
SAR 1g (W/Kg)	0.341
Variation (%)	1.580
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	86.455331

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.408	0.347	0.300	0.254	0.215	0.185	0.132

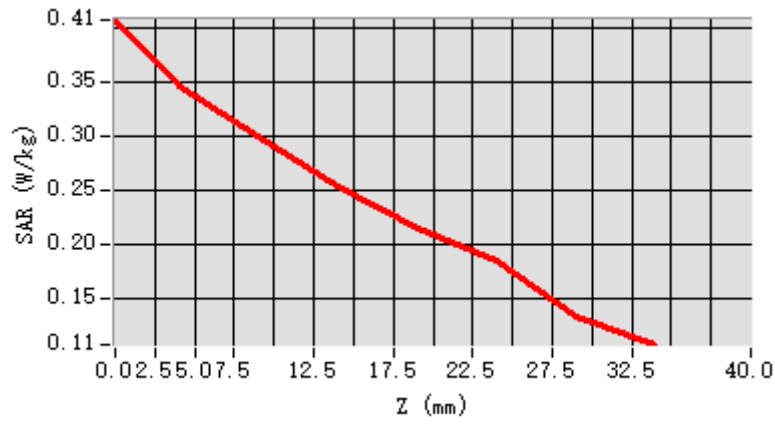

F. 3D Image

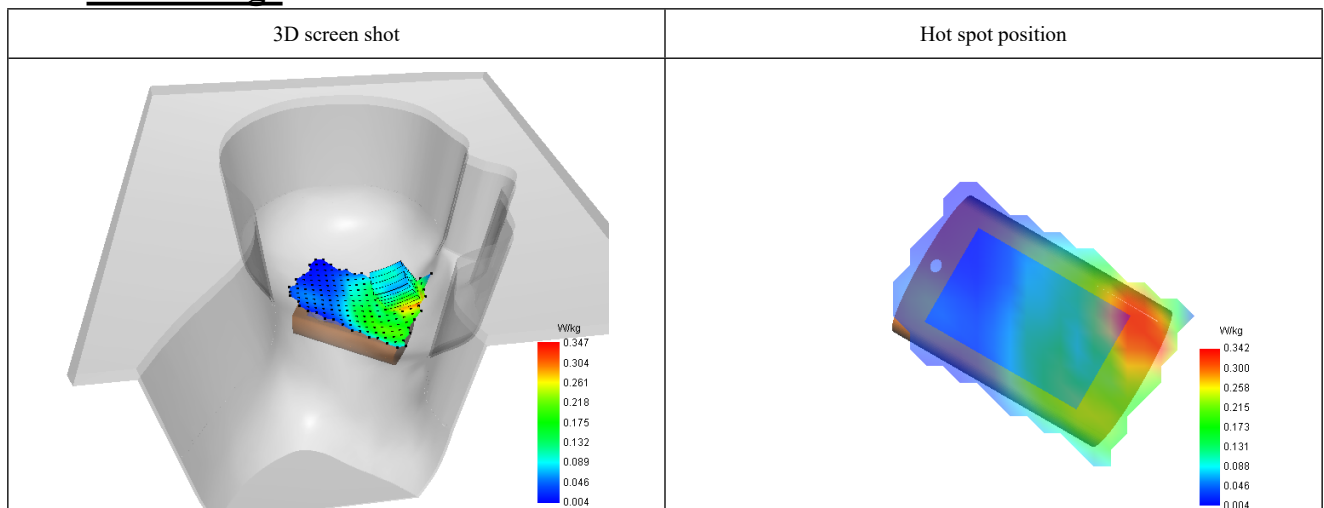

#6

Date of measurement: 27/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 2 (1900)
Channels/Frequency	Middle (9400)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

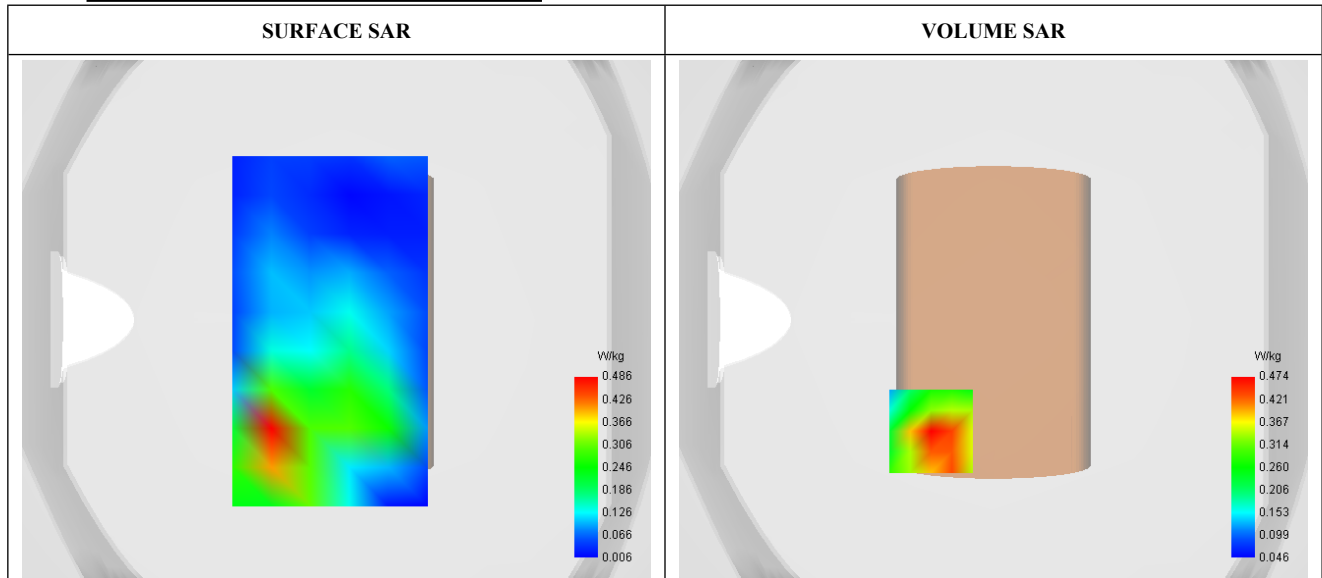


Maximum location: X=-24.00, Y=-43.00 ; SAR Peak: 0.58 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.300
SAR 1g (W/Kg)	0.438
Variation (%)	-2.840
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	78.059072

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.568	0.474	0.370	0.291	0.210	0.170	0.122

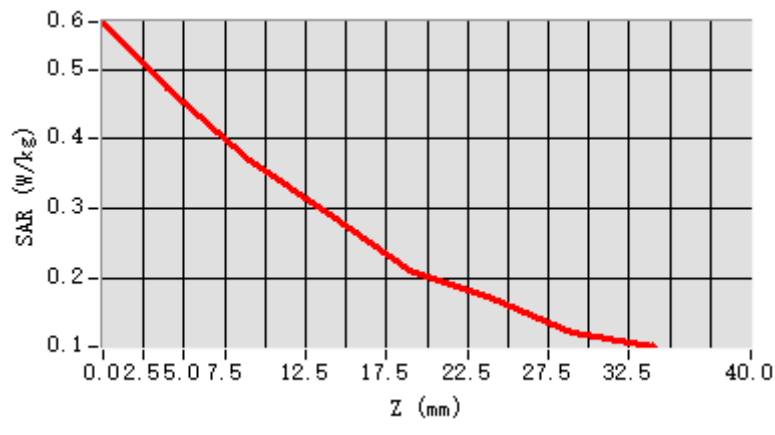

F. 3D Image

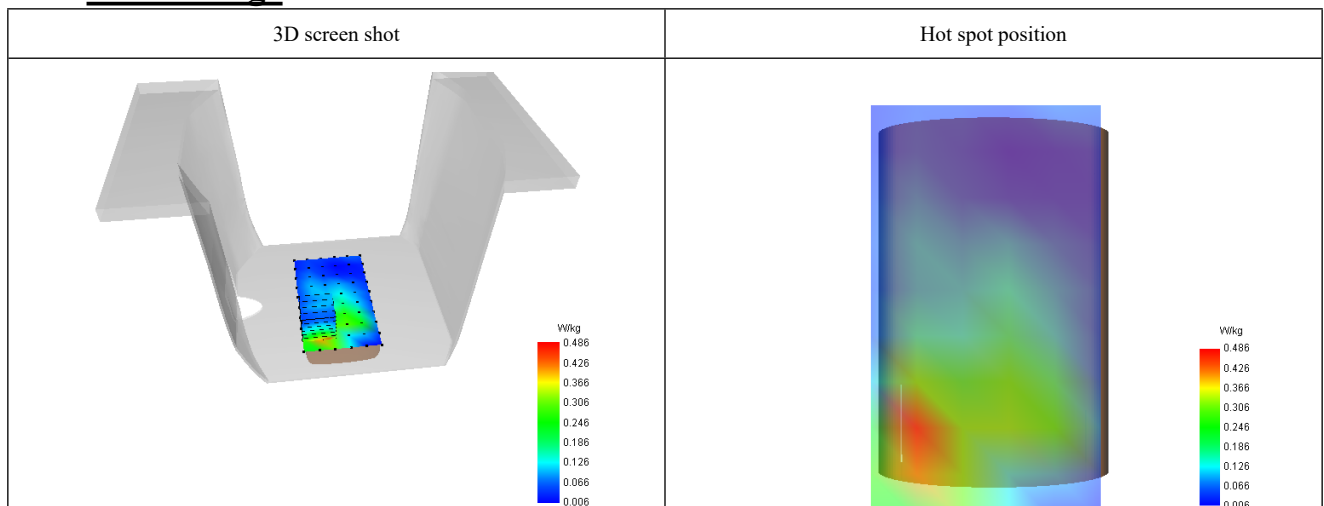

#7

Date of measurement: 26/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

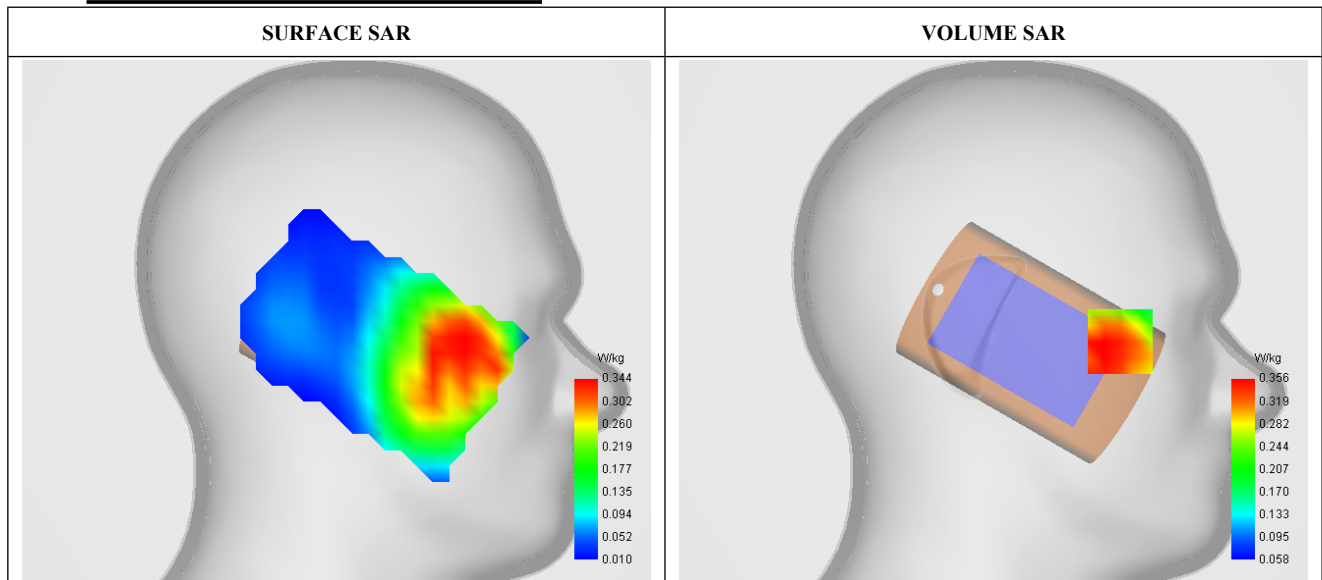


Maximum location: X=-63.00, Y=-10.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.230
SAR 1g (W/Kg)	0.357
Variation (%)	-0.590
Horizontal validation criteria: minimum distance (mm)	28.844410
Vertical validation criteria: SAR ratio M2/M1 (%)	73.876404

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.539	0.356	0.263	0.266	0.194	0.210	0.131

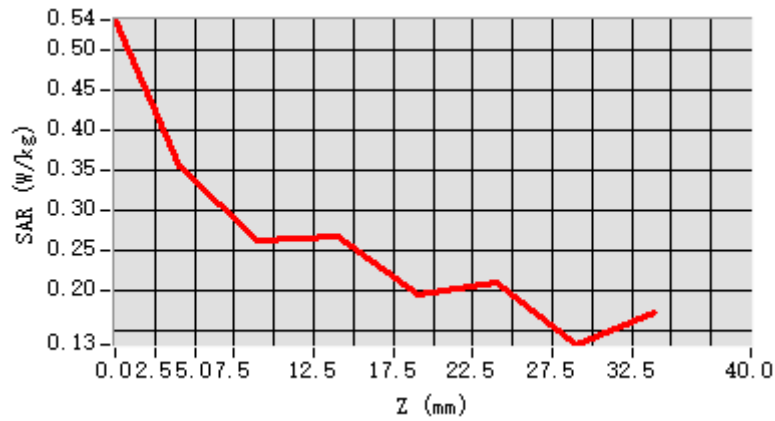

F. 3D Image

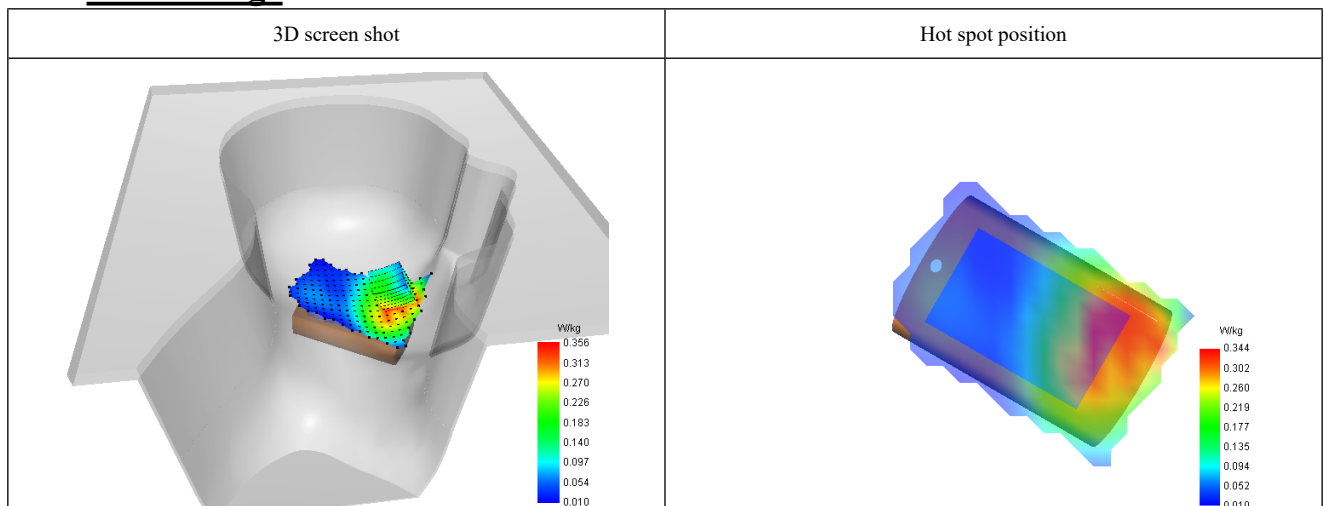

#8

Date of measurement: 26/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 4 (1700)
Channels/Frequency	Middle (1413)/ frequency 1732.60 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.60
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

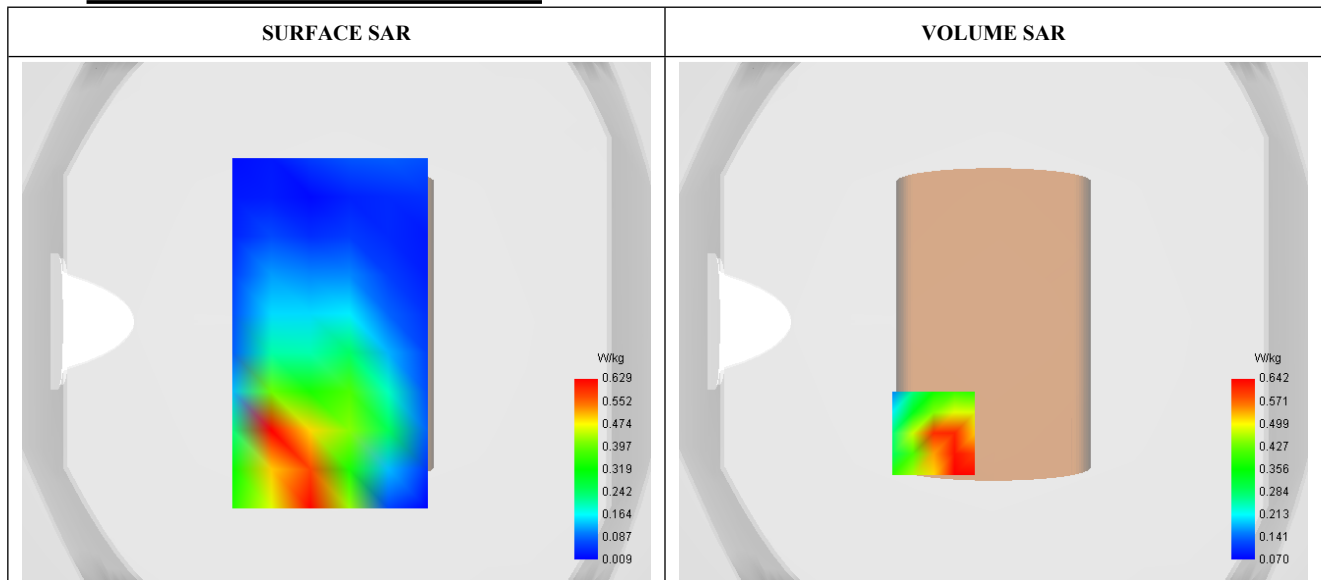


Maximum location: X=-23.00, Y=-43.00 ; SAR Peak: 0.97 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.383
SAR 1g (W/Kg)	0.627
Variation (%)	4.030
Horizontal validation criteria: minimum distance (mm)	25.298221
Vertical validation criteria: SAR ratio M2/M1 (%)	44.080997

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.230	0.642	0.283	0.348	0.224	0.195	0.156

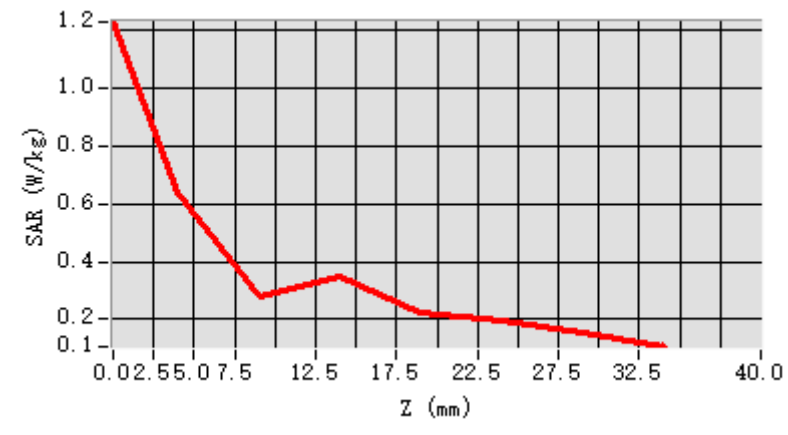

F. 3D Image

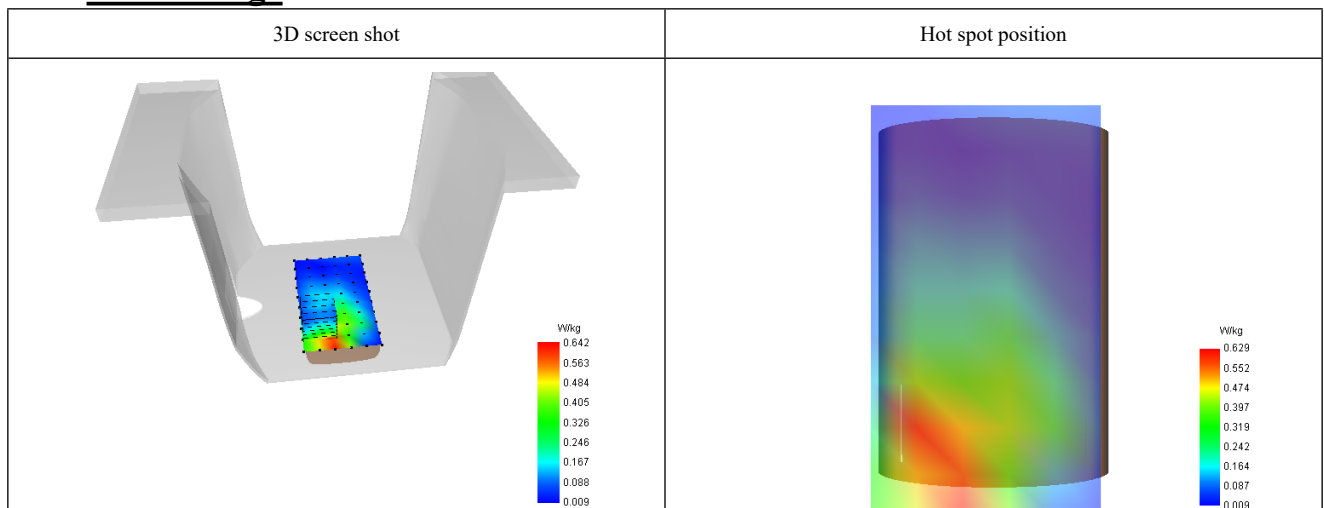

#9

Date of measurement: 25/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

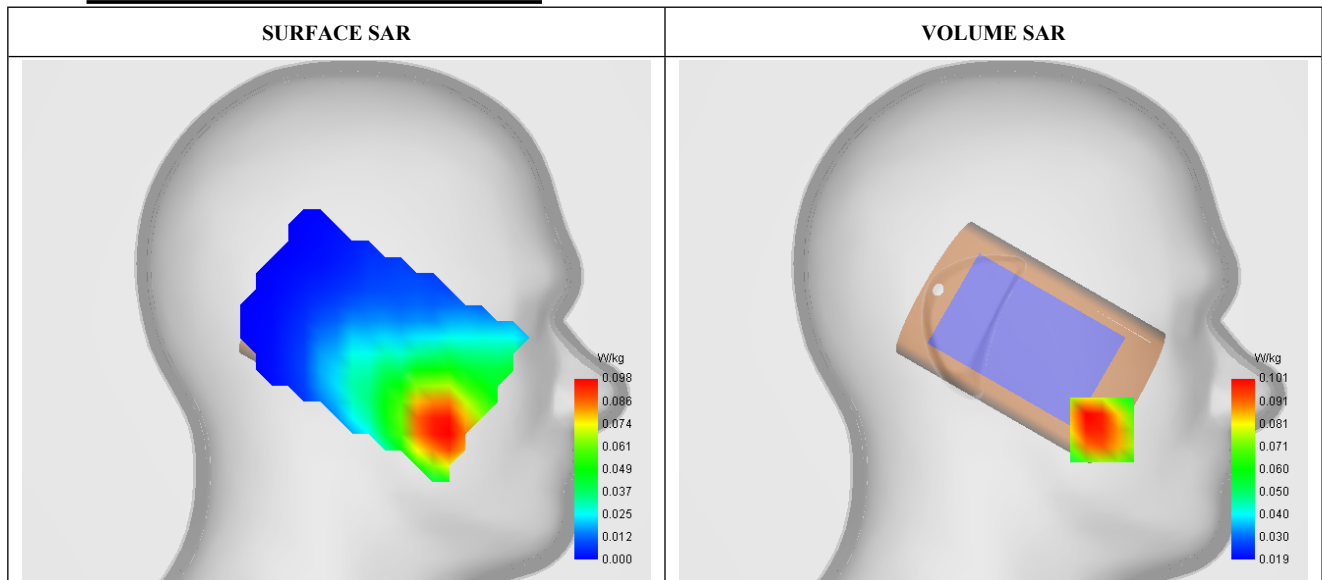


Maximum location: X=-54.00, Y=-54.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.079
SAR 1g (W/Kg)	0.100
Variation (%)	2.340
Horizontal validation criteria: minimum distance (mm)	15.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	77.227723

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.138	0.101	0.078	0.077	0.060	0.058	0.044

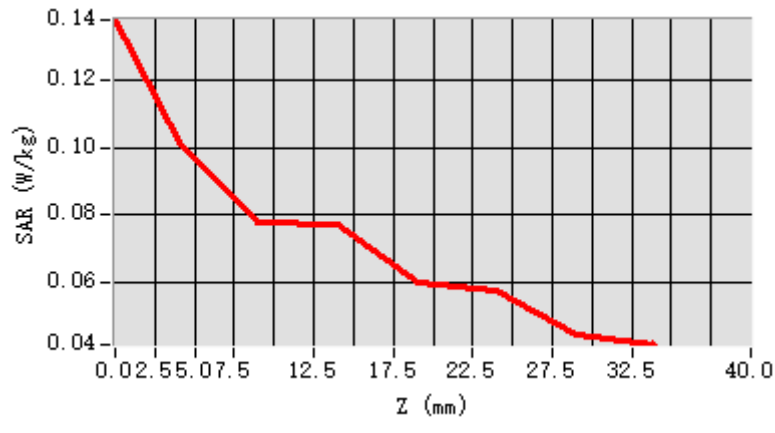

F. 3D Image

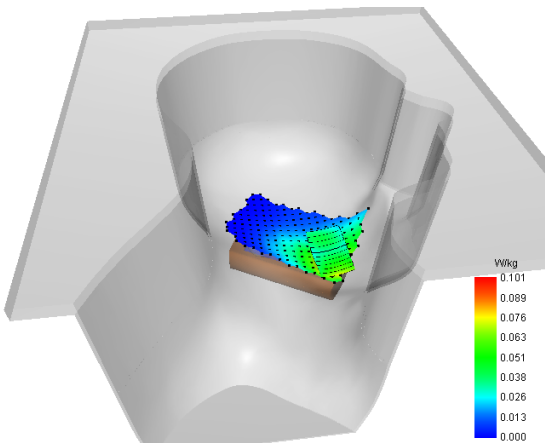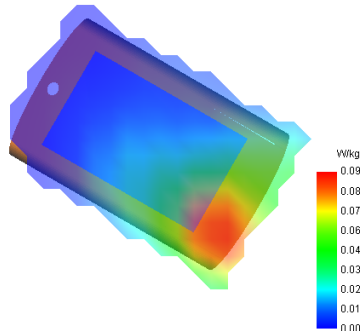3D screen shot	Hot spot position
	

#10

Date of measurement: 25/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	Band 5 (850)
Channels/Frequency	Middle (4182)/ frequency 836.40 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.40
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.901

C. SAR Surface and Volume

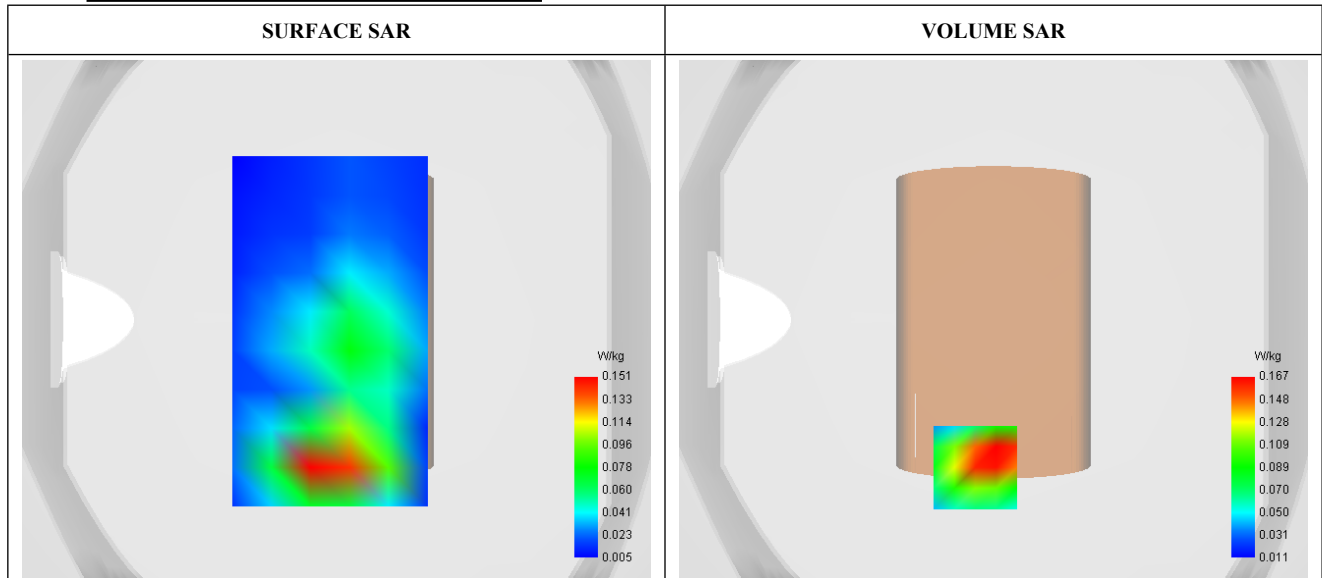


Maximum location: X=-7.00, Y=-57.00 ; SAR Peak: 0.24 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.164
Variation (%)	-1.570
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	45.508982

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.313	0.167	0.076	0.079	0.049	0.042	0.032

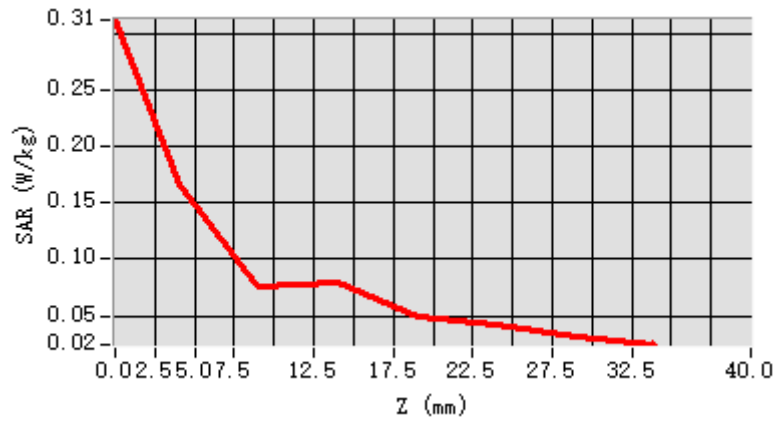

F. 3D Image

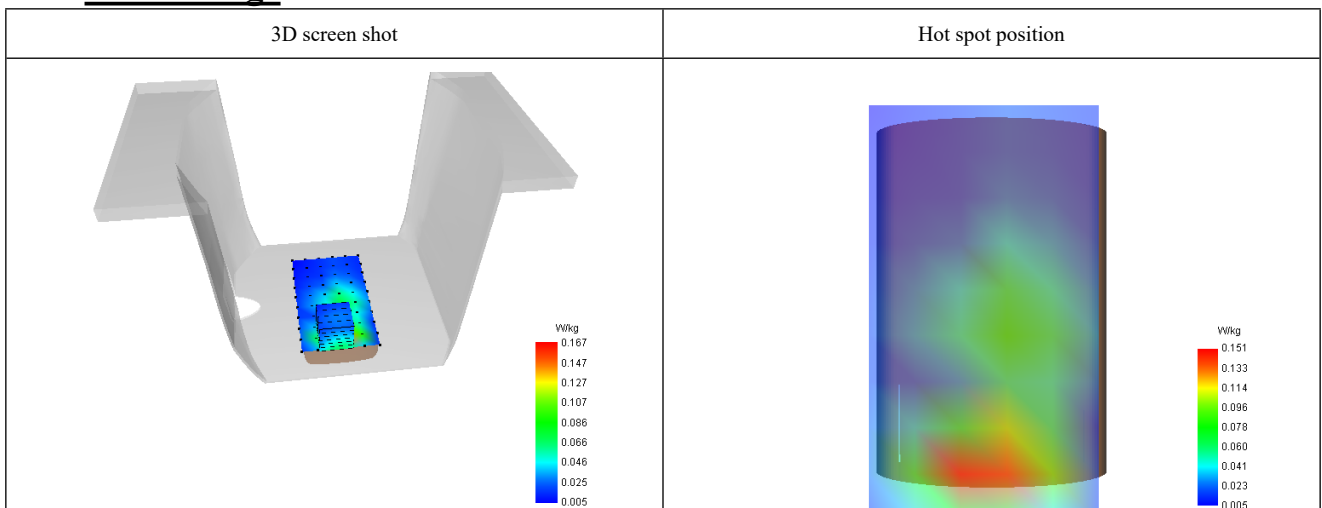

#11

Date of measurement: 3/3/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.30
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	U-NII-1
Channels/Frequency	High (48)/ frequency 5240.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5240.00
Relative permittivity (real part)	36.000
Relative permittivity (imaginary part)	16.130
Conductivity (S/m)	4.696

C. SAR Surface and Volume

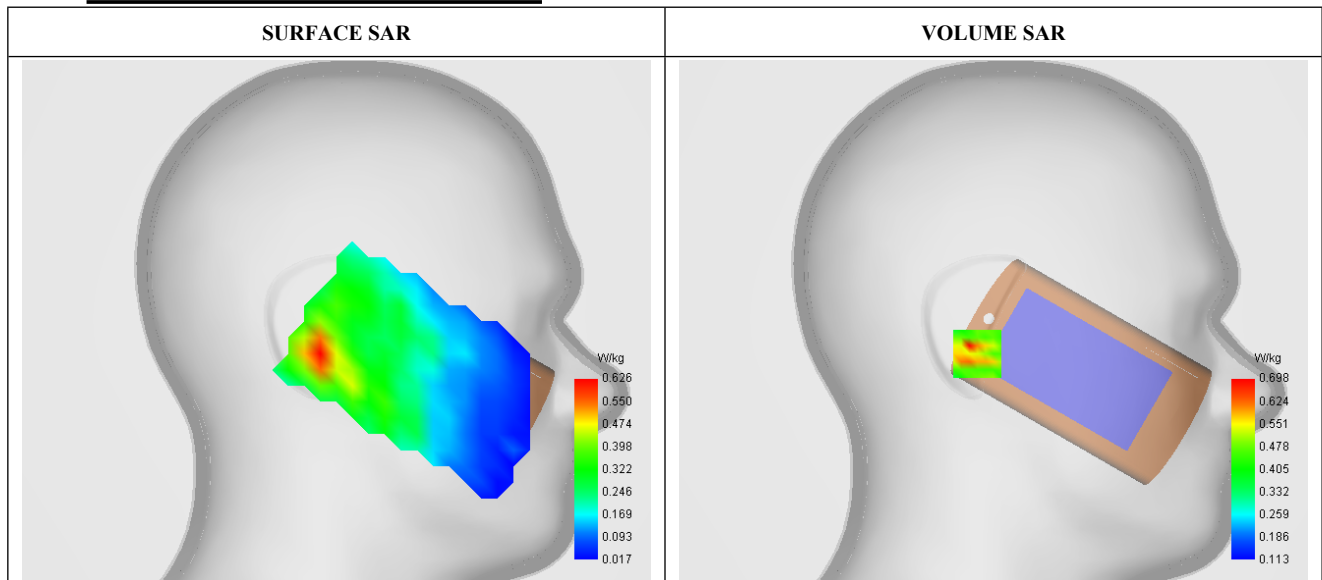


Maximum location: X=8.00, Y=-16.00 ; SAR Peak: 1.18 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.346
SAR 1g (W/Kg)	0.570
Variation (%)	-2.420
Horizontal validation criteria: minimum distance (mm)	12.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	76.074499

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.893	0.698	0.531	0.463	0.460	0.369	0.375	0.331	0.288	0.268	0.224	0.212

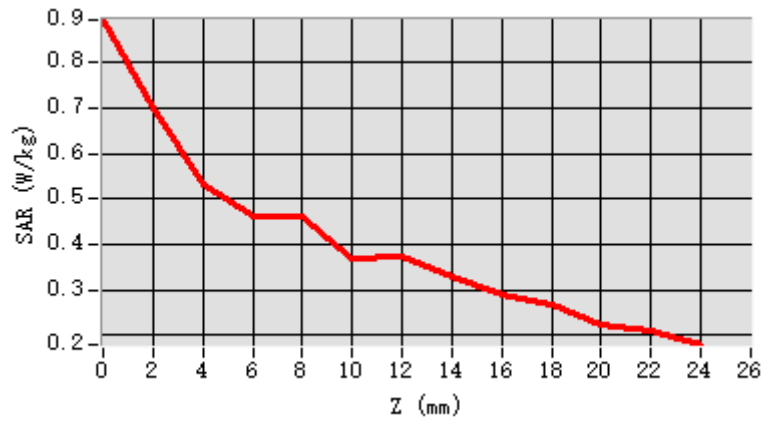

F. 3D Image

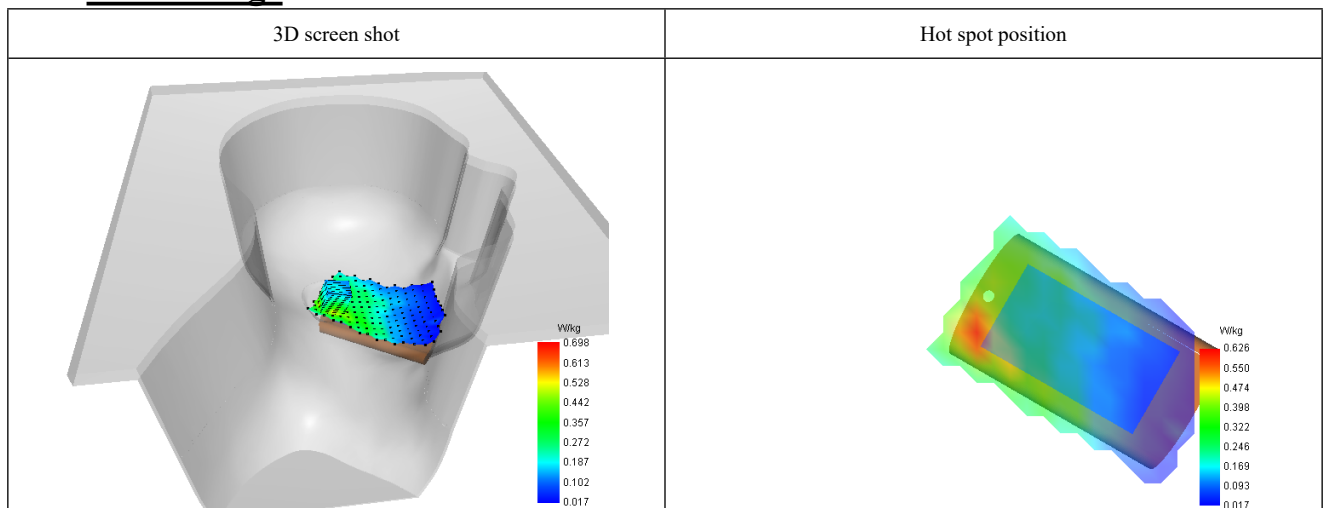

#12

Date of measurement: 3/3/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.30
Area Scan	dx=10mm dy=10mm, Complete
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	U-NII-1
Channels/Frequency	High (48)/ frequency 5240.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	5240.00
Relative permittivity (real part)	36.000
Relative permittivity (imaginary part)	16.130
Conductivity (S/m)	4.696

C. SAR Surface and Volume

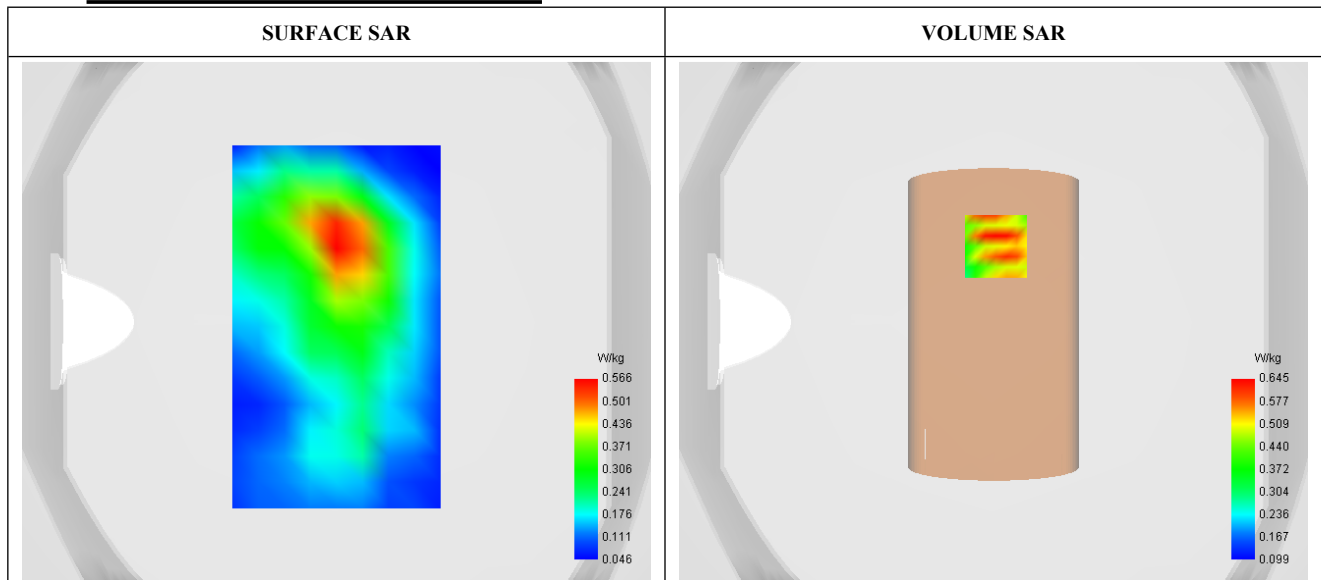


Maximum location: X=1.00, Y=29.00 ; SAR Peak: 0.87 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.282
SAR 1g (W/Kg)	0.487
Variation (%)	0.230
Horizontal validation criteria: minimum distance (mm)	20.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	81.085271

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.751	0.645	0.523	0.503	0.400	0.391	0.319	0.310	0.238	0.243	0.187	0.188

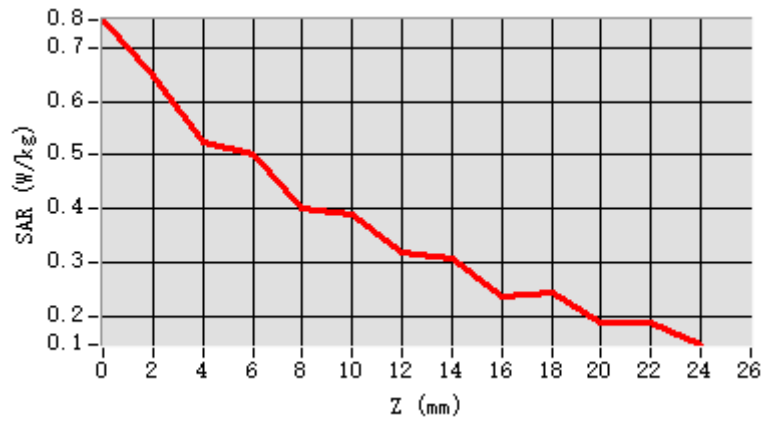

F. 3D Image

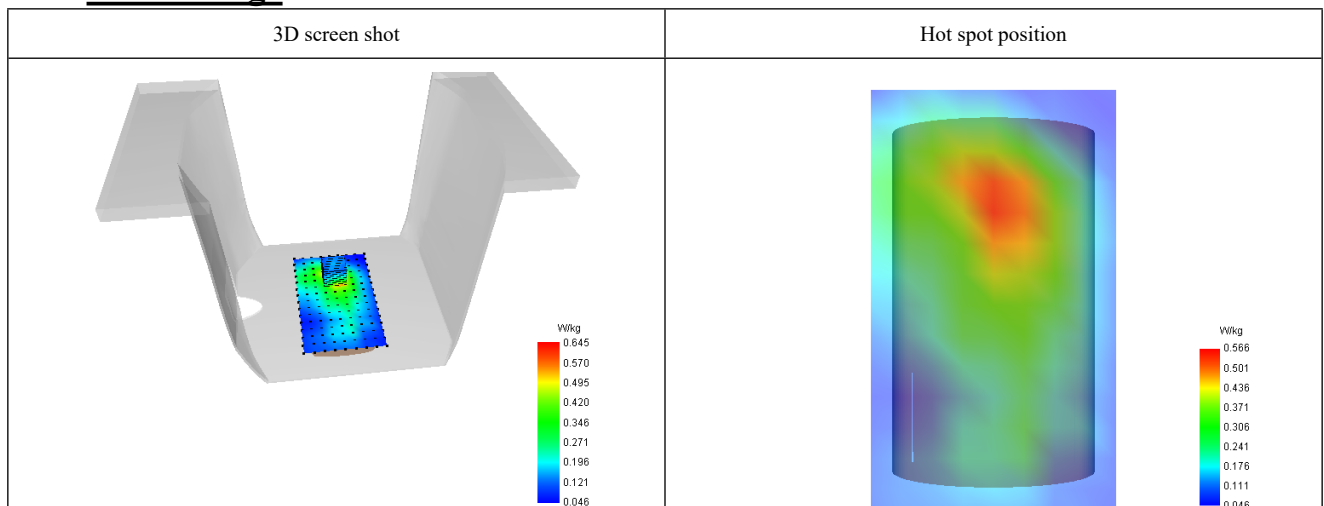

#13

Date of measurement: 2/3/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.38
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	ISM
Channels/Frequency	High (11)/ frequency 2462.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2462.00
Relative permittivity (real part)	39.227
Relative permittivity (imaginary part)	13.207
Conductivity (S/m)	1.806

C. SAR Surface and Volume

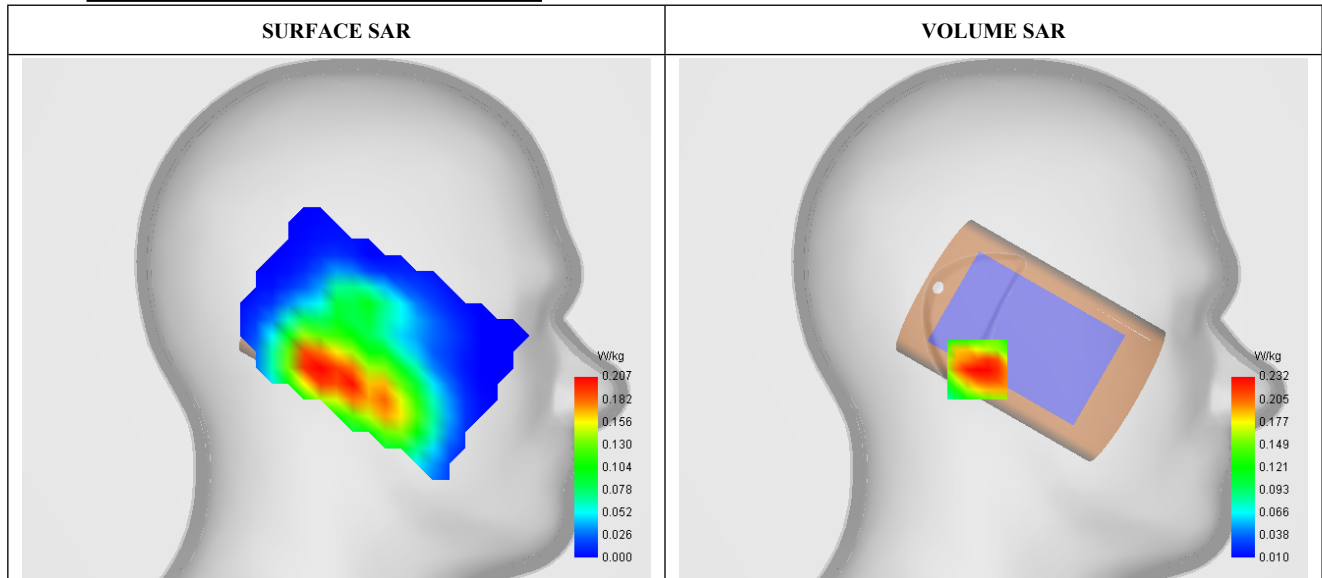


Maximum location: X=8.00, Y=-25.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.222
Variation (%)	1.040
Horizontal validation criteria: minimum distance (mm)	18.027756
Vertical validation criteria: SAR ratio M2/M1 (%)	63.362069

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.353	0.232	0.147	0.113	0.085	0.069	0.051

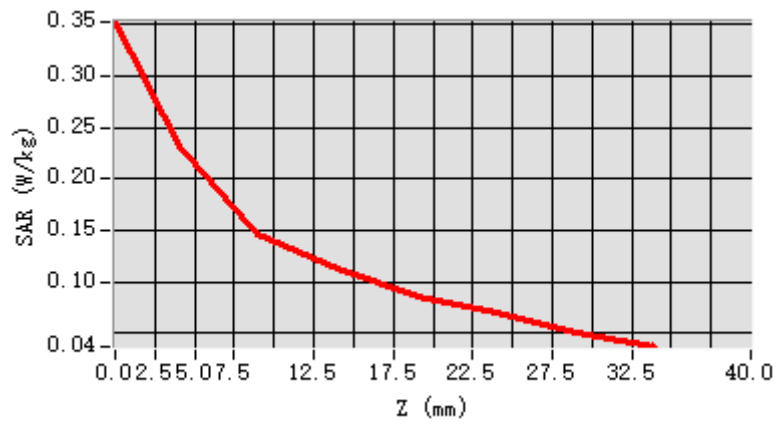

F. 3D Image

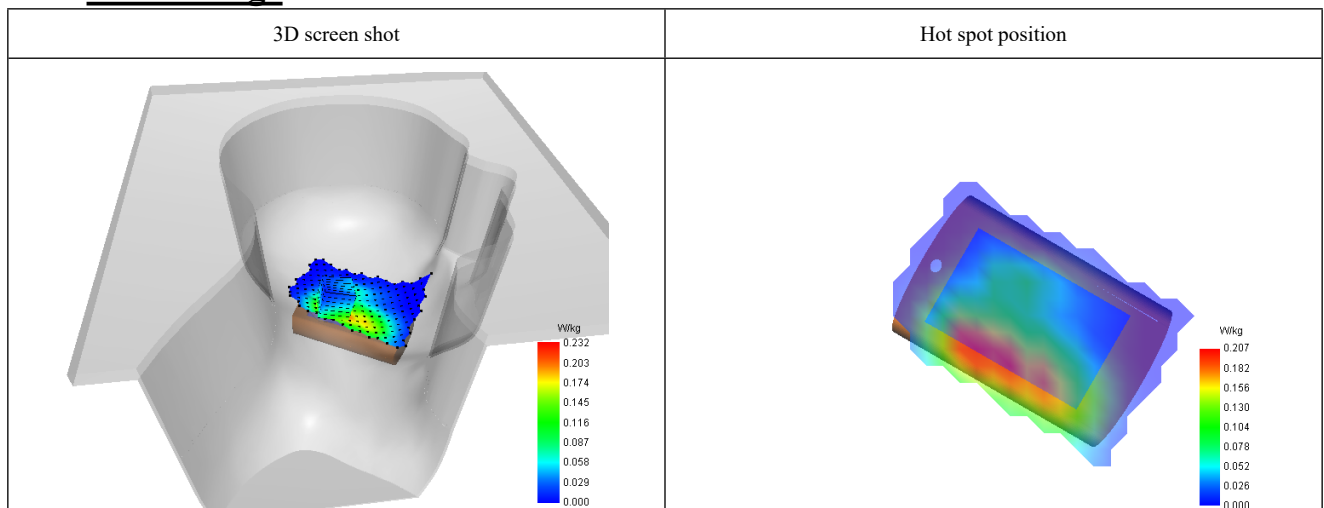

#14

Date of measurement: 2/3/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.38
Area Scan	dx=12mm dy=12mm, Complete
Zoom Scan	7x7x7,dx=5mm dy=5mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	ISM
Channels/Frequency	High (11)/ frequency 2462.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	2462.00
Relative permittivity (real part)	39.227
Relative permittivity (imaginary part)	13.207
Conductivity (S/m)	1.806

C. SAR Surface and Volume

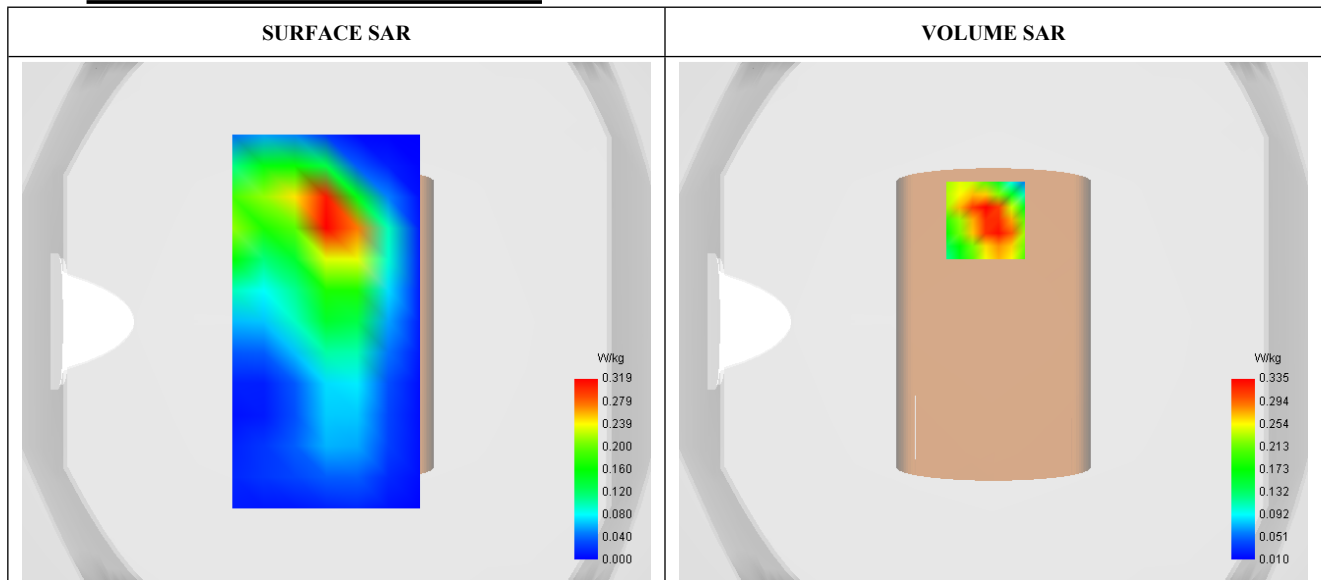


Maximum location: X=-3.00, Y=39.00 ; SAR Peak: 0.48 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.303
Variation (%)	-2.870
Horizontal validation criteria: minimum distance (mm)	11.180340
Vertical validation criteria: SAR ratio M2/M1 (%)	66.567164

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.463	0.335	0.223	0.139	0.106	0.056	0.046

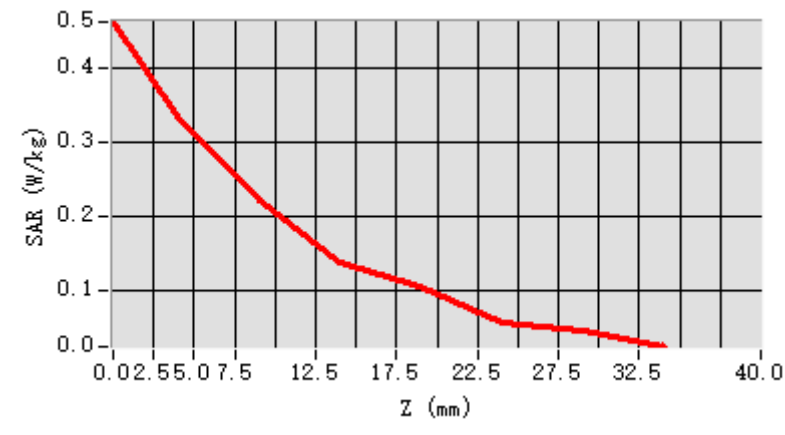

F. 3D Image

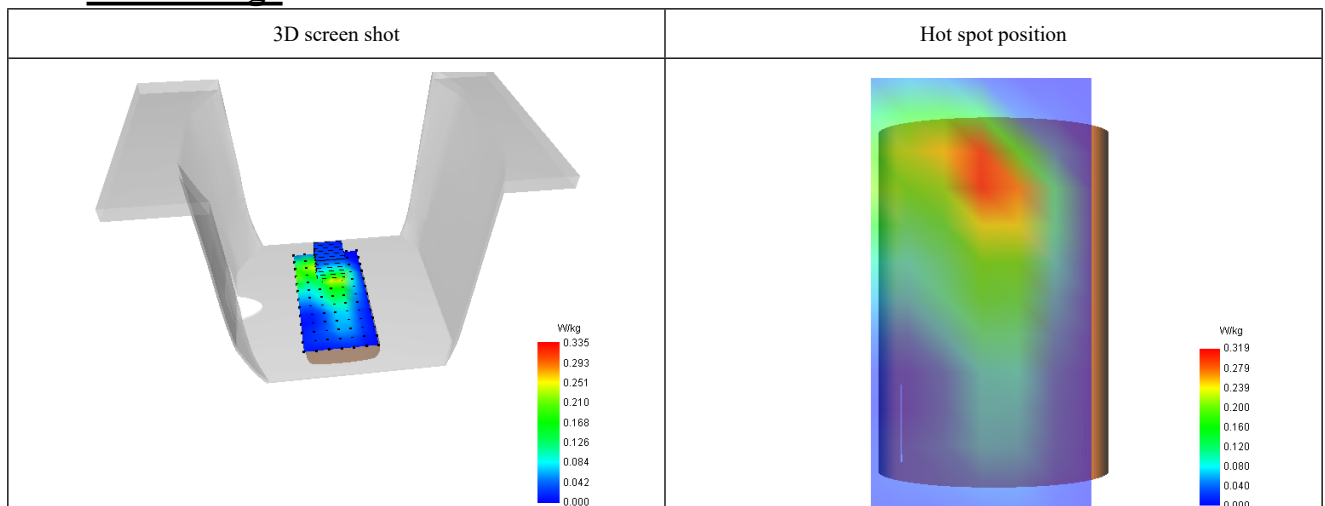

#15

Date of measurement: 27/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

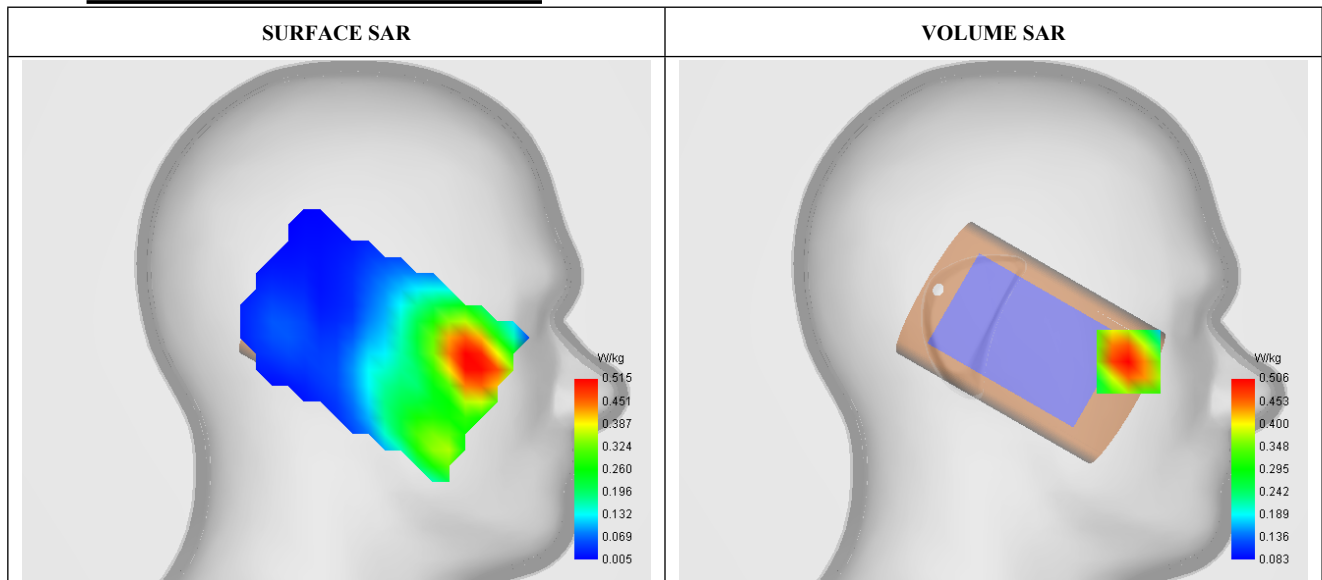


Maximum location: X=-67.00, Y=-20.00 ; SAR Peak: 0.58 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.376
SAR 1g (W/Kg)	0.489
Variation (%)	4.800
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	89.525692

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.550	0.506	0.453	0.381	0.315	0.261	0.190

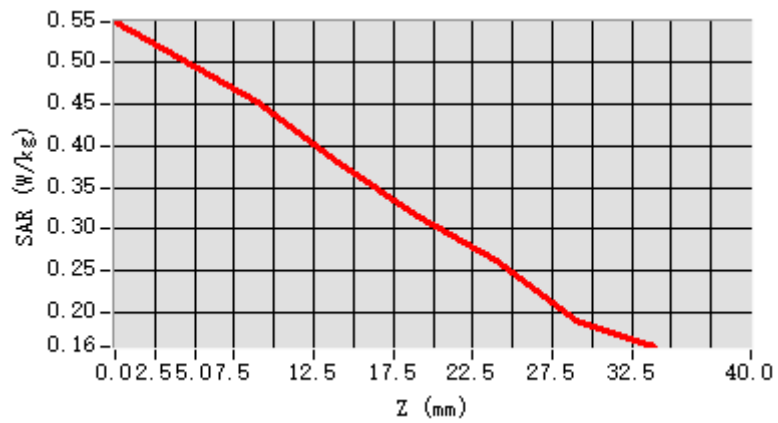

F. 3D Image

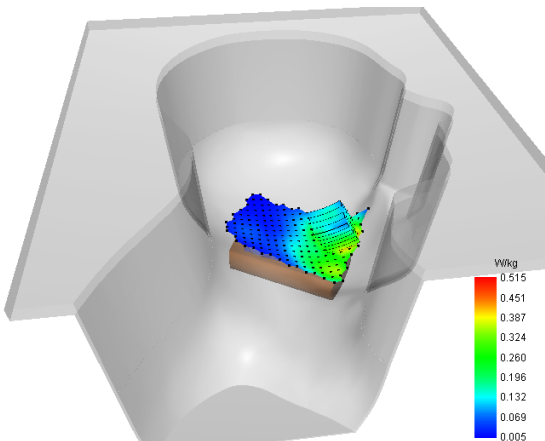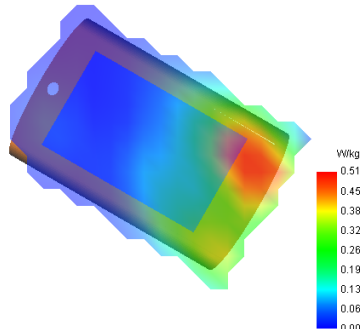3D screen shot	Hot spot position
	

#16

Date of measurement: 27/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 2
Channel Center [EARFCN] / Channel Center [MHz]	Middle (18900)/ frequency 1880.00 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1880.00
Relative permittivity (real part)	40.000
Relative permittivity (imaginary part)	13.408
Conductivity (S/m)	1.400

C. SAR Surface and Volume

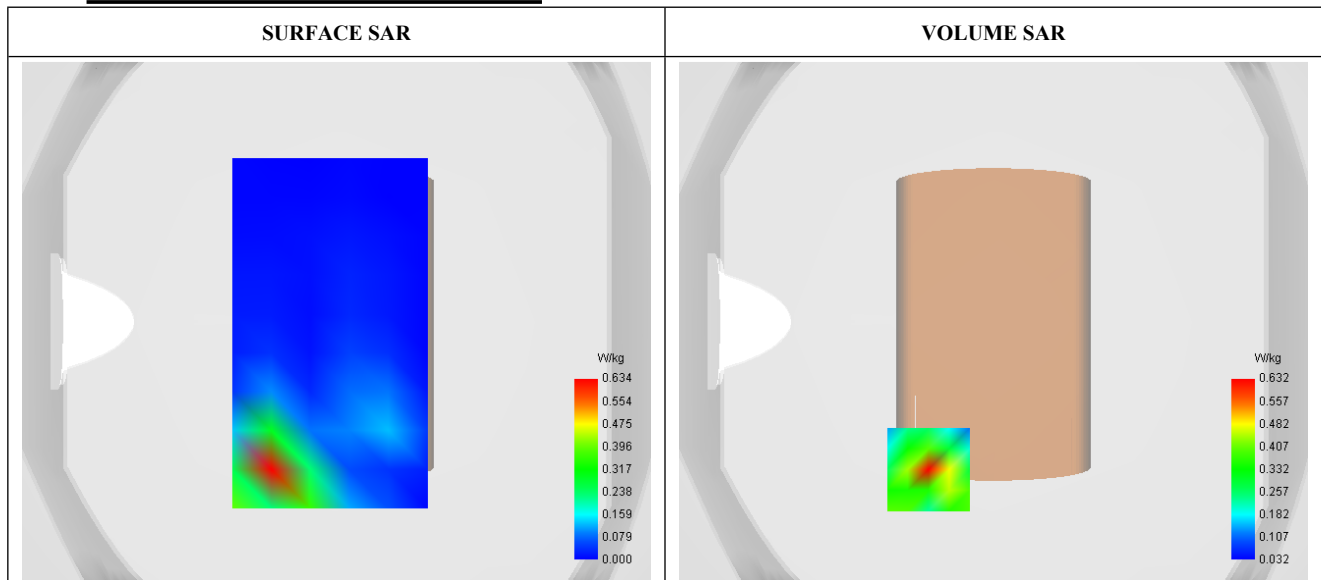


Maximum location: X=-25.00, Y=-57.00 ; SAR Peak: 0.89 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.314
SAR 1g (W/Kg)	0.547
Variation (%)	1.370
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	66.455696

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.899	0.632	0.420	0.310	0.219	0.168	0.118

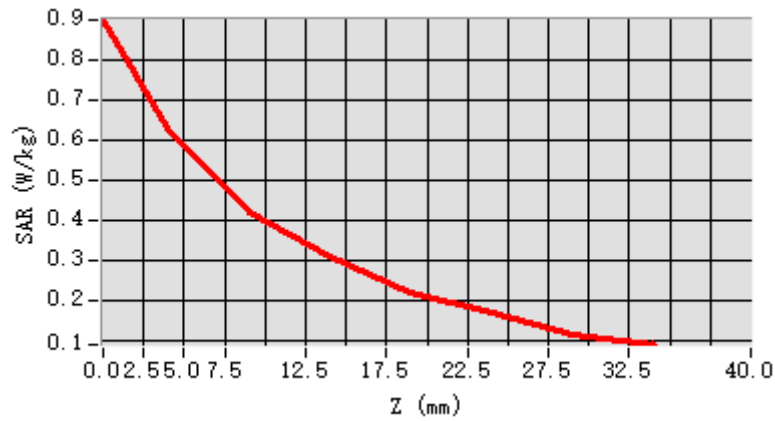

F. 3D Image

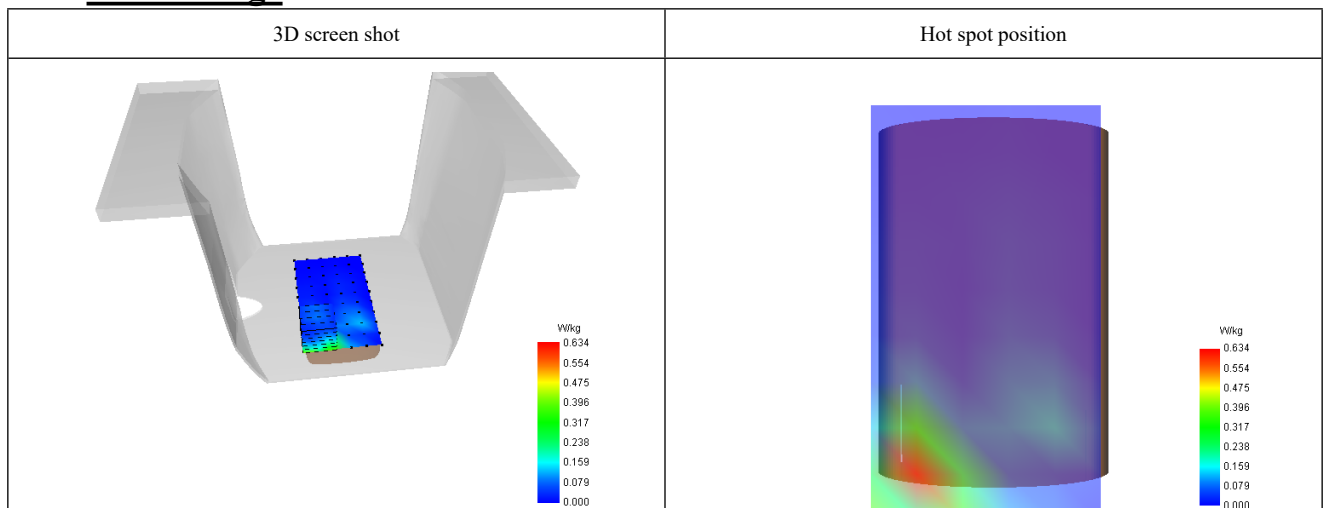

#17

Date of measurement: 26/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20175)/ frequency 1732.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.50
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

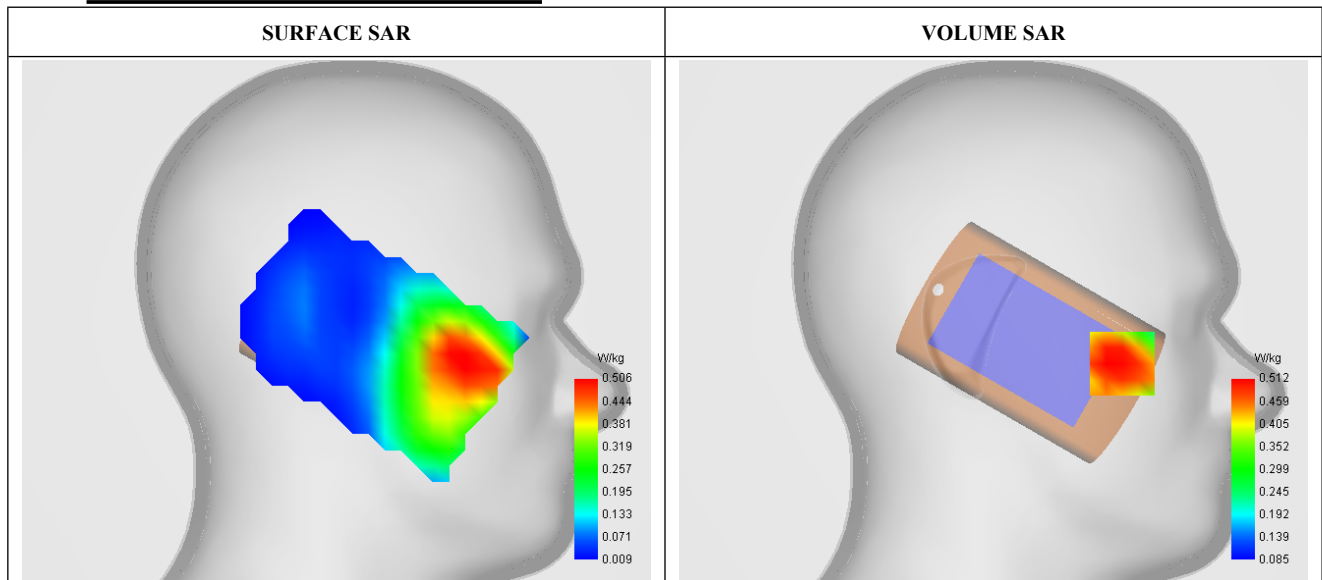


Maximum location: X=-64.00, Y=-21.00 ; SAR Peak: 0.59 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.405
SAR 1g (W/Kg)	0.504
Variation (%)	2.110
Horizontal validation criteria: minimum distance (mm)	28.844410
Vertical validation criteria: SAR ratio M2/M1 (%)	80.468750

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.697	0.512	0.412	0.401	0.287	0.315	0.193

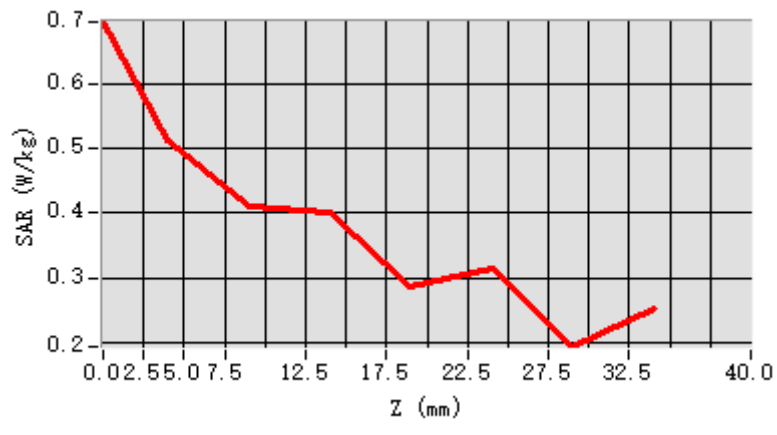

F. 3D Image

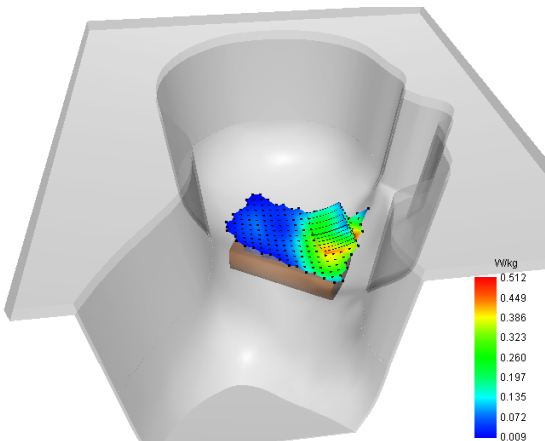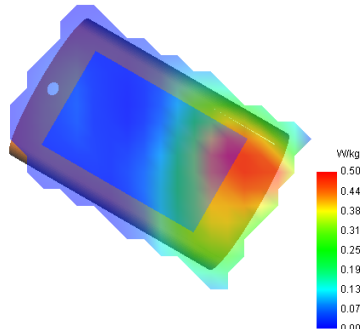3D screen shot	Hot spot position
	

#18

Date of measurement: 26/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	2.05
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 4
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20175)/ frequency 1732.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	1732.50
Relative permittivity (real part)	40.116
Relative permittivity (imaginary part)	14.136
Conductivity (S/m)	1.361

C. SAR Surface and Volume

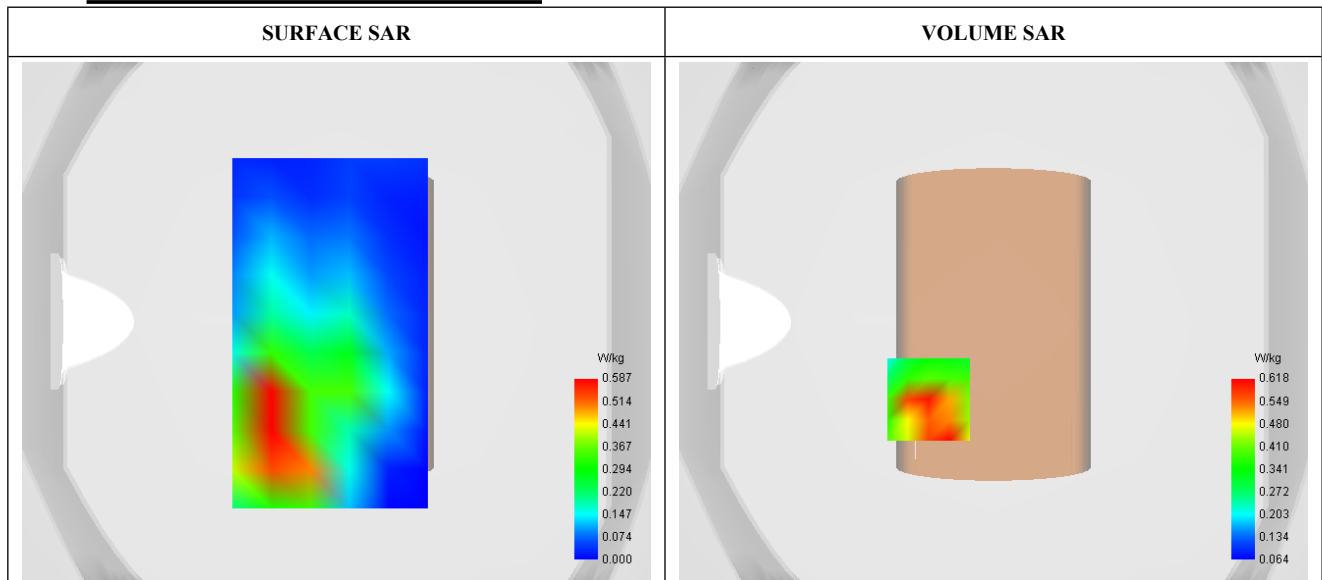


Maximum location: X=-25.00, Y=-30.00 ; SAR Peak: 0.89 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.374
SAR 1g (W/Kg)	0.565
Variation (%)	0.210
Horizontal validation criteria: minimum distance (mm)	32.984845
Vertical validation criteria: SAR ratio M2/M1 (%)	49.352751

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.112	0.618	0.305	0.277	0.237	0.154	0.167

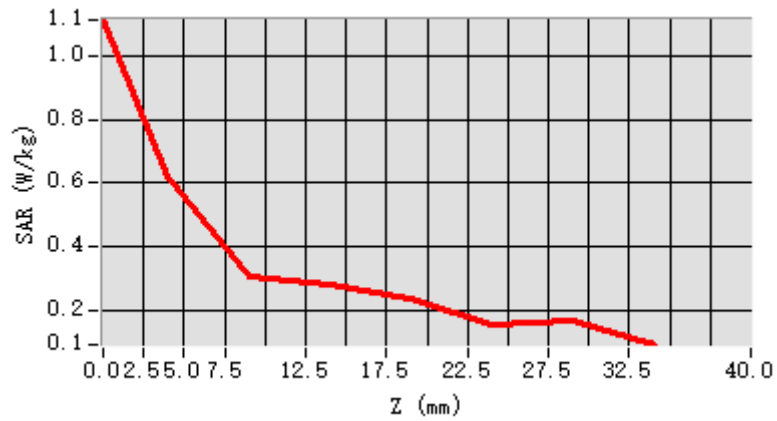

F. 3D Image

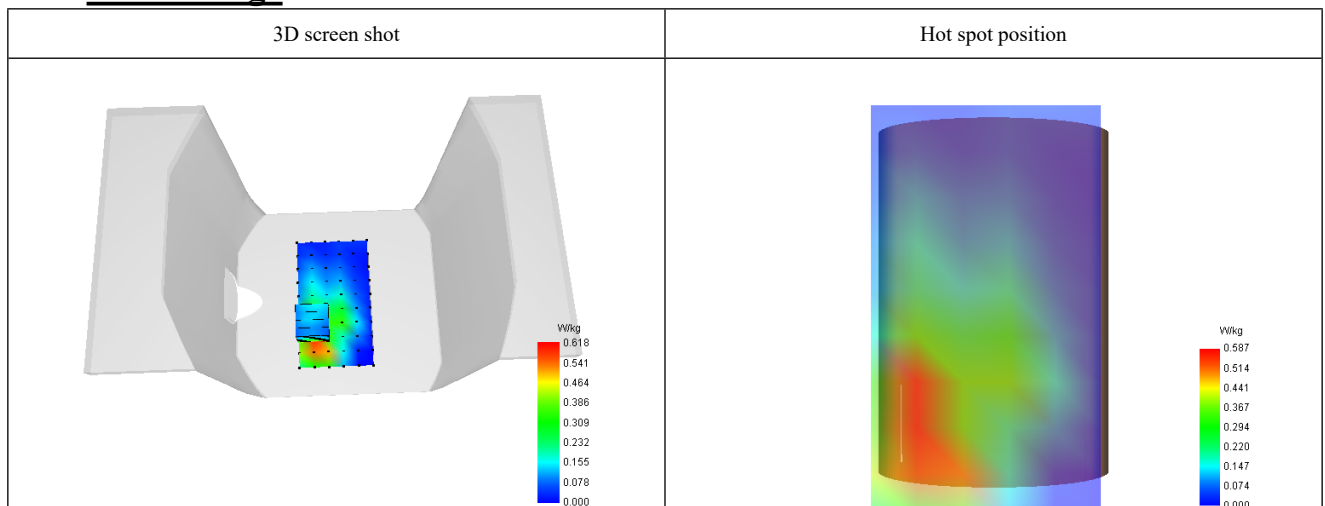

#19

Date of measurement: 25/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 5
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20525)/ frequency 836.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.50
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.902

C. SAR Surface and Volume

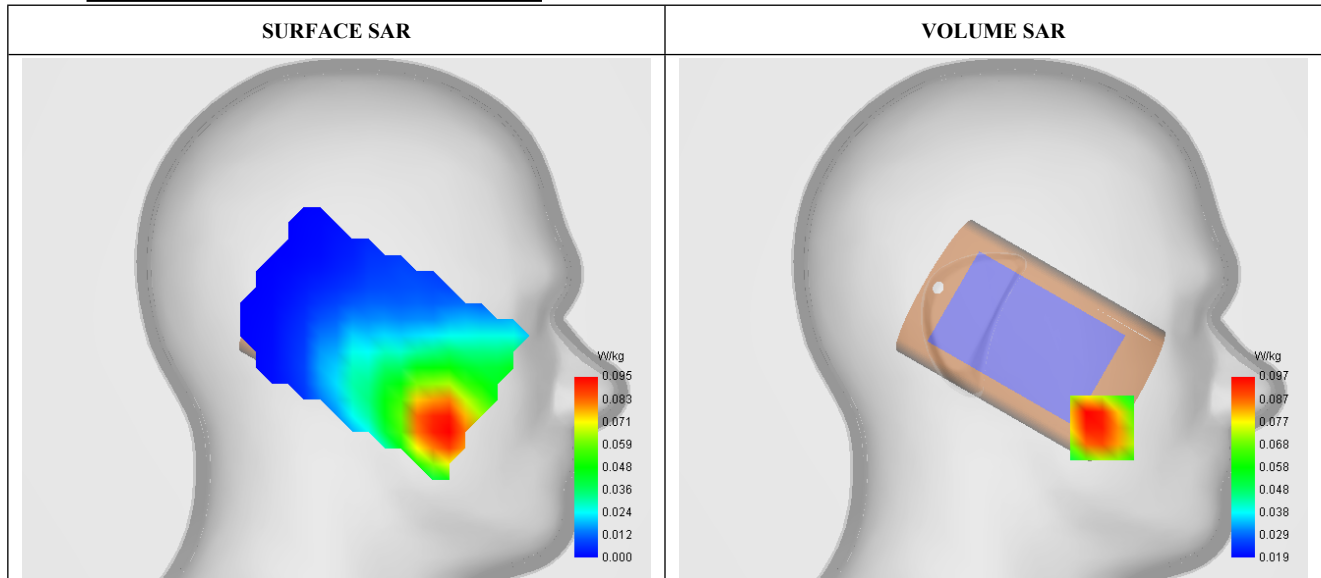


Maximum location: X=-54.00, Y=-54.00 ; SAR Peak: 0.12 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.076
SAR 1g (W/Kg)	0.096
Variation (%)	0.630
Horizontal validation criteria: minimum distance (mm)	13.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	77.319588

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.129	0.097	0.075	0.074	0.059	0.056	0.044

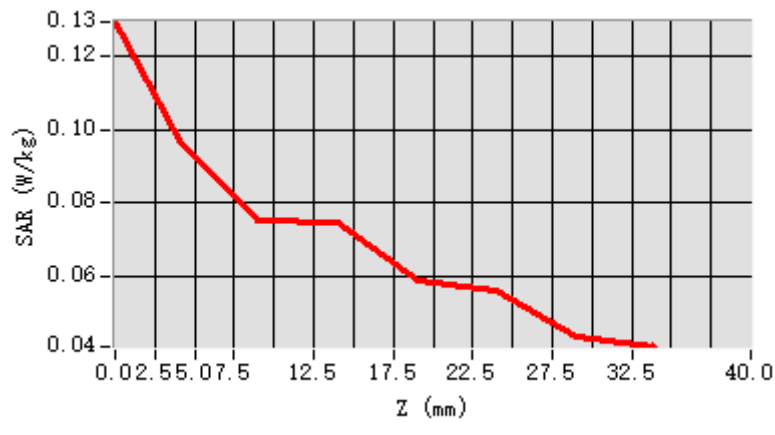

F. 3D Image

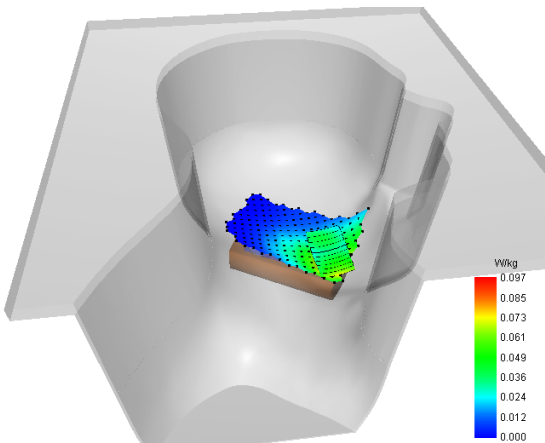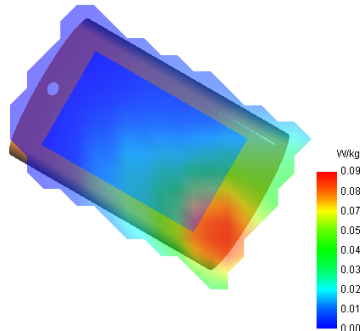3D screen shot	Hot spot position
	

#20

Date of measurement: 25/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.66
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 5
Channel Center [EARFCN] / Channel Center [MHz]	Middle (20525)/ frequency 836.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	836.50
Relative permittivity (real part)	41.500
Relative permittivity (imaginary part)	19.400
Conductivity (S/m)	0.902

C. SAR Surface and Volume

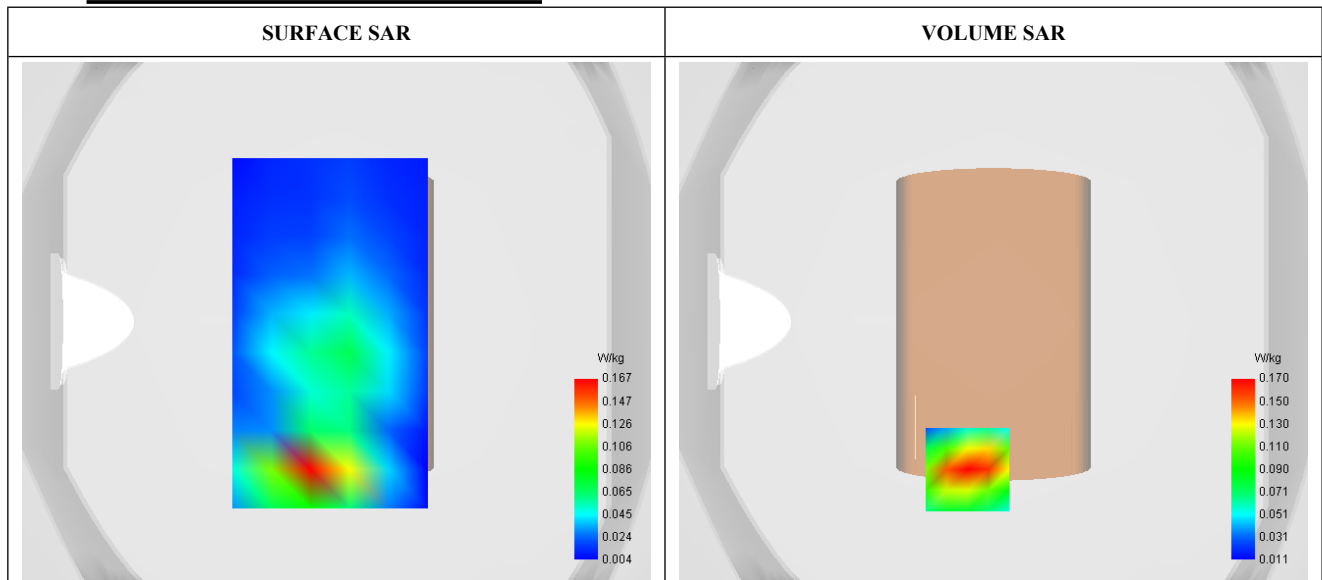


Maximum location: X=-10.00, Y=-57.00 ; SAR Peak: 0.23 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.099
SAR 1g (W/Kg)	0.158
Variation (%)	-0.230
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	69.411765

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.229	0.170	0.118	0.087	0.063	0.047	0.036

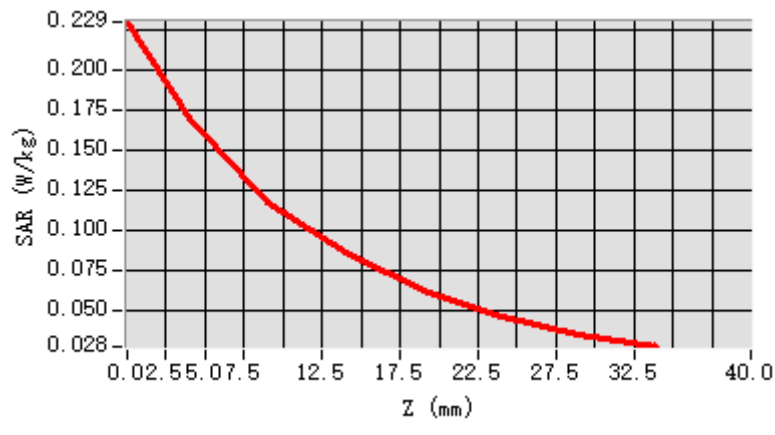

F. 3D Image

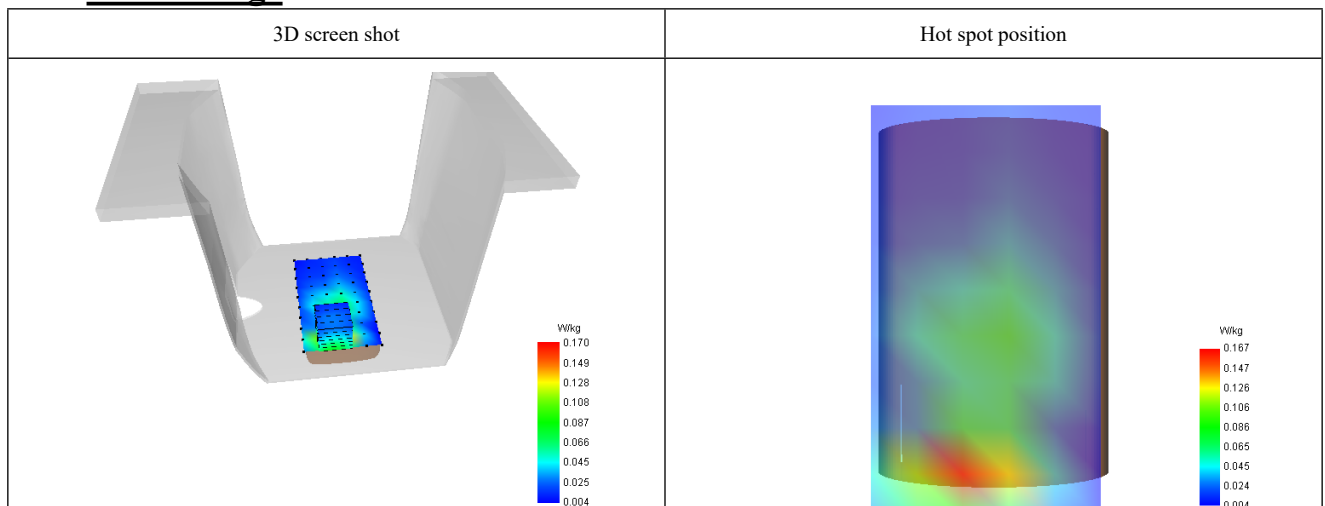

#21

Date of measurement: 24/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.65
Area Scan	dx=8mm dy=8mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Left head
Device Position	Cheek
Band	LTE band 12
Channel Center [EARFCN] / Channel Center [MHz]	Middle (23095)/ frequency 707.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	707.50
Relative permittivity (real part)	42.127
Relative permittivity (imaginary part)	23.264
Conductivity (S/m)	0.914

C. SAR Surface and Volume

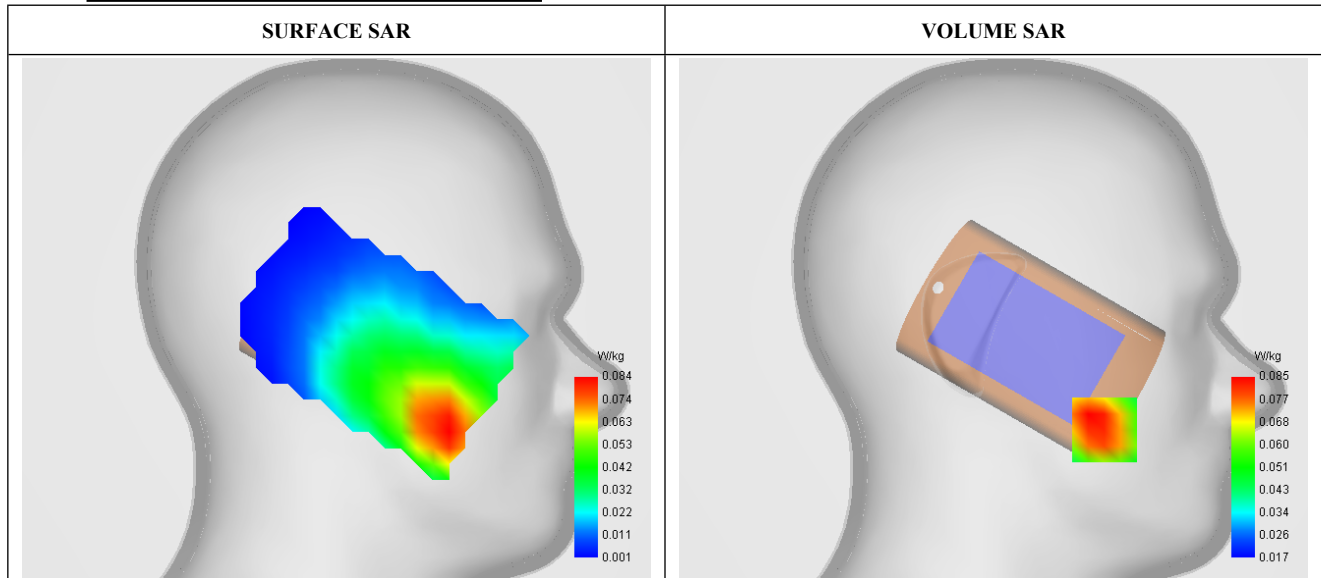


Maximum location: X=-55.00, Y=-55.00 ; SAR Peak: 0.10 W/kg

D. SAR 1g & 10g



SAR 10g (W/Kg)	0.070
SAR 1g (W/Kg)	0.085
Variation (%)	0.460
Horizontal validation criteria: minimum distance (mm)	12.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	75.294118

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.123	0.085	0.064	0.070	0.050	0.055	0.038

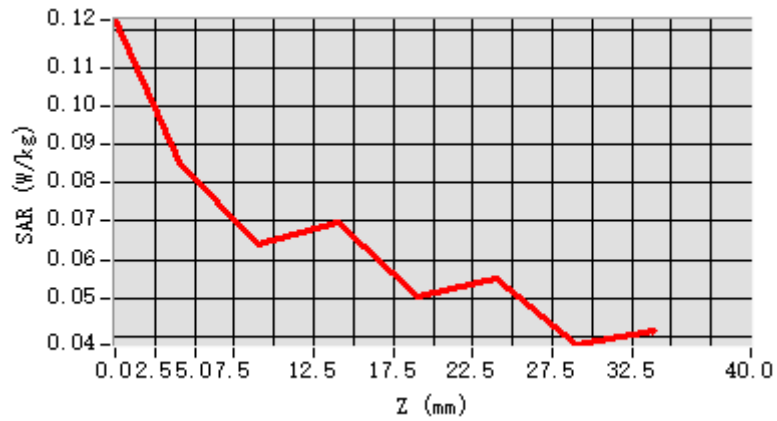

F. 3D Image

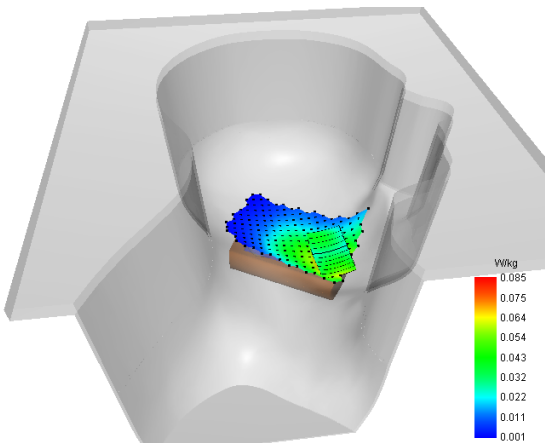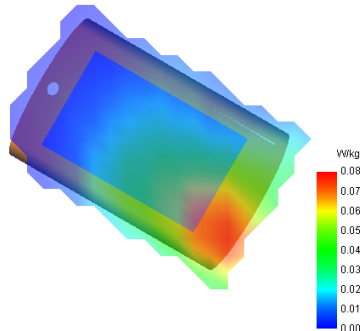3D screen shot	Hot spot position
	

#22

Date of measurement: 24/2/2026


A. Experimental conditions.

Probe	0523-EPGO-403
ConvF	1.65
Area Scan	dx=15mm dy=15mm, Complete
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5.0mm,Complete
Phantom	Validation plane
Device Position	Body
Band	LTE band 12
Channel Center [EARFCN] / Channel Center [MHz]	Middle (23095)/ frequency 707.50 Mhz

B. Permittivity

Middle TX Frequency (MHz)	707.50
Relative permittivity (real part)	42.127
Relative permittivity (imaginary part)	23.264
Conductivity (S/m)	0.914

C. SAR Surface and Volume

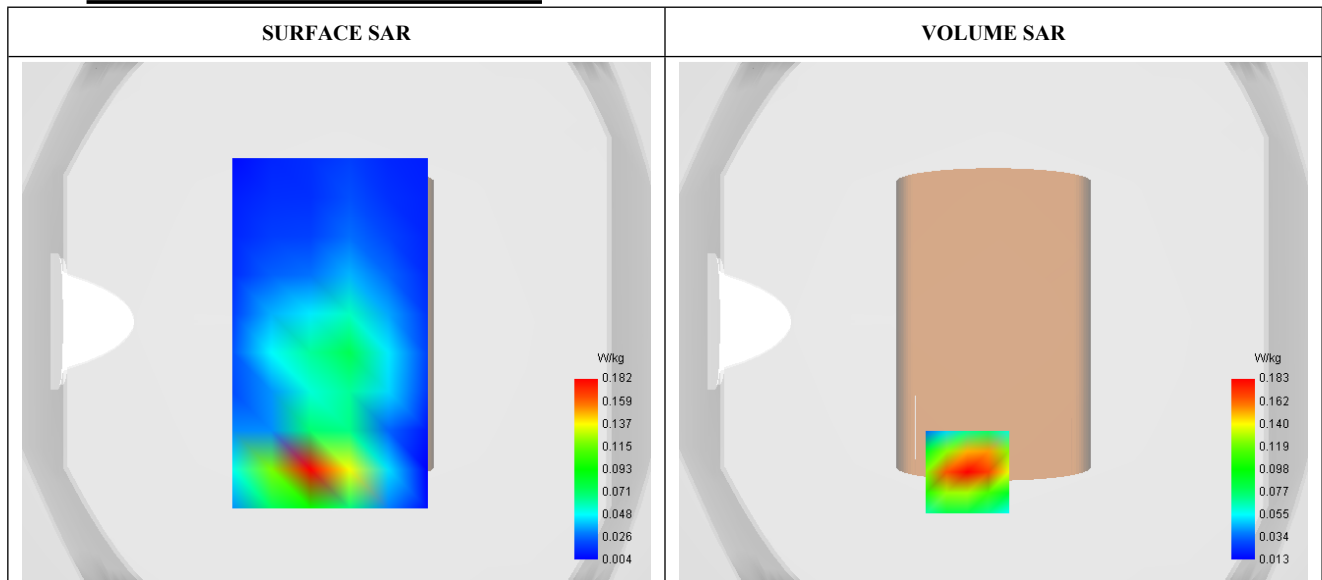

Maximum location: X=-10.00, Y=-58.00 ; SAR Peak: 0.25 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.110
SAR 1g (W/Kg)	0.176
Variation (%)	1.190
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	70.491803