

2. Features

- *Stable and reliable in performances
- *Compact size
- *RoHS compliance

3. Applications

- * IEEE802.11(a/b/g/n).
- * Hand-held devices when IEEE802.11(a/b/g/n) functions are needed.

4. Description

Unictron's PCB antenna with cable series are specially designed for IEEE802.11(a/b/g/n) applications. Based on Unictron's proprietary design and processes, this antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Operating Condition:

Temperature	-10 to +85 °C	(With double-sided tape)
	-40 to +85 °C	(Without double-sided tape)
Humidity	10 to 95% RH	

6. Storage Condition:

Temperature	-10 to +85 °C	(With double-sided tape)
	-40 to +85 °C	(Without double-sided tape)
Humidity	10 to 95% RH	

7. Electrical Specifications (Antenna in device)

7-1. 2400~2484 MHz Band

Characteristics		Specifications	Unit
Outline Dimensions		40.0 x 6.0 x 0.5	mm
Working Frequency		2400~2484	MHz
Bandwidth		84 Min (typical)	MHz
VSWR		2 Max. (typical)	
Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@ 2442 MHz)	2.7 (typical)	dBi
Efficiency		80 (typical)	%

*Center frequency will be offset to another frequency according to the conditions of user's ground plane and radome.

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$

Scale : Unit: mm

Prepared By :shelley Checked By :Joy

Approved By : Frank



Unictron Technologies
Corporation

Website: www.unictron.com

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band
PCB Substrate Antenna AA222

PART
NO.

H2B1PD1A1C305L

REV.

A


7-2. 5150~5850 MHz Band

Characteristics		Specifications	Unit
Working Frequency		5150~5850	MHz
Bandwidth		800 Min. (typical)	MHz
VSWR(		2.5 Max. (typical)	
Impedance		50	Ω
Polarization		Linear Polarization	
Peak Gain	(@5550 MHz)	3.5 (typical)	dBi
Efficiency		72.3 (typical)	%


*Center frequency will be offset to another frequency according to the conditions of user's ground plane and radome

7-3. Return Loss & VSWR

Return Loss

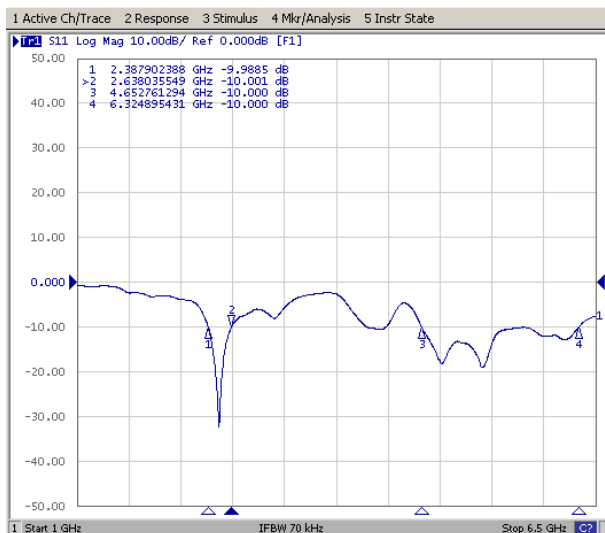

VSWR

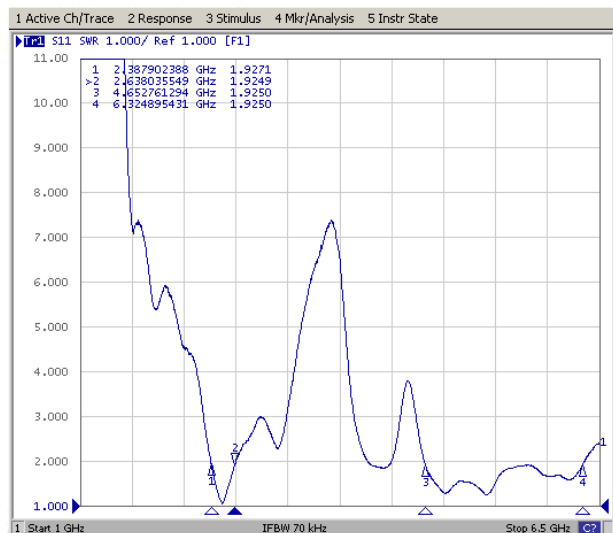

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$

Scale : Unit: mm

Prepared By :shelley Checked By :Joy

Approved By : Frank



Unictron Technologies Corporation

Website: www.unictron.com

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222


PART NO.

H2B1PD1A1C305L

REV.

A

8. Dimensions of PCB antenna with cable (unit: mm)

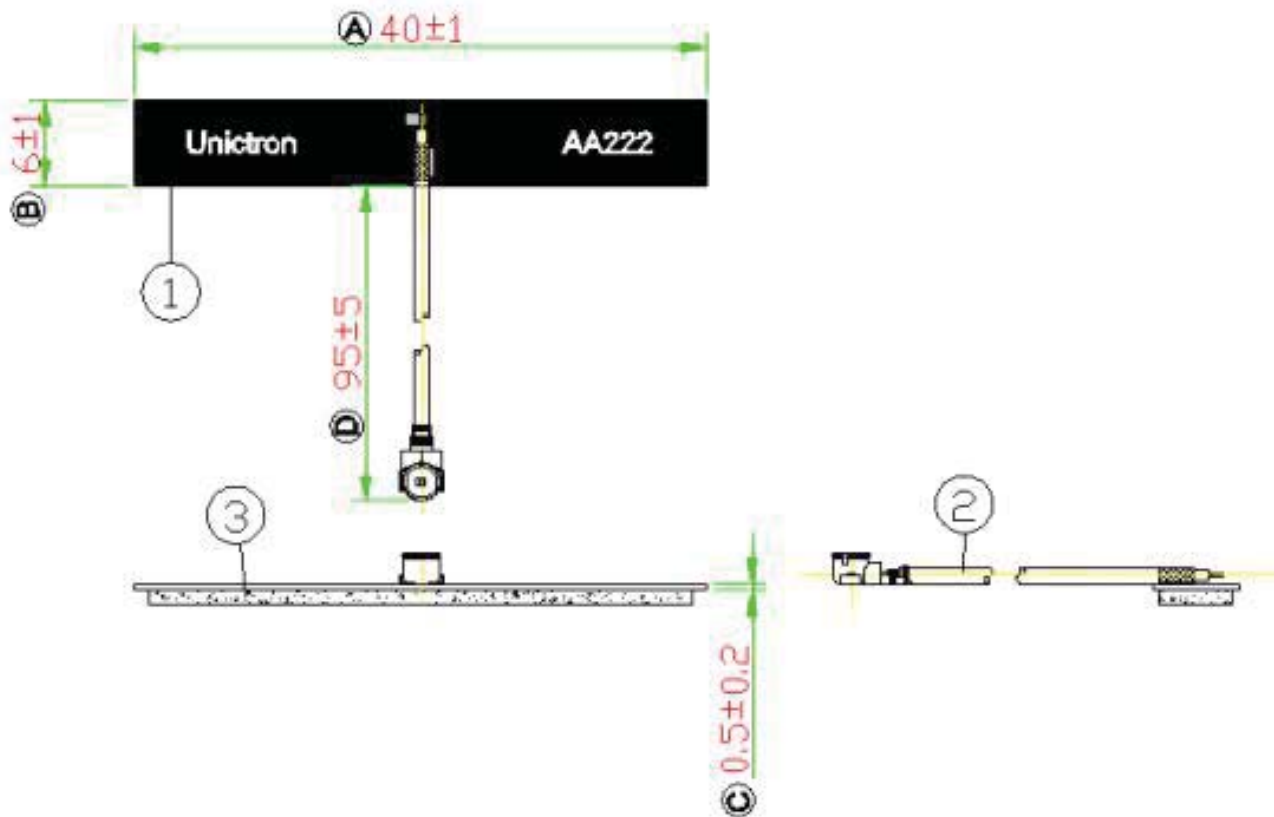

NOTE:

- 1.All materials are RoHS compliant.
- 2."A~D" Critical Dimensions.
- 3."()" Reference Dimensions.

Item	Name	Material	Color	Q'ty
1	AA222 PCB	FR4	Black	1
2	I-PEX Connector (MHF I) _ Cable1.13mm	FEP	Gray	1
3	Adhesive	PE	Black	1



Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01
Angle : $\pm$ Hole Dia. : $\pm$



Unictron Technologies Corporation
Website: www.unictron.com

Scale : Unit: mm
Prepared By :shelley Checked By :Joy
Approved By : Frank

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222

PART NO.





H2B1PD1A1C305L

REV.
A

9. Radiation Pattern

9-1.2400~2484 MHz Band

9-1-1.3D Gain Pattern @ 2442 MHz (unit: dBi)

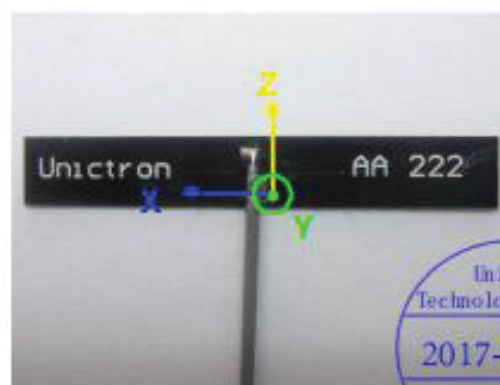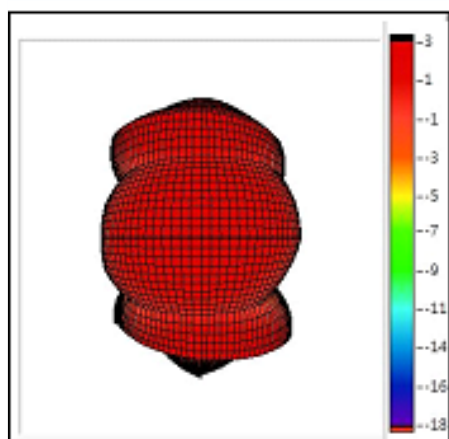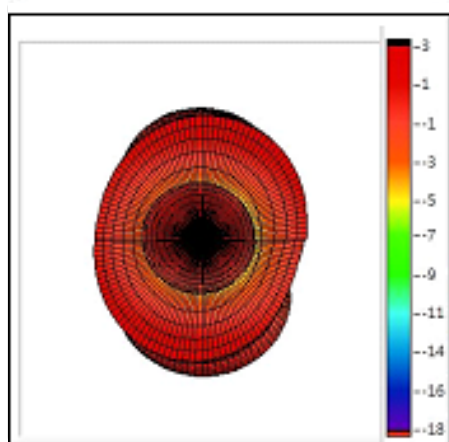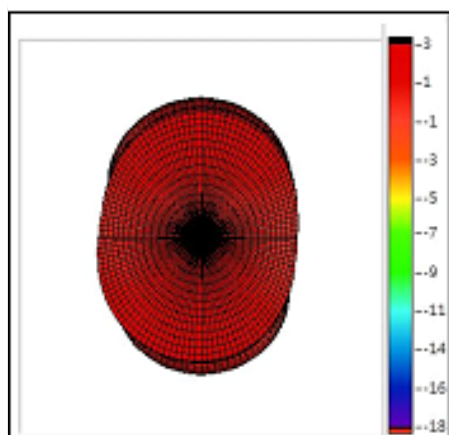

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$

Scale : Unit: mm

Prepared By : shelley Checked By : Joy

Approved By : Frank



Unictron Technologies Corporation

Website: www.unictron.com

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222

PART NO.

H2B1PD1A1C305L

REV.


A

PAGE 5 OF 9

9-1-2. 3D Efficiency Table

Frequency (MHz)	2400	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472	2484
Efficiency (dB)	-1.5	-1.5	-1.3	-1.4	-1.4	-1.2	-1.1	-1.0	-1.1	-1.0	-0.9	-0.7	-0.7	-0.9	-0.8
Efficiency (%)	71.0	71.6	73.8	71.8	73.1	76.7	77.5	80.0	78.3	79.1	81.5	85.3	84.8	81.5	84.2
Gain (dBi)	2.1	2.2	2.3	2.3	2.3	2.5	2.5	2.7	3.1	3.2	3.5	3.7	3.7	3.4	3.4

9-1-3. 3D Efficiency vs. Frequency

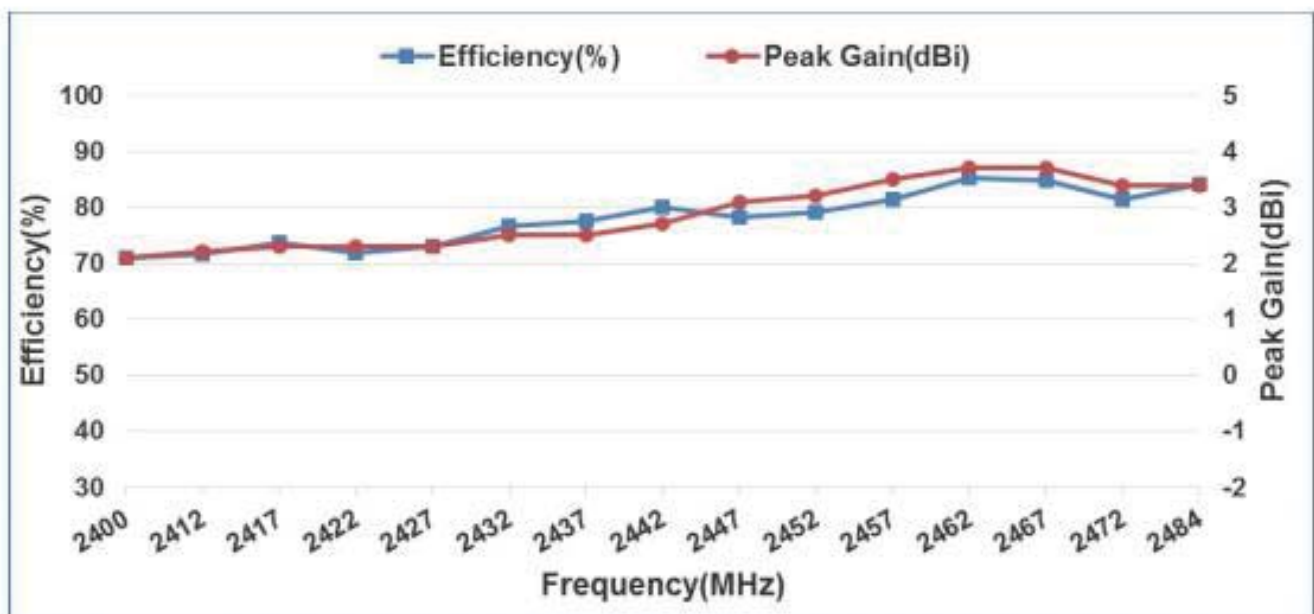

Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01
Angle : $\pm$ Hole Dia. : $\pm$



Unictron Technologies Corporation
Website: www.unictron.com

Scale : Unit: mm
Prepared By : shelley Checked By : Joy
Approved By : Frank

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222




PART NO.

H2B1PD1A1C305L

REV. A

9-2. 5150~5850 MHz Band

9-2-1.3D Gain Pattern @ 5550 MHz (unit: dBi)

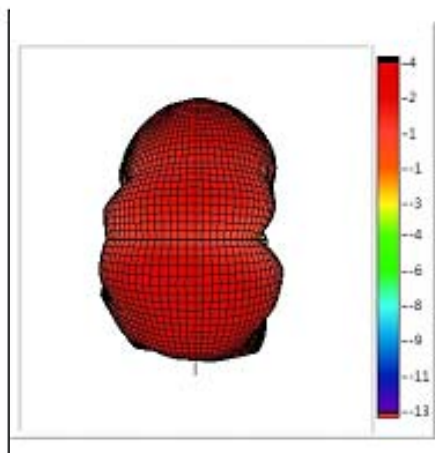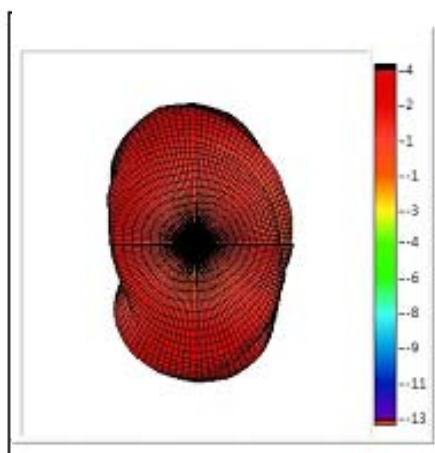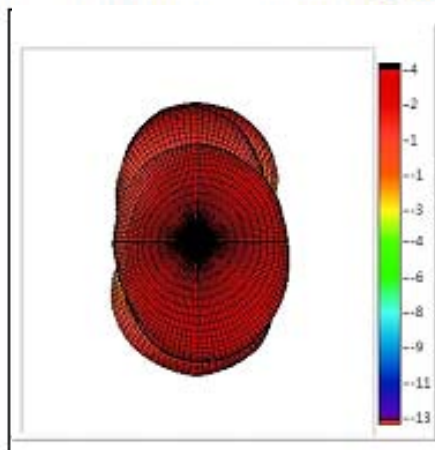

Tolerances (Unless otherwise specified)

X : ± 1 X.X : ± 0.1 X.XX : ± 0.01

Angle : $\pm$ Hole Dia. : $\pm$

Scale : Unit: mm

Prepared By : shelley Checked By : Joy

Approved By : Frank



Unictron Technologies
Corporation

Website: www.unictron.com

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band
PCB Substrate Antenna AA222

**PART
NO.**

H2B1PD1A1C305L

REV.


A

PAGE 7 OF 9

9-2-4. 3D Efficiency Table

Frequency(MHz)	5150	5200	5250	5300	5350	5400	5450	5500	5550	5600	5650	5700	5750	5800	5850
Efficiency(dB)	-1.2	-1.0	-1.1	-1.1	-0.7	-1.0	-1.8	-1.9	-1.4	-1.3	-1.9	-1.9	-1.5	-1.3	-0.8
Efficiency(%)	76.7	80.0	78.1	77.5	86.0	79.6	65.9	65.0	72.3	74.8	64.1	65.4	70.3	73.6	83.1
Peak Gain(dBi)	3.2	3.5	3.7	3.3	3.4	3.4	2.5	3.0	3.5	3.8	2.6	3.1	3.7	3.9	5.2

9-2-5. 3D Efficiency vs. Frequency

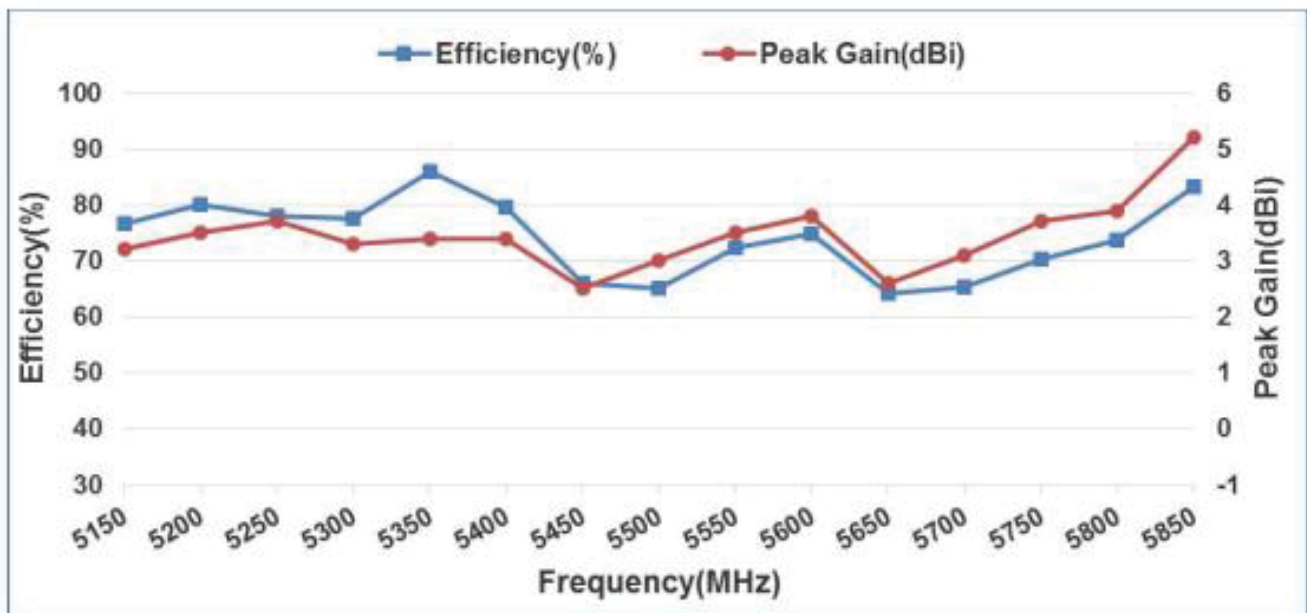

Tolerances (Unless otherwise specified)
X : ± 1 X.X : ± 0.1 X.XX : ± 0.01
Angle : $\pm$ Hole Dia. : $\pm$



Unictron Technologies Corporation
Website: www.unictron.com

Scale : Unit: mm
Prepared By :shelley Checked By :Joy
Approved By : Frank

THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION

TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222

PART NO.

H2B1PD1A1C305L

REV. A

10. Manufacturer Information

Unictron Technologies(Shenzhen)Co. Ltd

Add: Room 609, Building 3, Pingshan Private Enterprise Technology Park, No. 65
Lishan Road, Pingshan Community, Taoyuan Street, Nanshan District, Shenzhen,
Guangdong, China

Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01 Angle : $\pm$ Hole Dia. : $\pm$		 Unictron Technologies Corporation Website: www.unictron.com	
Scale :	Unit: mm	THIS SPECIFICATION IS THE PROPERTY OF UNICTRON TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCED OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION	
Prepared By :shelley	Checked By :Joy		
	Approved By : Frank		
TITLE: 40 x 6.0 x 0.4mmWiFi Dual Band PCB Substrate Antenna AA222		PART NO.	H2B1PD1A1C305L
			REV. A
PAGE 9 OF 9			