



Features:

- Frequency 868-928MHz
- Gain 1dBi
- Efficiency 70%
- Length 195mm straight
- Connectors:
 - W1063 RP-SMA Male
 - W1063M SMA Male
- RoHS Compliant

Applications:

- Indoor use
- 868MHz and 915MHz ISM band radios
- IoT devices
- Security
- Sensors
- Monitoring

All dimensions are in mm

ELECTRICAL SPECIFICATIONS

Frequency	863-928 MHz
Nominal Impedance	50 Ω
VSWR	2 Maximum
Radiation Pattern	Omni
Gain	1 dBi
Efficiency	70 %
Polarization	Linear
Power Withstanding	1 W

MECHANICAL SPECIFICATIONS

Overall Length	195+/-2 mm
Weight	23.5 g
Antenna Color / Material	Black
Connector type	W1063 RP SMA Male W1063M SMA Male
IP Rating	IP20, Indoor use

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature	-20 °C /+65 ° C
Storage Temperature	-30 °C /+75 °C

Series: Stick Antenna

Description: 868-928MHz Swivel Type
dipole antenna


PART NUMBER: W1063/ W1063M

MECHANICAL DRAWING

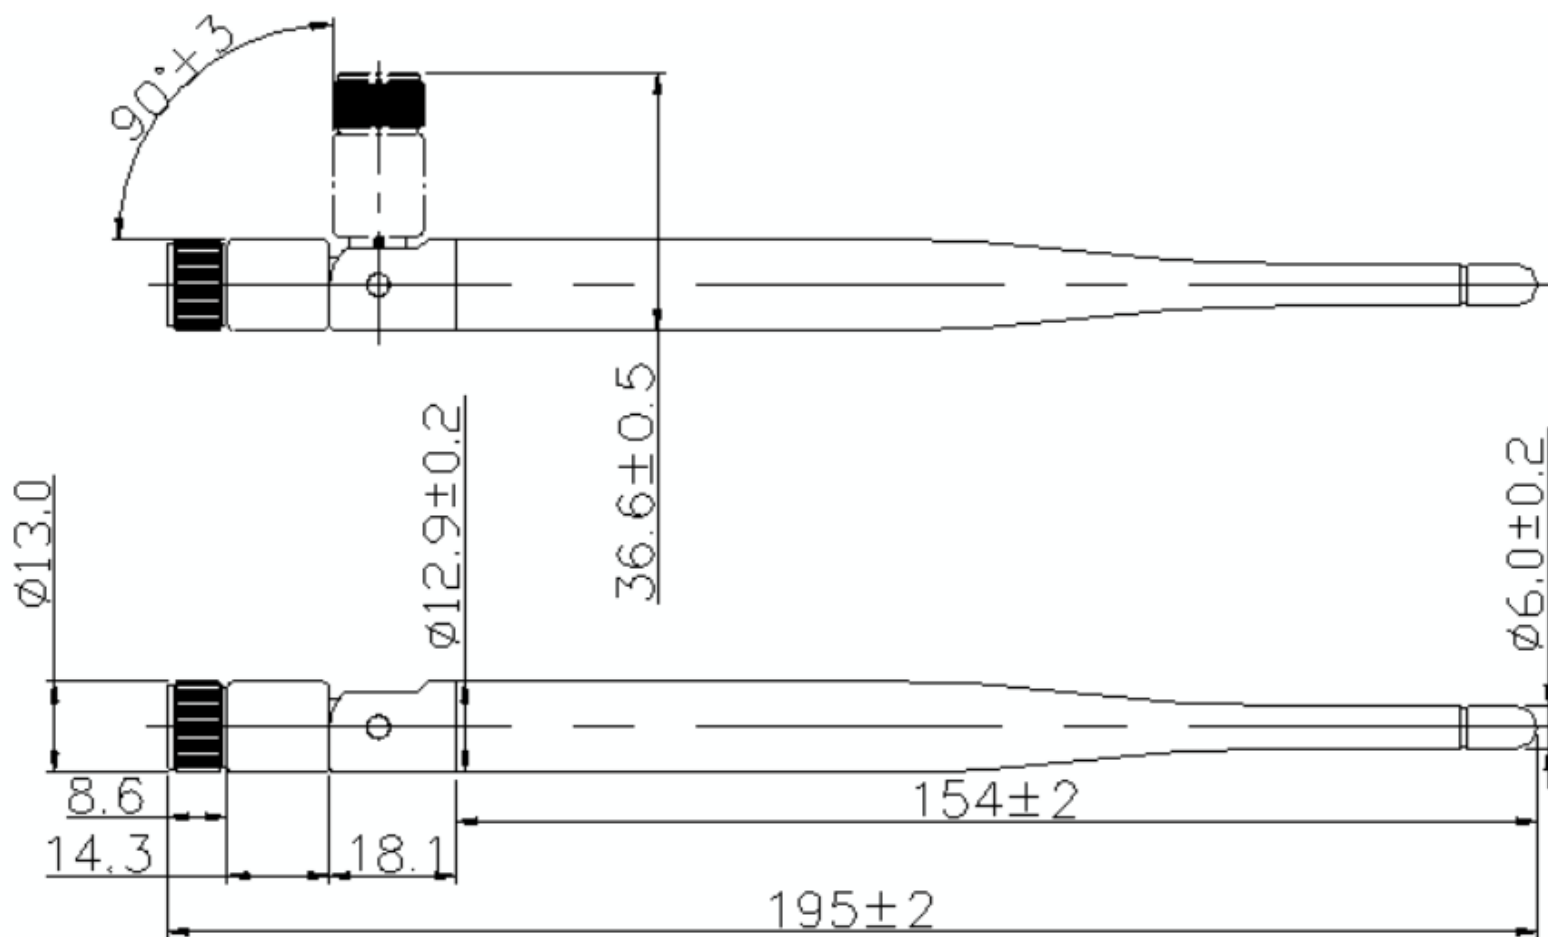


All dimensions are in mm

TEST SETUP

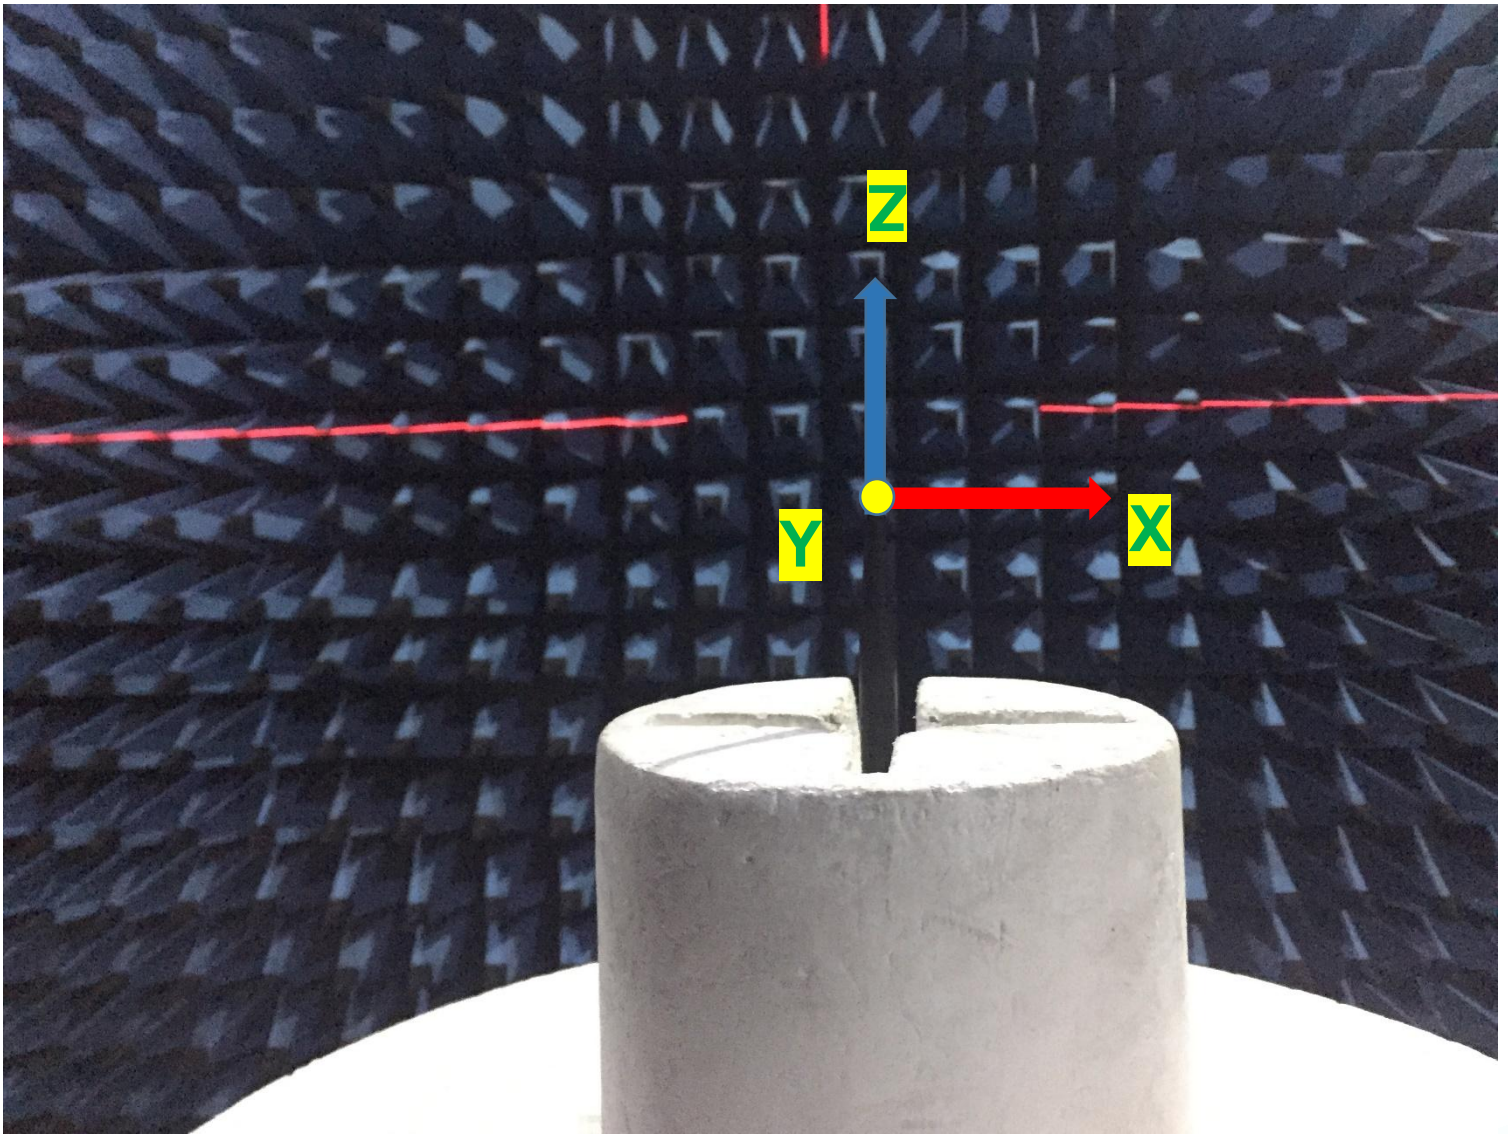


CHARTS

VSWR

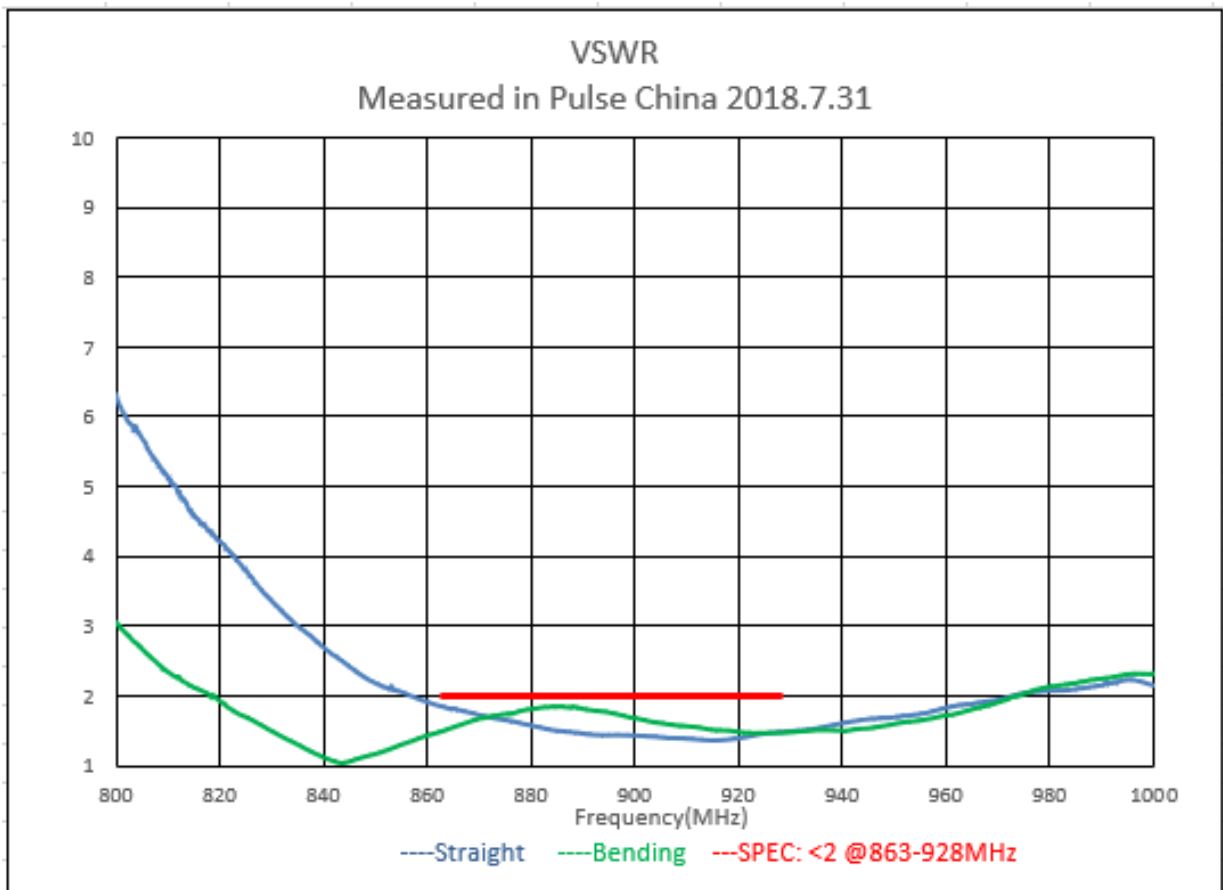


CHARTS

Efficiency(%)

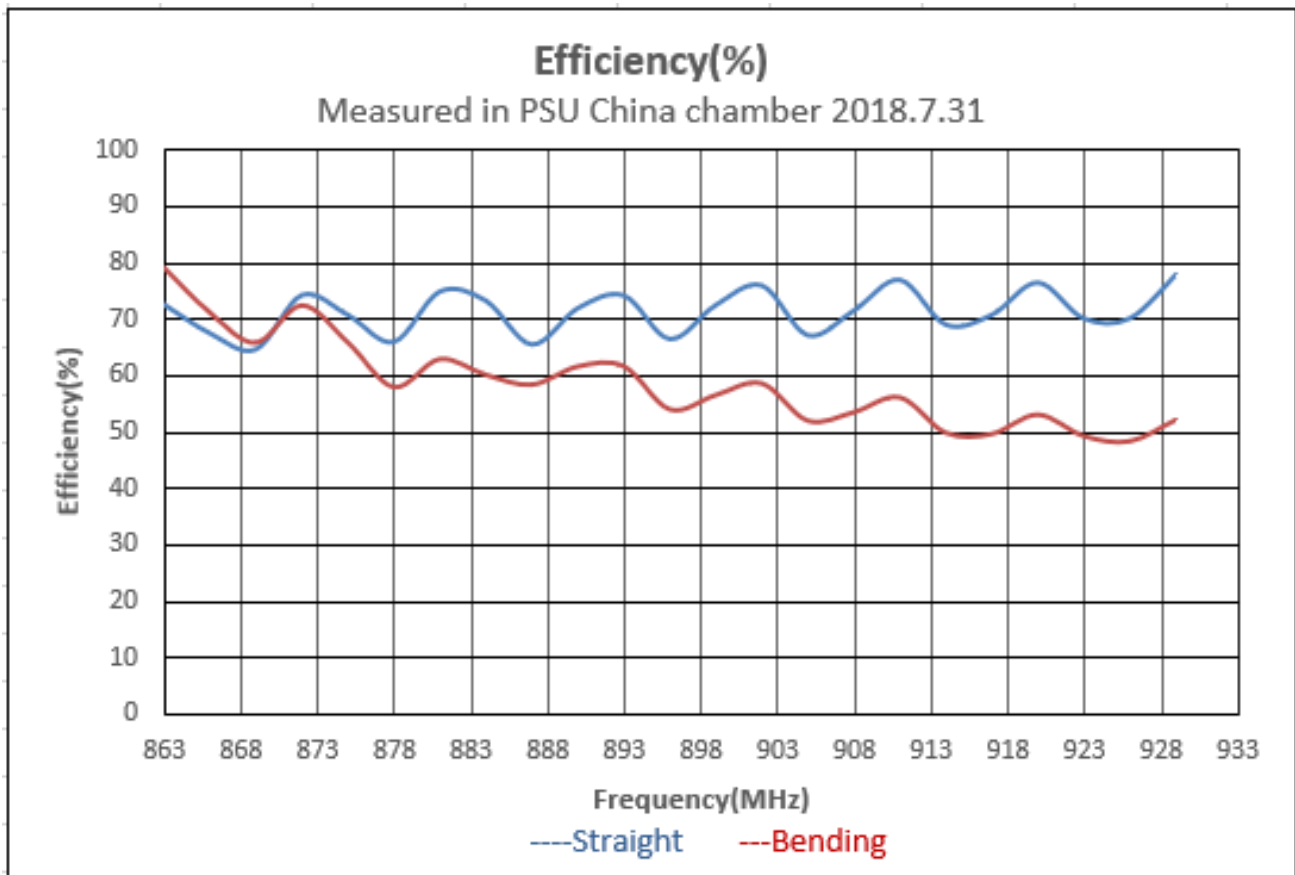


CHARTS

Peak Gain (dBi)

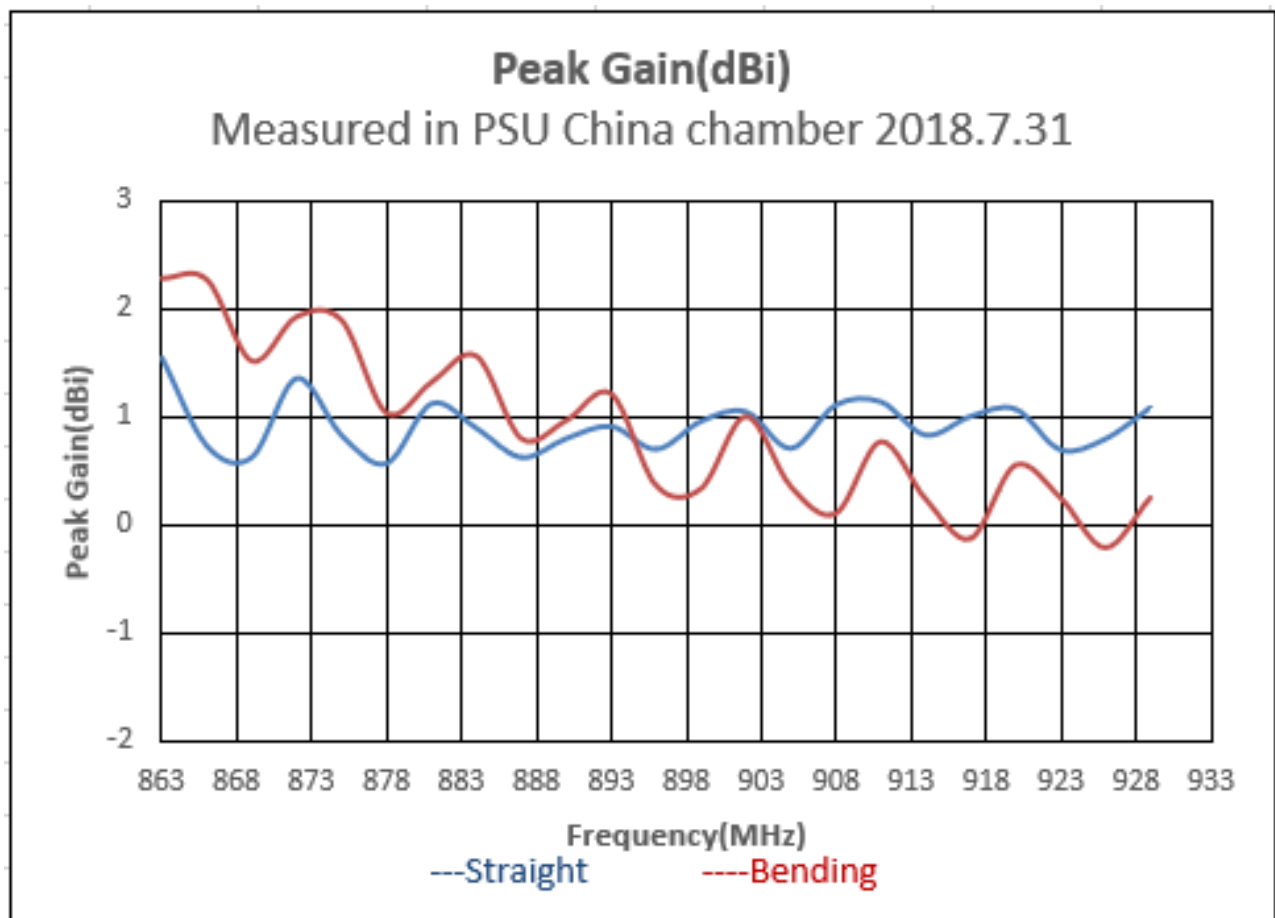


CHARTS

Free space radiation pattern

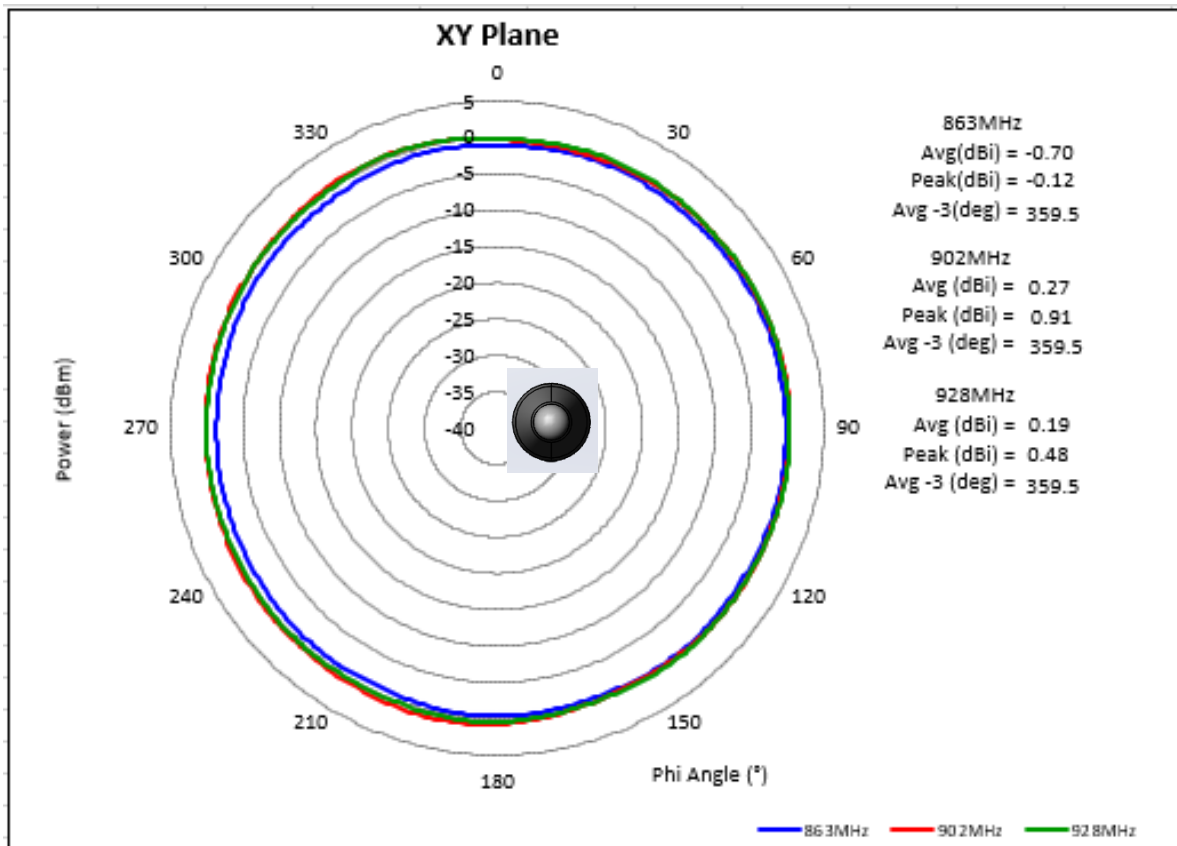


CHARTS

Free space radiation pattern

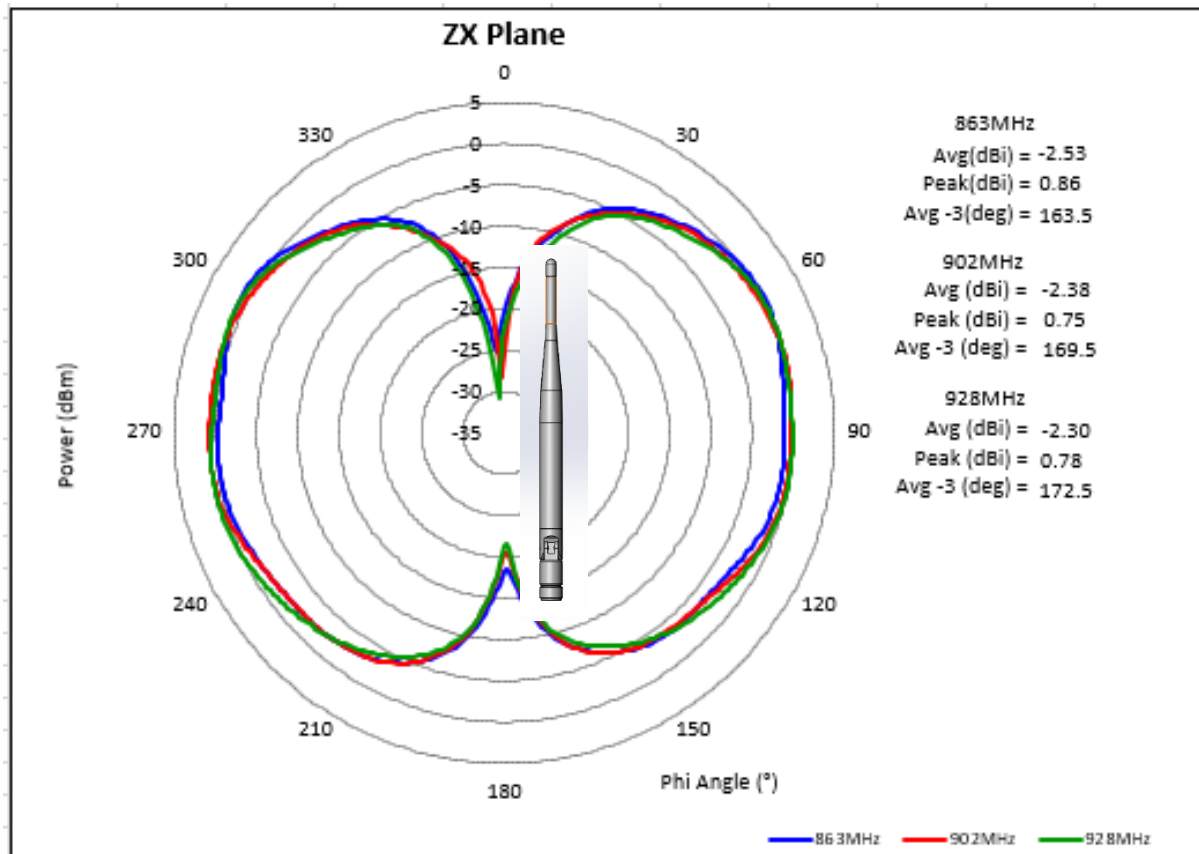

CHARTS

Free space radiation pattern

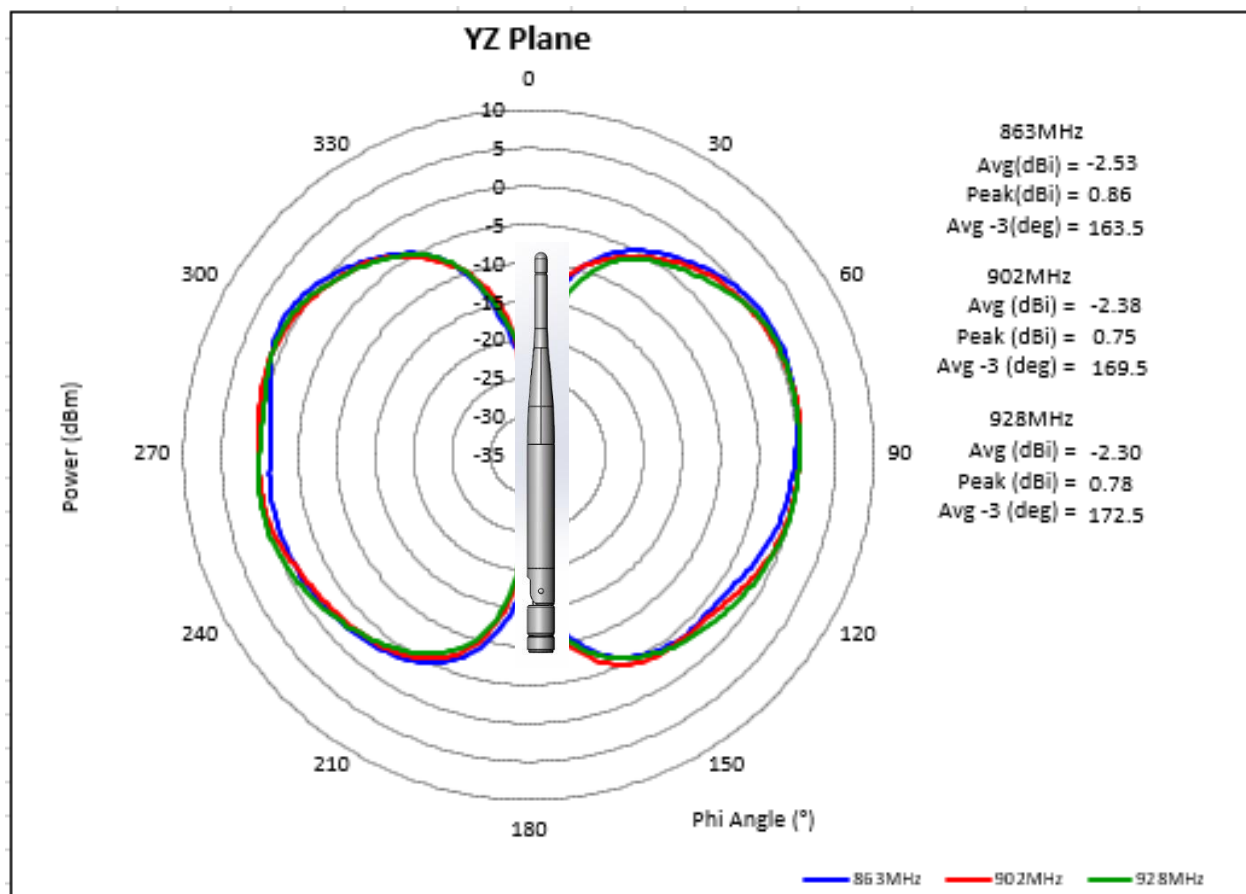

Series: Stick Antenna

Description: 868-928MHz Swivel Type
dipole antenna

PART NUMBER: W1063/ W1063M

PACKAGING

1PCS/PE BAG

250PCS/ carton box

Carton box dimensions (MM): 460x235x140