

Appendix A. Test Result of AC Power Line Conducted Emission

For Adapter

TX 916.983MHz Line

Site :HY-SR01
Condition :Line
Mode :TX 916.983MHz
test by :Neko

Level (dBuV)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)

Conduction(QP)
Conduction(AV)

Date: 2025-12-24

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.161	58.23	65.40	-7.17	48.66	9.57	QP
2	0.161	36.84	55.40	-18.56	27.27	9.57	Average
3	0.325	48.50	59.58	-11.08	38.92	9.58	QP
4	0.325	28.05	49.58	-21.53	18.47	9.58	Average
5	0.457	37.41	56.75	-19.34	27.82	9.59	QP
6	0.457	19.55	46.75	-27.20	9.96	9.59	Average
7	0.661	29.59	56.00	-26.41	19.98	9.61	QP
8	0.661	11.32	46.00	-34.68	1.71	9.61	Average
9	5.313	24.67	60.00	-35.33	14.60	10.07	QP
10	5.313	17.71	50.00	-32.29	7.64	10.07	Average
11	23.281	30.59	60.00	-29.41	20.73	9.86	QP
12	23.281	25.21	50.00	-24.79	15.35	9.86	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX 916.983MHz Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX 916.983MHz
test by :Neko

Level (dBuV)

100
87.5
75.0
62.5
50.0
37.5
25.0
12.5

0.15 0.2 0.5 1 2 5 10 20 30

Frequency (MHz)

Conduction(QP)
Conduction(AV)

Date: 2025-12-24


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.159	57.48	65.53	-8.05	47.92	9.56	QP
2	0.159	40.06	55.53	-15.47	30.50	9.56	Average
3	0.295	49.03	60.38	-11.35	39.45	9.58	QP
4	0.295	27.08	50.38	-23.30	17.50	9.58	Average
5	0.460	37.42	56.69	-19.27	27.83	9.59	QP
6	0.460	22.64	46.69	-24.05	13.05	9.59	Average
7	0.657	28.64	56.00	-27.36	19.03	9.61	QP
8	0.657	12.10	46.00	-33.90	2.49	9.61	Average
9	2.429	24.58	56.00	-31.42	14.80	9.78	QP
10	2.429	6.25	46.00	-39.75	-3.53	9.78	Average
11	14.640	31.64	60.00	-28.36	21.77	9.87	QP
12	14.640	21.88	50.00	-28.12	12.01	9.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

For PoE

TX 916.983MHz Line

Site :HY-SR01
Condition :Line
Mode :TX 916.983MHz
test by :Neko

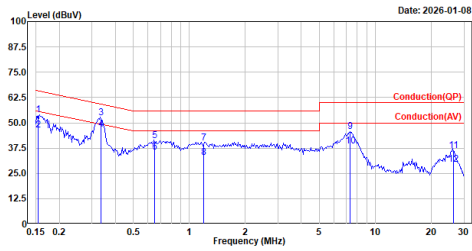


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.154	54.12	65.77	-11.65	44.55	9.57	QP
2	0.154	46.49	55.77	-9.28	36.92	9.57	Average
3	0.334	52.28	59.35	-7.07	42.70	9.58	QP
4	0.334	46.75	49.35	-2.60	37.17	9.58	Average
5	0.651	41.03	56.00	-14.97	31.42	9.61	QP
6	0.651	35.32	46.00	-10.68	25.71	9.61	Average
7	1.191	40.07	56.00	-15.93	30.43	9.64	QP
8	1.191	32.74	46.00	-13.26	23.10	9.64	Average
9	7.345	45.48	60.00	-14.52	35.36	10.12	QP
10	7.345	38.31	50.00	-11.69	28.19	10.12	Average
11	26.199	36.16	60.00	-23.84	26.33	9.83	QP
12	26.199	29.55	50.00	-20.45	19.72	9.83	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX 916.983MHz Neutral

Site :HY-SR01
Condition :Neutral
Mode :TX 916.983MHz
test by :Neko

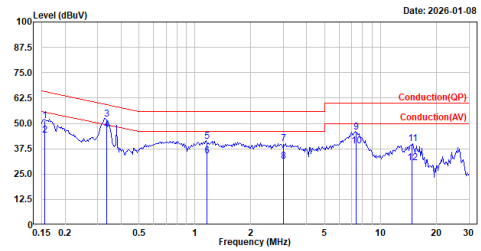


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	Line	Limit	Level	dB	
1	0.156	51.43	65.66	-14.23	41.87	9.56	QP
2	0.156	44.31	55.66	-11.35	34.75	9.56	Average
3	0.336	52.25	59.31	-7.06	42.67	9.58	QP
4	0.336	46.74	49.31	-2.57	37.16	9.58	Average
5	1.164	41.21	56.00	-14.79	31.57	9.64	QP
6	1.164	34.10	46.00	-11.90	24.46	9.64	Average
7	2.991	40.09	56.00	-15.91	30.23	9.86	QP
8	2.991	31.22	46.00	-14.78	21.36	9.86	Average
9	7.362	45.82	60.00	-14.18	35.66	10.16	QP
10	7.362	38.83	50.00	-11.17	28.67	10.16	Average
11	14.810	39.90	60.00	-20.10	30.03	9.87	QP
12	14.810	30.70	50.00	-19.30	20.83	9.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	907.065	592	0.50	Pass
	916.983	590	0.50	Pass
	926.901	590	0.50	Pass

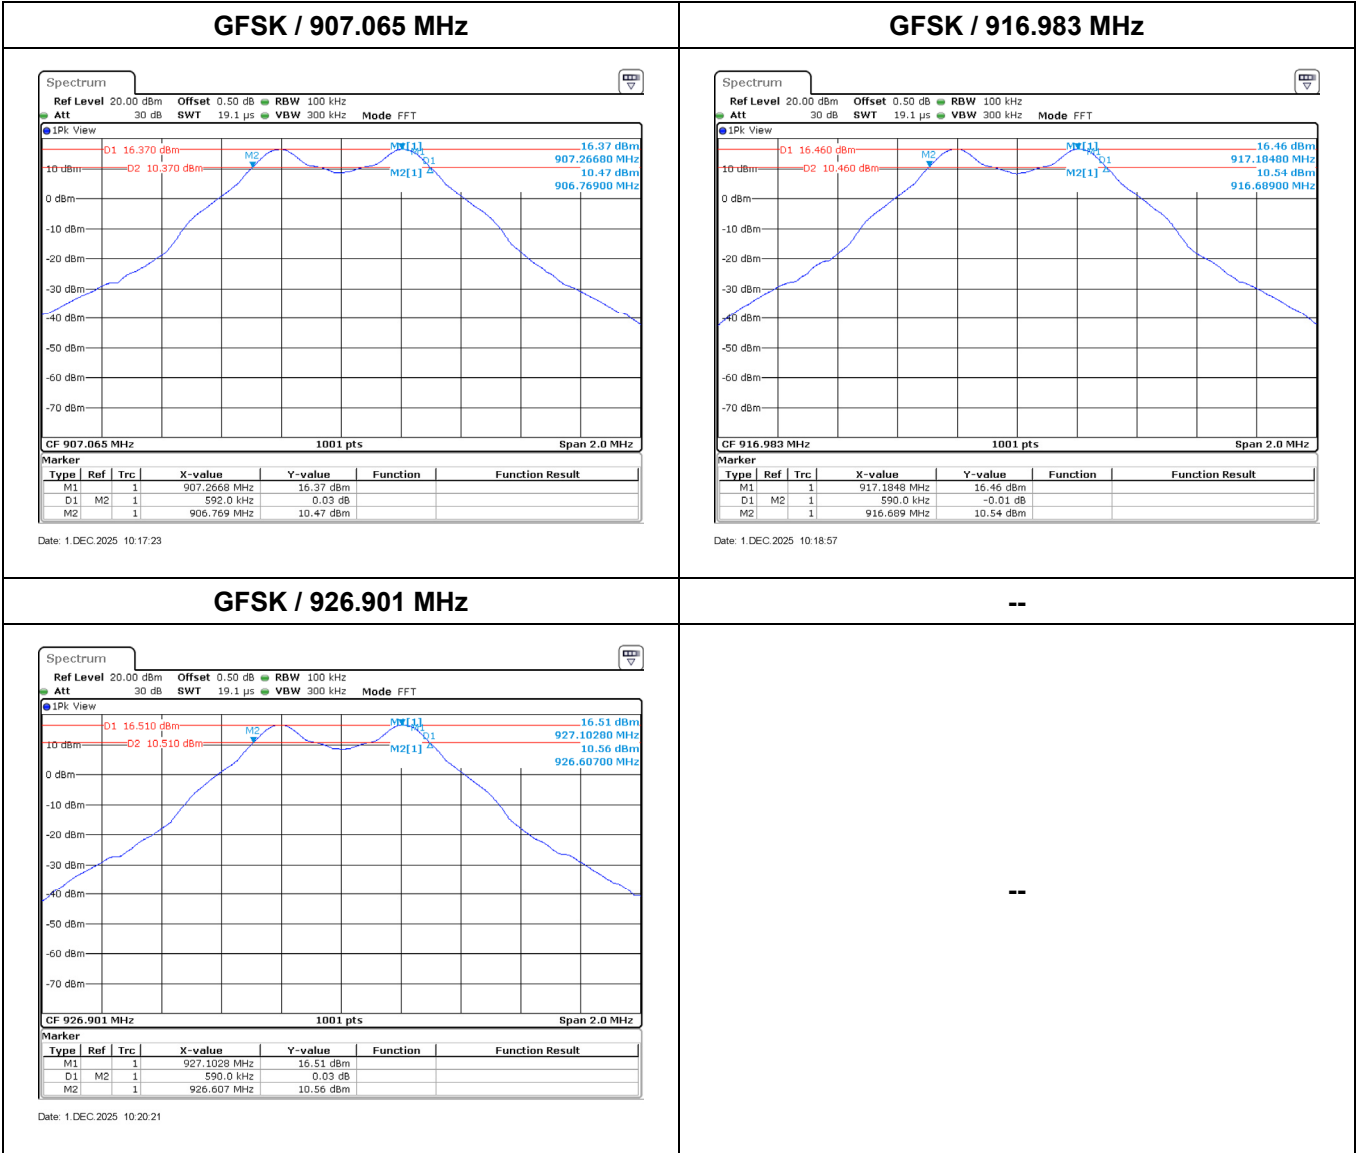


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	907.065	16.95	28.00	Pass
	916.983	16.97	28.00	Pass
	926.901	16.95	28.00	Pass


Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Measure Value (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK	907.065	5.75	6.00	Pass
	916.983	5.71	6.00	Pass
	926.901	5.95	6.00	Pass

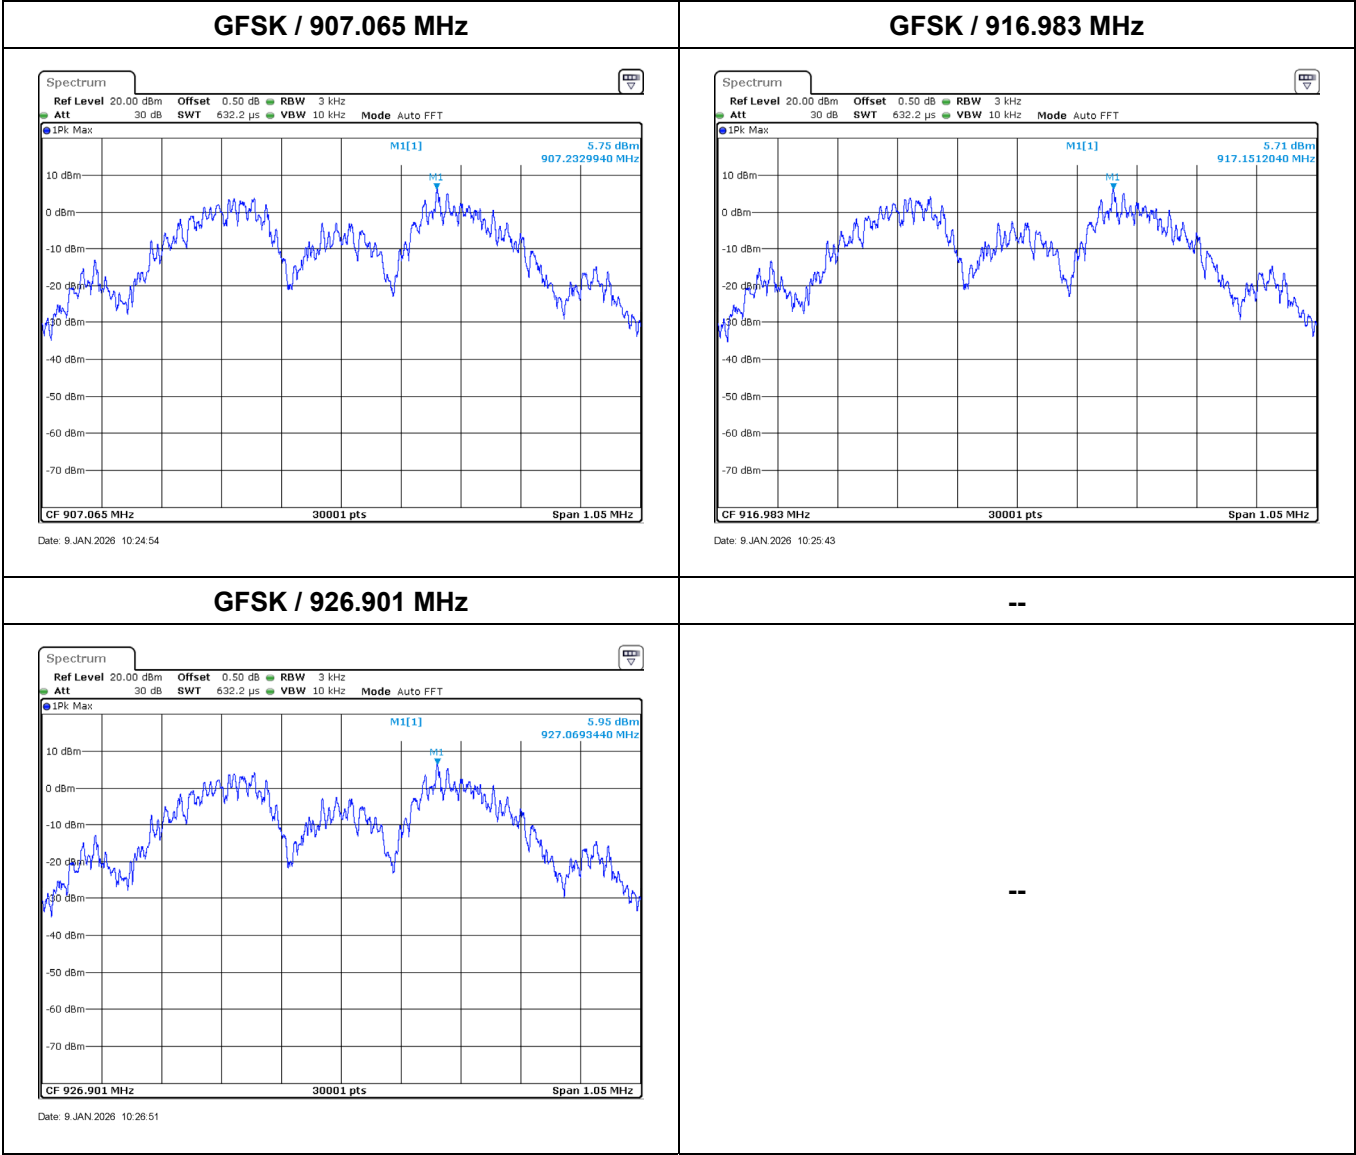

Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK	> 20	PASS

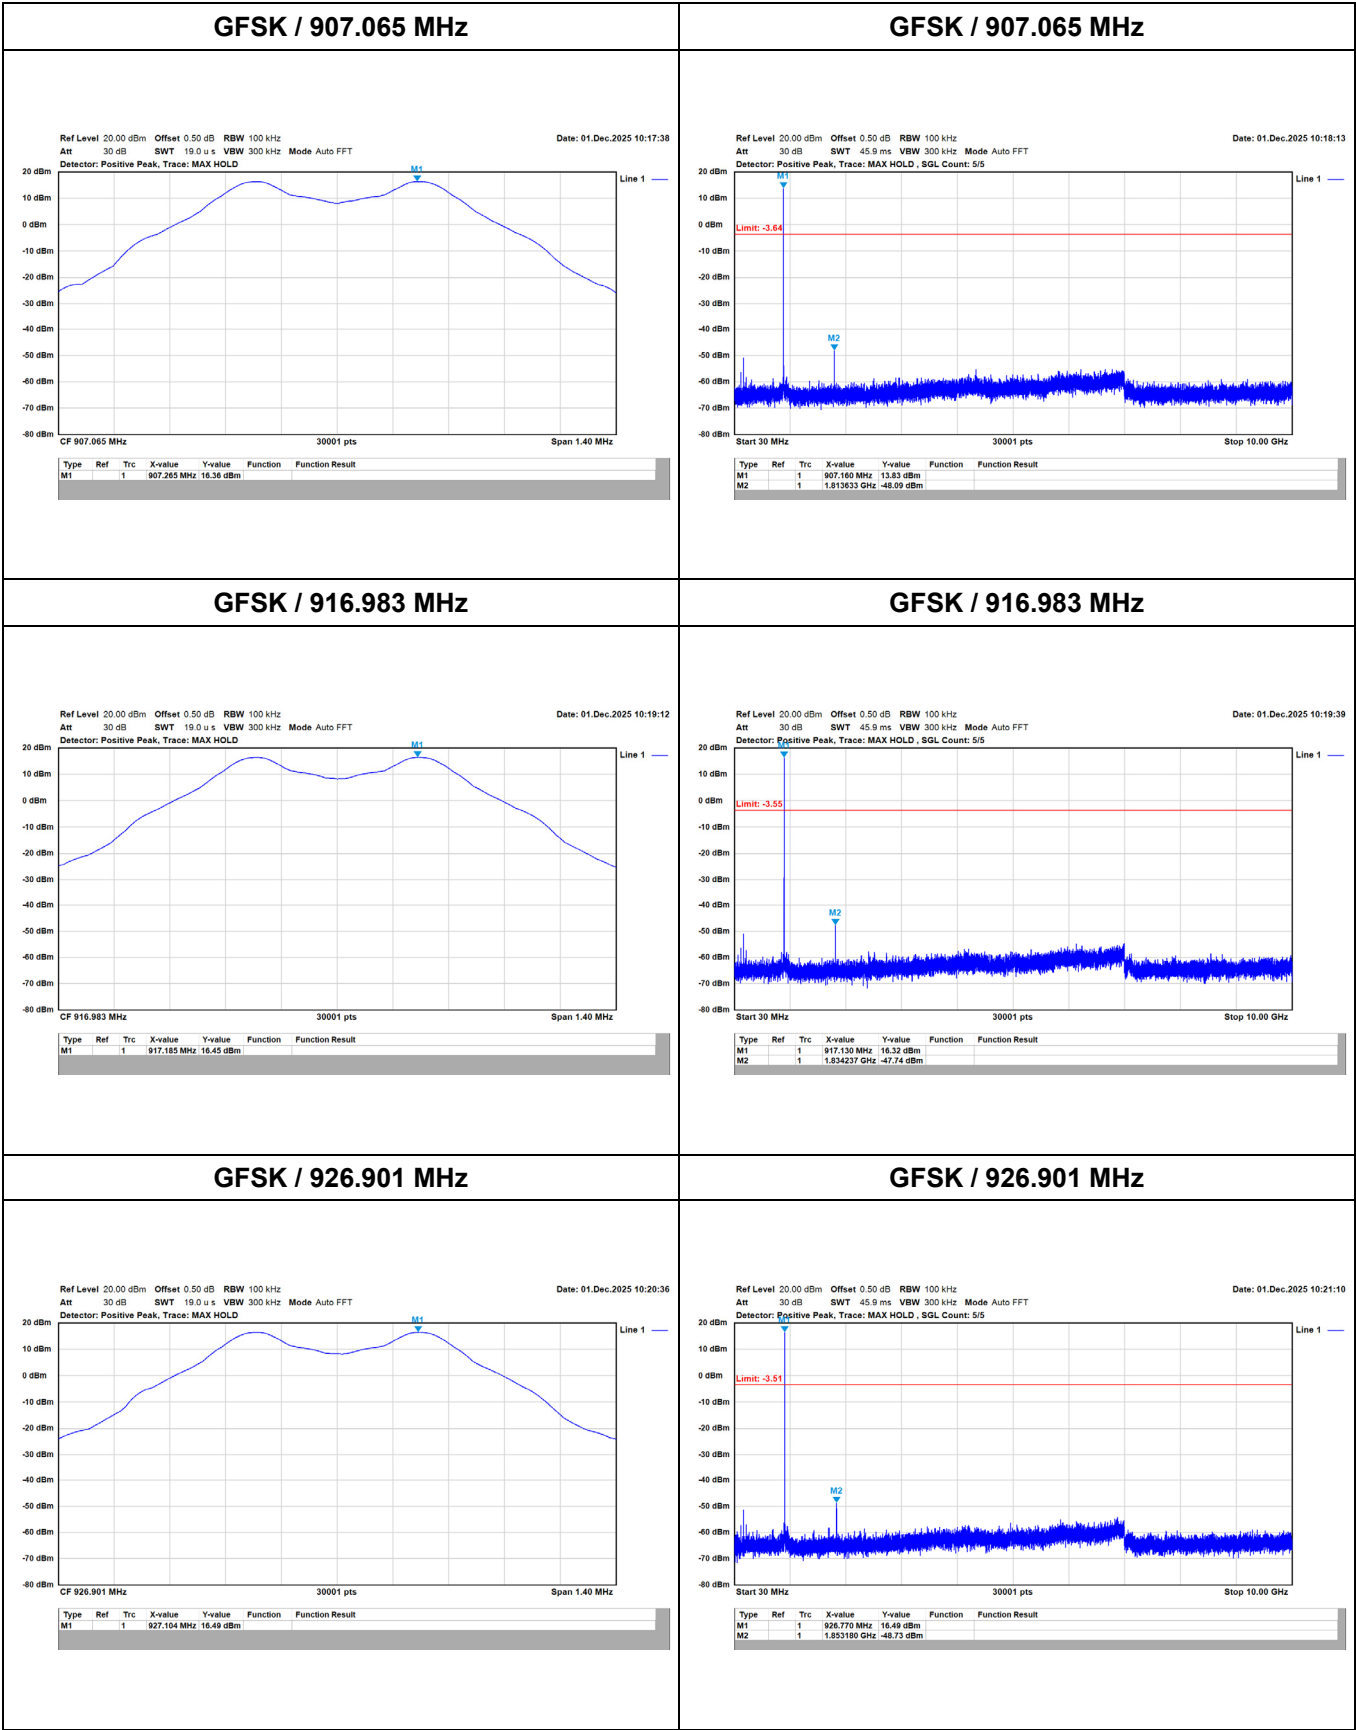

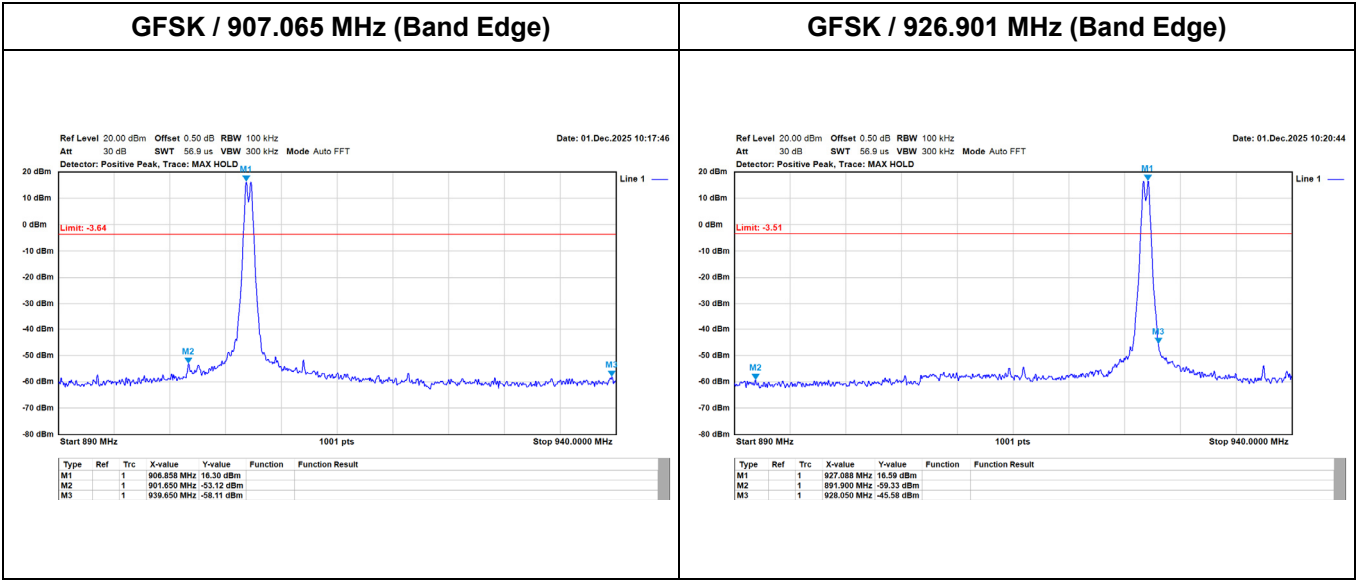


Appendix F. Test Result of Radiated Emission

Dipole

TX 907.065MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Ashton

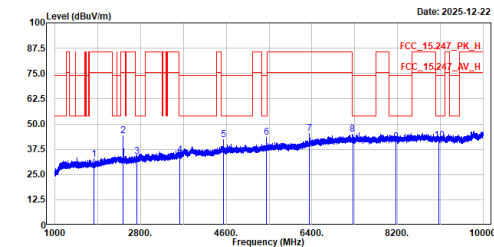


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1814.130	32.41	85.59	-53.18	57.78	-25.37	Peak
2	2434.790	44.27	85.59	-41.32	68.01	-23.74	Peak
3	2721.195	33.78	74.00	-40.22	56.52	-22.74	Peak
4	3628.260	34.77	74.00	-39.23	54.83	-20.06	Peak
5	4535.325	42.31	74.00	-31.69	58.43	-16.12	Peak
6	5442.390	43.47	74.00	-30.53	56.69	-13.22	Peak
7	6349.455	45.29	85.59	-40.30	54.54	-9.25	Peak
8	7256.520	45.00	74.00	-29.00	52.14	-7.14	Peak
9	8163.585	41.17	74.00	-32.83	48.75	-7.58	Peak
10	9070.650	42.03	74.00	-31.97	48.75	-6.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX 907.065MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Ashton

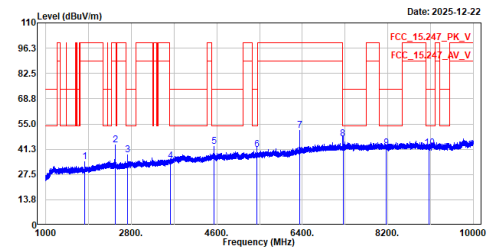


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1814.130	34.64	99.29	-64.65	60.01	-25.37	Peak
2	2434.791	43.54	99.29	-55.75	67.26	-23.72	Peak
3	2721.195	38.13	74.00	-35.87	60.87	-22.74	Peak
4	3628.260	34.69	74.00	-39.31	54.75	-20.06	Peak
5	4535.325	42.57	74.00	-31.43	58.69	-16.12	Peak
6	5442.390	41.15	74.00	-32.85	54.37	-13.22	Peak
7	6349.455	51.35	99.29	-47.94	60.60	-9.25	Peak
8	7256.520	45.70	74.00	-27.30	53.64	-7.14	Peak
9	8163.585	41.98	74.00	-32.02	49.56	-7.58	Peak
10	9070.650	42.09	74.00	-31.91	48.81	-6.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX 916.983MHz H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Ashton

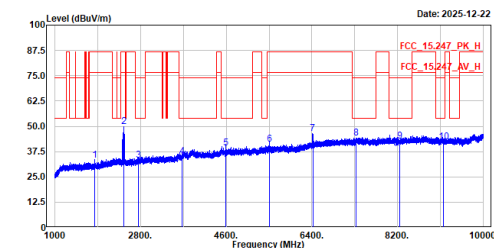


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1833.966	33.36	86.72	-53.36	58.59	-25.23	Peak
2	2440.540	49.96	86.72	-36.76	73.75	-23.79	Peak
3	2750.949	33.14	74.00	-40.86	55.84	-22.70	Peak
4	3667.932	34.99	74.00	-39.01	54.68	-19.69	Peak
5	4584.915	39.10	74.00	-34.90	55.05	-15.95	Peak
6	5501.898	41.00	86.72	-45.72	54.21	-13.21	Peak
7	6418.881	46.39	86.72	-40.33	55.04	-8.65	Peak
8	7335.864	44.07	74.00	-29.93	50.97	-6.90	Peak
9	8252.847	42.76	74.00	-31.24	50.14	-7.38	Peak
10	9169.830	42.43	74.00	-31.57	49.35	-6.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX 916.983MHz V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Ashton

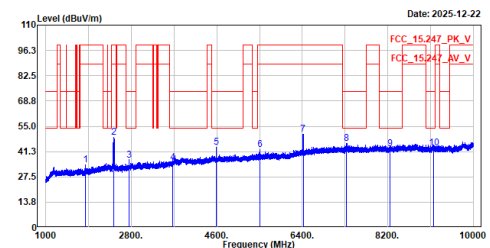


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1833.966	33.95	99.03	-65.08	59.18	-25.23	Peak
2	2436.790	48.91	99.03	-50.12	72.66	-23.75	Peak
3	2750.949	36.40	74.00	-37.60	59.10	-22.70	Peak
4	3667.932	35.13	74.00	-38.87	54.82	-19.69	Peak
5	4584.915	43.74	74.00	-30.26	59.69	-15.95	Peak
6	5501.898	42.25	99.03	-56.78	55.46	-13.21	Peak
7	6418.881	50.73	99.03	-48.30	59.38	-8.65	Peak
8	7335.864	45.76	74.00	-28.24	52.66	-6.90	Peak
9	8252.847	42.67	74.00	-31.33	50.85	-7.38	Peak
10	9169.830	43.00	74.00	-31.00	49.92	-6.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Ashton

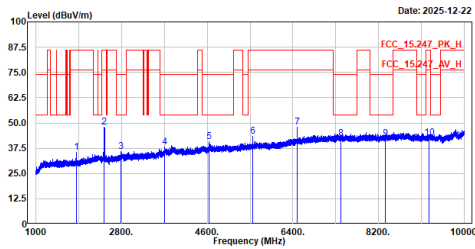


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1853.802	35.31	86.18	-50.87	60.45	-25.14	Peak
2	2438.790	48.06	86.18	-38.12	71.83	-23.77	Peak
3	2780.703	35.71	74.00	-38.29	58.09	-22.38	Peak
4	3707.604	38.18	74.00	-35.82	57.49	-19.31	Peak
5	4634.505	40.64	74.00	-33.36	56.34	-15.70	Peak
6	5561.406	43.23	86.18	-42.95	55.93	-12.70	Peak
7	6488.307	47.96	86.18	-38.22	56.43	-8.47	Peak
8	7415.208	42.33	74.00	-31.67	49.27	-6.94	Peak
9	8342.109	42.11	74.00	-31.89	49.35	-7.24	Peak
10	9269.010	42.53	86.18	-43.65	49.46	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Ashton

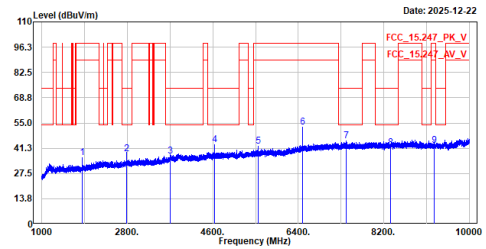

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1853.802	35.95	98.33	-62.38	61.09	-25.14	Peak
2	2780.703	38.14	74.00	-35.86	60.52	-22.38	Peak
3	3707.604	36.95	74.00	-37.05	56.26	-19.31	Peak
4	4634.505	43.32	74.00	-30.68	59.02	-15.70	Peak
5	5561.406	42.37	98.33	-55.96	55.07	-12.70	Peak
6	6488.307	52.61	98.33	-45.72	61.08	-8.47	Peak
7	7415.208	45.33	74.00	-28.67	52.27	-6.94	Peak
8	8342.109	41.66	74.00	-32.34	48.90	-7.24	Peak
9	9269.010	42.78	98.33	-55.55	49.71	-6.93	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

For Adapter

TX_907.065MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Rock

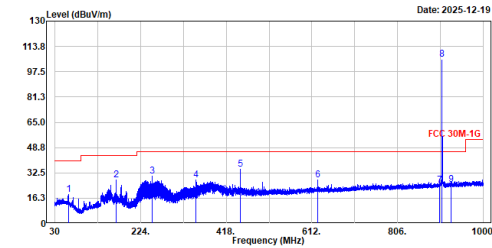


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	60.167	18.40	40.00	-21.60	42.74	-24.34	QP
2	168.031	28.05	43.50	-15.45	52.47	-24.42	QP
3	249.996	30.52	46.00	-15.48	55.53	-25.01	QP
4	350.003	28.14	46.00	-17.86	50.26	-22.12	QP
5	450.010	34.80	46.00	-11.20	53.93	-19.13	QP
6	625.095	27.97	46.00	-18.03	43.32	-15.35	QP
7	902.000	24.59	46.00	-21.41	36.33	-11.74	QP
8	907.065	105.59	-----	-----	117.21	-11.62	QP
9	928.000	24.79	46.00	-21.21	35.99	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_907.065MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Rock

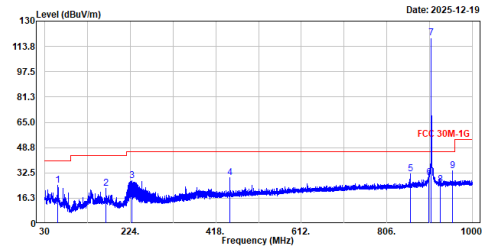


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	24.75	40.00	-15.25	49.02	-24.27	QP
2	168.031	22.75	43.50	-20.75	47.17	-24.42	QP
3	227.395	27.31	46.00	-18.69	53.73	-26.42	QP
4	450.010	29.41	46.00	-16.59	48.54	-19.13	QP
5	859.350	32.01	46.00	-13.99	44.15	-12.14	QP
6	902.000	29.46	46.00	-16.54	41.20	-11.74	QP
7	907.065	119.29	-----	-----	130.91	-11.62	QP
8	928.000	25.19	46.00	-20.81	36.39	-11.20	QP
9	954.895	34.06	46.00	-11.94	44.80	-10.74	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_916.983MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Rock

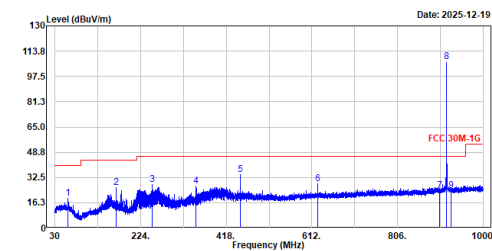


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	19.17	40.00	-20.83	43.44	-24.27	QP
2	168.031	25.94	43.50	-17.56	50.36	-24.42	QP
3	249.996	27.94	46.00	-18.06	52.95	-25.01	QP
4	350.003	26.90	46.00	-19.10	49.02	-22.12	QP
5	450.010	34.57	46.00	-11.43	53.70	-19.13	QP
6	625.095	28.33	46.00	-17.67	43.68	-15.35	QP
7	902.000	23.80	46.00	-22.20	35.54	-11.74	QP
8	916.983	106.72	-----	-----	118.11	-11.39	QP
9	928.000	23.99	46.00	-22.01	35.19	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_916.983MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Rock

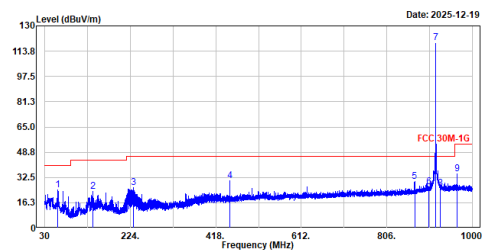


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	60.070	24.72	40.00	-15.28	49.02	-24.30	QP
2	138.543	23.47	43.50	-20.03	48.08	-24.61	QP
3	230.596	25.98	46.00	-20.02	52.81	-26.03	QP
4	450.010	30.47	46.00	-15.53	49.60	-19.13	QP
5	869.244	30.11	46.00	-15.89	42.28	-12.17	QP
6	902.000	26.31	46.00	-19.69	38.05	-11.74	QP
7	916.983	119.03	-----	-----	130.42	-11.39	QP
8	928.000	25.41	46.00	-20.59	36.61	-11.20	QP
9	965.274	34.78	54.00	-19.22	45.50	-10.72	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Rock

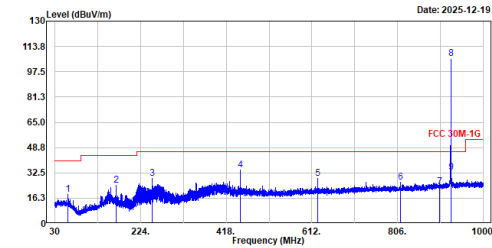


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	18.67	40.00	-21.33	42.94	-24.27	QP
2	168.031	24.65	43.50	-18.85	49.07	-24.42	QP
3	249.996	28.74	46.00	-17.26	53.75	-25.01	QP
4	450.010	34.49	46.00	-11.51	53.62	-19.13	QP
5	625.095	29.05	46.00	-16.95	44.40	-15.35	QP
6	812.693	26.39	46.00	-19.61	39.07	-12.68	QP
7	902.000	23.64	46.00	-22.36	35.38	-11.74	QP
8	926.901	106.18	-----	-----	117.38	-11.20	QP
9	928.000	32.76	46.00	-13.24	43.96	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Rock

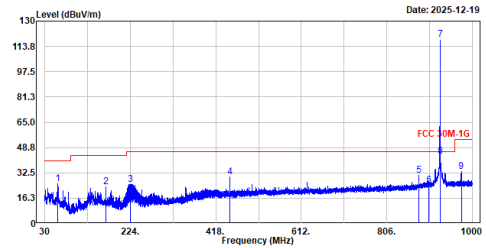

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	25.41	40.00	-14.59	49.68	-24.27	QP
2	168.031	23.36	43.50	-20.14	47.78	-24.42	QP
3	224.000	25.09	46.00	-20.91	51.82	-26.73	QP
4	450.010	30.00	46.00	-16.00	49.13	-19.13	QP
5	879.235	30.81	46.00	-15.19	42.78	-11.97	QP
6	902.000	24.39	46.00	-21.61	36.13	-11.74	QP
7	926.901	118.33	-----	-----	129.53	-11.20	QP
8	928.000	43.01	46.00	-2.99	54.21	-11.20	QP
9	975.168	33.32	54.00	-20.68	43.95	-10.63	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

For PoE

TX_907.065MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Rock

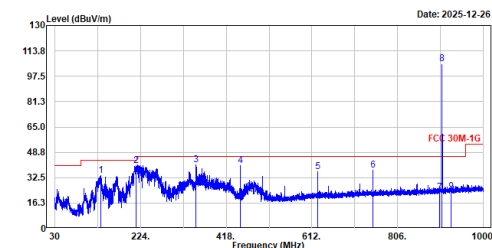


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	133.596	33.76	43.50	-9.74	58.93	-25.17	QP
2	213.718	40.21	43.50	-3.29	66.88	-26.67	QP
3	350.003	40.65	46.00	-5.35	62.77	-22.12	QP
4	450.010	40.21	46.00	-5.79	59.34	-19.13	QP
5	625.095	36.37	46.00	-9.63	51.72	-15.35	QP
6	750.128	37.17	46.00	-8.83	50.37	-13.20	QP
7	902.000	22.86	46.00	-23.14	34.60	-11.74	QP
8	907.065	105.24	-----	-----	116.86	-11.62	QP
9	928.000	23.79	46.00	-22.21	34.99	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_907.065MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Rock

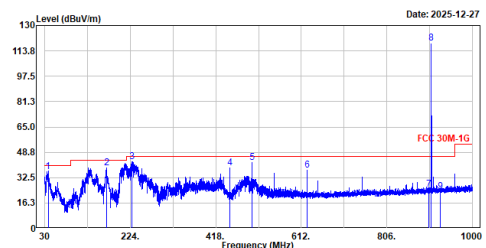


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	37.566	36.51	40.00	-3.49	60.93	-24.42	QP
2	170.747	38.82	43.50	-4.68	63.39	-24.57	QP
3	228.365	42.82	46.00	-3.18	69.13	-26.31	QP
4	450.010	38.84	46.00	-7.16	57.97	-19.13	QP
5	500.062	41.97	46.00	-4.03	60.38	-18.41	QP
6	625.095	37.05	46.00	-8.95	52.40	-15.35	QP
7	902.000	25.00	46.00	-21.00	36.74	-11.74	QP
8	907.065	118.94	-----	-----	130.56	-11.62	QP
9	928.000	23.53	46.00	-22.47	34.73	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 916.983MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Rock

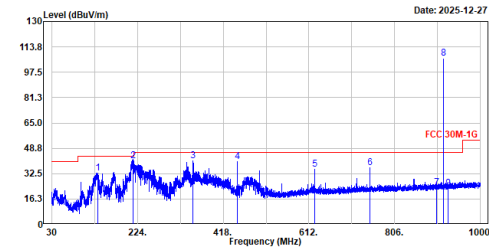


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	133.984	32.97	43.50	-10.53	58.05	-25.08	QP
2	214.397	40.48	43.50	-3.02	67.14	-26.66	QP
3	350.003	40.71	46.00	-5.29	62.83	-22.12	QP
4	450.010	40.35	46.00	-5.65	59.48	-19.13	QP
5	625.095	35.09	46.00	-10.91	50.44	-15.35	QP
6	750.128	36.25	46.00	-9.75	49.45	-13.20	QP
7	902.000	23.36	46.00	-22.64	35.10	-11.74	QP
8	916.983	106.52	-----	-----	117.91	-11.39	QP
9	928.000	22.93	46.00	-23.07	34.13	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 916.983MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Rock

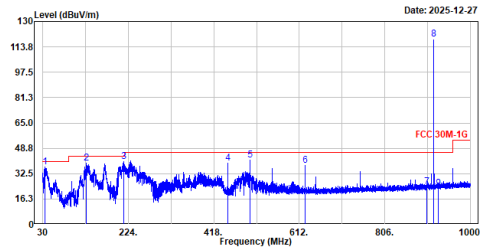


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	35.626	36.59	40.00	-3.41	61.29	-24.70	QP
2	128.843	39.10	43.50	-4.40	64.76	-25.66	QP
3	213.039	39.99	43.50	-3.51	66.66	-26.67	QP
4	450.010	39.09	46.00	-6.91	58.22	-19.13	QP
5	500.062	40.98	46.00	-5.02	59.39	-18.41	QP
6	625.095	37.96	46.00	-8.04	53.31	-15.35	QP
7	902.000	23.91	46.00	-22.09	35.65	-11.74	QP
8	916.983	118.74	-----	-----	130.13	-11.39	QP
9	928.000	22.84	46.00	-23.16	34.04	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Rock

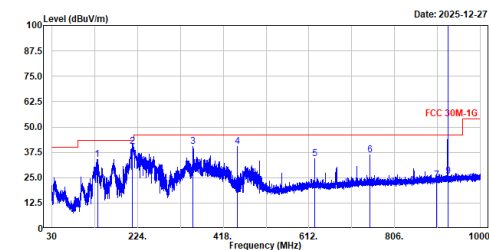


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	133.014	34.03	43.50	-9.47	59.32	-25.29	QP
2	212.651	40.46	43.50	-3.04	67.13	-26.67	QP
3	350.003	40.22	46.00	-5.78	62.34	-22.12	QP
4	450.010	40.40	46.00	-5.60	59.53	-19.13	QP
5	625.095	34.23	46.00	-11.77	49.58	-15.35	QP
6	750.128	36.31	46.00	-9.69	49.51	-13.20	QP
7	902.000	23.86	46.00	-22.14	35.60	-11.74	QP
8	926.901	105.84	-----	-----	117.04	-11.20	QP
9	928.000	25.76	46.00	-20.24	36.96	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Rock

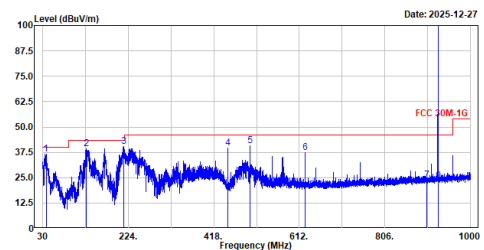


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	37.566	36.75	40.00	-3.25	61.17	-24.42	QP
2	128.261	39.11	43.50	-4.39	64.94	-25.83	QP
3	213.330	40.40	43.50	-3.10	67.07	-26.67	QP
4	450.010	39.48	46.00	-6.52	58.61	-19.13	QP
5	500.062	40.62	46.00	-5.38	59.03	-18.41	QP
6	625.095	37.50	46.00	-8.50	52.85	-15.35	QP
7	902.000	23.81	46.00	-22.19	35.55	-11.74	QP
8	926.901	118.04	-----	-----	129.24	-11.20	QP
9	928.000	23.54	46.00	-22.46	34.74	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Panel

TX_907.065MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Ashton

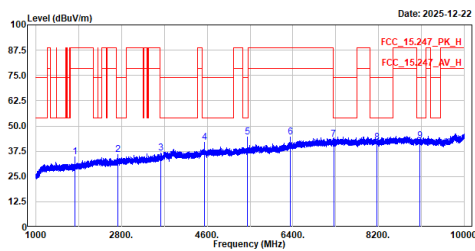


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1814.130	34.89	88.52	-53.63	60.26	-25.37	Peak
2	2721.195	35.91	74.00	-38.09	58.65	-22.74	Peak
3	3628.260	36.79	74.00	-37.21	56.85	-20.06	Peak
4	4535.325	41.91	74.00	-32.09	58.03	-16.12	Peak
5	5442.390	44.40	74.00	-29.60	57.62	-13.22	Peak
6	6349.455	44.72	88.52	-43.80	53.97	-9.25	Peak
7	7256.520	43.46	74.00	-30.54	50.60	-7.14	Peak
8	8163.585	41.94	74.00	-32.06	49.52	-7.58	Peak
9	9070.650	42.64	74.00	-31.36	49.36	-6.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_907.065MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Ashton

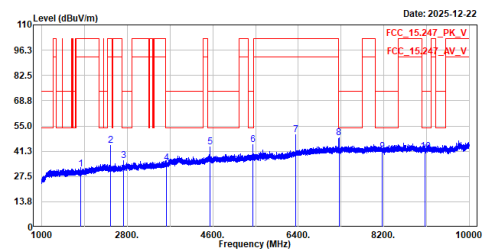


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1814.130	31.47	102.70	-71.23	56.84	-25.37	Peak
2	2448.540	44.38	102.70	-58.32	68.18	-23.80	Peak
3	2721.195	35.95	74.00	-38.05	58.69	-22.74	Peak
4	3628.260	34.81	74.00	-39.19	54.87	-20.06	Peak
5	4535.325	43.41	74.00	-30.59	59.53	-16.12	Peak
6	5442.390	44.71	74.00	-29.29	57.93	-13.22	Peak
7	6349.455	50.24	102.70	-52.46	59.49	-9.25	Peak
8	7256.520	40.50	74.00	-33.50	55.64	-7.14	Peak
9	8163.585	41.04	74.00	-32.96	48.62	-7.58	Peak
10	9070.650	41.28	74.00	-32.72	48.00	-6.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_916.983MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Ashton

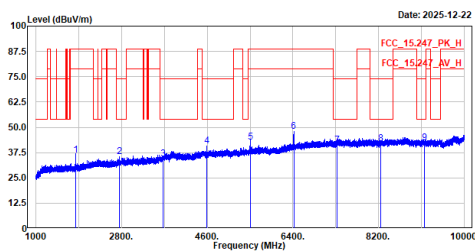


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1833.966	36.12	88.84	-52.72	61.35	-25.23	Peak
2	2750.949	35.52	74.00	-38.48	58.22	-22.70	Peak
3	3667.932	34.18	74.00	-39.82	53.67	-19.69	Peak
4	4584.915	40.73	74.00	-33.27	56.68	-15.95	Peak
5	5501.898	42.79	88.84	-46.05	56.00	-13.21	Peak
6	6418.881	47.93	88.84	-40.91	56.58	-8.65	Peak
7	7335.864	41.11	74.00	-32.89	48.01	-6.90	Peak
8	8252.847	42.02	74.00	-31.98	49.40	-7.38	Peak
9	9169.830	42.10	74.00	-31.90	49.02	-6.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_916.983MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Ashton

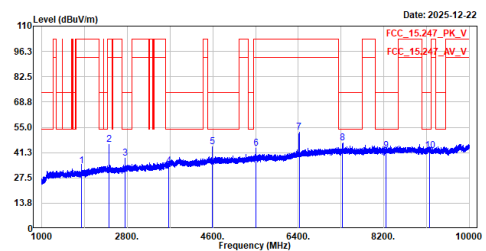


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	1833.966	34.00	103.09	-69.09	59.23	-25.23	Peak
2	2413.289	45.62	103.09	-57.47	69.19	-23.57	Peak
3	2750.949	38.28	74.00	-35.72	60.98	-22.70	Peak
4	3667.932	33.91	74.00	-40.09	53.60	-19.69	Peak
5	4584.915	44.34	74.00	-29.66	60.29	-15.95	Peak
6	5501.898	43.39	103.09	-59.70	56.60	-13.21	Peak
7	6418.881	52.49	103.09	-50.60	61.14	-8.65	Peak
8	7335.864	46.52	74.00	-27.48	53.42	-6.90	Peak
9	8252.847	42.33	74.00	-31.67	49.71	-7.38	Peak
10	9169.830	42.34	74.00	-31.66	49.26	-6.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Ashton

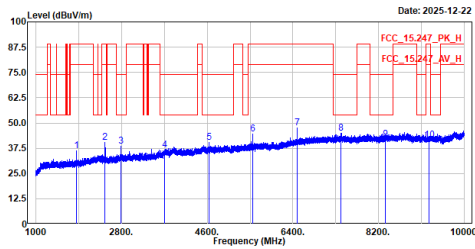


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1853.802	36.33	88.88	-52.55	61.47	-25.14	Peak
2	2453.040	40.45	88.88	-48.43	64.21	-23.76	Peak
3	2780.703	38.60	74.00	-35.40	60.98	-22.38	Peak
4	3707.604	36.48	74.00	-37.52	55.79	-19.31	Peak
5	4634.505	40.25	74.00	-33.75	55.95	-15.70	Peak
6	5561.406	44.54	88.88	-44.34	57.24	-12.70	Peak
7	6488.307	47.40	88.88	-41.48	55.87	-8.47	Peak
8	7415.208	44.97	74.00	-29.03	51.91	-6.94	Peak
9	8342.109	41.86	74.00	-32.14	49.10	-7.24	Peak
10	9269.010	41.68	88.88	-47.20	48.61	-6.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Ashton

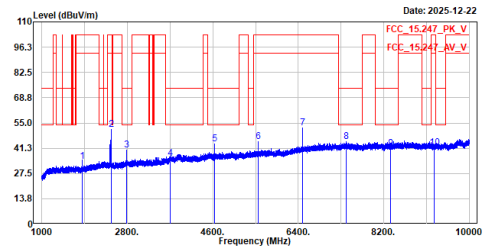

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	1853.802	34.09	102.78	-68.69	59.23	-25.14	Peak
2	2458.541	51.66	102.78	-51.12	75.37	-23.71	Peak
3	2780.703	40.36	74.00	-33.64	62.74	-22.38	Peak
4	3707.604	35.57	74.00	-38.43	54.88	-19.31	Peak
5	4634.505	43.46	74.00	-30.54	59.16	-15.70	Peak
6	5561.406	44.71	102.78	-58.07	57.41	-12.70	Peak
7	6488.307	52.14	102.78	-50.64	60.61	-8.47	Peak
8	7415.208	44.74	74.00	-29.26	51.68	-6.94	Peak
9	8342.109	41.30	74.00	-32.70	48.54	-7.24	Peak
10	9269.010	41.52	102.78	-61.26	48.45	-6.93	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

For Adapter

TX_907.065MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Rock

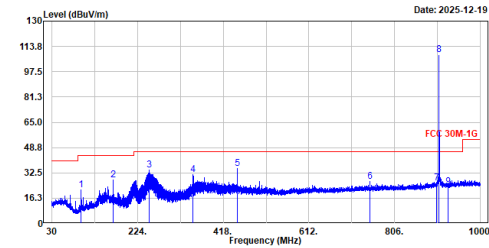


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	95.960	21.79	43.50	-21.71	50.90	-29.11	QP
2	168.031	28.01	43.50	-15.49	52.43	-24.42	QP
3	249.996	34.33	46.00	-11.67	59.34	-25.01	QP
4	350.003	31.42	46.00	-14.58	53.54	-22.12	QP
5	450.010	35.10	46.00	-10.90	54.23	-19.13	QP
6	750.128	27.07	46.00	-18.93	40.27	-13.20	QP
7	902.000	25.87	46.00	-20.13	37.61	-11.74	QP
8	907.065	108.52	-----	-----	120.14	-11.62	QP
9	928.000	23.69	46.00	-22.31	34.89	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_907.065MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Rock

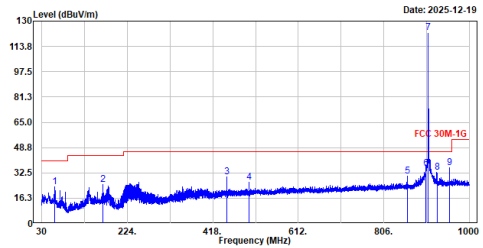


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.973	23.42	40.00	-16.58	47.69	-24.27	QP
2	168.031	24.79	43.50	-18.71	49.21	-24.42	QP
3	450.010	29.73	46.00	-16.27	48.86	-19.13	QP
4	500.062	26.31	46.00	-19.69	44.72	-18.41	QP
5	859.350	30.22	46.00	-15.78	42.36	-12.14	QP
6	902.000	35.50	46.00	-10.50	47.24	-11.74	QP
7	907.065	122.70	-----	-----	134.32	-11.62	QP
8	928.000	33.02	46.00	-12.98	44.22	-11.20	QP
9	955.380	35.92	46.00	-10.08	46.66	-10.74	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_916.983MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Rock

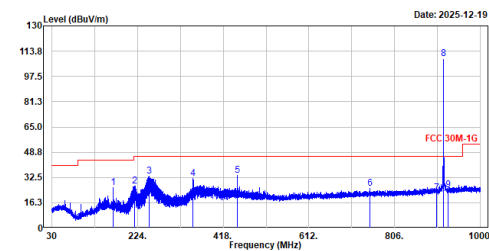


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	25.95	43.50	-17.55	50.37	-24.42	QP
2	216.434	27.06	46.00	-18.94	53.75	-26.69	QP
3	249.999	33.59	46.00	-12.41	58.60	-25.01	QP
4	350.003	31.69	46.00	-14.31	53.81	-22.12	QP
5	450.010	34.07	46.00	-11.93	53.20	-19.13	QP
6	750.128	25.60	46.00	-20.40	38.80	-13.20	QP
7	902.000	22.76	46.00	-23.24	34.50	-11.74	QP
8	916.983	108.84	-----	-----	120.23	-11.39	QP
9	928.000	24.77	46.00	-21.23	35.97	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_916.983MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Rock

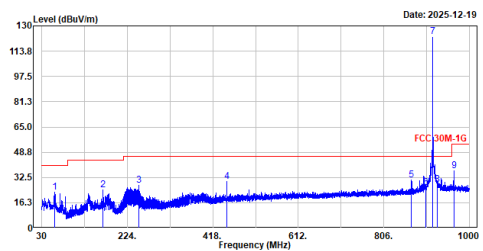


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.876	23.21	40.00	-16.79	47.49	-24.28	QP
2	168.031	24.46	43.50	-19.04	48.88	-24.42	QP
3	249.996	27.28	46.00	-18.72	52.29	-25.01	QP
4	450.010	29.92	46.00	-16.08	49.05	-19.13	QP
5	868.856	31.08	46.00	-14.92	43.25	-12.17	QP
6	902.000	25.99	46.00	-20.01	37.73	-11.74	QP
7	916.983	123.09	-----	-----	134.48	-11.39	QP
8	928.000	28.17	46.00	-17.83	39.37	-11.20	QP
9	964.886	36.61	54.00	-17.39	47.34	-18.73	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Rock

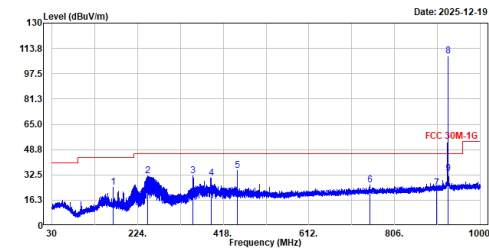


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	168.031	24.31	43.50	-19.19	48.73	-24.42	QP
2	246.601	31.66	46.00	-14.34	56.75	-25.09	QP
3	350.003	31.81	46.00	-14.19	53.93	-22.12	QP
4	390.064	30.61	46.00	-15.39	51.39	-20.78	QP
5	450.010	35.26	46.00	-10.74	54.39	-19.13	QP
6	750.031	26.02	46.00	-19.98	39.22	-13.20	QP
7	902.000	24.03	46.00	-21.97	35.77	-11.74	QP
8	926.901	108.88	-----	-----	120.08	-11.20	QP
9	928.000	33.45	46.00	-12.55	44.65	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Rock

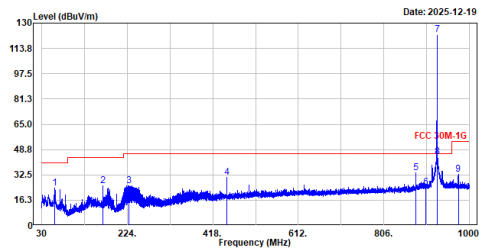

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	59.876	23.80	40.00	-16.20	48.08	-24.28	QP
2	168.031	25.41	43.50	-18.09	49.83	-24.42	QP
3	227.104	25.58	46.00	-20.42	52.04	-26.46	QP
4	450.010	31.08	46.00	-14.92	50.21	-19.13	QP
5	879.138	33.63	46.00	-12.37	45.60	-11.97	QP
6	902.000	24.66	46.00	-21.34	36.40	-11.74	QP
7	926.901	122.78	-----	-----	133.98	-11.20	QP
8	928.000	44.32	46.00	-1.68	55.52	-11.20	QP
9	975.168	32.95	54.00	-21.05	43.58	-10.63	QP


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

For PoE

TX_907.065MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_907.065MHz
Test BY :Rock

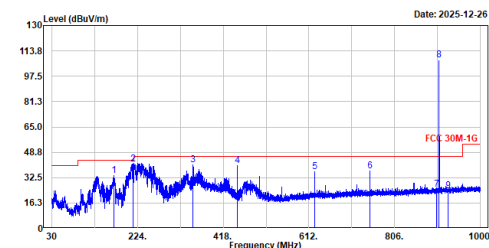


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	170.456	33.93	43.50	-9.57	58.48	-24.55	QP
2	213.621	41.34	43.50	-2.16	68.01	-26.67	QP
3	350.003	40.64	46.00	-5.36	62.76	-22.12	QP
4	450.010	40.21	46.00	-5.79	59.34	-19.13	QP
5	625.095	36.07	46.00	-9.93	51.42	-15.35	QP
6	750.128	36.74	46.00	-9.26	49.94	-13.20	QP
7	902.000	24.83	46.00	-21.17	36.57	-11.74	QP
8	907.065	108.03	-----	-----	119.64	-11.61	QP
9	928.000	24.13	46.00	-21.87	35.33	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_907.065MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_907.065MHz
Test BY :Rock

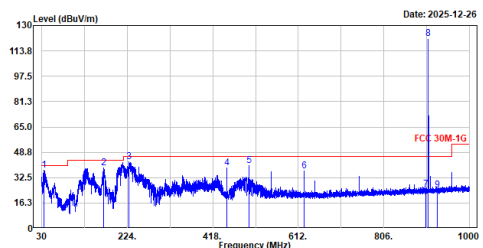


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.432	37.26	40.00	-2.74	62.00	-24.74	QP
2	170.747	38.56	43.50	-4.94	63.13	-24.57	QP
3	228.268	42.71	46.00	-3.29	69.03	-26.32	QP
4	450.010	38.92	46.00	-7.08	58.05	-19.13	QP
5	500.062	40.35	46.00	-5.65	58.76	-18.41	QP
6	625.095	36.65	46.00	-9.35	52.00	-15.35	QP
7	902.000	25.07	46.00	-20.93	36.81	-11.74	QP
8	907.065	121.89	-----	-----	133.50	-11.61	QP
9	928.000	24.75	46.00	-21.25	35.95	-11.20	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 916.983MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_916.983MHz
Test BY :Rock

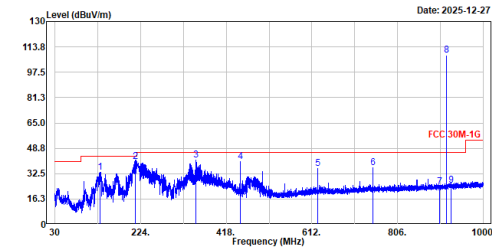


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	131.753	33.44	43.50	-10.06	58.79	-25.35	QP
2	211.875	40.25	43.50	-3.25	66.92	-26.67	QP
3	350.003	41.05	46.00	-4.95	63.17	-22.12	QP
4	450.010	40.42	46.00	-5.58	59.55	-19.13	QP
5	625.095	35.79	46.00	-10.21	51.14	-15.35	QP
6	750.128	36.27	46.00	-9.73	49.47	-13.20	QP
7	902.000	23.93	46.00	-22.07	35.67	-11.74	QP
8	916.983	108.24	-----	-----	119.63	-11.39	QP
9	928.000	24.79	46.00	-21.21	35.99	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 916.983MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_916.983MHz
Test BY :Rock

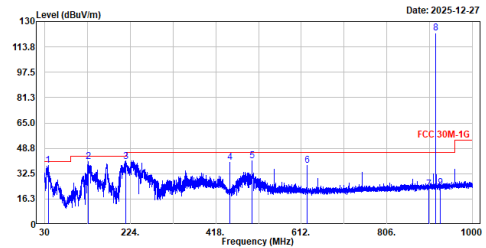


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	37.566	37.62	40.00	-2.38	62.04	-24.42	QP
2	128.358	40.00	43.50	-3.50	65.00	-25.00	QP
3	213.718	40.45	43.50	-3.05	67.12	-26.67	QP
4	450.010	39.57	46.00	-6.43	58.70	-19.13	QP
5	500.062	40.54	46.00	-5.46	58.95	-18.41	QP
6	625.095	37.99	46.00	-8.01	53.34	-15.35	QP
7	902.000	22.75	46.00	-23.25	34.49	-11.74	QP
8	916.983	122.48	-----	-----	133.86	-11.38	QP
9	928.000	23.52	46.00	-22.48	34.72	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 926.901MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_926.901MHz
Test BY :Rock

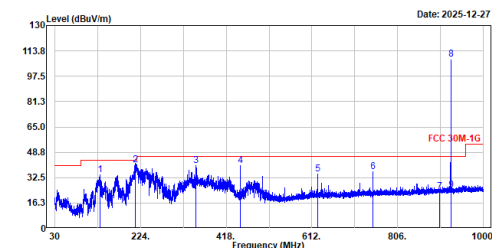


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	131.753	34.17	43.50	-9.33	59.52	-25.35	QP
2	212.166	40.48	43.50	-3.02	67.15	-26.67	QP
3	350.003	40.11	46.00	-5.89	62.23	-22.12	QP
4	450.010	40.39	46.00	-5.61	59.52	-19.13	QP
5	625.095	34.81	46.00	-11.19	50.16	-15.35	QP
6	750.128	36.40	46.00	-9.60	49.60	-13.20	QP
7	902.000	23.52	46.00	-22.48	35.26	-11.74	QP
8	926.901	108.17	-----	-----	119.37	-11.20	QP
9	928.000	24.36	46.00	-21.64	35.56	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX 926.901MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_926.901MHz
Test BY :Rock

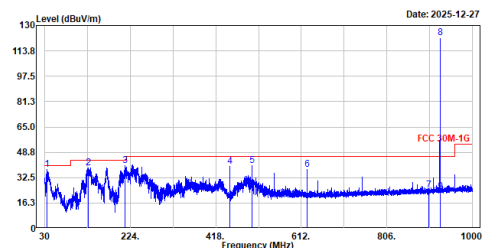


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	35.626	37.57	40.00	-2.43	62.27	-24.70	QP
2	129.425	38.61	43.50	-4.89	64.13	-25.52	QP
3	212.651	40.18	43.50	-3.32	66.85	-26.67	QP
4	450.010	39.64	46.00	-6.36	58.77	-19.13	QP
5	500.062	40.31	46.00	-5.69	58.72	-18.41	QP
6	625.095	38.01	46.00	-7.99	53.36	-15.35	QP
7	902.000	24.42	46.00	-21.58	36.16	-11.74	QP
8	926.901	122.13	-----	-----	133.33	-11.20	QP
9	928.000	23.77	46.00	-22.23	34.97	-11.20	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Appendix G. Test Result of Radiated Emissions Co-location


TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz H								TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz H_002.png																																																																																							
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock Level (dBUV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000 4400 7800 11200 14600 18000 Date: 2025-12-26 FCC_15.247_PK FCC_15.247_AV 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22								<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBUV/m</td><td>dBUV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>15</td><td>7216.848</td><td>50.01</td><td>74.00</td><td>-23.99</td><td>57.26</td><td>-7.25</td><td>Peak</td></tr><tr><td>16</td><td>7415.208</td><td>42.72</td><td>74.00</td><td>-31.28</td><td>49.66</td><td>-6.94</td><td>Peak</td></tr><tr><td>17</td><td>8118.954</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>49.51</td><td>-7.57</td><td>Peak</td></tr><tr><td>18</td><td>8342.109</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>50.76</td><td>-7.24</td><td>Peak</td></tr><tr><td>19</td><td>9021.060</td><td>43.61</td><td>74.00</td><td>-30.39</td><td>50.45</td><td>-6.84</td><td>Peak</td></tr><tr><td>20</td><td>9269.010</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>51.04</td><td>-6.93</td><td>Peak</td></tr><tr><td>21</td><td>12210.000</td><td>53.24</td><td>54.00</td><td>-0.76</td><td>54.42</td><td>-1.18</td><td>Average</td></tr><tr><td>22</td><td>12210.000</td><td>64.89</td><td>74.00</td><td>-9.11</td><td>66.07</td><td>-1.18</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		15	7216.848	50.01	74.00	-23.99	57.26	-7.25	Peak	16	7415.208	42.72	74.00	-31.28	49.66	-6.94	Peak	17	8118.954	41.94	74.00	-32.06	49.51	-7.57	Peak	18	8342.109	43.52	74.00	-30.48	50.76	-7.24	Peak	19	9021.060	43.61	74.00	-30.39	50.45	-6.84	Peak	20	9269.010	44.11	74.00	-29.89	51.04	-6.93	Peak	21	12210.000	53.24	54.00	-0.76	54.42	-1.18	Average	22	12210.000	64.89	74.00	-9.11	66.07	-1.18	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																								
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m																																																																																									
15	7216.848	50.01	74.00	-23.99	57.26	-7.25	Peak																																																																																								
16	7415.208	42.72	74.00	-31.28	49.66	-6.94	Peak																																																																																								
17	8118.954	41.94	74.00	-32.06	49.51	-7.57	Peak																																																																																								
18	8342.109	43.52	74.00	-30.48	50.76	-7.24	Peak																																																																																								
19	9021.060	43.61	74.00	-30.39	50.45	-6.84	Peak																																																																																								
20	9269.010	44.11	74.00	-29.89	51.04	-6.93	Peak																																																																																								
21	12210.000	53.24	54.00	-0.76	54.42	-1.18	Average																																																																																								
22	12210.000	64.89	74.00	-9.11	66.07	-1.18	Peak																																																																																								
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.																																																																																															
TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz V								TX 926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz V_002.png																																																																																							
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz Test BY :Rock Level (dBUV/m) 100 87.5 75.0 62.5 50.0 37.5 25.0 12.5 0 Frequency (MHz) 1000 4400 7800 11200 14600 18000 Date: 2025-12-26 FCC_15.247_PK FCC_15.247_AV 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22								<table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><td></td><td>MHz</td><td>dBUV/m</td><td>dBUV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td></tr><tr><td>15</td><td>7216.848</td><td>50.74</td><td>74.00</td><td>-23.26</td><td>57.99</td><td>-7.25</td><td>Peak</td></tr><tr><td>16</td><td>7415.208</td><td>44.92</td><td>74.00</td><td>-29.08</td><td>51.86</td><td>-6.94</td><td>Peak</td></tr><tr><td>17</td><td>8118.954</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>52.04</td><td>-7.57</td><td>Peak</td></tr><tr><td>18</td><td>8342.109</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>50.23</td><td>-7.24</td><td>Peak</td></tr><tr><td>19</td><td>9021.060</td><td>46.61</td><td>74.00</td><td>-27.39</td><td>53.45</td><td>-6.84</td><td>Peak</td></tr><tr><td>20</td><td>9269.010</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>50.35</td><td>-6.93</td><td>Peak</td></tr><tr><td>21</td><td>12210.000</td><td>50.67</td><td>54.00</td><td>-3.33</td><td>51.85</td><td>-1.18</td><td>Average</td></tr><tr><td>22</td><td>12210.000</td><td>62.06</td><td>74.00</td><td>-11.94</td><td>63.24</td><td>-1.18</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.								No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m		15	7216.848	50.74	74.00	-23.26	57.99	-7.25	Peak	16	7415.208	44.92	74.00	-29.08	51.86	-6.94	Peak	17	8118.954	44.47	74.00	-29.53	52.04	-7.57	Peak	18	8342.109	42.99	74.00	-31.01	50.23	-7.24	Peak	19	9021.060	46.61	74.00	-27.39	53.45	-6.84	Peak	20	9269.010	43.42	74.00	-30.58	50.35	-6.93	Peak	21	12210.000	50.67	54.00	-3.33	51.85	-1.18	Average	22	12210.000	62.06	74.00	-11.94	63.24	-1.18	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																																																																								
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB/m																																																																																									
15	7216.848	50.74	74.00	-23.26	57.99	-7.25	Peak																																																																																								
16	7415.208	44.92	74.00	-29.08	51.86	-6.94	Peak																																																																																								
17	8118.954	44.47	74.00	-29.53	52.04	-7.57	Peak																																																																																								
18	8342.109	42.99	74.00	-31.01	50.23	-7.24	Peak																																																																																								
19	9021.060	46.61	74.00	-27.39	53.45	-6.84	Peak																																																																																								
20	9269.010	43.42	74.00	-30.58	50.35	-6.93	Peak																																																																																								
21	12210.000	50.67	54.00	-3.33	51.85	-1.18	Average																																																																																								
22	12210.000	62.06	74.00	-11.94	63.24	-1.18	Peak																																																																																								
Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.																																																																																															

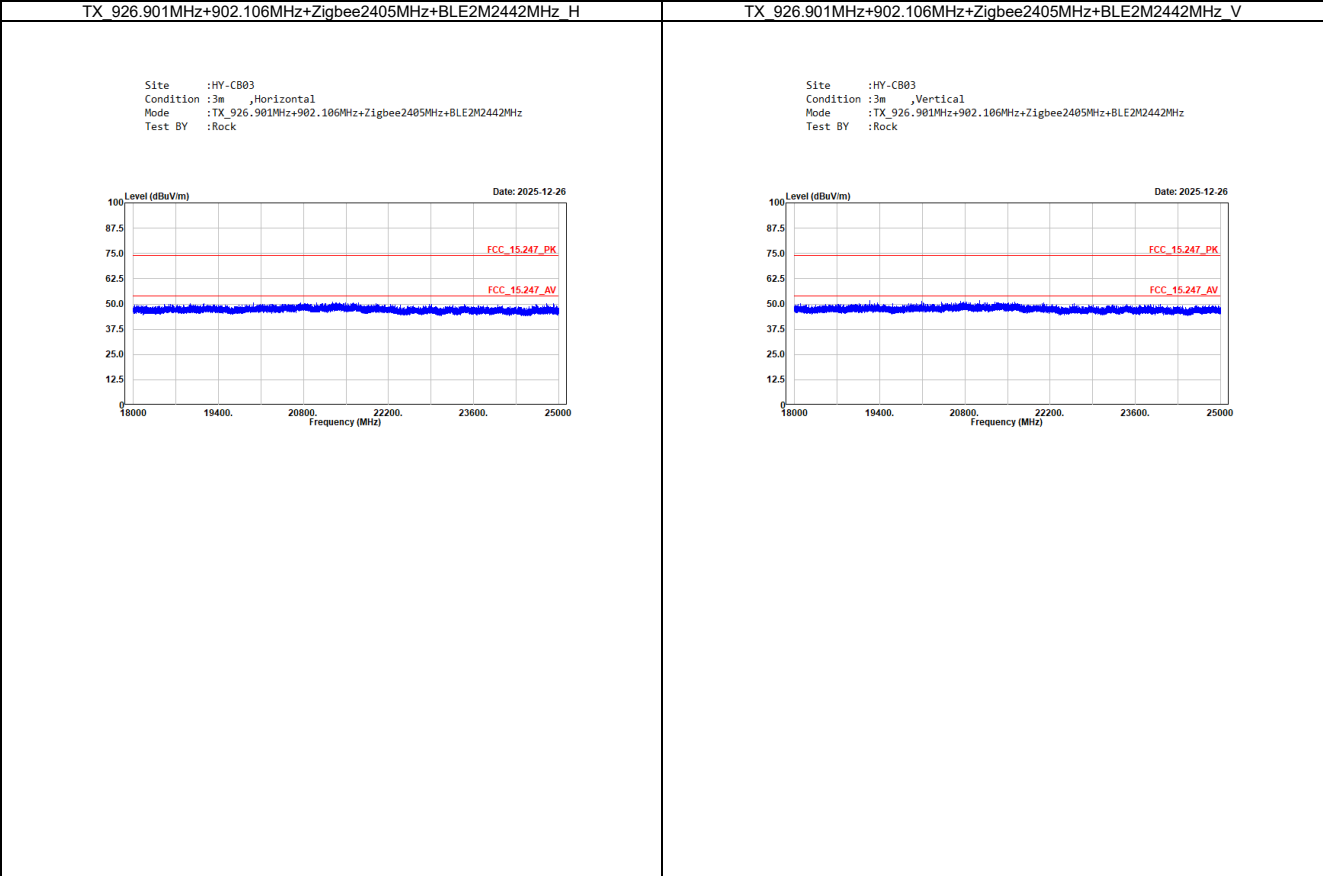

For Adapter

TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz
 Test BY :Rock

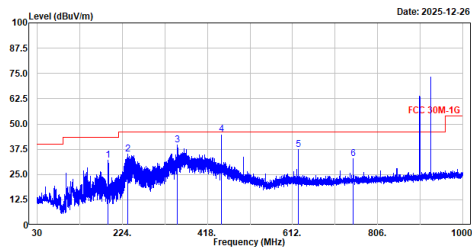


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	191.990	31.94	43.50	-11.56	58.63	-26.69	QP
2	235.543	35.19	46.00	-10.81	60.73	-25.54	QP
3	350.003	39.46	46.00	-6.54	61.58	-22.12	QP
4	450.010	44.99	46.00	-1.01	64.12	-19.13	QP
5	625.095	37.49	46.00	-8.51	52.84	-15.35	QP
6	750.128	32.94	46.00	-13.06	46.14	-13.20	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz
 Test BY :Rock

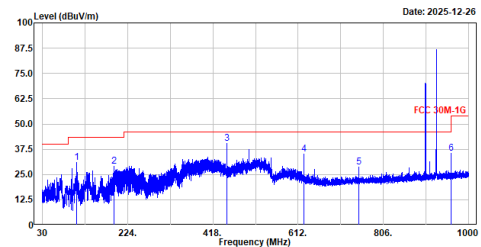


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	107.988	30.98	43.50	-12.52	58.23	-27.25	QP
2	192.572	28.97	43.50	-14.53	55.76	-26.79	QP
3	450.010	40.49	46.00	-5.51	59.62	-19.13	QP
4	625.095	35.00	46.00	-11.00	50.35	-15.35	QP
5	750.128	28.76	46.00	-17.24	41.96	-13.20	QP
6	960.133	35.65	54.00	-18.35	46.40	-18.75	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

For PoE

TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_H

Site :HY-CB03
 Condition :3m ,Horizontal
 Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz
 Test BY :Rock

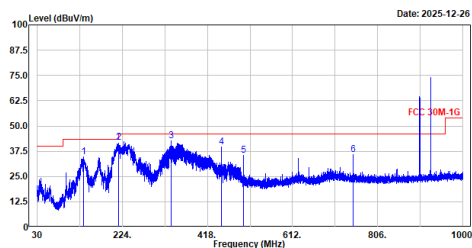


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	134.954	34.59	43.50	-8.91	59.48	-24.89	QP
2	215.076	41.94	43.50	-1.56	68.60	-26.66	QP
3	334.580	42.53	46.00	-3.47	64.70	-22.17	QP
4	450.010	39.62	46.00	-6.38	58.75	-19.13	QP
5	500.062	35.60	46.00	-10.40	54.01	-18.41	QP
6	750.128	35.67	46.00	-10.33	48.87	-13.20	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz_V

Site :HY-CB03
 Condition :3m ,Vertical
 Mode :TX_926.901MHz+902.106MHz+Zigbee2405MHz+BLE2M2442MHz
 Test BY :Rock

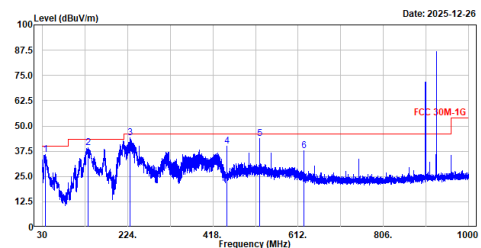

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	36.014	35.73	40.00	-4.27	60.36	-24.63	QP
2	133.790	39.24	43.50	-4.26	64.37	-25.13	QP
3	229.917	44.15	46.00	-1.85	70.26	-26.11	QP
4	450.010	40.03	46.00	-5.97	59.16	-19.13	QP
5	524.991	43.78	46.00	-2.22	61.59	-17.81	QP
6	625.095	37.80	46.00	-8.20	53.15	-15.35	QP

Note:
 1. Level = Read Level + Factor
 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
 3. Over Limit = Level - Limit Line
 4. The emission under 30MHz was not included since the emission levels are very low against the limit.