



Certificate #2343.01


TEST REPORT N°: CRWJ-ESH-P25120941B-3

FCC Test Report

Applicant:	Zhejiang Lingzhu Technology Co., Ltd.
Address:	Room 302, No 1 Building Huace Center, Xihu District, Hangzhou City, Zhejiang Province, China
Manufacturer:	Zhejiang Lingzhu Technology Co., Ltd.
Address:	Room 302, No 1 Building Huace Center, Xihu District, Hangzhou City, Zhejiang Province, China
Factory:	Hangzhou Xizhi Electronics Co., Ltd.
Address:	2nd Floor, Building 3, No. 8, Yuyang Road, Lushan Street, Fuyang District, Hangzhou City, Zhejiang Province, China
This document includes 109 pages	

Product Name:	Smart Battery Doorbell	
Test Model:	SC162-WCD3A	
Serial Models:	SC162-WCxyz (The main differences between models lie in appearance, color, camera resolution, and sensors or lenses. Apart from these, the PCB, software and hardware versions, antennas, etc., are all the same.)	
Brand Name:	--	
FCC ID:	2BEWXSC162A	
Rated Voltage/Power:	AC 8-24V~ 50/60Hz 200mA or 5V= 1.5A	
Received Date:	Dec. 12, 2025	
Test Date:	Dec. 15, 2025 to Jan. 09, 2026	
Applicable Standards:	47 CFR Part 15 Subpart C (Section 15.247) ANSI C63.10:2020	
Clause Examined:	All Clauses Relevant	

CONCLUSION : The submitted sample was found to COMPLY with the test requirement.

Test done by:  Name: Ghost Li Title: Project Engineer Date: Jan. 16, 2026	Approved by:  Name: Sean YU Title: RF Supervisor Date: Jan. 16, 2026
---	--

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

Table of Contents

Release Control Record	5
1 Summary of Test Results	6
1.1 Test Instruments	7
1.2 Test Facility	8
1.3 Measurement Uncertainty	9
1.4 Modification Record	10
2 General Information	11
2.1 General Description of EUT	11
2.2 Description of Test Modes	12
2.2.1 Test Mode Applicability:	13
2.2.2 Test Condition:	15
2.3 Duty Cycle of Test Signal	16
2.4 Description of Support Units	21
2.5 General Description of Applied Standards	21
3 Test Procedure and Results	22
3.1 AC Power Conducted Emission	22
3.1.1 Limits	22
3.1.2 Test Procedures	22
3.1.3 Deviation from Test Standard	22
3.1.4 Test Setup	23
3.1.5 EUT Operating Conditions	23
3.1.6 Test Results	24
3.2 Minimum 6dB Bandwidth	28
3.2.1 Limit	28
3.2.2 Test Setup	28
3.2.3 Test Procedures	28
3.2.4 Deviation of Test Standard	28
3.2.5 Test Results	29
3.3 Conducted Output Power	38
3.3.1 Limit	38
3.3.2 Test Setup	38
3.3.3 Test Procedures	38



TEST REPORT N°: CRWJ-ESH-P25120941B-3

3.3.4 Deviation of Test Standard	38
3.3.5 Test Results	39
3.4 Power Spectral Density	44
3.4.1 Limit	44
3.4.2 Test Setup	44
3.4.3 Test Procedures	44
3.4.4 Deviation of Test Standard	44
3.4.5 Test Results	45
3.5 Conducted Band Edges Measurement	50
3.5.1 Limit	50
3.5.2 Test Setup	50
3.5.3 Test Procedures	50
3.5.4 Deviation of Test Standard	50
3.5.5 Test Results	51
3.6 Conducted Spurious Emissions	55
3.6.1 Limit	55
3.6.2 Test Setup	55
3.6.3 Test Procedures	55
3.6.4 Deviation of Test Standard	55
3.6.5 Test Results	56
3.7 Emissions in restricted frequency bands	69
3.7.1 Test Limit	69
3.7.2 Test Procedure Reference	70
3.7.3 Test Procedures	70
3.7.4 Test Setup	71
3.7.5 Test Results	72
3.8 Radiated Emission Measurement	96
3.8.1 Limits	96
3.8.2 Test Procedures	96
3.8.3 Deviation from Test Standard	98
3.8.4 Test Setup	98
3.8.5 EUT Operating Conditions	99
3.8.6 Test Results	100



TEST REPORT N°: CRWJ-ESH-P25120941B-3

4 Pictures of Test Arrangements	107
---------------------------------------	-----



TEST REPORT N°: CRWJ-ESH-P25120941B-3

Release Control Record

Issue No.	Description	Date Issued
CRWJ-ESH-P25120941B-3	Original release	Jan. 16, 2026



TEST REPORT N°: CRWJ-ESH-P25120941B-3

1 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

1.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Loop Antenna	ETS-LINDGREN	6502	E1A1039	Jul.30,24	Jul.29,26
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1001	Mar.28,24	Mar.27,26
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Jul.31,24	Jul.30,26
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.31,24	Jul.30,26
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Feb.17,25	Feb.16,26
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jun.26,25	Jun.25,26
Pre-Amplifier(18GHz-40GHz)	Toscend	TAP18040048	E1A2014	May.28,25	May.27,26
EMI test receiver	R&S	ESR26	E1R1009	Aug.12,25	Aug.11,26
Spectrum Analyzer	Keysight	N9030B	E1S1003	May.23,25	May.22,26
Spectrum Analyzer	Keysight	N9020A	E1S1004	Feb.18,25	Feb.17,26
EMI test receiver	R&S	ESR3	E1R1008	Aug.12,25	Aug.11,26
LISN	R&S	ENV216	E1L1013	Aug.18,25	Aug.17, 26
Humidity&Temp Tester	ESPEC	SE TH-Z-042U	C1TH002	Jun.05,25	Jun.04,26
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	Toscend	JS32-CE	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A



TEST REPORT N°: CRWJ-ESH-P25120941B-3

1.2 Test Facility

Laboratory Name: LCIE CHINA COMPANY LIMITED

Laboratory Address: No.829, Xin Zhuan Road, Song Jiang District, Shanghai, China

Test Location: No.829, Xin Zhuan Road, Song Jiang District, Shanghai, China

A2LA Lab Code: 2343.01

FCC-Recognized Accredited Testing Lab: CN1213

ISED Recognized Lab: 6392A

FCC Accredited Test Site Number: 176467



TEST REPORT N°: CRWJ-ESH-P25120941B-3

1.3 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.56 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.08 dB
Radiated Emissions above 1 GHz	Above 1GHz	5.12 dB



TEST REPORT N°: CRWJ-ESH-P25120941B-3

1.4 Modification Record

There were no modifications required for compliance.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

2 General Information

2.1 General Description of EUT

Product	Smart Battery Doorbell
Brand	--
Test Model	SC162-WCD3A
Serial Models	SC162-WCxyz (The main differences between models lie in appearance, color, camera resolution, and sensors or lenses. Apart from these, the PCB, software and hardware versions, antennas, etc., are all the same.)
Power Rating	8-24V~ 50/60Hz 200mA or 5V= 1.5A
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Operating Frequency	2412MHz ~ 2462MHz
Number of Channel	802.11b, 802.11g and 802.11n (HT20):11 802.11n (HT40):9
Output Power	16.85 dBm
Antenna Type	Dipole Antenna
Antenna Connector	--
Antenna Gain	1.05 dBi
Product SW/HW version	--
Radio SW/HW version	--
Test SW version	--
RF power setting in Test SW	--

Note: For more details, please refer to the User's manual of the EUT.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

2.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20).

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz	-	-

7 channels are provided for 802.11n (HT40).

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz	-	-



TEST REPORT N°: CRWJ-ESH-P25120941B-3

2.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz

RE< 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	6.5

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0



TEST REPORT N°: CRWJ-ESH-P25120941B-3

Antenna Port Conducted Measurement

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	6.5



TEST REPORT N°: CRWJ-ESH-P25120941B-3

2.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	23deg. C, 58%RH	5V $\overline{\overline{=}}$ 1.5A Powered by battery
RE < 1G	23deg. C, 58%RH	5V $\overline{\overline{=}}$ 1.5A Powered by battery
PLC	23deg. C, 58%RH	5V $\overline{\overline{=}}$ 1.5A
APCM	25deg. C, 60%RH	5V $\overline{\overline{=}}$ 1.5A Powered by battery



TEST REPORT N°: CRWJ-ESH-P25120941B-3

2.3 Duty Cycle of Test Signal


TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Duty Cycle Factor
11B	Ant1	2412	12.42	12.56	98.89	0.05
		2437	12.41	12.54	98.96	0.05
		2462	12.42	12.56	98.89	0.05
11G	Ant1	2412	2.06	2.19	94.06	0.27
		2437	2.07	2.20	94.09	0.26
		2462	2.07	2.20	94.09	0.26
11N20SISO	Ant1	2412	1.92	2.05	93.66	0.28
		2437	1.92	2.04	94.12	0.26
		2462	1.92	2.05	93.66	0.28
11N40SISO	Ant1	2422	0.95	1.08	87.96	0.56
		2437	0.94	1.07	87.85	0.56
		2452	0.94	1.07	87.85	0.56

Note: Duty Cycle Factor=10* Log[1/Duty Cycle(%)*100], Duty Cycle= $T_{on}/T_{period} * 100\%$




TEST REPORT N°: CRWJ-ESH-P25120941B-3

Test Graphs

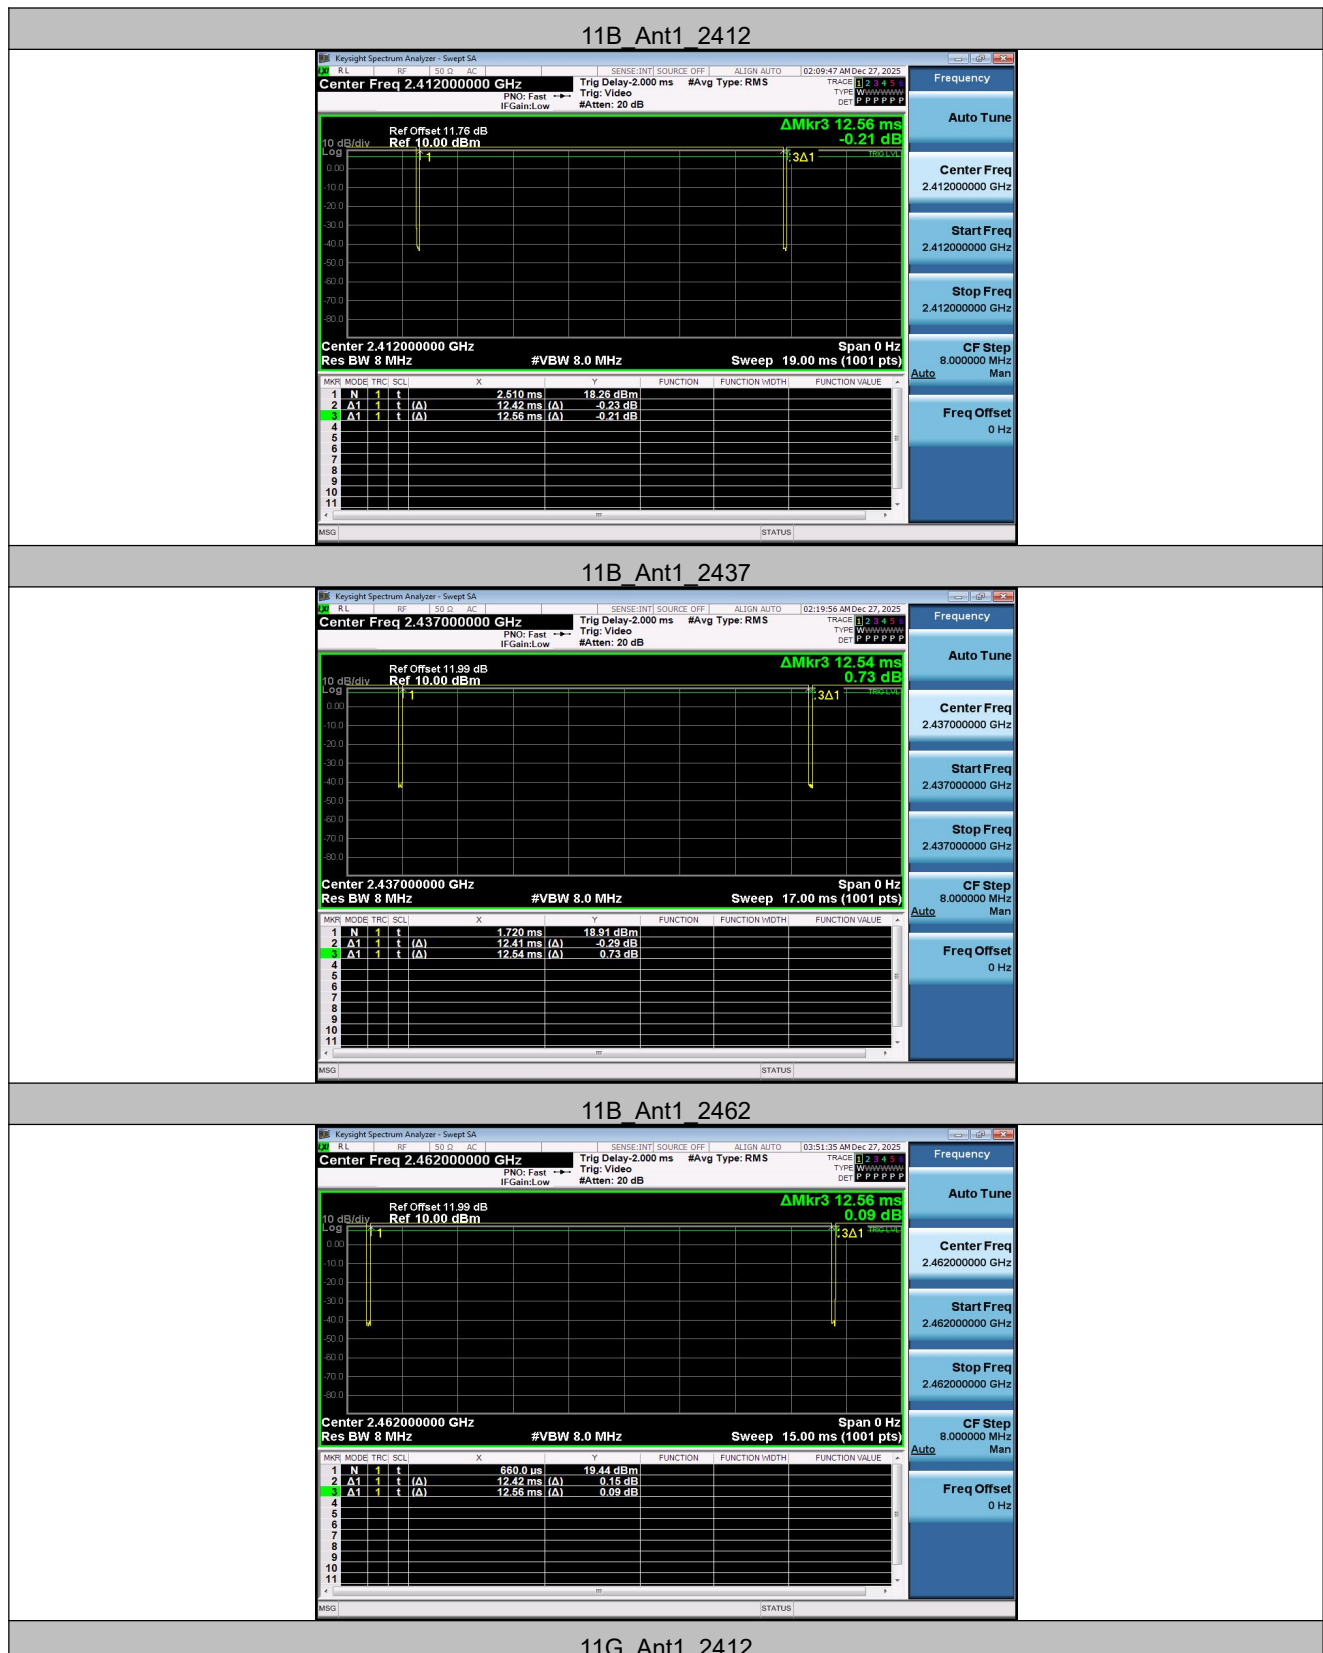





TEST REPORT N°: CRWJ-ESH-P25120941B-3

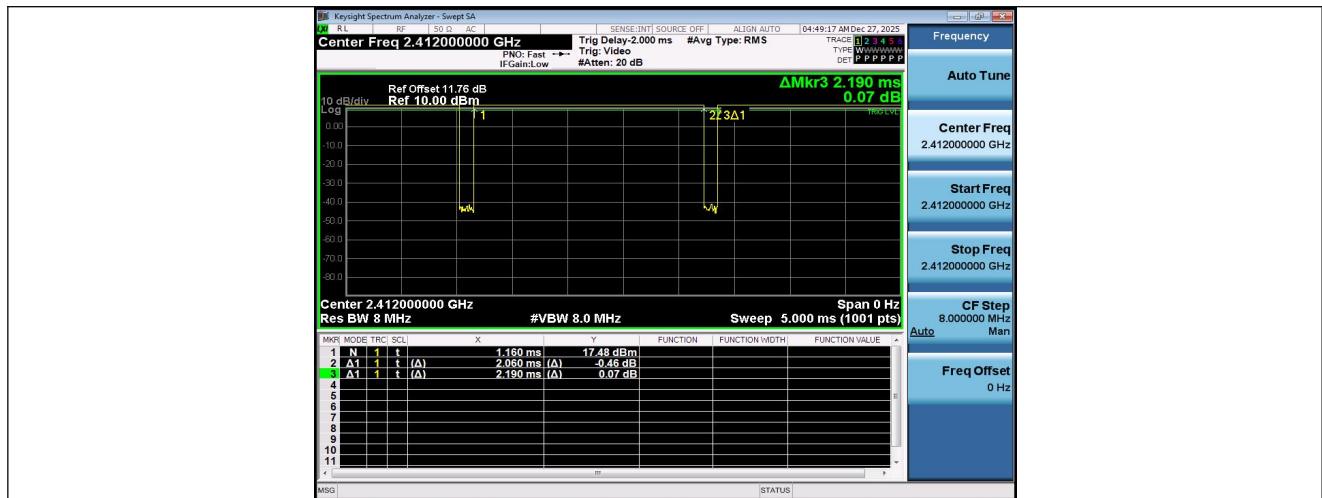

11G Ant1 2437

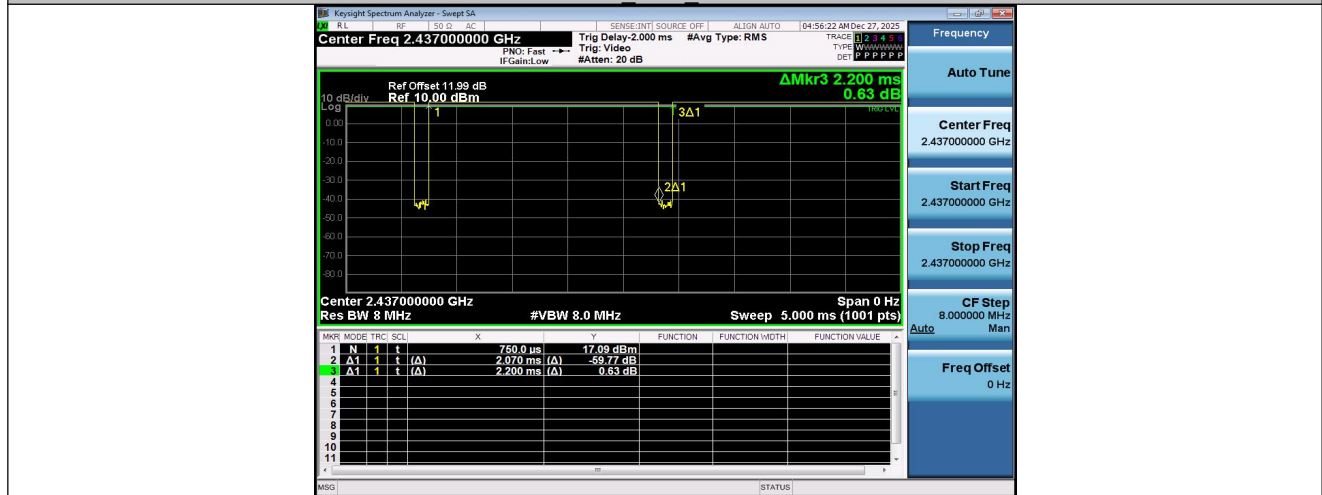


11G Ant1 2462

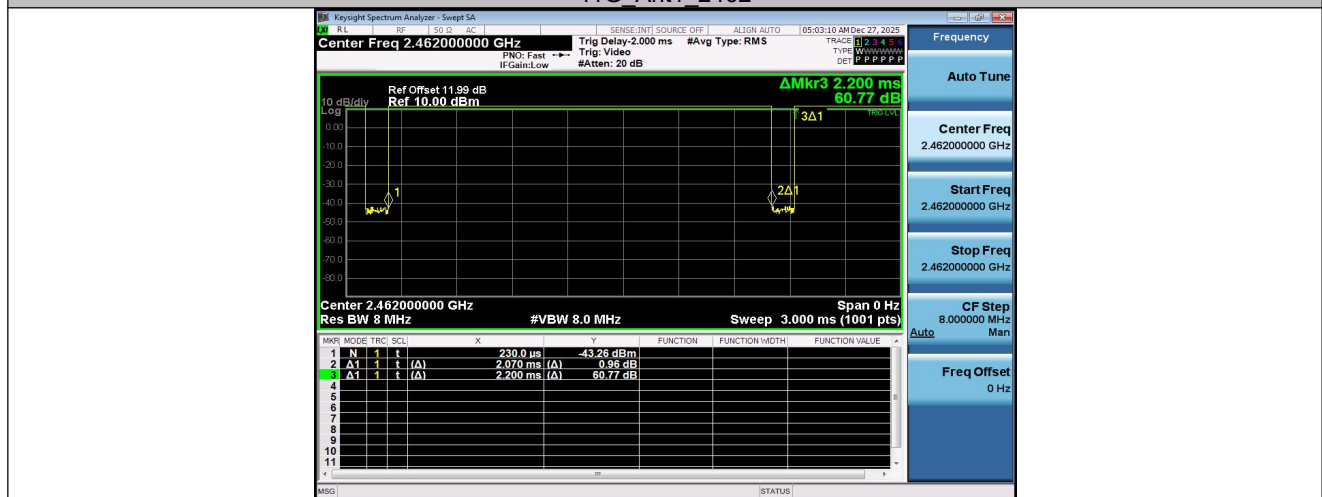

11N20SISO Ant1 2412



TEST REPORT N°: CRWJ-ESH-P25120941B-3

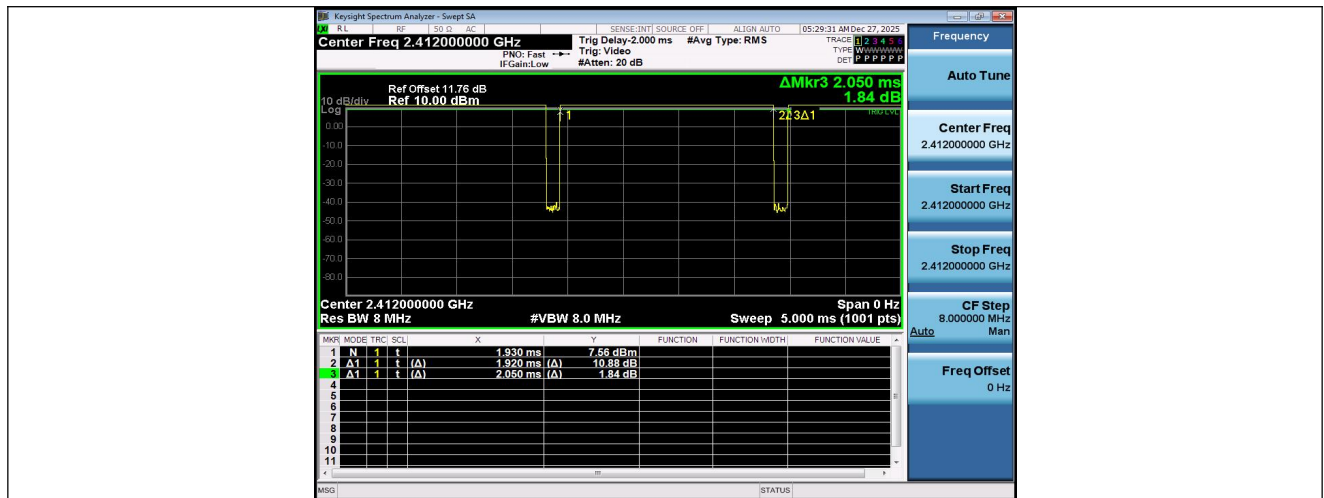

11N20SISO Ant1 2437



11N20SISO Ant1 2462



11N40SISO Ant1 2422



TEST REPORT N°: CRWJ-ESH-P25120941B-3





TEST REPORT N°: CRWJ-ESH-P25120941B-3

2.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

NO.	PRODUCT	BRAND/ Manufacturer	MODEL NO.
1.	AC/DC Adapter	--	KA06E-0501000US
2.	Laptop	Lenovo	L470
3.	Indoor Chime 1	SC162-DDJ	100-240V~50/60Hz 20mA
4.	Indoor Chime 2	SC162-DDJ-USB	DC5V 1A
5.	Adaptor	VC54GBCH	100-240V~50/60Hz 600mA

2.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

47 CFR Part 15 Subpart C (Section 15.247)

KDB 558074 D01 DTS Meas Guidance v05r02

ANSI C63.10:2020

All relaxed test items have been performed and recorded as per the above standard.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

3 Test Procedure and Results

3.1 AC Power Conducted Emission

3.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.2 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

3.1.3 Deviation from Test Standard

No deviation.

TEST REPORT N°: CRWJ-ESH-P25120941B-3

3.1.4 Test Setup

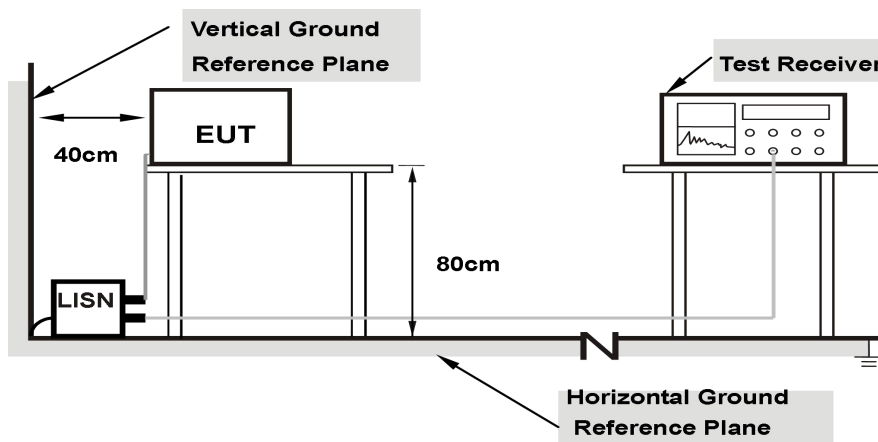

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).


3.1.5 EUT Operating Conditions

Same as 3.1.6.

TEST REPORT N°: CRWJ-ESH-P25120941B-3

3.1.6 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	Adaptor: AC 120V, 60Hz EUT Rated Power: AC 8-24V~ 50/60Hz 200mA or 5V= 1.5A		
Test Mode	Charging (By adaptor) + Bluetooth link + WiFi link + 433MHz link with indoor chime 1		

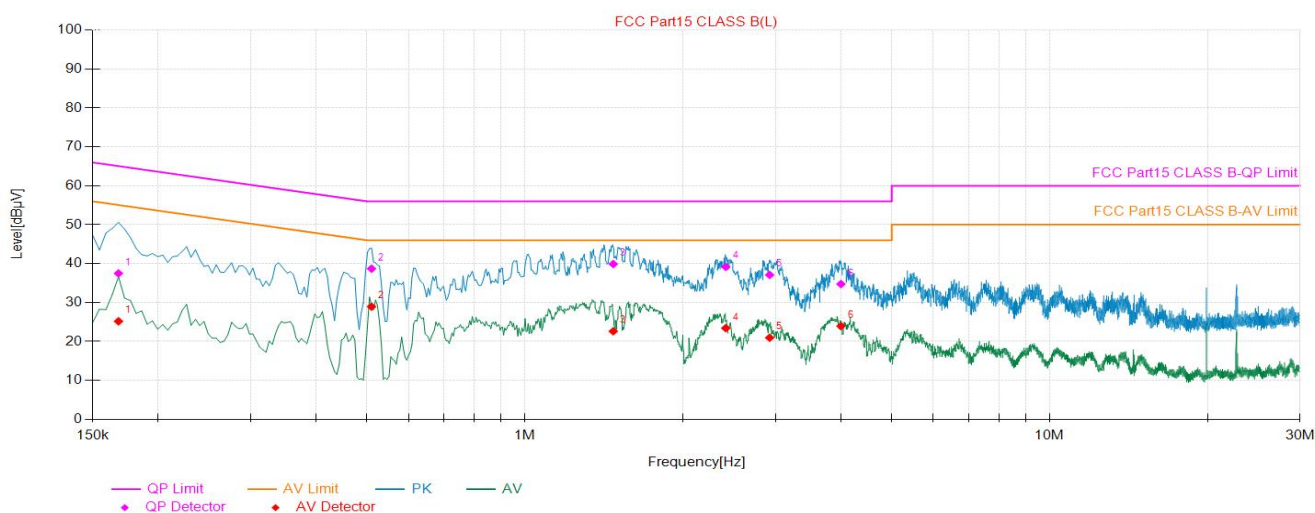

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.17	19.89	17.60	37.49	65.06	27.57	5.29	25.18	55.06	29.88
2	0.51	19.66	19.04	38.70	56.00	17.30	9.28	28.94	46.00	17.06
3	1.47	19.68	20.21	39.89	56.00	16.11	2.93	22.61	46.00	23.39
4	2.41	19.77	19.40	39.17	56.00	16.83	3.65	23.42	46.00	22.58
5	2.93	19.83	17.27	37.10	56.00	18.90	1.12	20.95	46.00	25.05
6	4.00	19.87	14.88	34.75	56.00	21.25	4.09	23.96	46.00	22.04

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss

TEST REPORT N°: CRWJ-ESH-P25120941B-3

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	Adaptor: AC 120V, 60Hz EUT Rated Power: AC 8-24V~ 50/60Hz 200mA or 5V= 1.5A		
Test Mode	Charging (By adaptor) + Bluetooth link + WiFi link + 433MHz link with indoor chime 1		

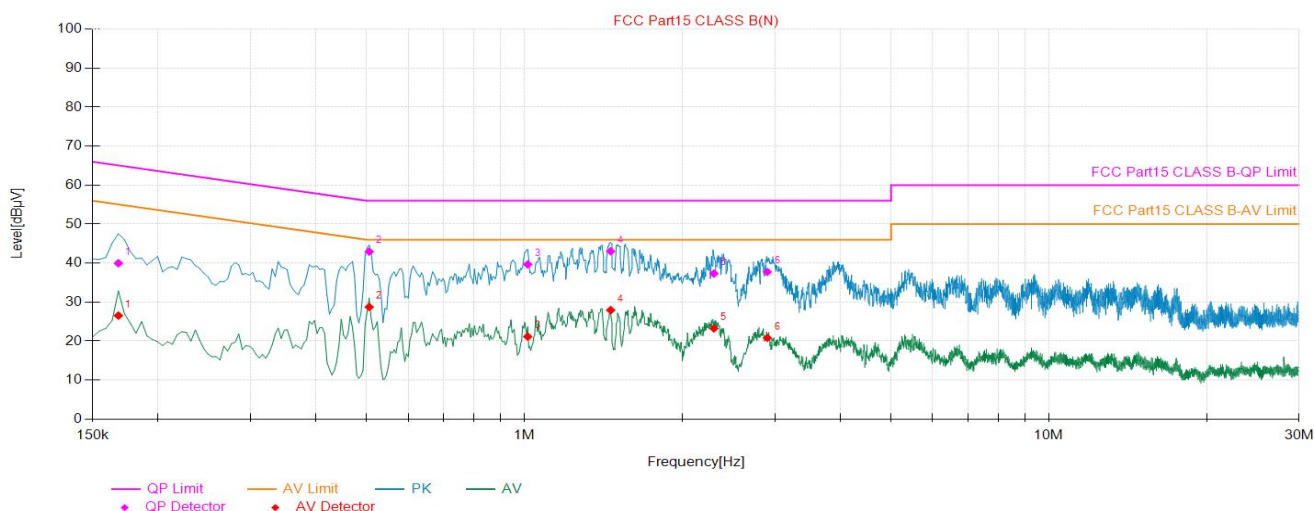

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBuV]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Reading [dBuV]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]
1	0.17	19.87	20.10	39.97	65.06	25.09	6.67	26.54	55.06	28.52
2	0.51	19.64	23.31	42.95	56.00	13.05	9.11	28.75	46.00	17.25
3	1.01	19.63	20.04	39.67	56.00	16.33	1.52	21.15	46.00	24.85
4	1.46	19.69	23.35	43.04	56.00	12.96	8.26	27.95	46.00	18.05
5	2.30	19.78	17.54	37.32	56.00	18.68	3.47	23.25	46.00	22.75
6	2.90	19.82	17.92	37.74	56.00	18.26	1.01	20.83	46.00	25.17

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss

TEST REPORT N°: CRWJ-ESH-P25120941B-3

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	Adaptor: AC 120V, 60Hz EUT Rated Power: AC 8-24V~ 50/60Hz 200mA or 5V= 1.5A		
Test Mode	Charging (By adaptor) + Bluetooth link + WiFi link + 433MHz link with indoor chime 2		

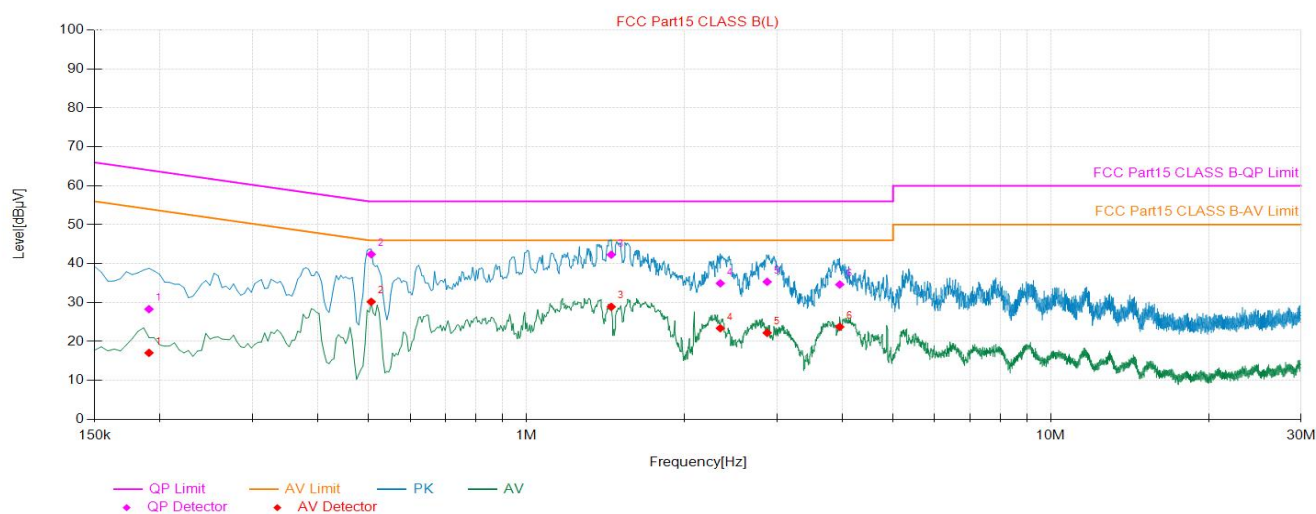

Final Data List


NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]
1	0.19	19.87	8.43	28.30	64.01	35.71	-2.80	17.07	54.01	36.94
2	0.51	19.66	22.74	42.40	56.00	13.60	10.53	30.19	46.00	15.81
3	1.45	19.68	22.61	42.29	56.00	13.71	9.22	28.90	46.00	17.10
4	2.34	19.76	15.18	34.94	56.00	21.06	3.63	23.39	46.00	22.61
5	2.88	19.83	15.49	35.32	56.00	20.68	2.37	22.20	46.00	23.80
6	3.96	19.87	14.76	34.63	56.00	21.37	3.88	23.75	46.00	22.25

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss

TEST REPORT N°: CRWJ-ESH-P25120941B-3

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	Adaptor: AC 120V, 60Hz EUT Rated Power: AC 8-24V~ 50/60Hz 200mA or 5V= 1.5A		
Test Mode	Charging (By adaptor) + Bluetooth link + WiFi link + 433MHz link with indoor chime 2		

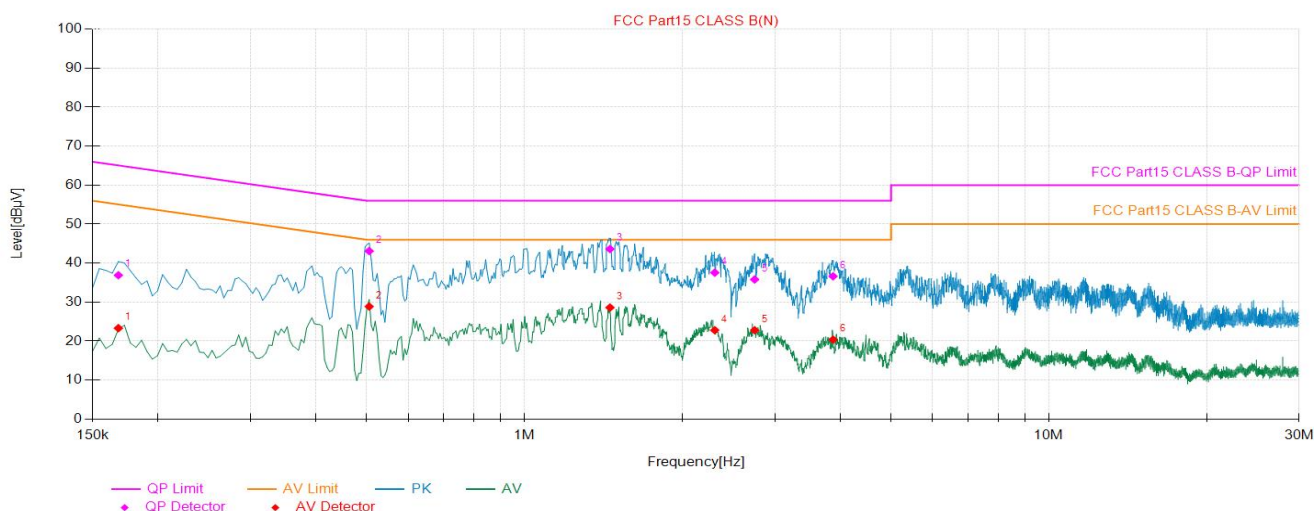

Final Data List

NO.	Freq. [MHz]	Factor [dB]	QP Reading [dBuV]	QP Value [dBuV]	QP Limit [dBuV]	QP Margin [dB]	AV Reading [dBuV]	AV Value [dBuV]	AV Limit [dBuV]	AV Margin [dB]
1	0.17	19.87	17.02	36.89	65.06	28.17	3.44	23.31	55.06	31.75
2	0.51	19.64	23.45	43.09	56.00	12.91	9.22	28.86	46.00	17.14
3	1.46	19.69	23.92	43.61	56.00	12.39	8.91	28.60	46.00	17.40
4	2.31	19.79	17.77	37.56	56.00	18.44	3.01	22.80	46.00	23.20
5	2.75	19.81	16.00	35.81	56.00	20.19	2.99	22.80	46.00	23.20
6	3.88	19.82	16.80	36.62	56.00	19.38	0.56	20.38	46.00	25.62

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss




TEST REPORT N°: CRWJ-ESH-P25120941B-3

3.2 Minimum 6dB Bandwidth

3.2.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

3.2.2 Test Setup

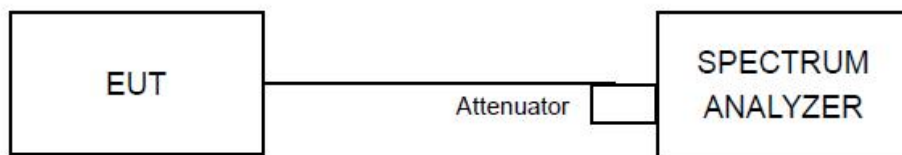

3.2.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW ≥ 3 RBW, peak detector with maximum hold) is implemented by the instrumentation function.

3.2.4 Deviation of Test Standard

No deviation.



TEST REPORT N°: CRWJ-ESH-P25120941B-3

3.2.5 Test Results

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	9.520	2407.040	2416.560	0.5	PASS
		2437	9.040	2432.520	2441.560	0.5	PASS
		2462	10.040	2457.040	2467.080	0.5	PASS
11G	Ant1	2412	16.280	2403.880	2420.160	0.5	PASS
		2437	16.320	2428.840	2445.160	0.5	PASS
		2462	16.280	2453.880	2470.160	0.5	PASS
11N20SISO	Ant1	2412	16.640	2403.880	2420.520	0.5	PASS
		2437	17.560	2428.240	2445.800	0.5	PASS
		2462	16.680	2453.880	2470.560	0.5	PASS
11N40SISO	Ant1	2422	34.160	2405.360	2439.520	0.5	PASS
		2437	35.120	2419.480	2454.600	0.5	PASS
		2452	35.040	2434.480	2469.520	0.5	PASS

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	14.642	2404.7848	2419.4268	---	---
		2437	14.650	2429.7525	2444.4025	---	---
		2462	14.619	2454.7927	2469.4117	---	---
11G	Ant1	2412	17.043	2403.5326	2420.5756	---	---
		2437	17.062	2428.4237	2445.4857	---	---
		2462	16.916	2453.5998	2470.5158	---	---
11N20SISO	Ant1	2412	17.959	2403.0392	2420.9982	---	---
		2437	18.069	2428.0061	2446.0751	---	---
		2462	17.937	2453.1244	2471.0614	---	---
11N40SISO	Ant1	2422	35.859	2404.1031	2439.9621	---	---
		2437	35.910	2419.0851	2454.9951	---	---
		2452	35.890	2434.0832	2469.9732	---	---



TEST REPORT N°: CRWJ-ESH-P25120941B-3

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462






TEST REPORT N°: CRWJ-ESH-P25120941B-3


11G_Ant1_2412



11G_Ant1_2437

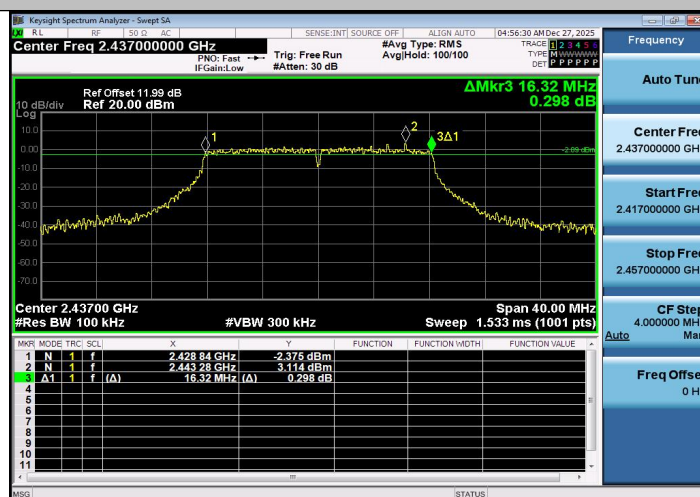

11G_Ant1_2462

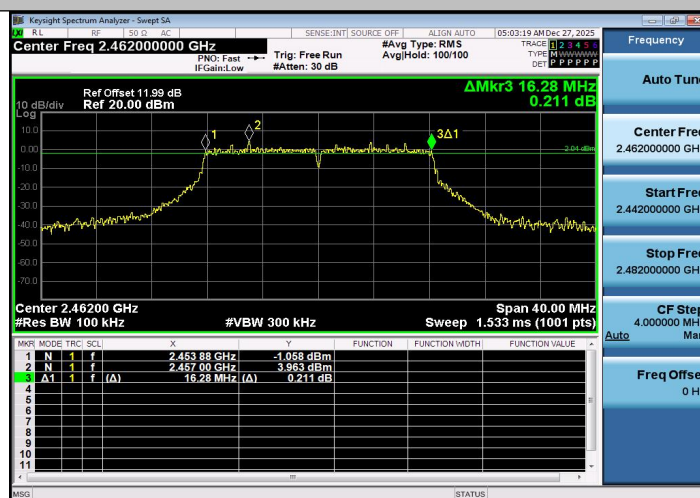




TEST REPORT N°: CRWJ-ESH-P25120941B-3


11N20SISO_Ant1_2412



11N20SISO_Ant1_2437

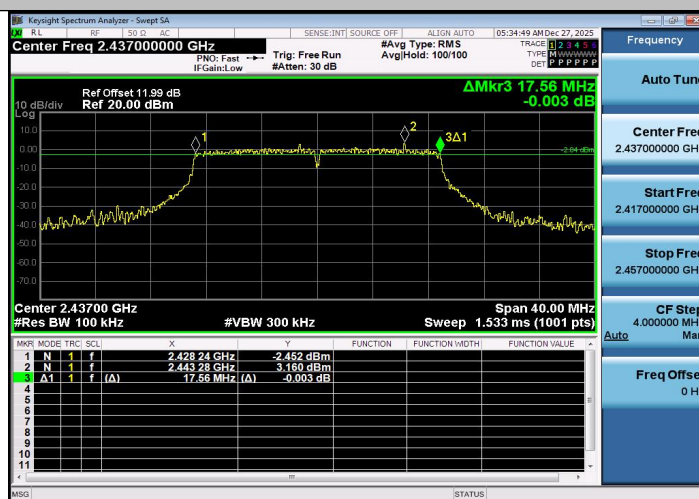


11N20SISO_Ant1_2462

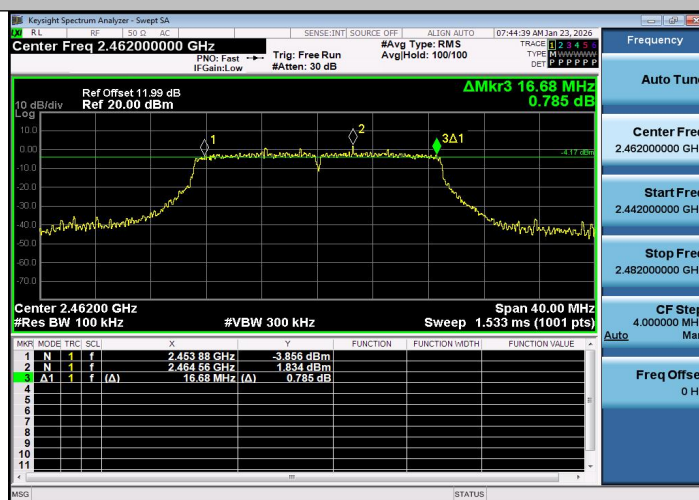




TEST REPORT N°: CRWJ-ESH-P25120941B-3


11N40SISO_Ant1_2422

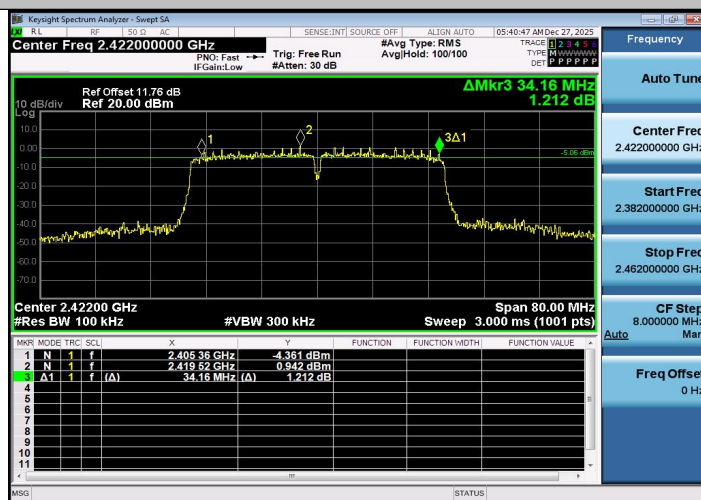

11N40SISO_Ant1_2437

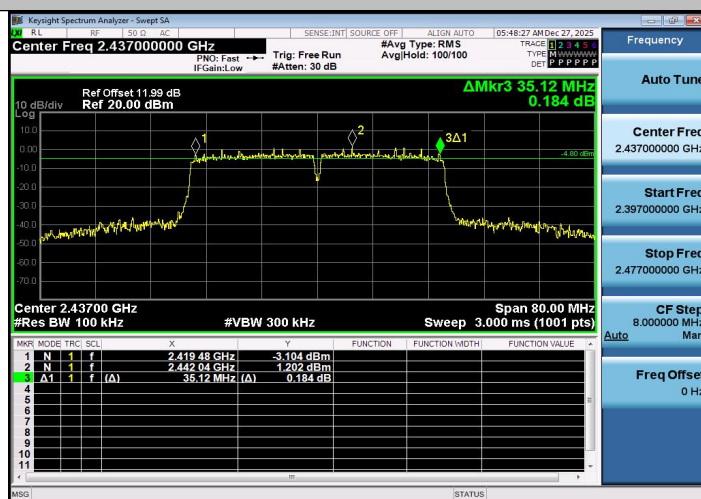


11N40SISO_Ant1_2452

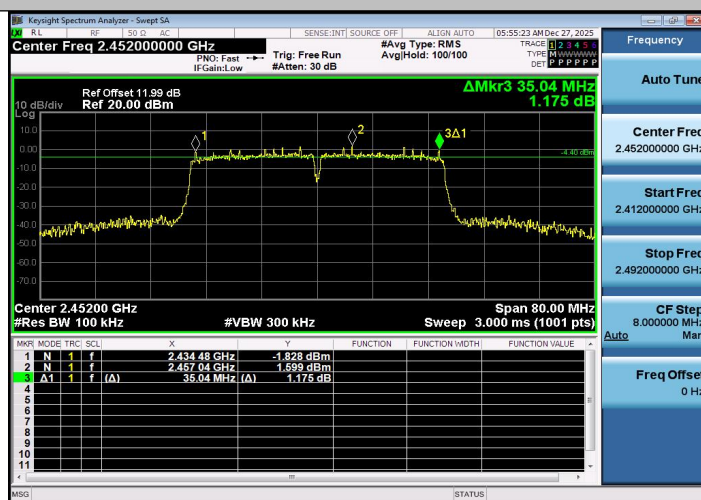




TEST REPORT N°: CRWJ-ESH-P25120941B-3


11B_Ant1_2412

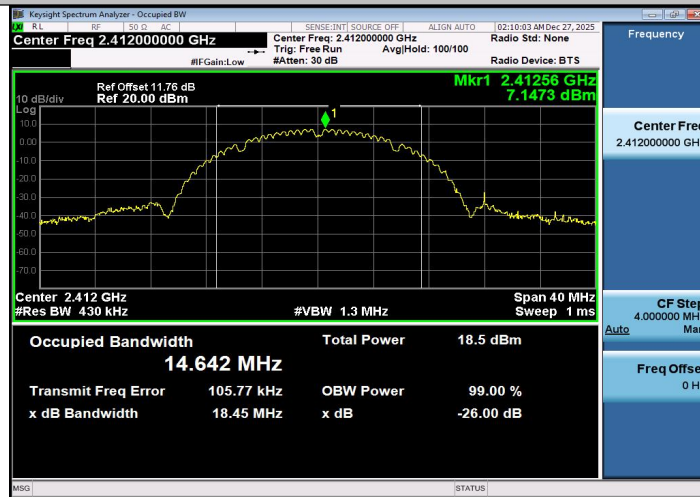

11B_Ant1_2437

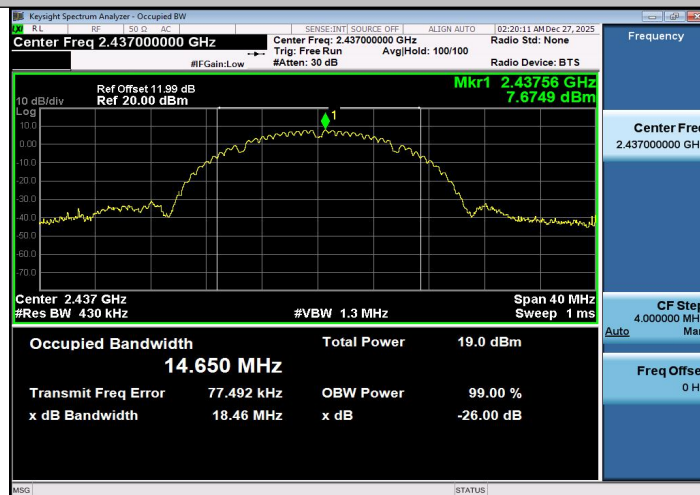


11B_Ant1_2462

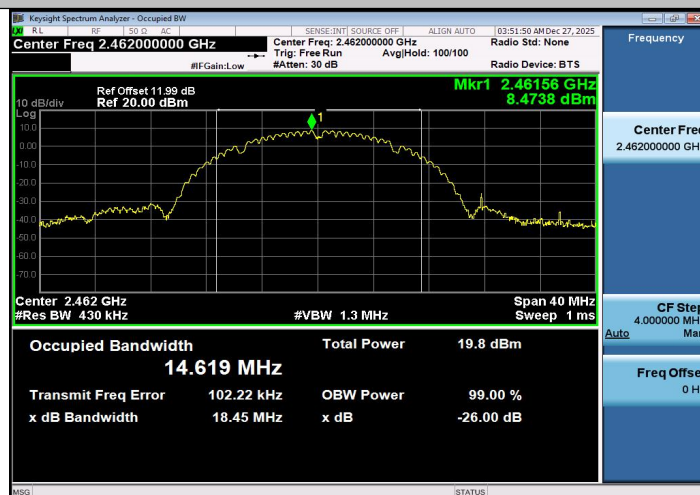




TEST REPORT N°: CRWJ-ESH-P25120941B-3

11G_Ant1_2412

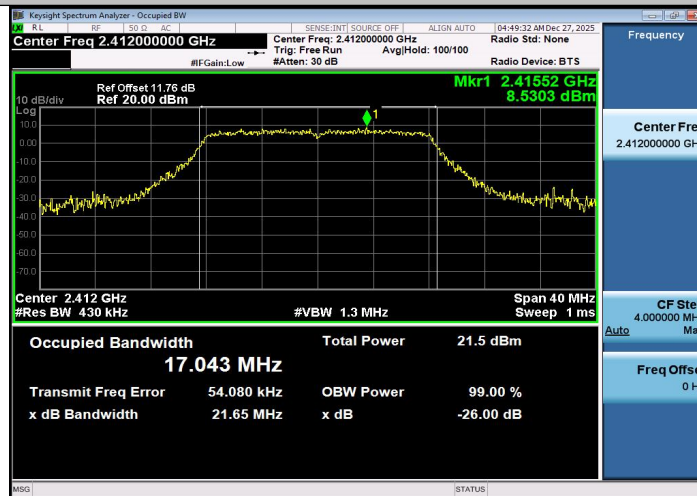

11G_Ant1_2437

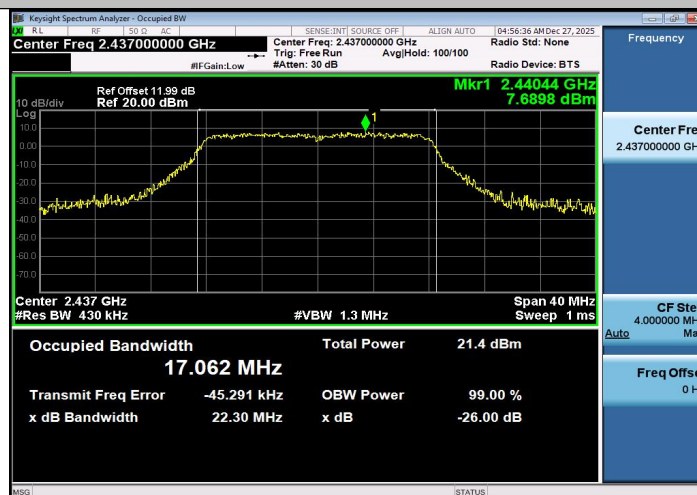

11G_Ant1_2462

