Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 106/53

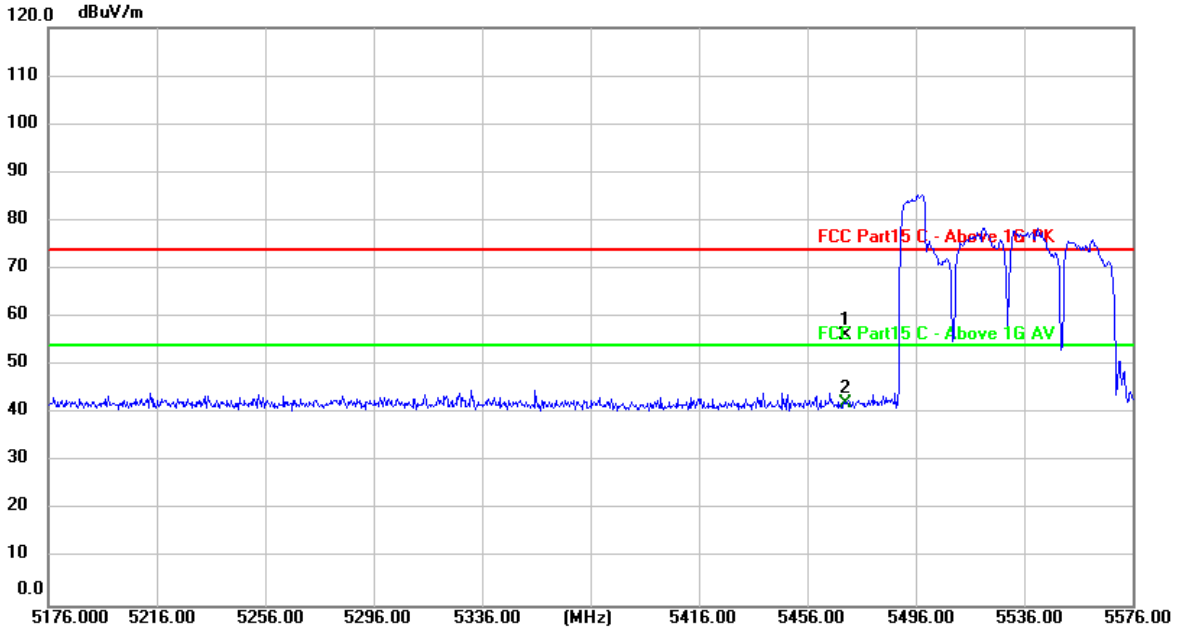

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	18.52	37.59	56.11	74.00	-17.89	peak
2 *	5470.000	4.64	37.59	42.23	54.00	-11.77	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 106/53

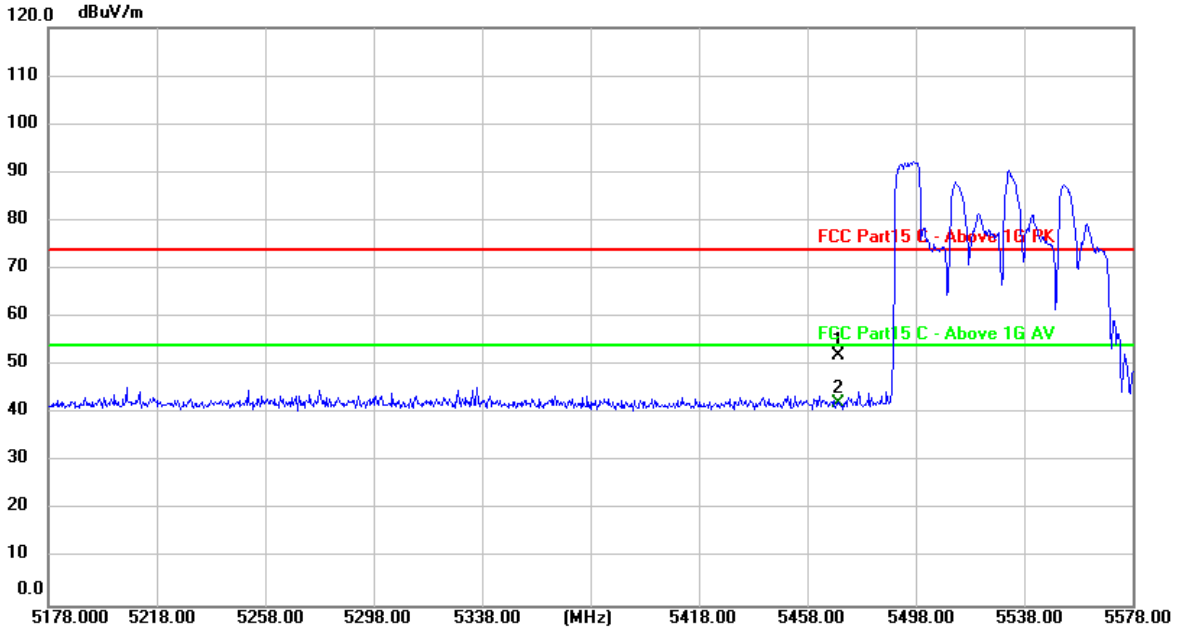

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	14.32	37.59	51.91	74.00	-22.09	peak
2 *	5470.000	4.62	37.59	42.21	54.00	-11.79	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 242/61

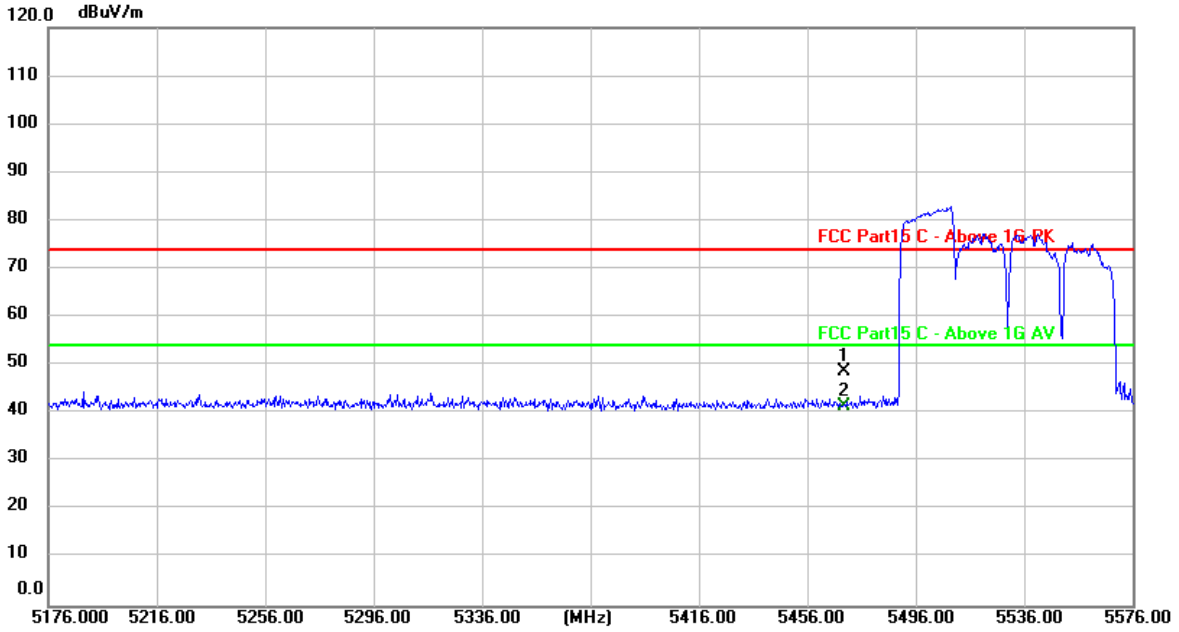

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	11.23	37.59	48.82	74.00	-25.18	peak
2 *	5470.000	4.04	37.59	41.63	54.00	-12.37	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 242/61

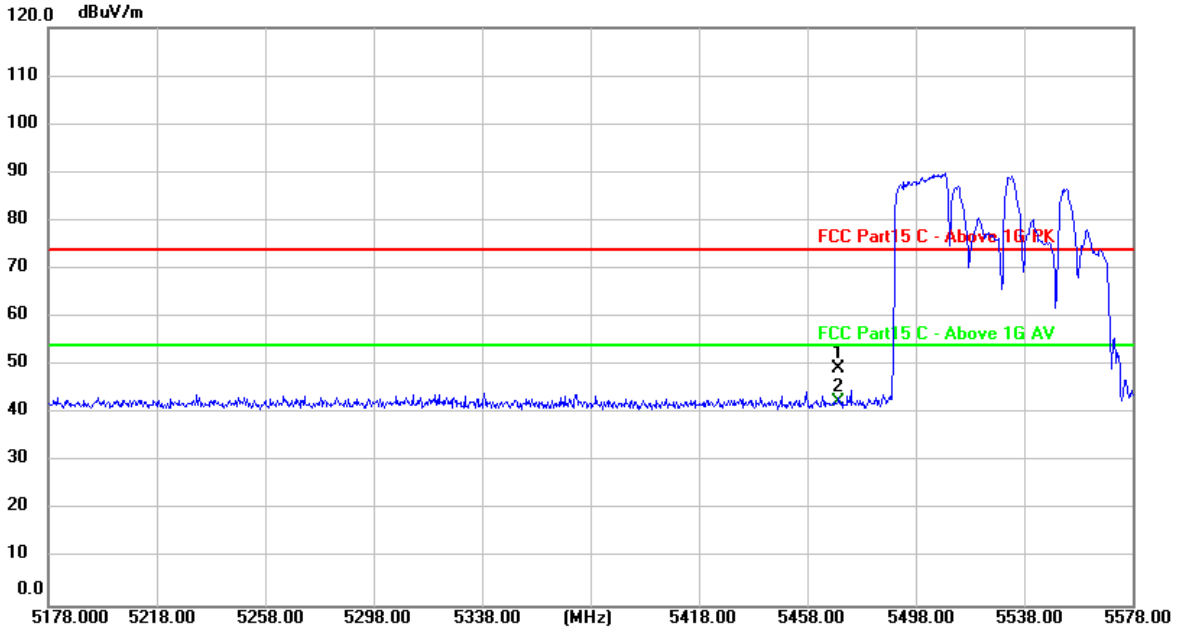

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	11.81	37.59	49.40	74.00	-24.60	peak
2 *	5470.000	4.77	37.59	42.36	54.00	-11.64	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 484/65

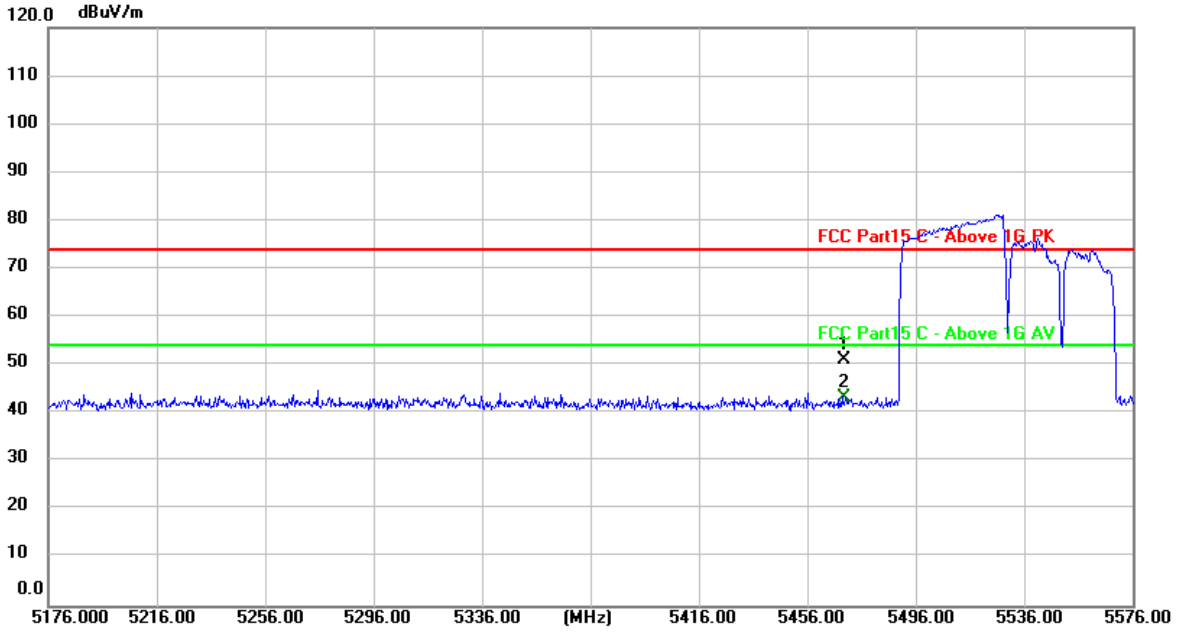

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	13.68	37.59	51.27	74.00	-22.73	peak
2 *	5470.000	5.74	37.59	43.33	54.00	-10.67	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 484/65

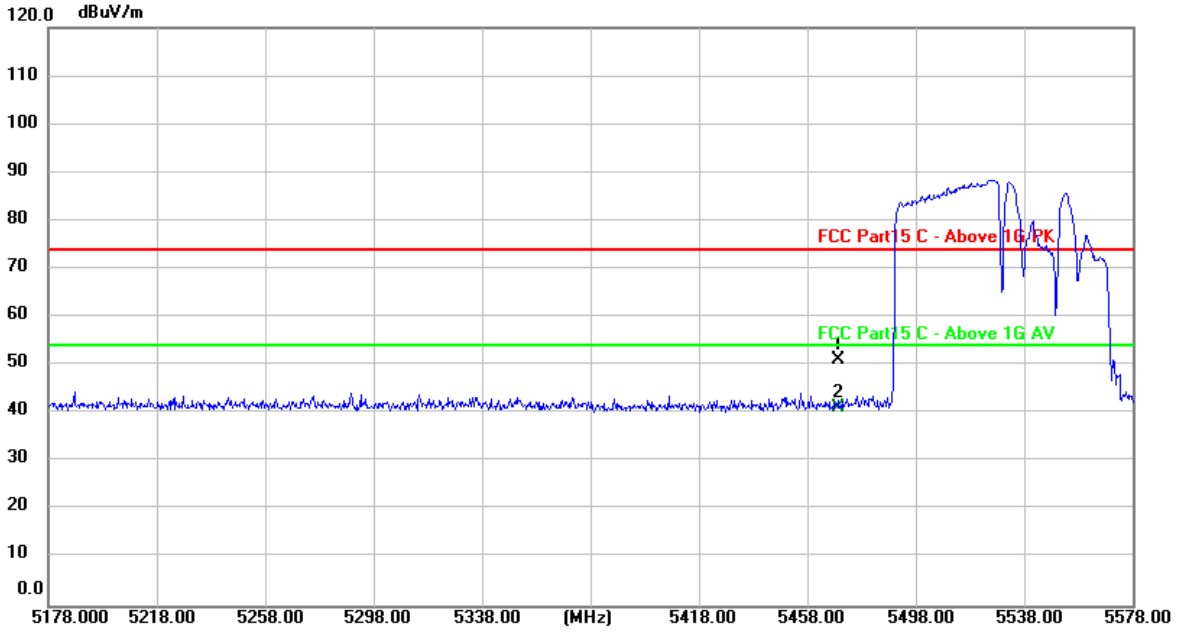

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	13.62	37.59	51.21	74.00	-22.79	peak
2 *	5470.000	3.73	37.59	41.32	54.00	-12.68	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 996/67

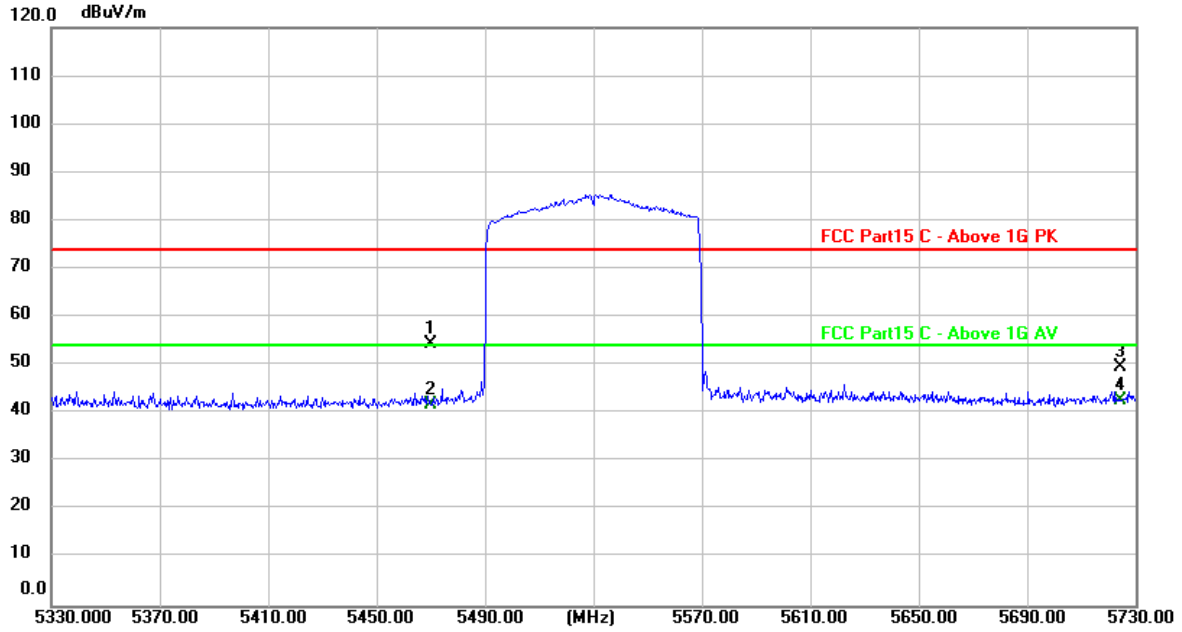

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	16.96	37.59	54.55	74.00	-19.45	peak
2	5470.000	4.19	37.59	41.78	54.00	-12.22	AVG
3	5725.000	11.41	38.16	49.57	74.00	-24.43	peak
4 *	5725.000	4.52	38.16	42.68	54.00	-11.32	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5530MHz (U-NII-2C) 996/67

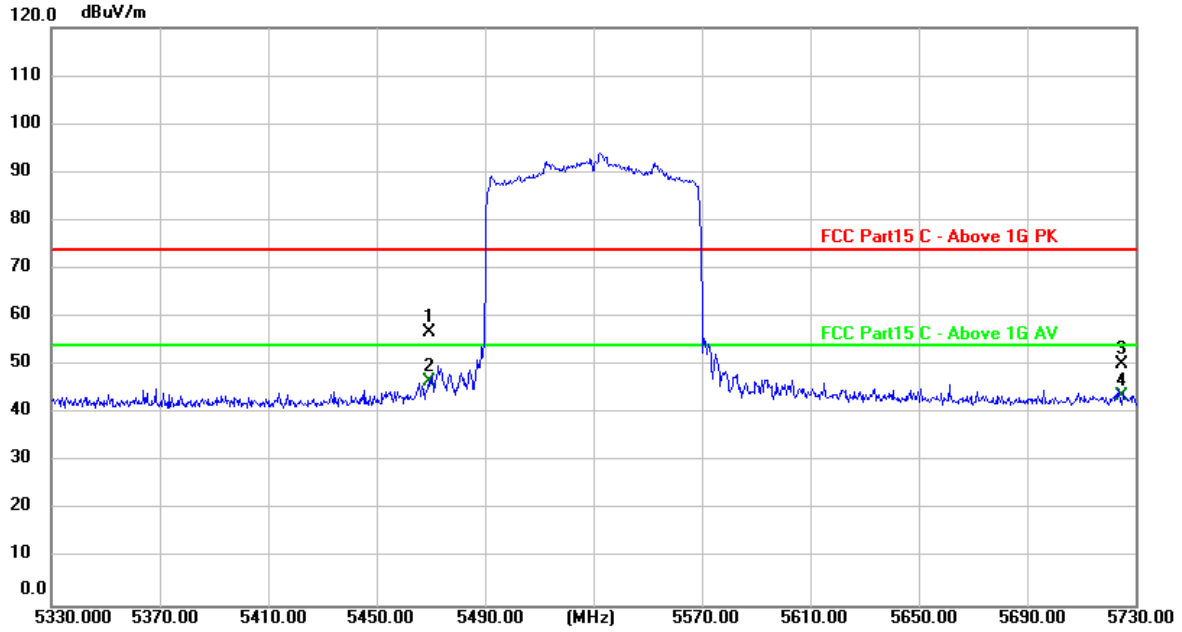

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	19.19	37.59	56.78	74.00	-17.22	peak
2 *	5470.000	8.99	37.59	46.58	54.00	-7.42	AVG
3	5725.000	12.18	38.16	50.34	74.00	-23.66	peak
4	5725.000	5.45	38.16	43.61	54.00	-10.39	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 26/36

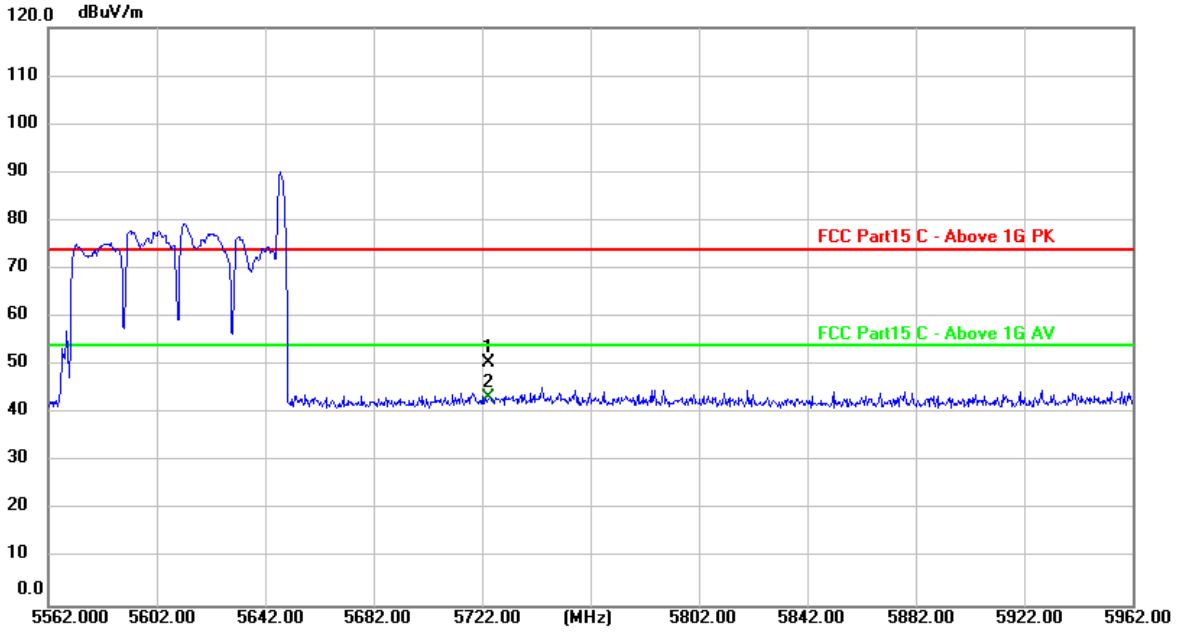

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	12.32	38.16	50.48	74.00	-23.52	peak
2 *	5725.000	5.06	38.16	43.22	54.00	-10.78	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 26/36

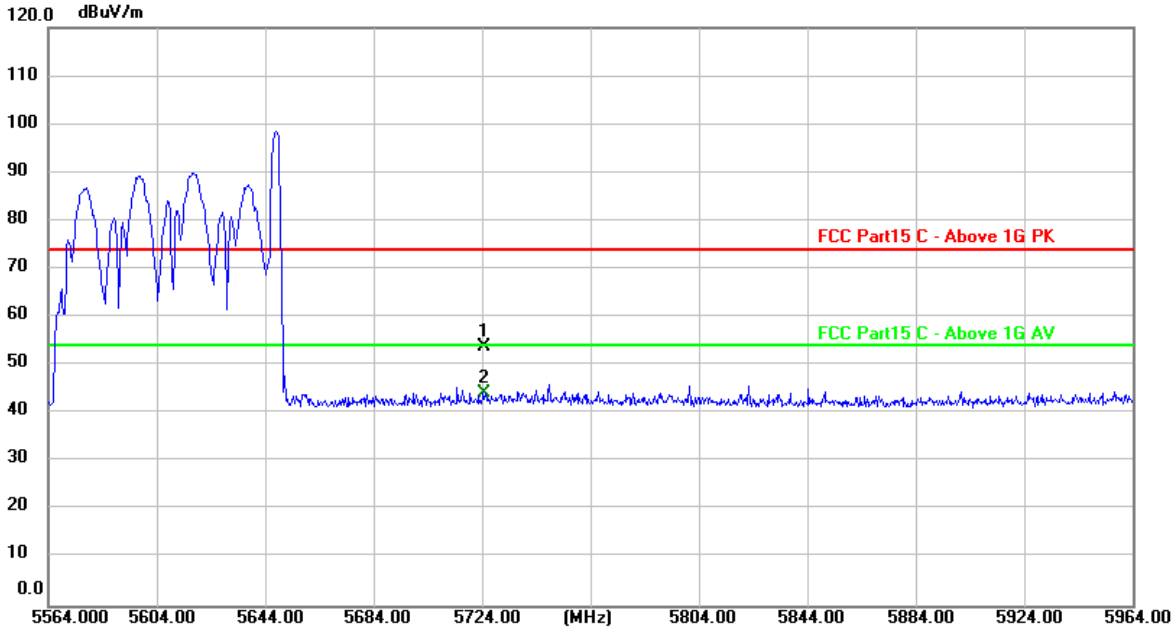

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	15.72	38.16	53.88	74.00	-20.12	peak
2 *	5725.000	6.02	38.16	44.18	54.00	-9.82	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 52/52

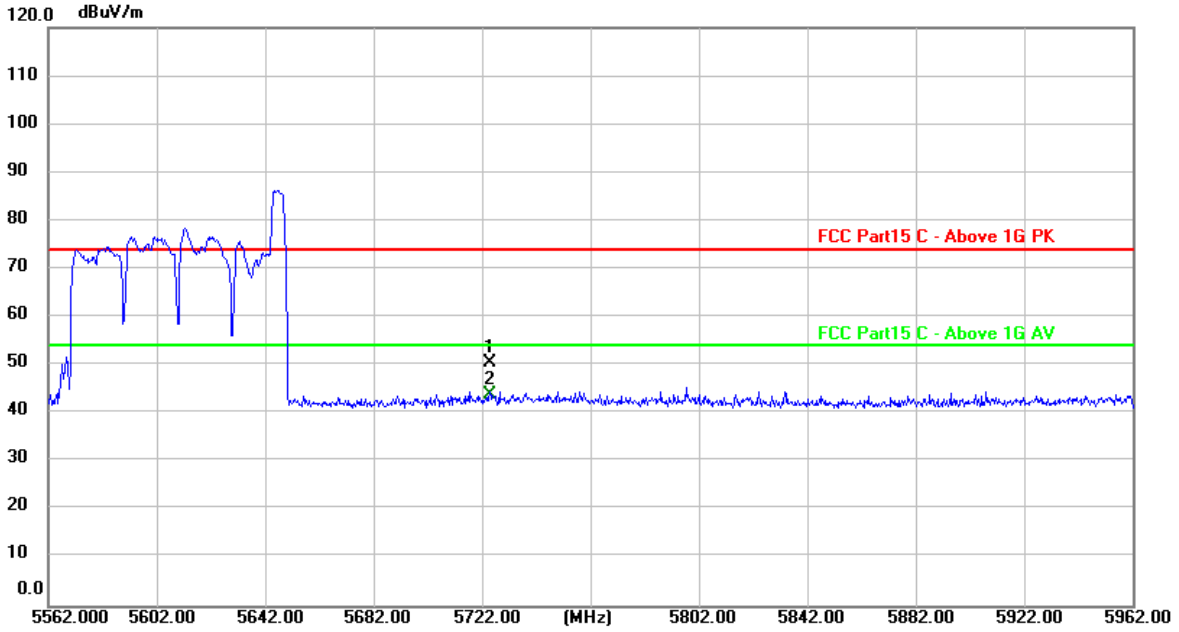

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	12.49	38.16	50.65	74.00	-23.35	peak
2 *	5725.000	5.89	38.16	44.05	54.00	-9.95	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 52/52

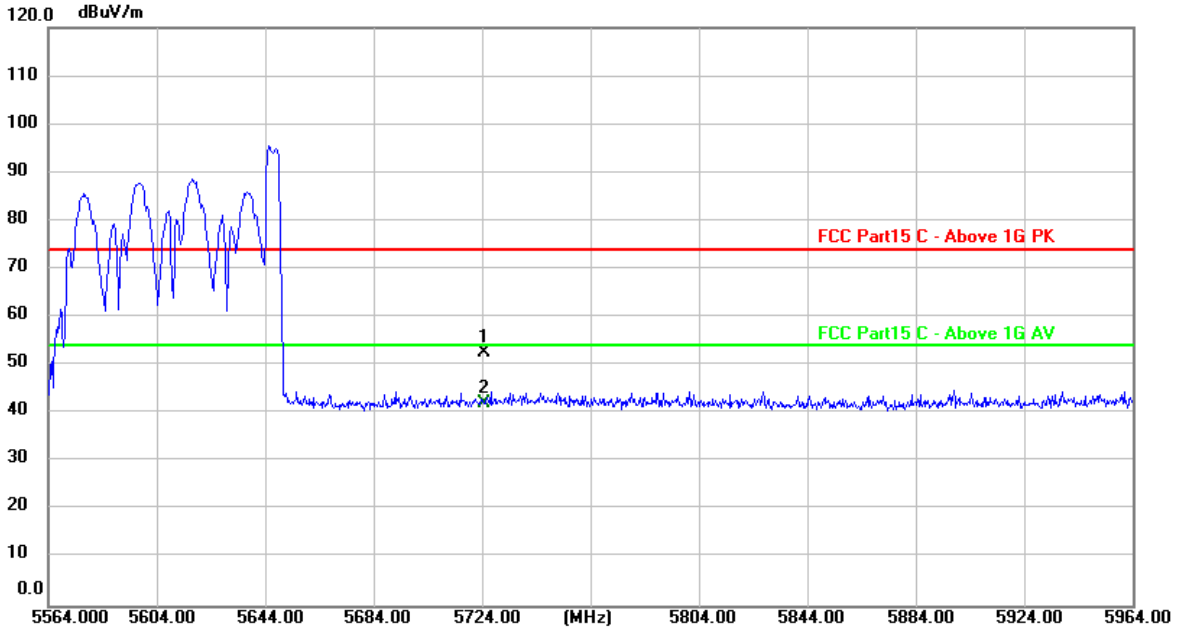

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	14.61	38.16	52.77	74.00	-21.23	peak
2 *	5725.000	4.05	38.16	42.21	54.00	-11.79	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 106/60

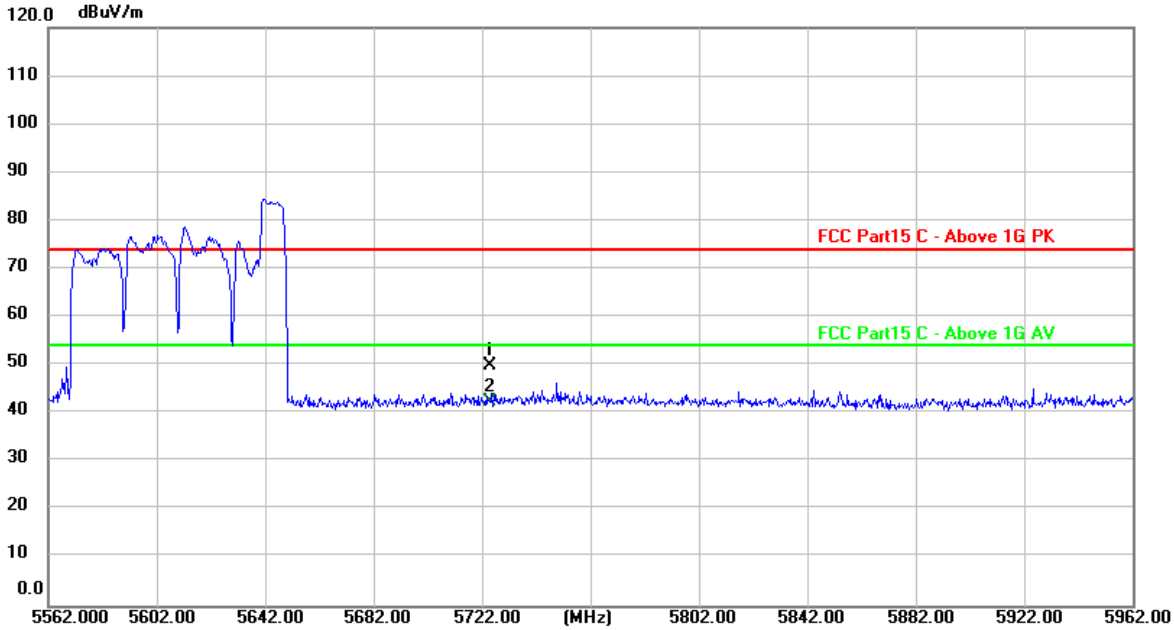

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	11.85	38.16	50.01	74.00	-23.99	peak
2 *	5725.000	4.38	38.16	42.54	54.00	-11.46	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 106/60

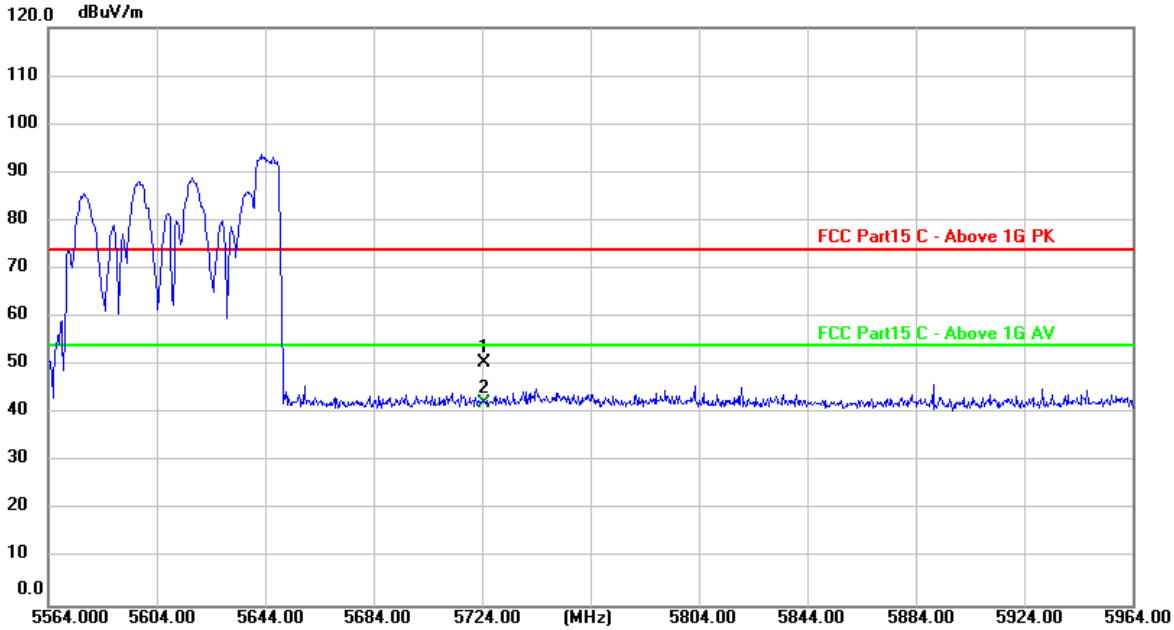

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	12.45	38.16	50.61	74.00	-23.39	peak
2 *	5725.000	4.13	38.16	42.29	54.00	-11.71	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 242/64

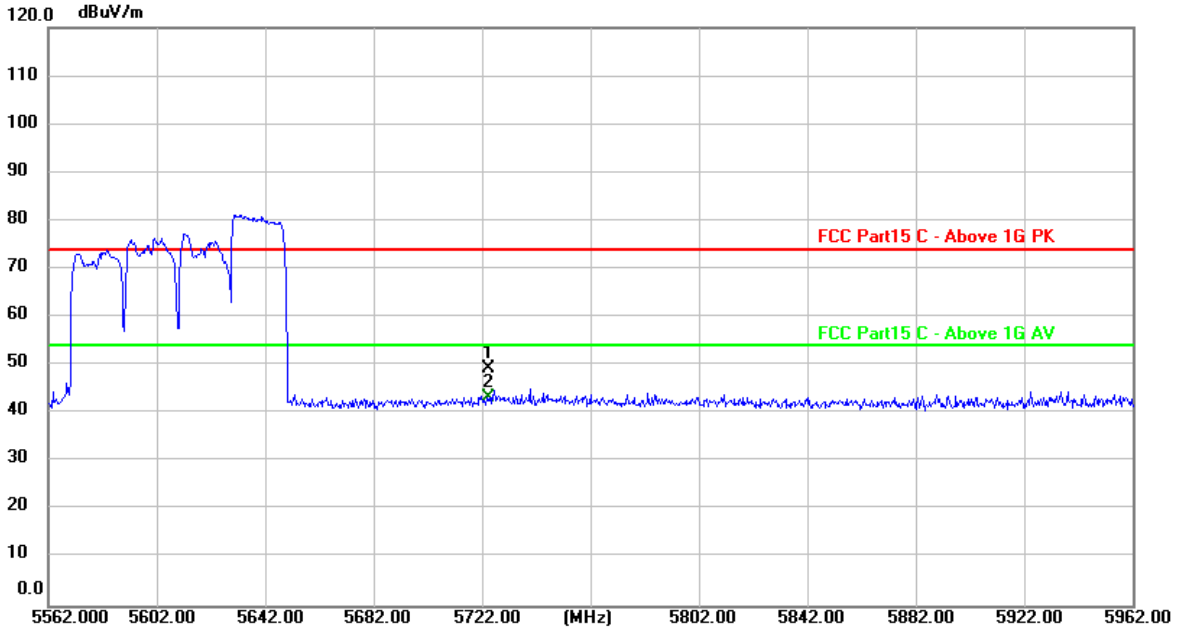

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	11.05	38.16	49.21	74.00	-24.79	peak
2 *	5725.000	5.25	38.16	43.41	54.00	-10.59	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 242/64

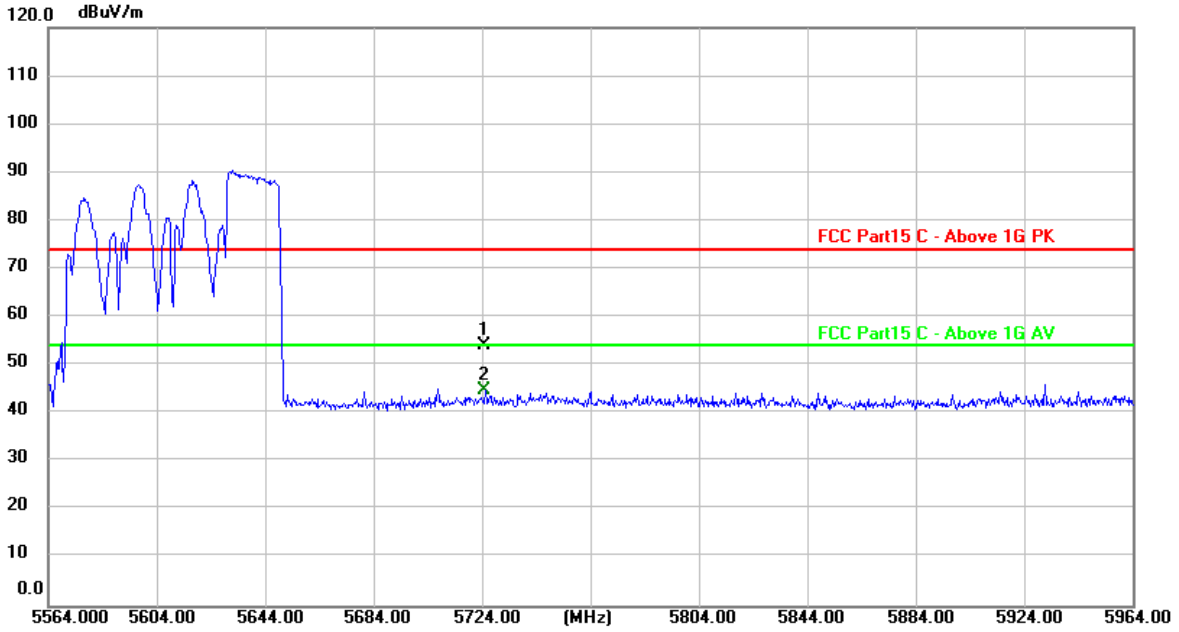

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.04	38.16	54.20	74.00	-19.80	peak
2 *	5725.000	6.61	38.16	44.77	54.00	-9.23	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 484/66

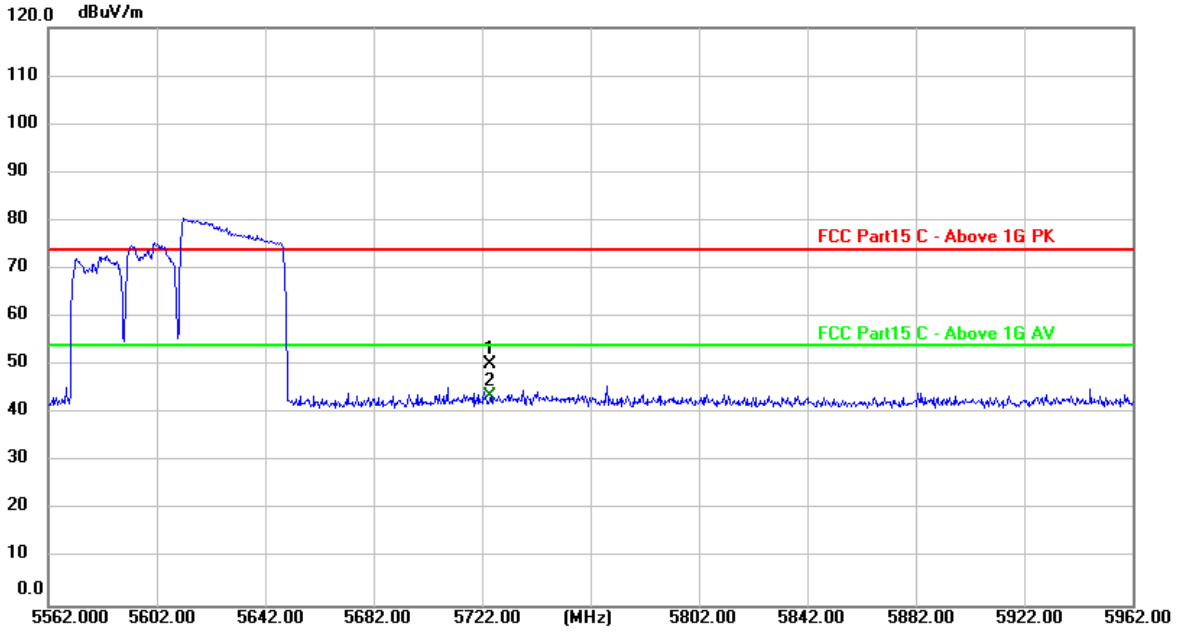

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	12.18	38.16	50.34	74.00	-23.66	peak
2 *	5725.000	5.40	38.16	43.56	54.00	-10.44	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 484/66

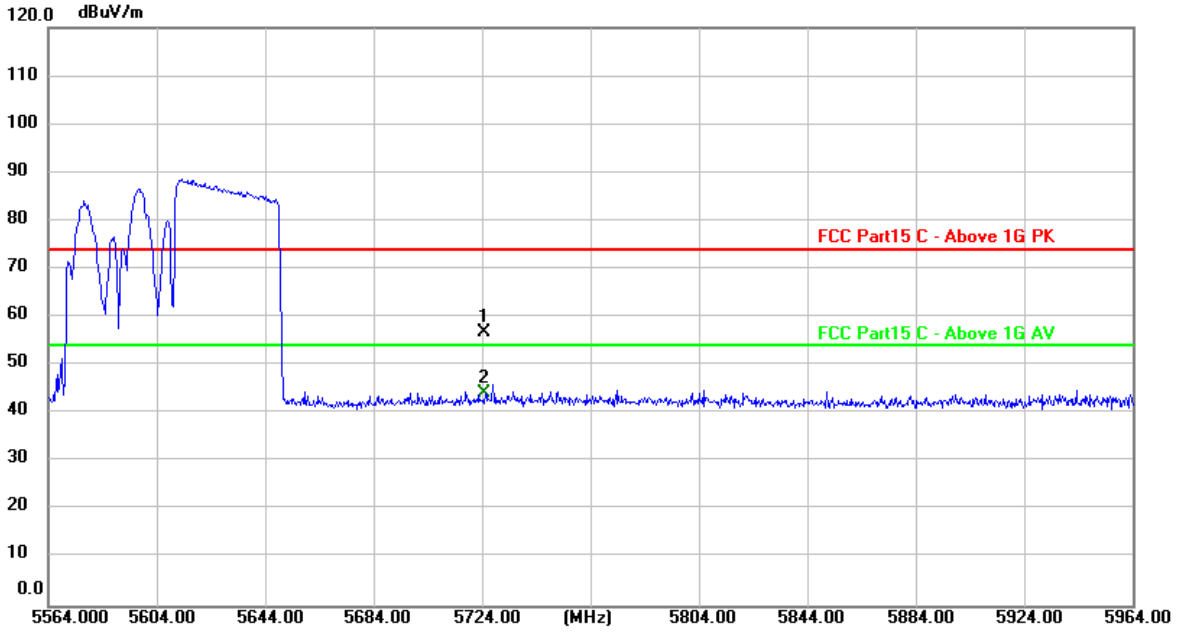

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	18.54	38.16	56.70	74.00	-17.30	peak
2 *	5725.000	6.22	38.16	44.38	54.00	-9.62	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 996/67

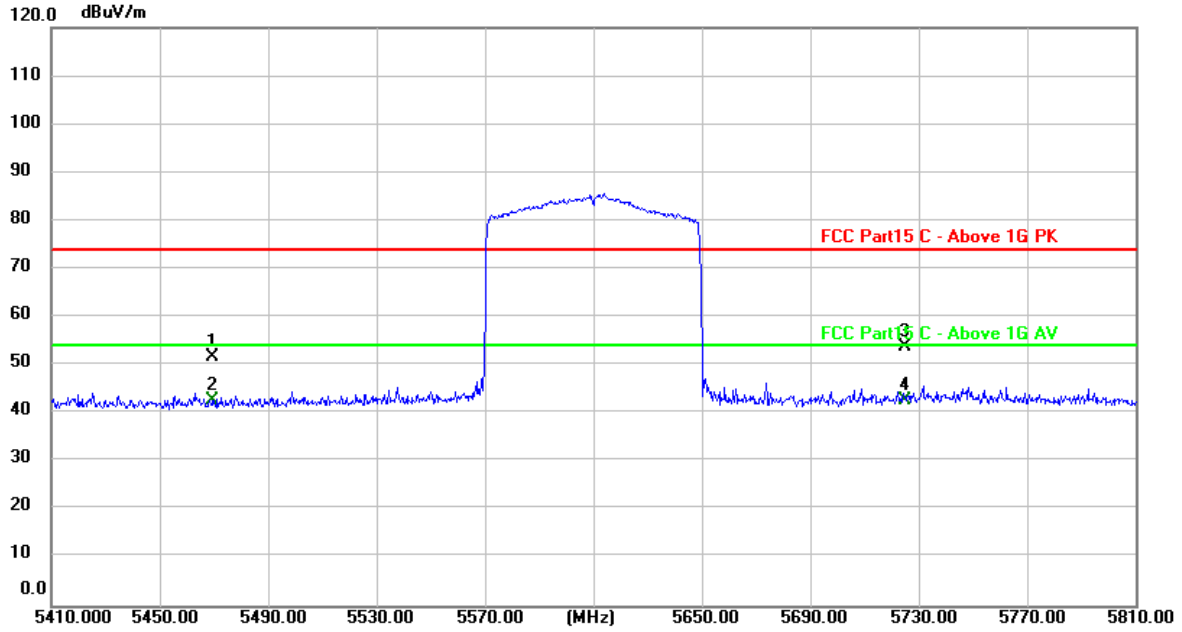

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	14.19	37.59	51.78	74.00	-22.22	peak
2 *	5470.000	5.17	37.59	42.76	54.00	-11.24	AVG
3	5725.000	15.71	38.16	53.87	74.00	-20.13	peak
4	5725.000	4.54	38.16	42.70	54.00	-11.30	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5610MHz (U-NII-2C) 996/67

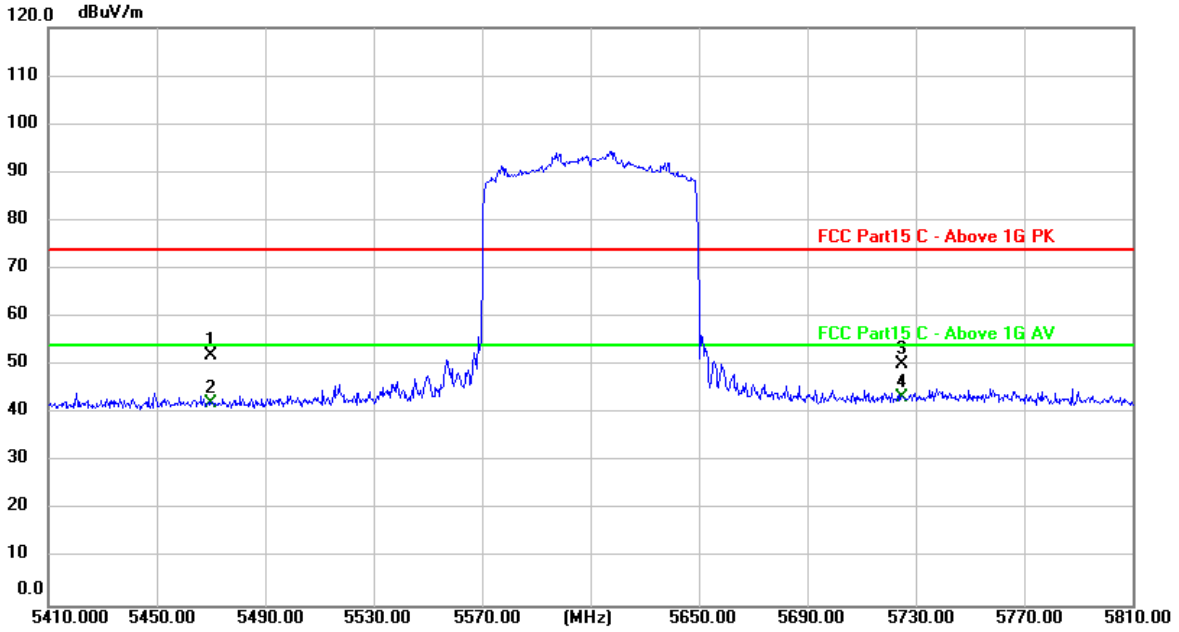

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5470.000	14.42	37.59	52.01	74.00	-21.99	peak
2	5470.000	4.71	37.59	42.30	54.00	-11.70	AVG
3	5725.000	12.01	38.16	50.17	74.00	-23.83	peak
4 *	5725.000	5.05	38.16	43.21	54.00	-10.79	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)

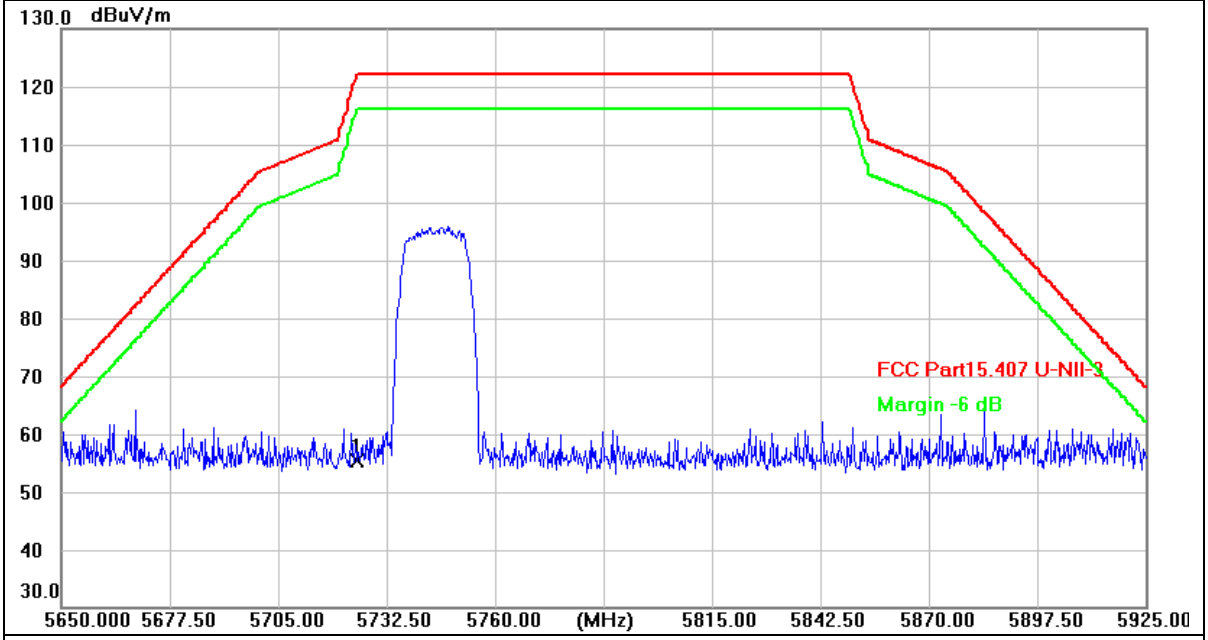

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	17.26	38.16	55.42	122.20	-66.78	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)

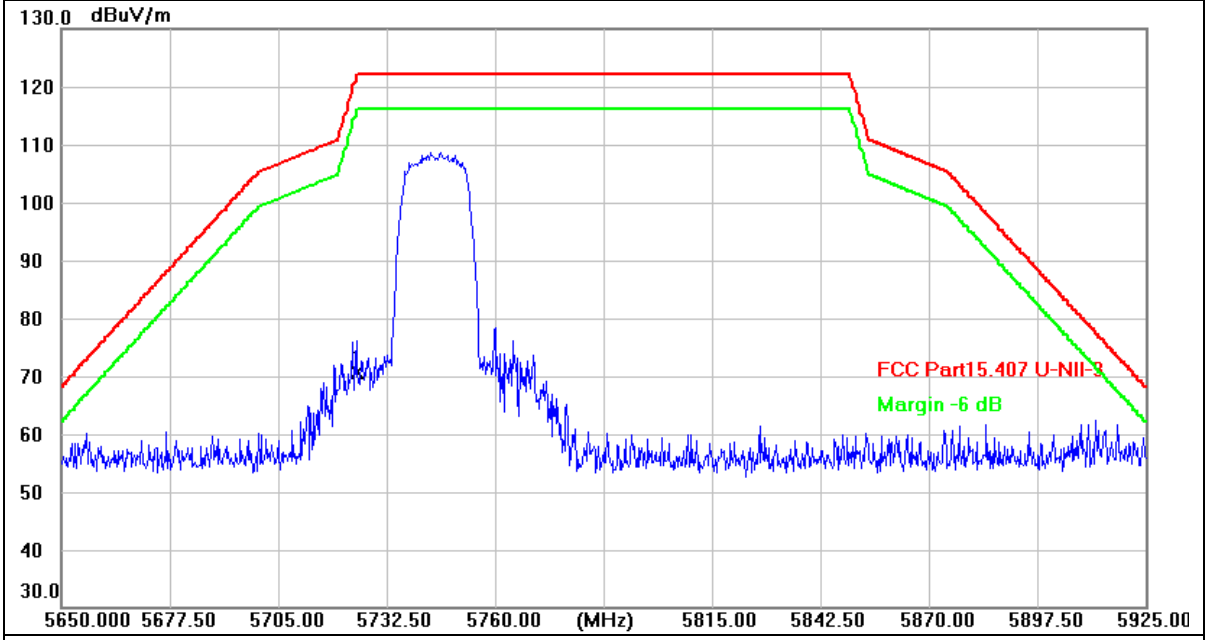

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	32.54	38.16	70.70	122.20	-51.50	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)

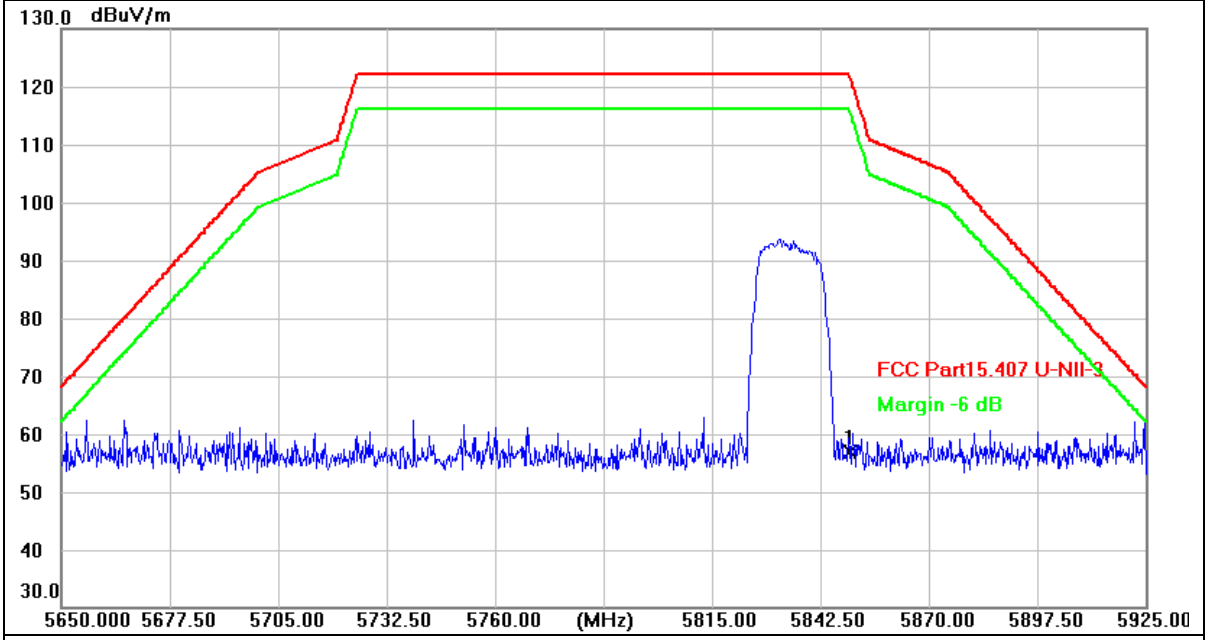

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	18.39	38.44	56.83	122.20	-65.37	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)

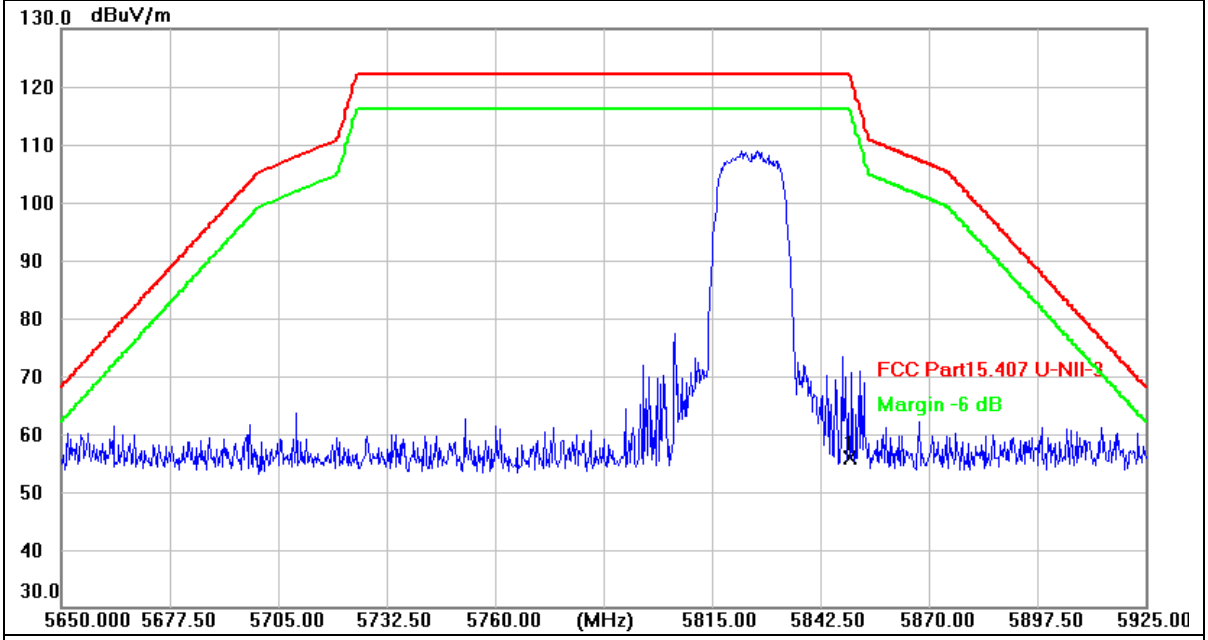

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.51	38.44	55.95	122.20	-66.25	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)

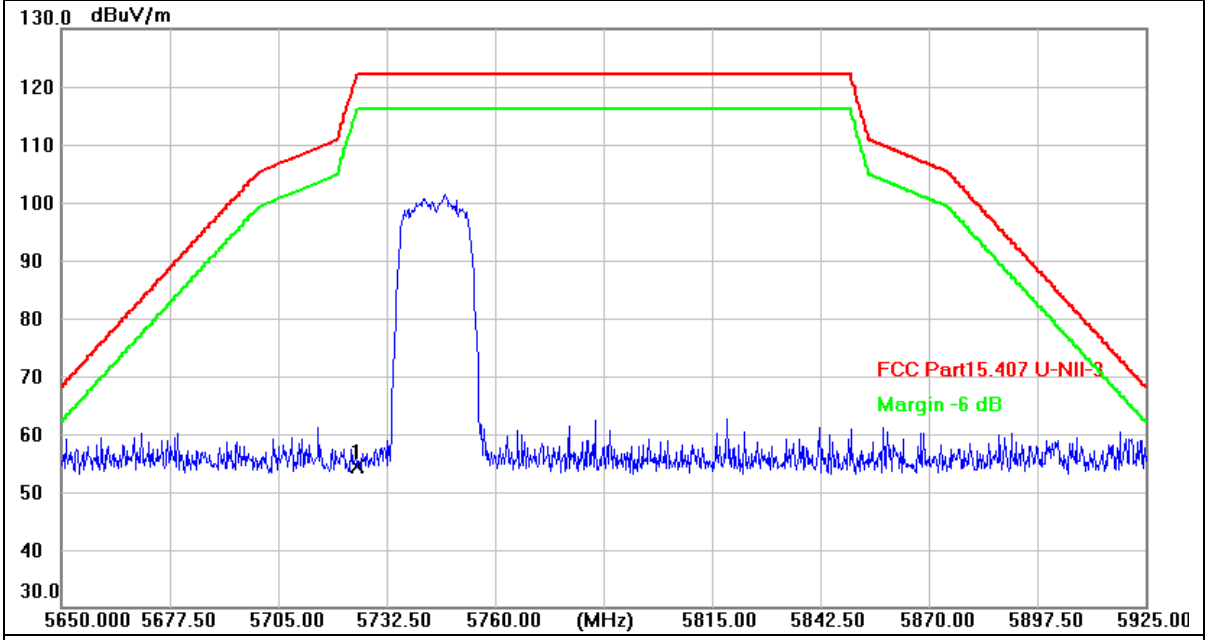

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.13	38.16	54.29	122.20	-67.91	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)

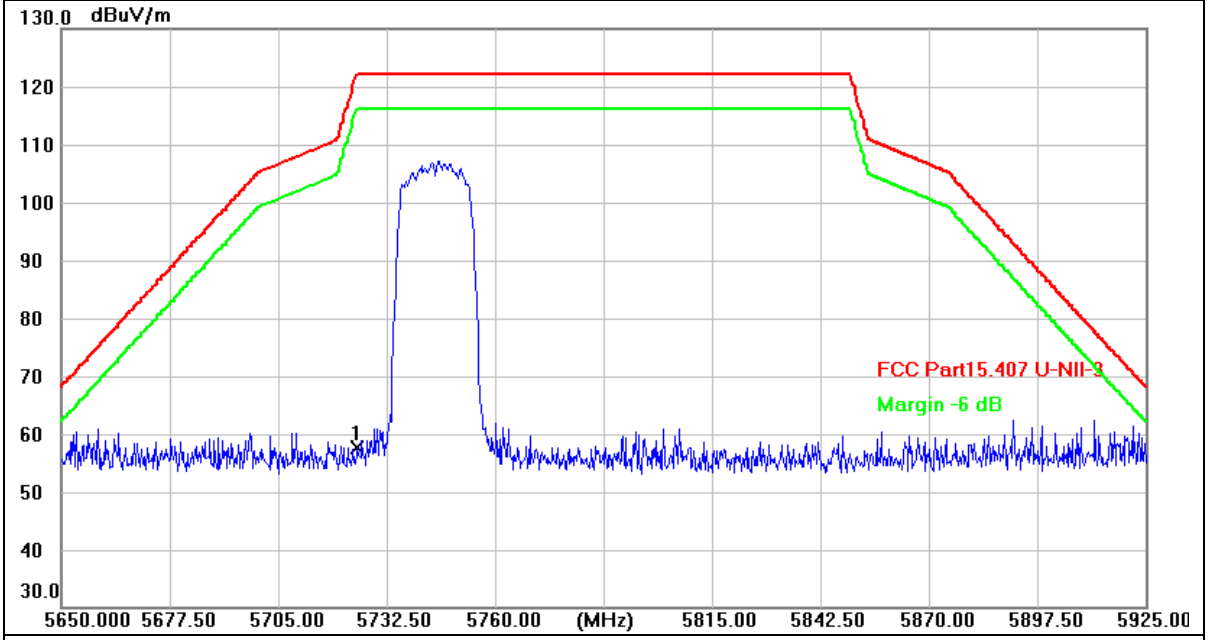

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.47	38.16	57.63	122.20	-64.57	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)

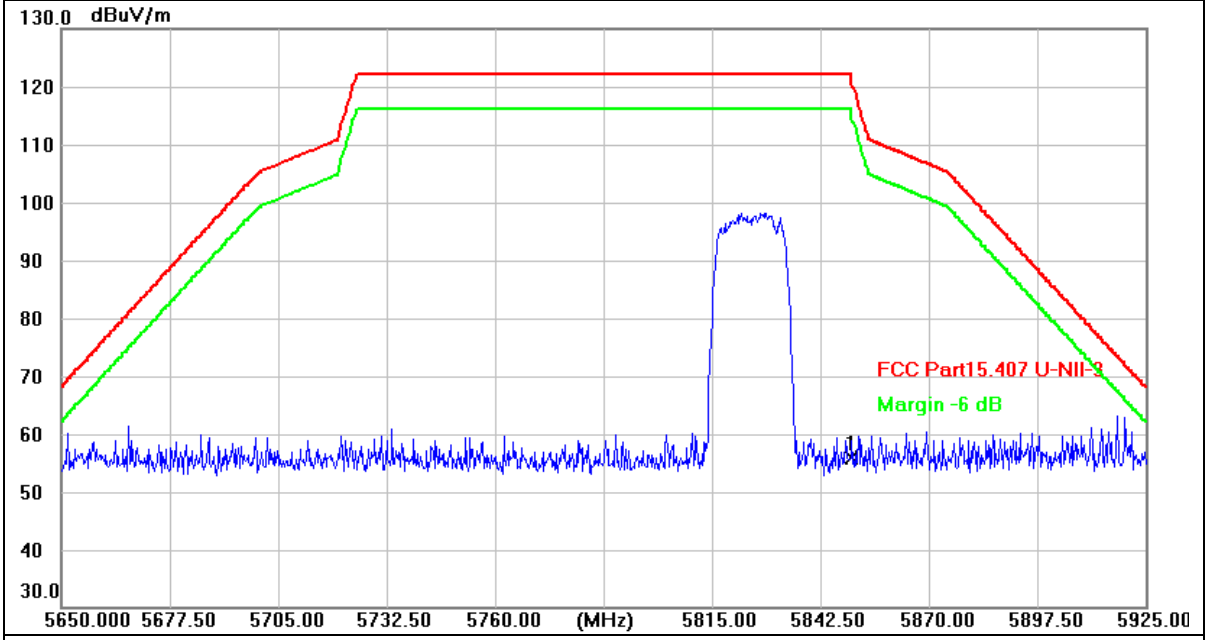

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.37	38.44	55.81	122.20	-66.39	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)

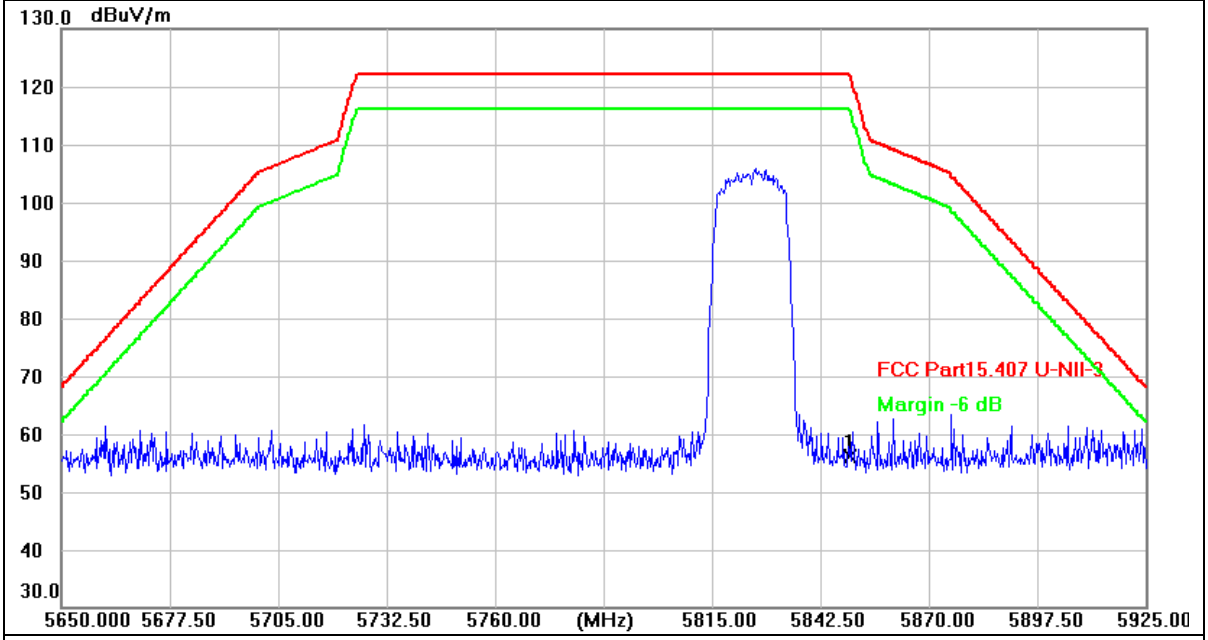

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.78	38.44	56.22	122.20	-65.98	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)

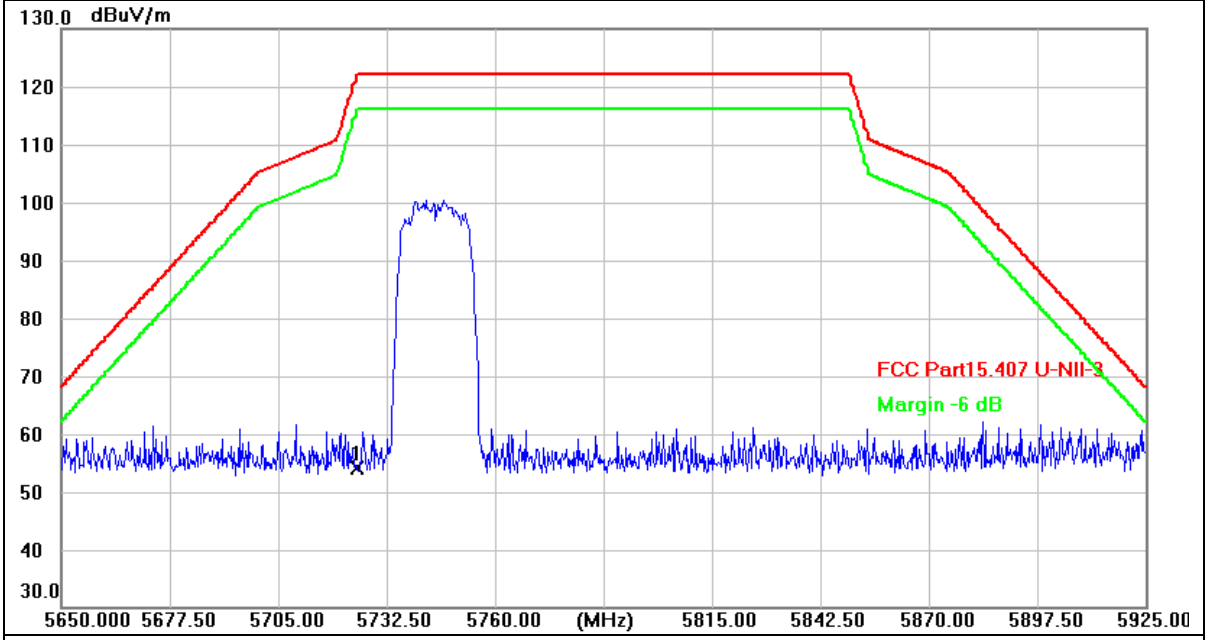

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	15.95	38.16	54.11	122.20	-68.09	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)

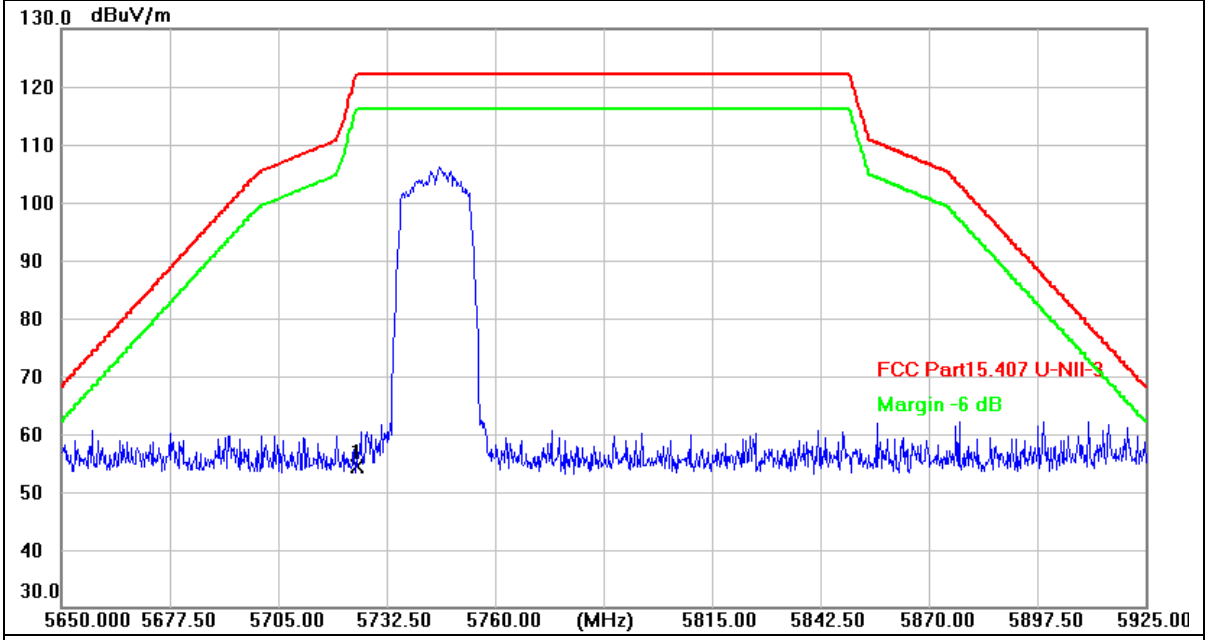

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.15	38.16	54.31	122.20	-67.89	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)

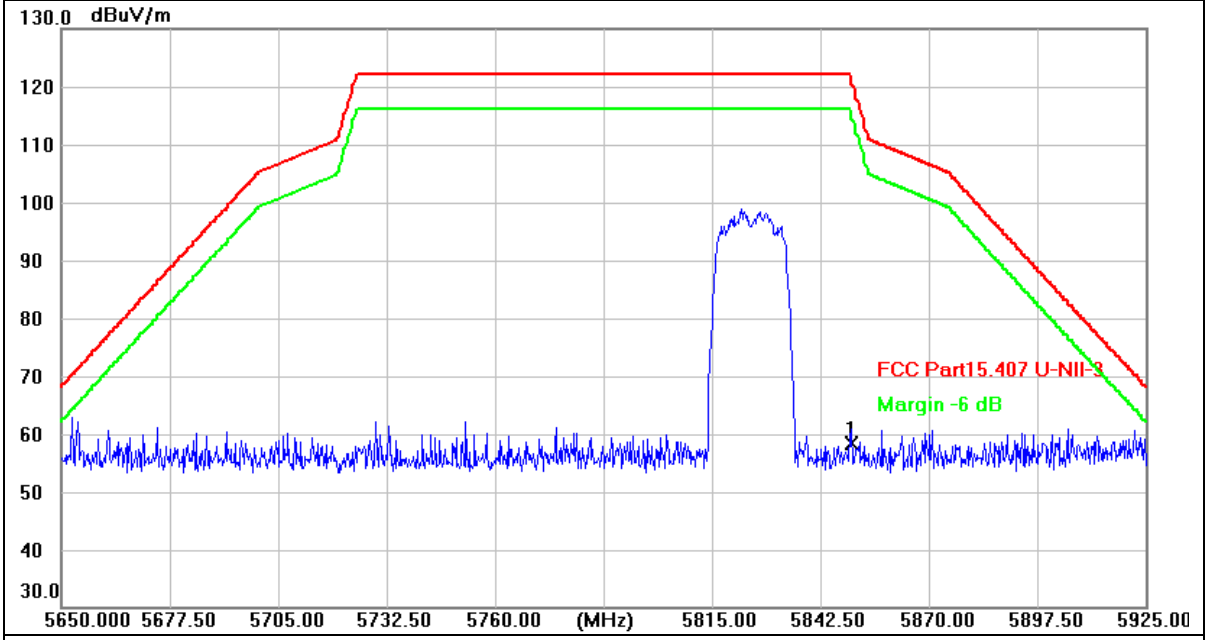

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	19.89	38.44	58.33	122.20	-63.87	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)

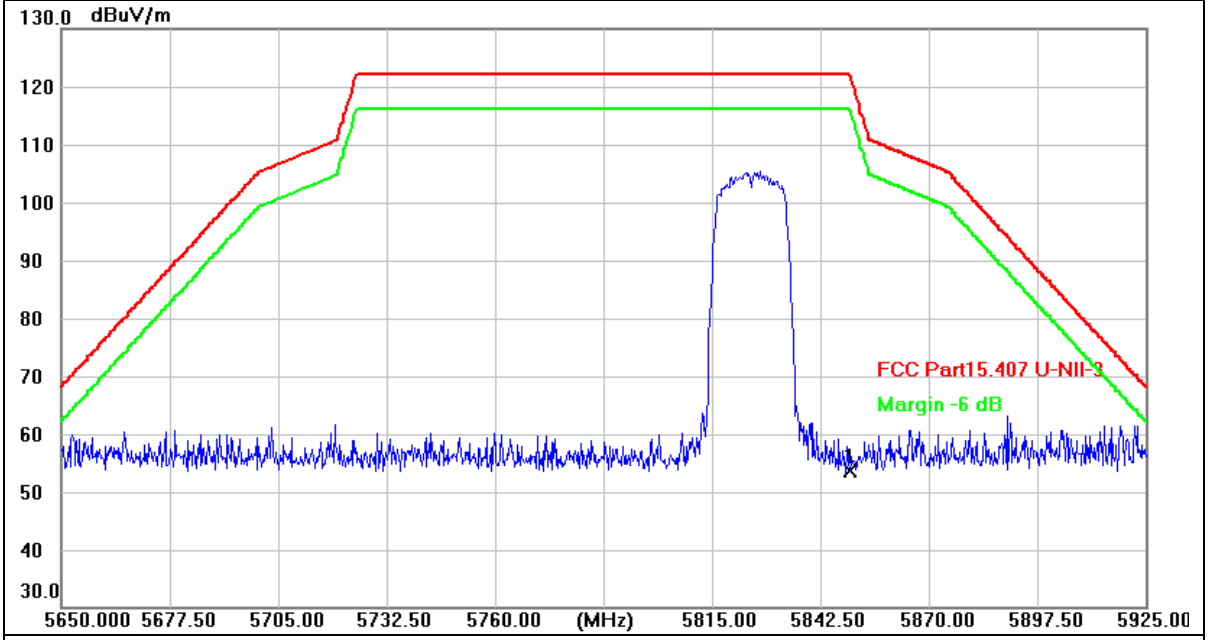

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	15.15	38.44	53.59	122.20	-68.61	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 26/0

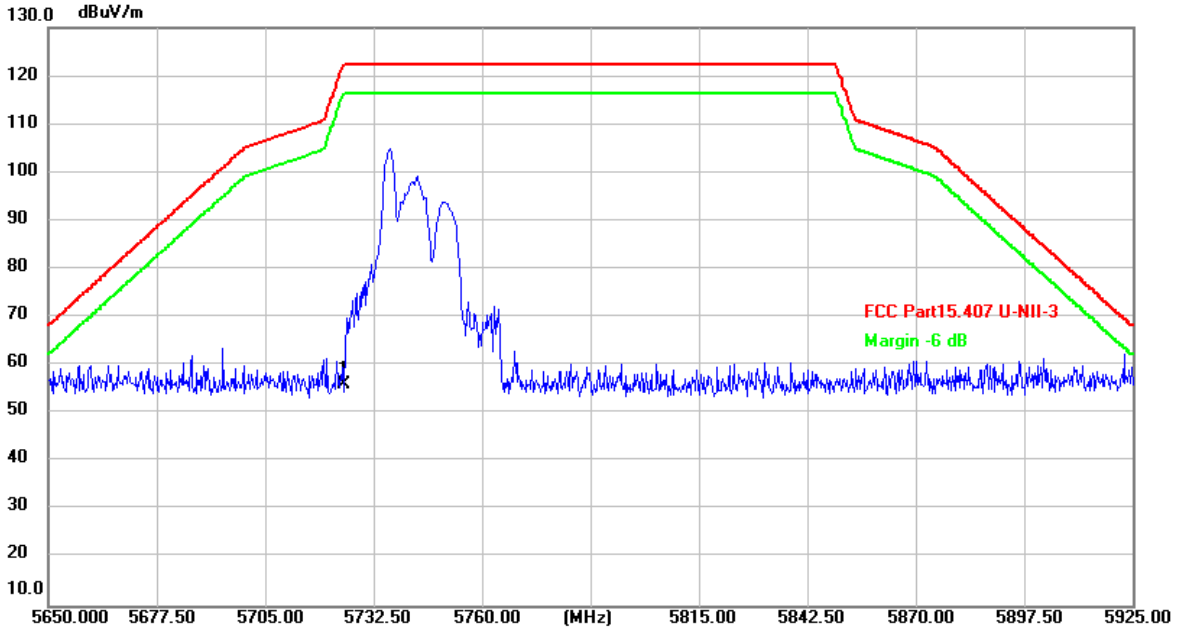

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	17.92	38.16	56.08	122.20	-66.12	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 26/0

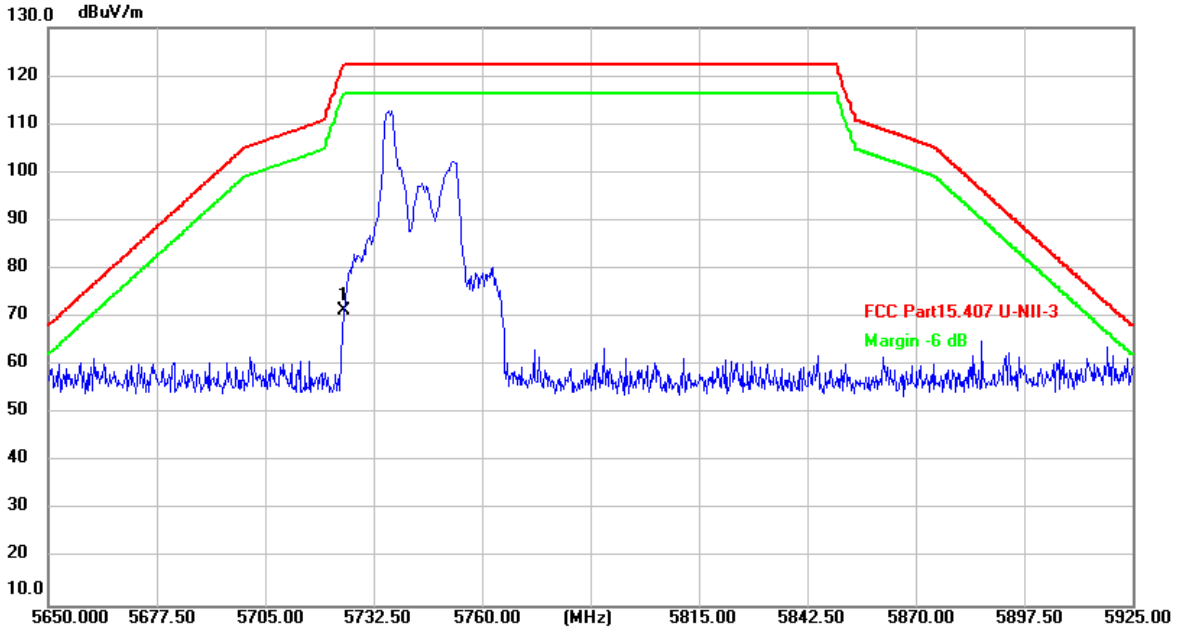

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	33.09	38.16	71.25	122.20	-50.95	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 52/37

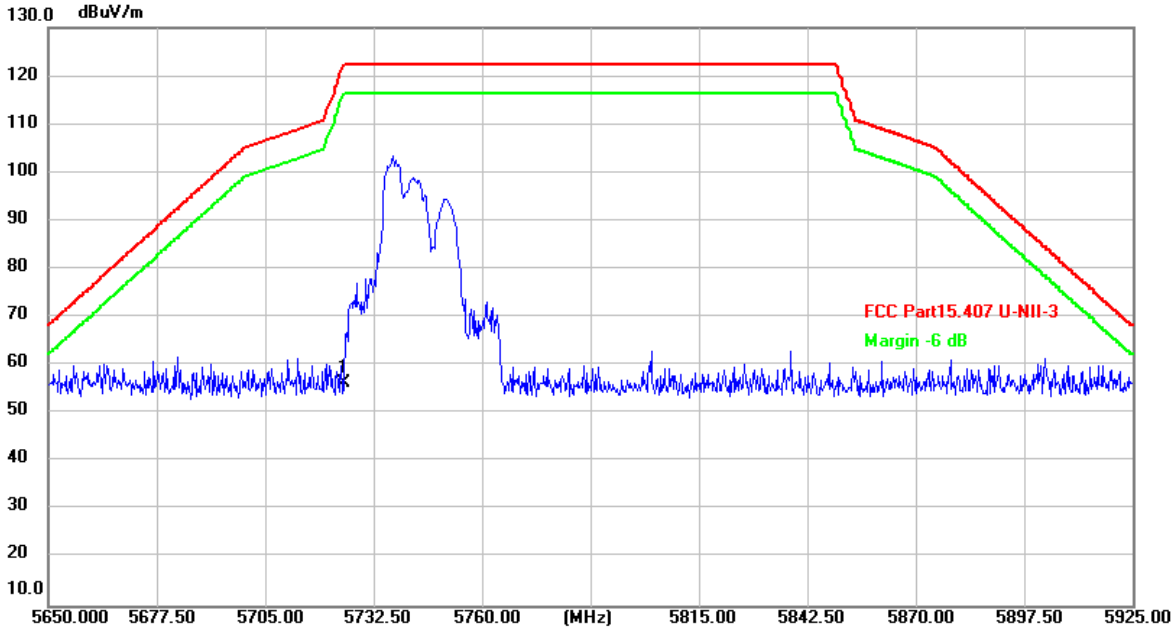

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.25	38.16	56.41	122.20	-65.79	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 52/37

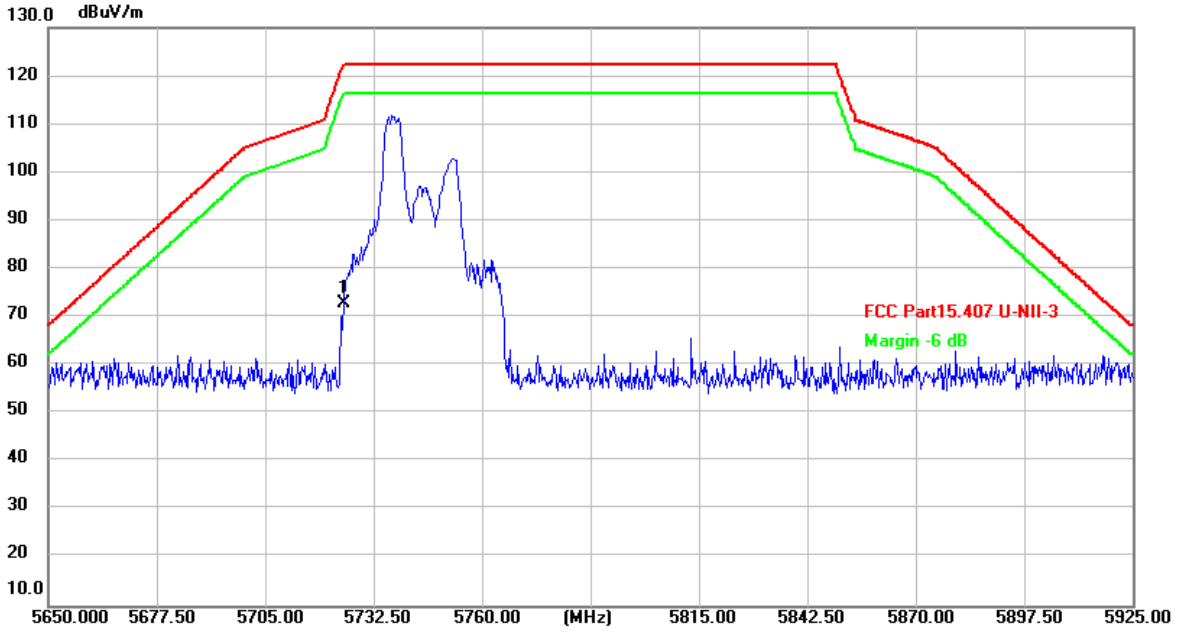

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	34.83	38.16	72.99	122.20	-49.21	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 106/53

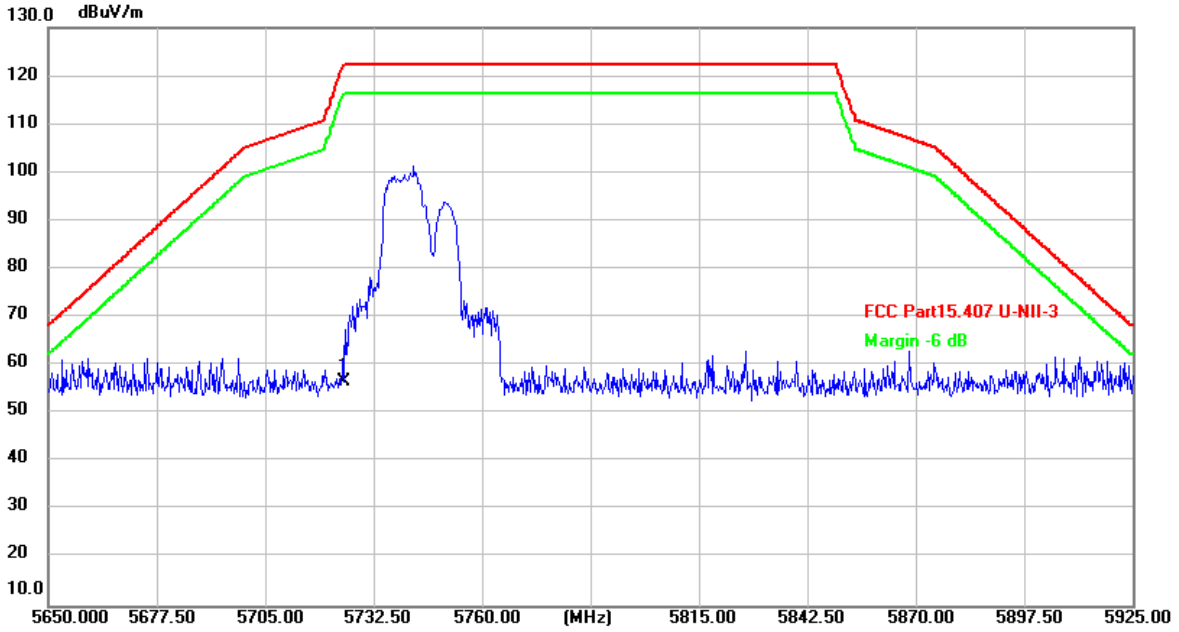

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.55	38.16	56.71	122.20	-65.49	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 106/53

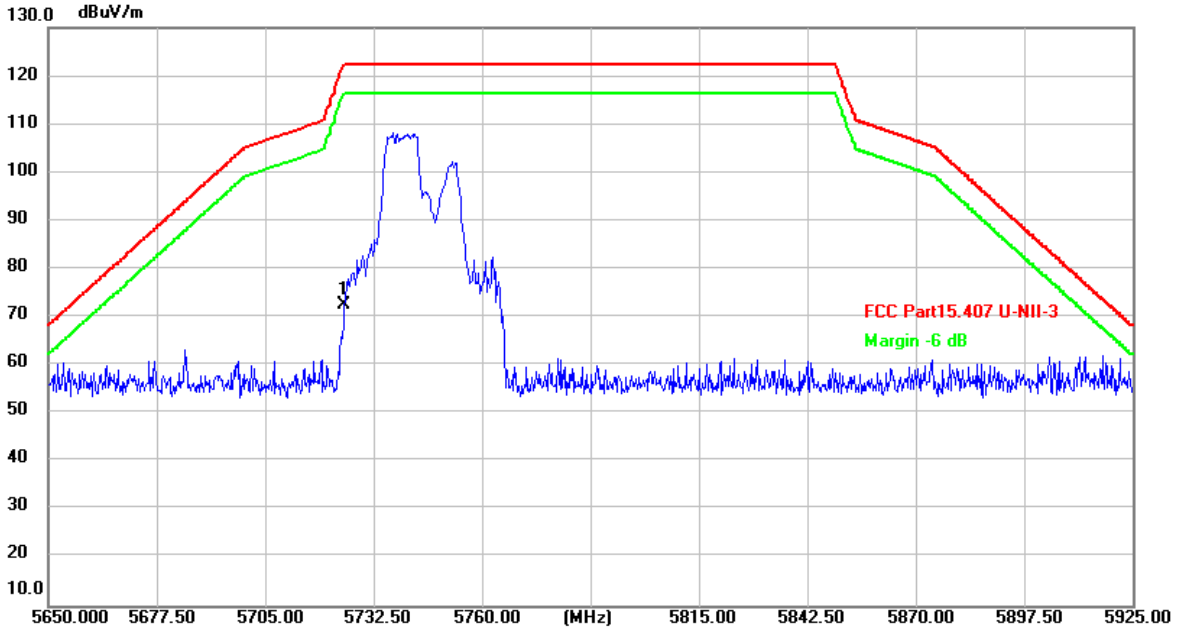

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	34.24	38.16	72.40	122.20	-49.80	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61

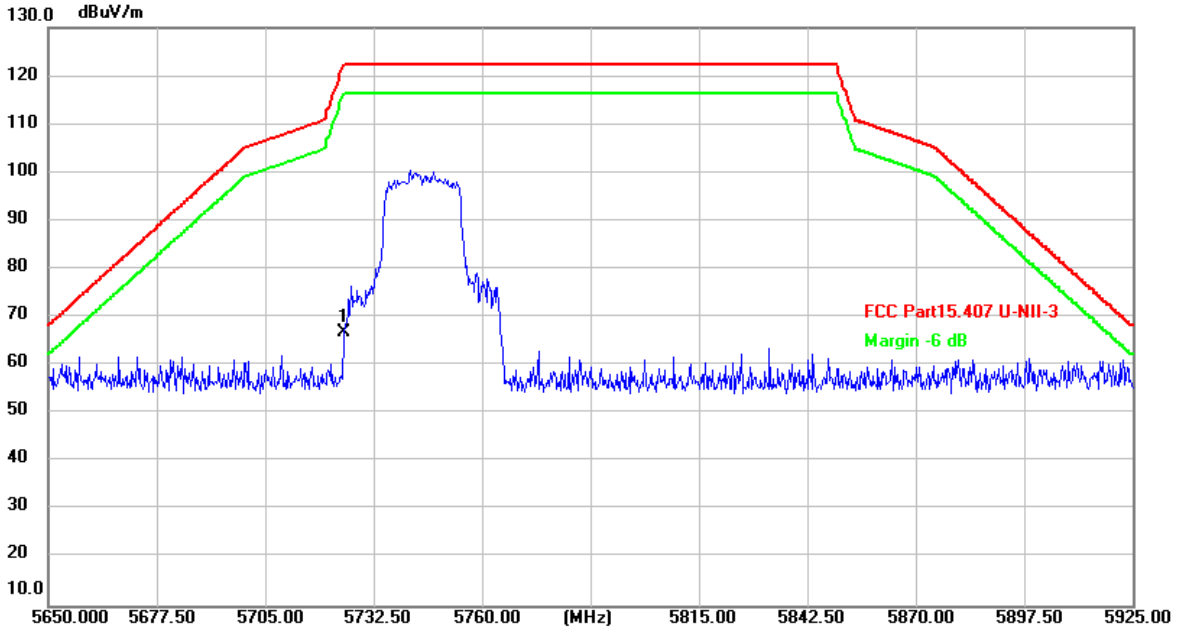

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	28.68	38.16	66.84	122.20	-55.36	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5745MHz (U-NII-3) 242/61

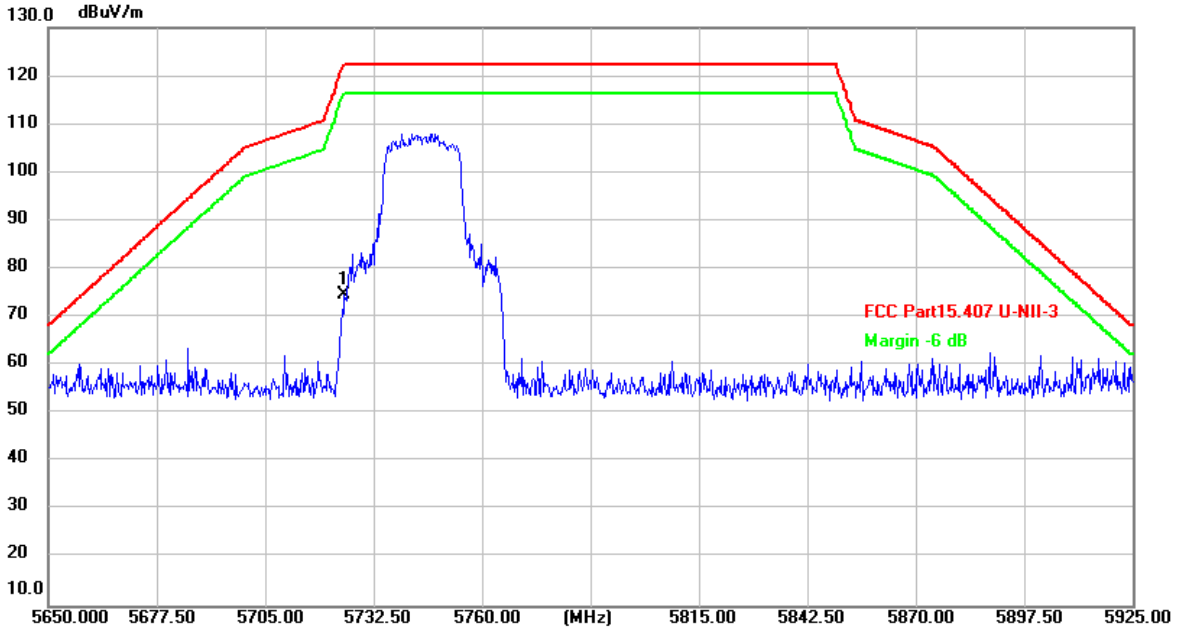

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	36.35	38.16	74.51	122.20	-47.69	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 26/8

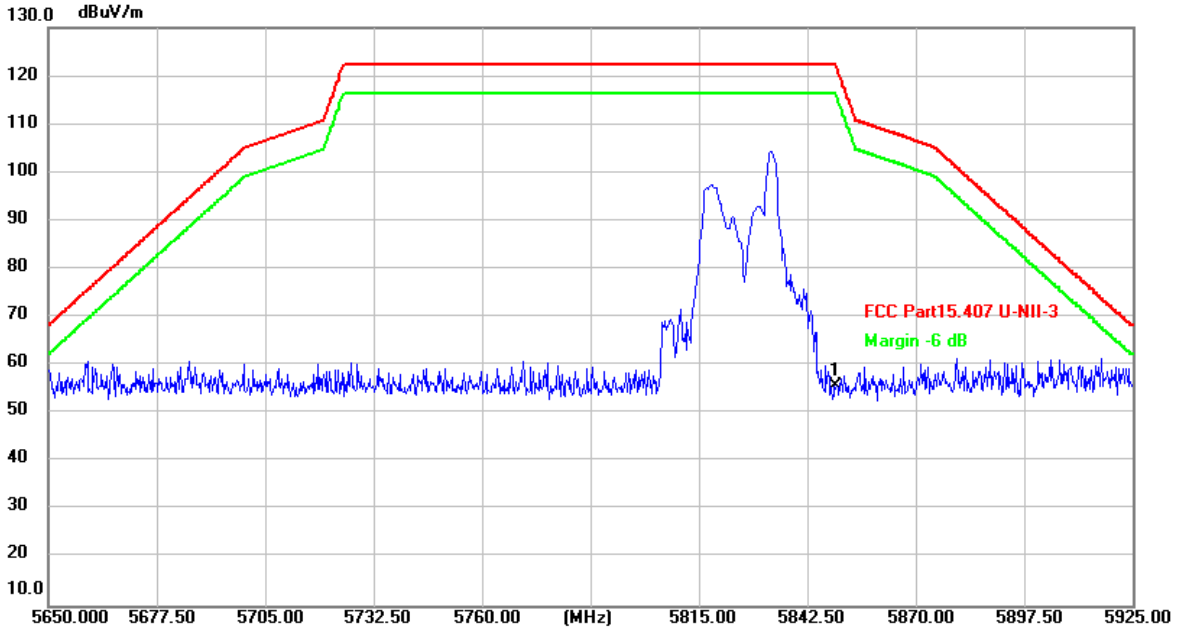

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.31	38.44	55.75	122.20	-66.45	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 26/8

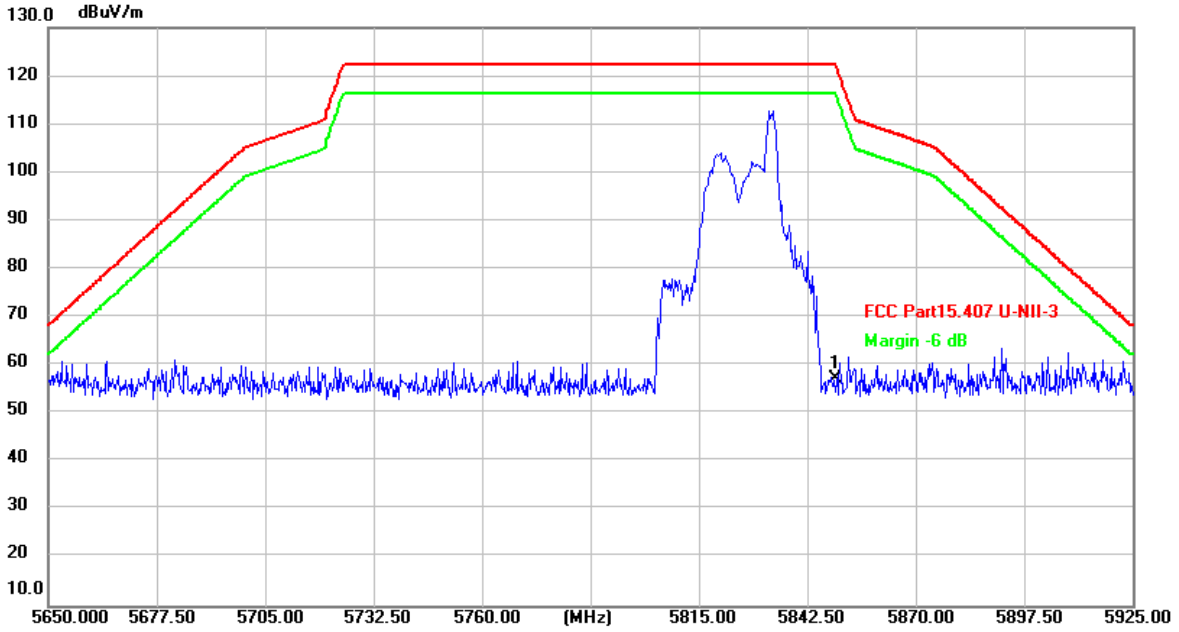

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	18.76	38.44	57.20	122.20	-65.00	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 52/40

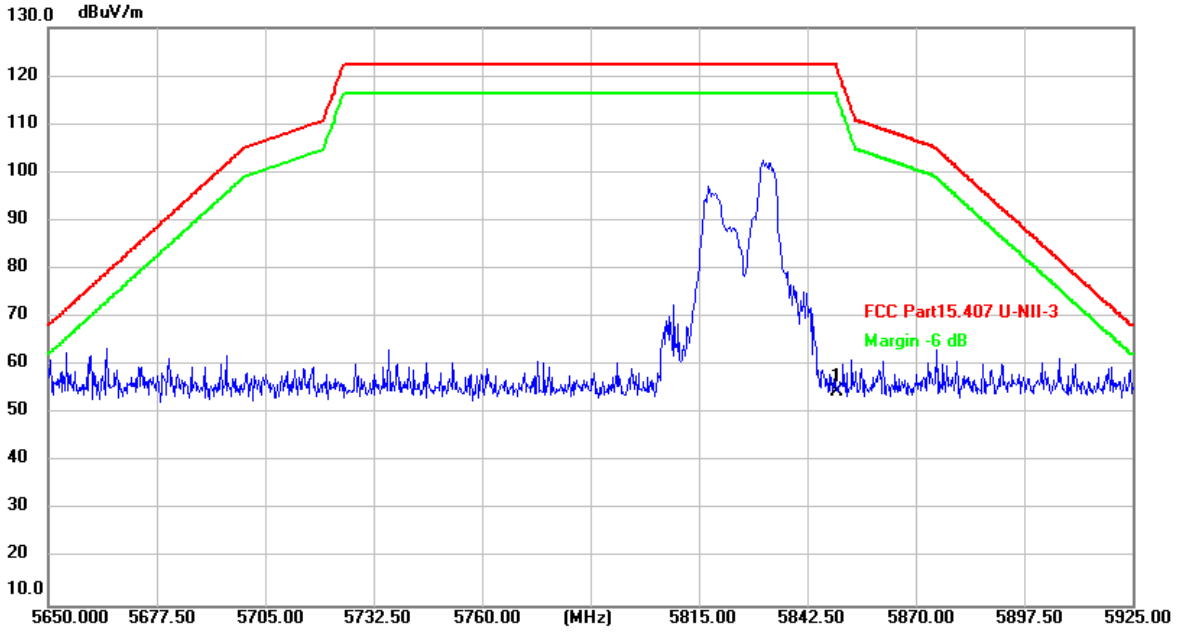

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.21	38.44	54.65	122.20	-67.55	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 52/40

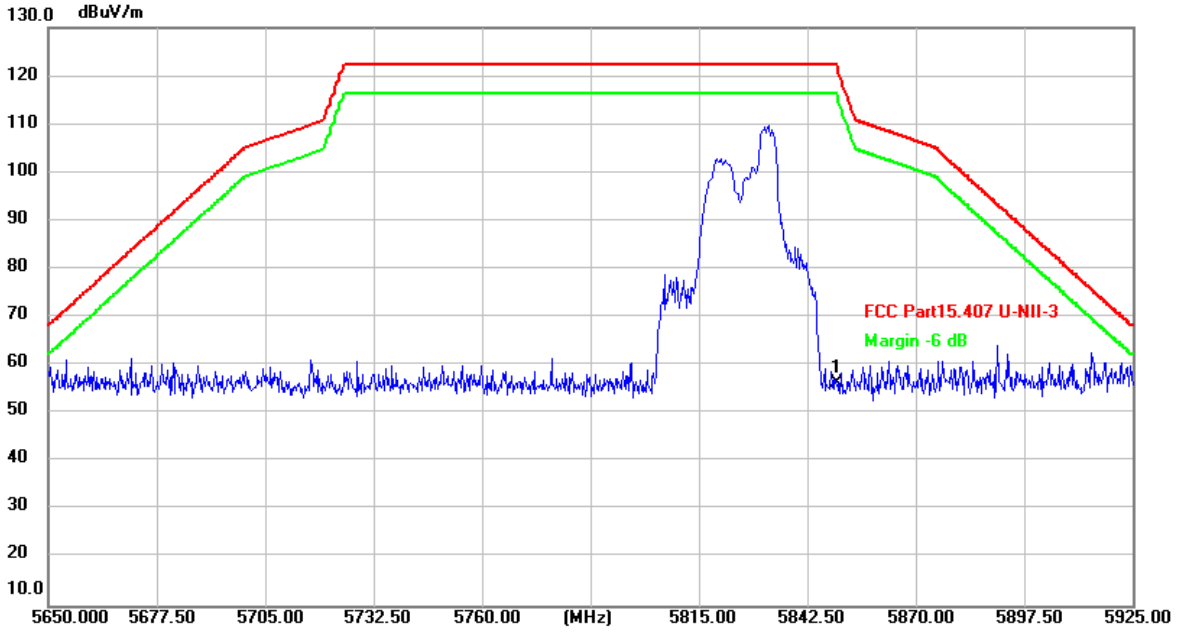

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	18.01	38.44	56.45	122.20	-65.75	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 106/54

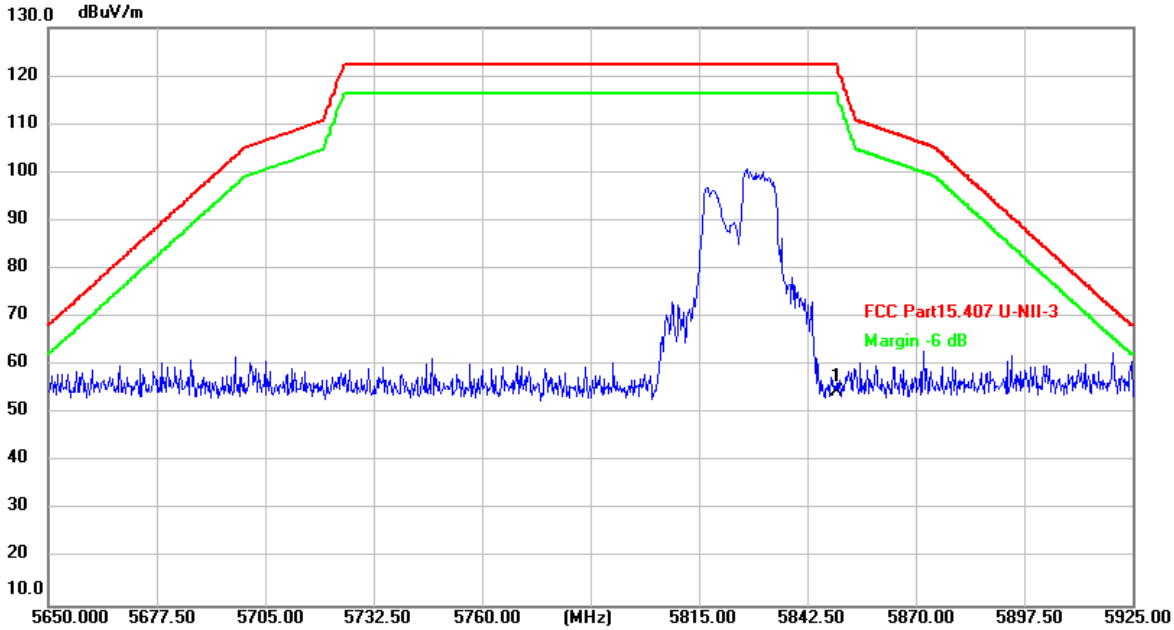

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.00	38.44	54.44	122.20	-67.76	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 106/54

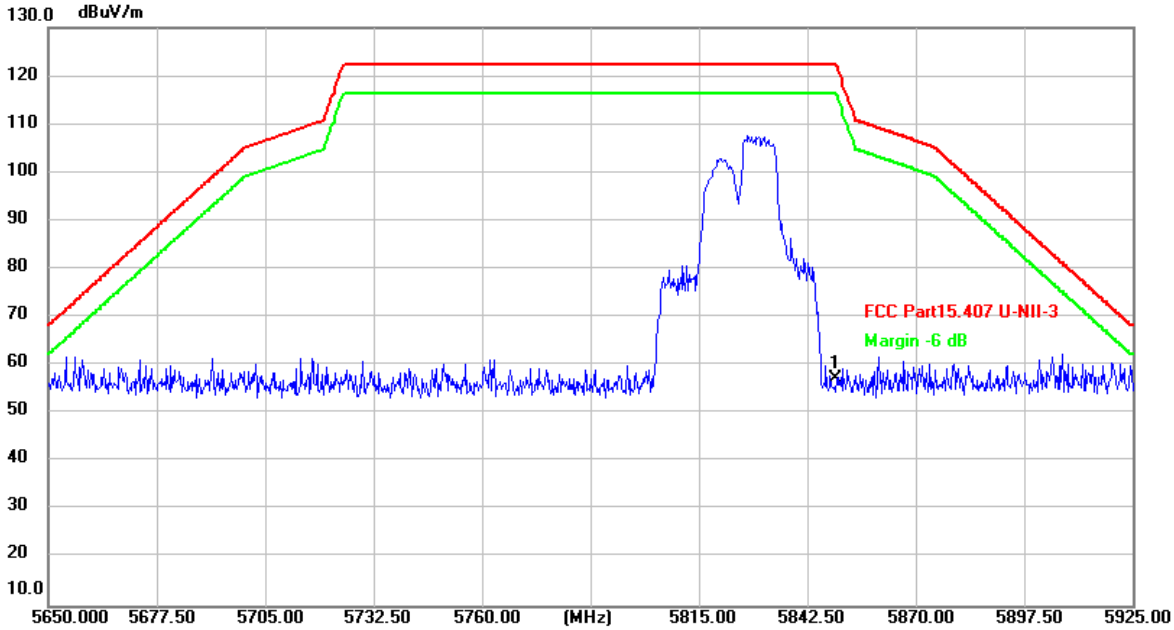

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	18.86	38.44	57.30	122.20	-64.90	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61

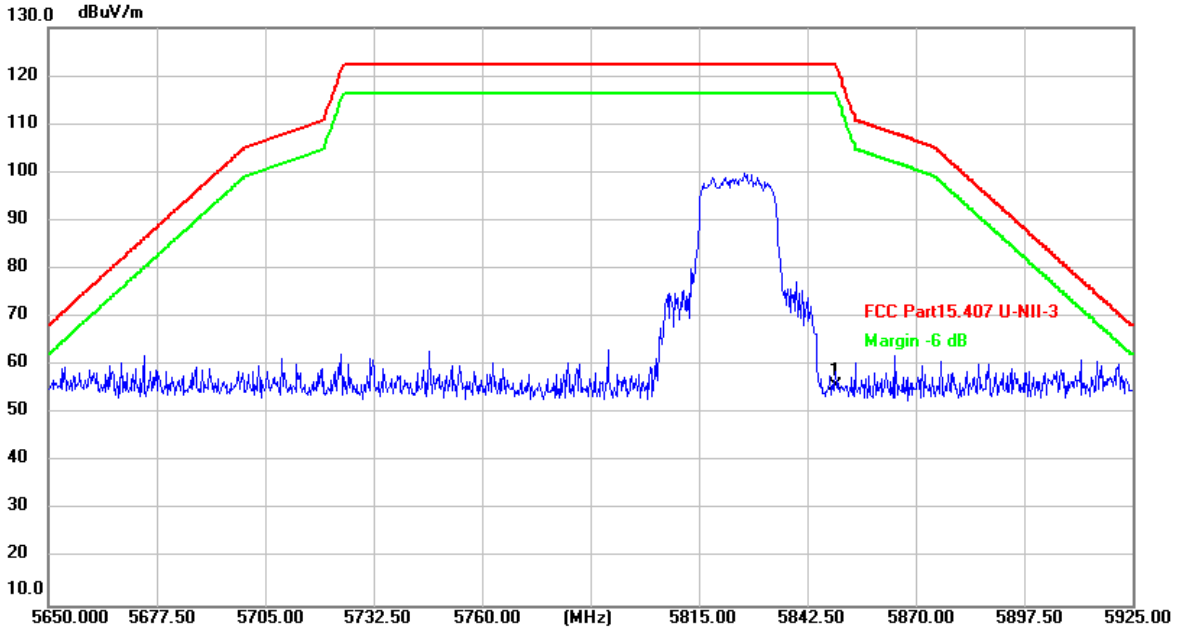

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.33	38.44	55.77	122.20	-66.43	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 5825MHz (U-NII-3) 242/61

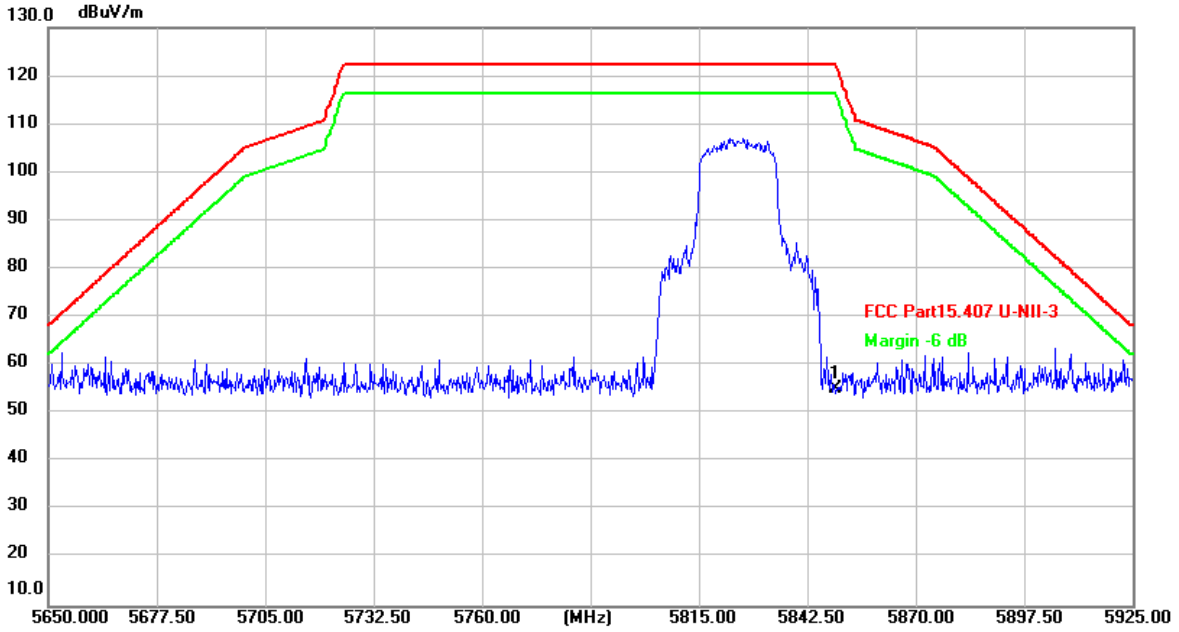

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.70	38.44	55.14	122.20	-67.06	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)

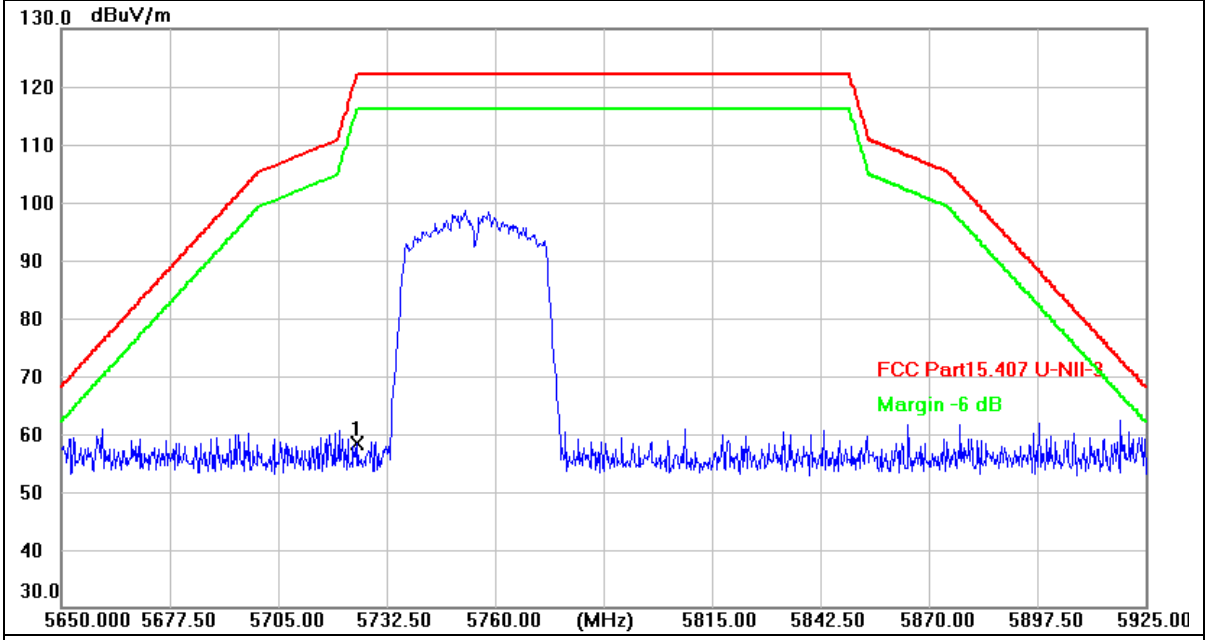

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	20.27	38.16	58.43	122.20	-63.77	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)

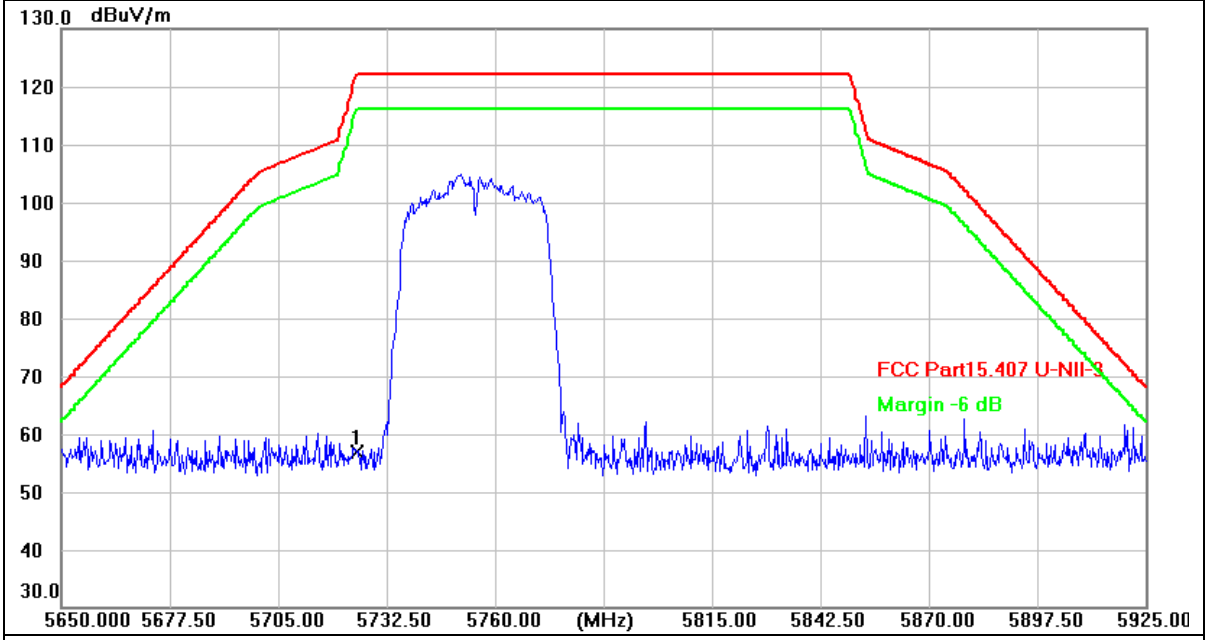

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.77	38.16	56.93	122.20	-65.27	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)

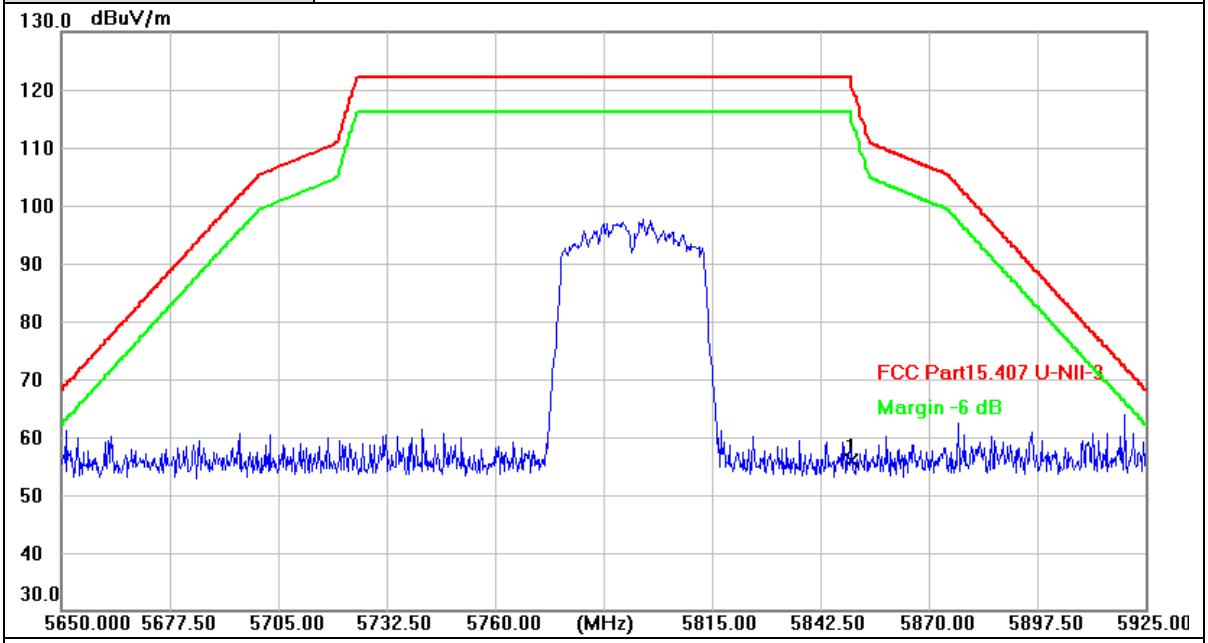

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.34	38.44	55.78	122.20	-66.42	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)

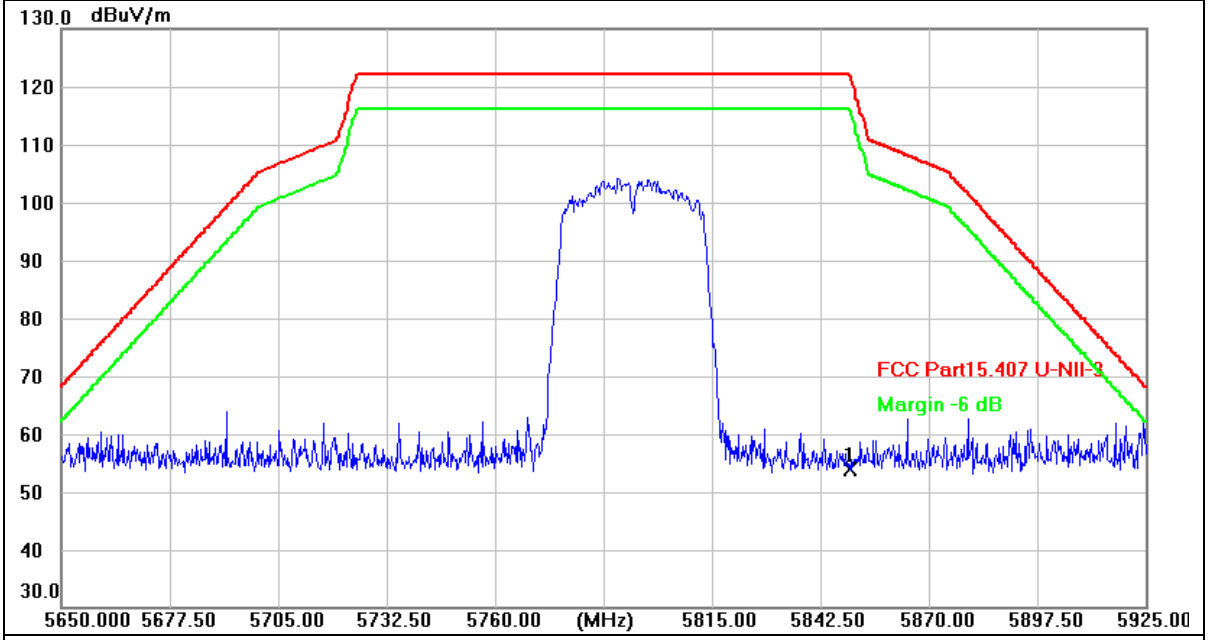

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	15.45	38.44	53.89	122.20	-68.31	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)

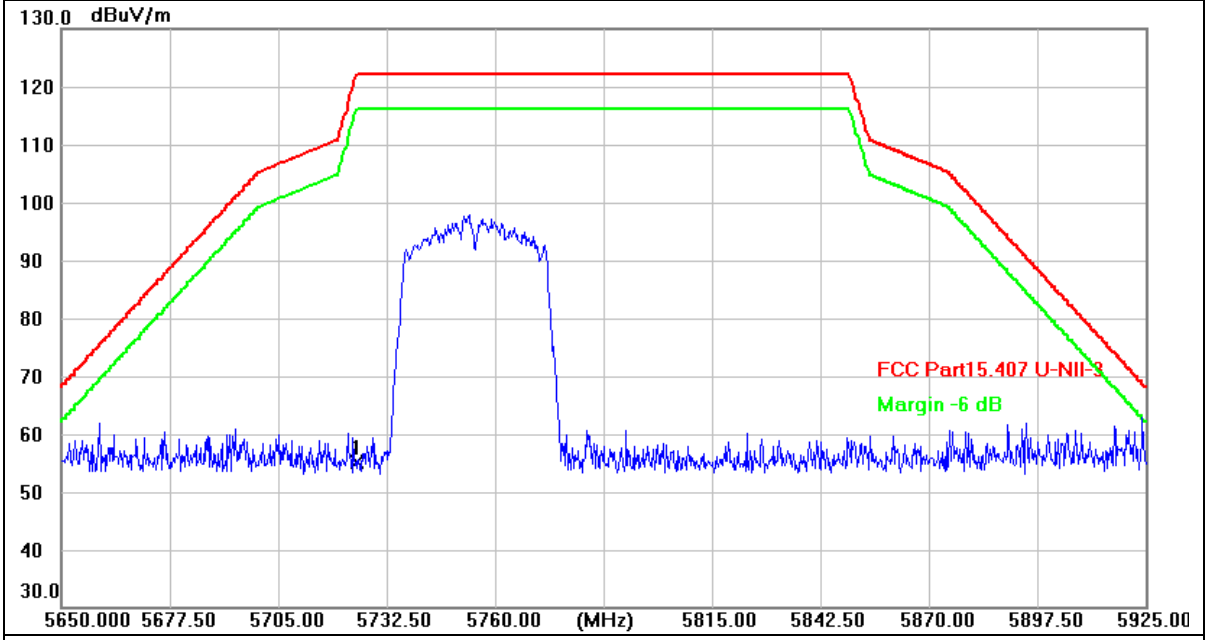

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	17.03	38.16	55.19	122.20	-67.01	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)

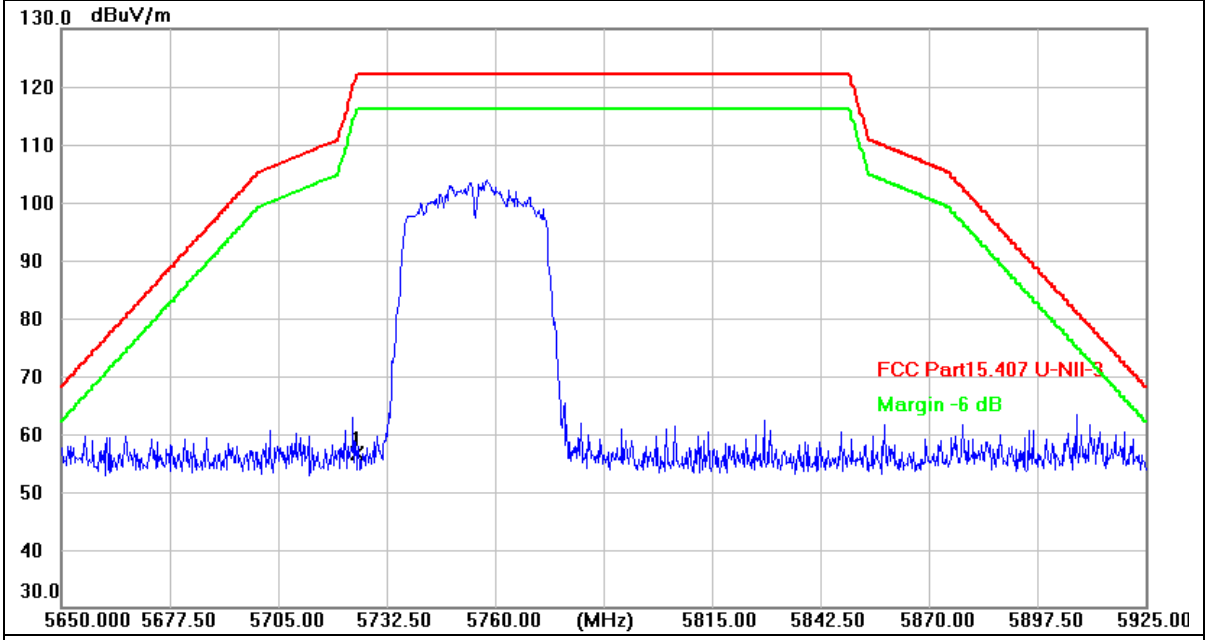

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.39	38.16	56.55	122.20	-65.65	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)

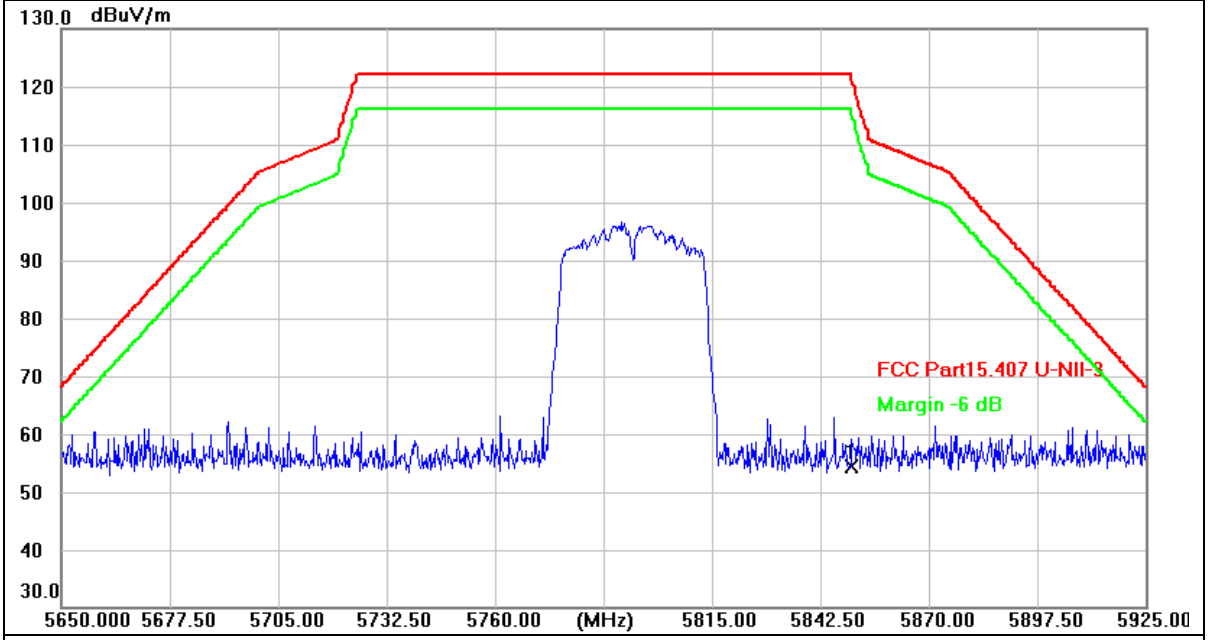

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.05	38.44	54.49	122.20	-67.71	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT40) Mode 5795MHz (U-NII-3)

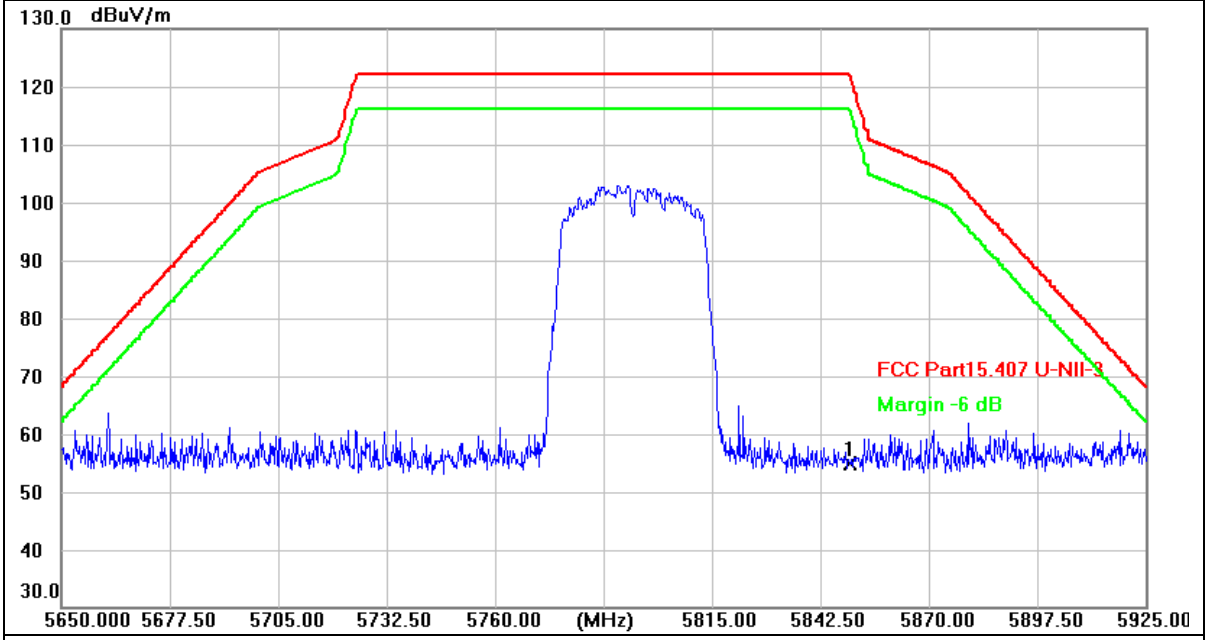

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.46	38.44	54.90	122.20	-67.30	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 26/0

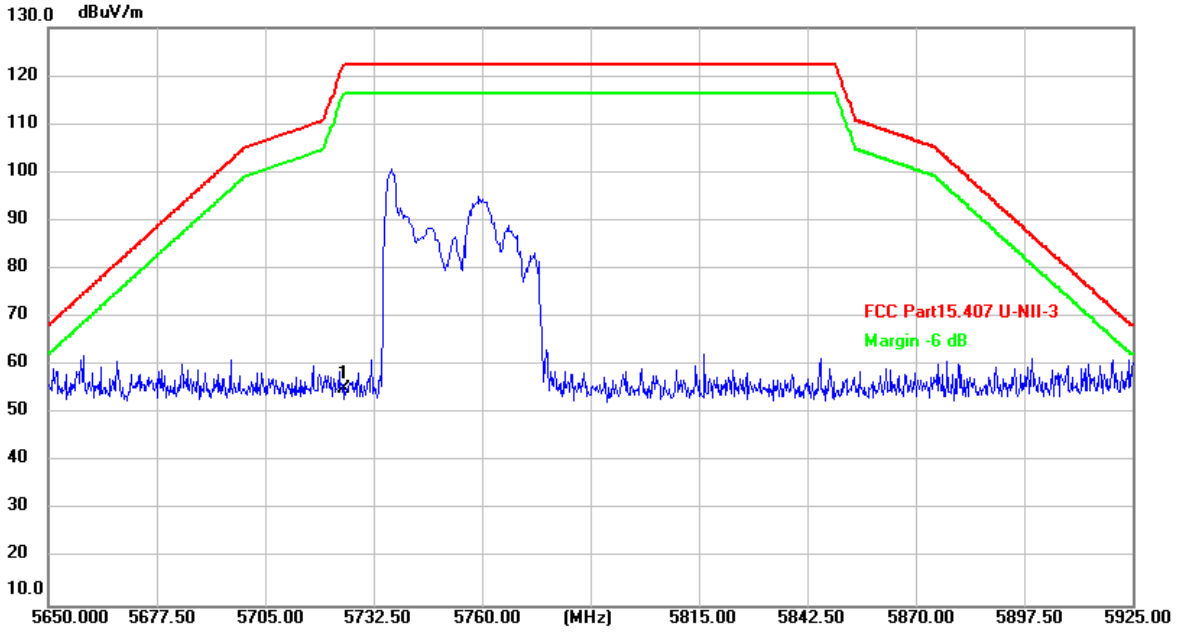

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.85	38.16	55.01	122.20	-67.19	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 26/0

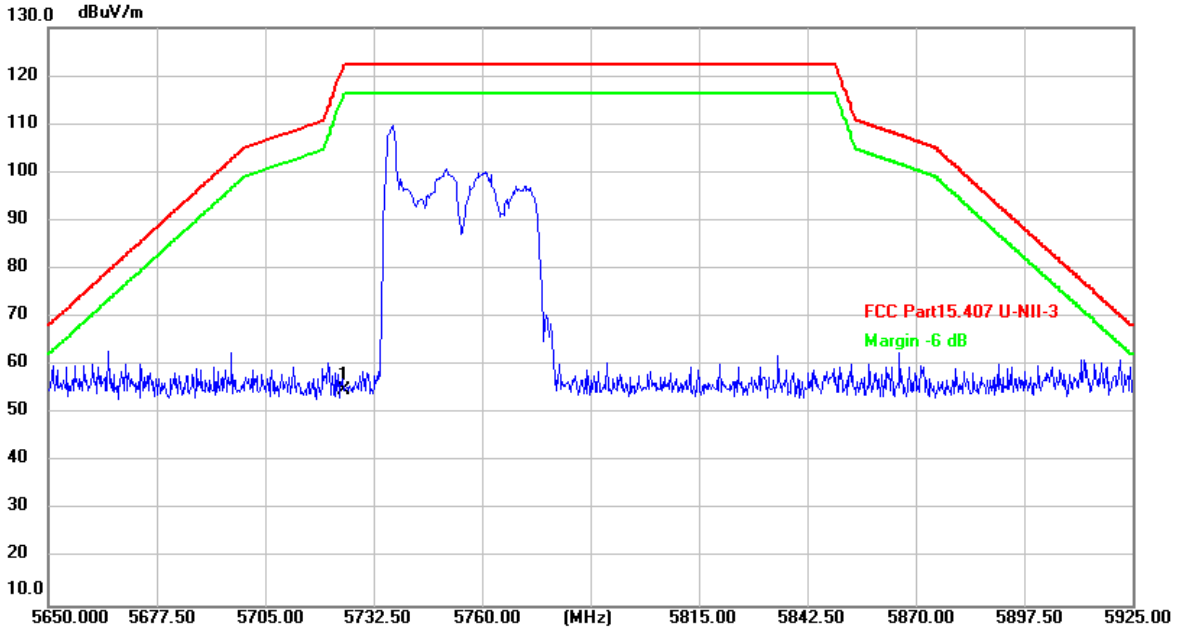

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.56	38.16	54.72	122.20	-67.48	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 52/37

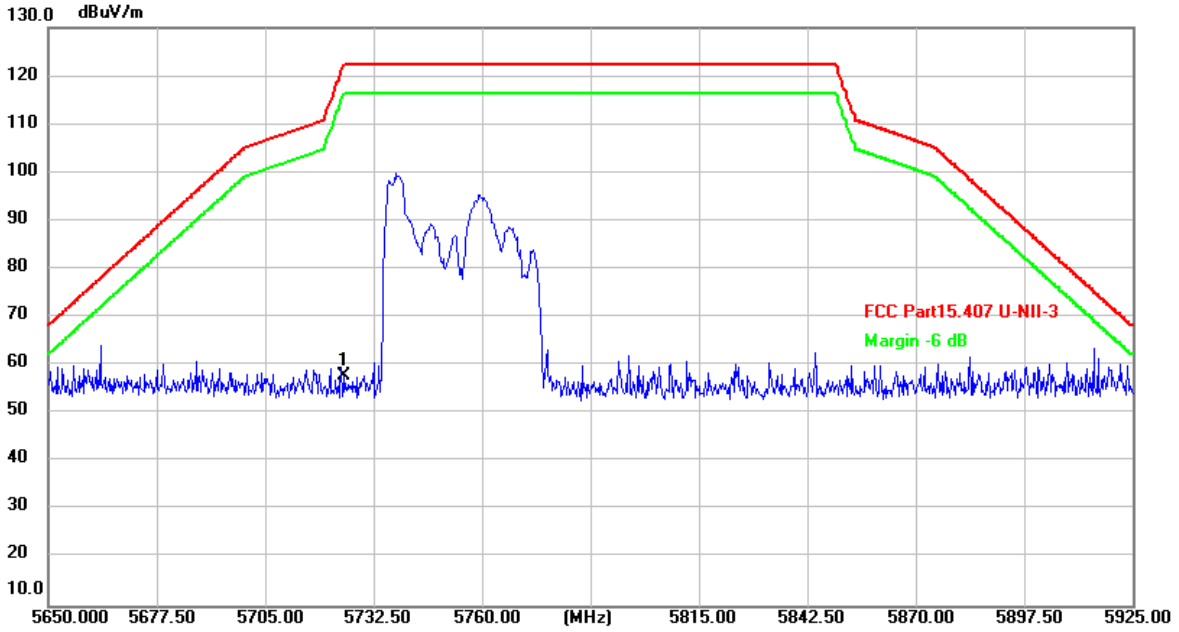

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.64	38.16	57.80	122.20	-64.40	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 52/37

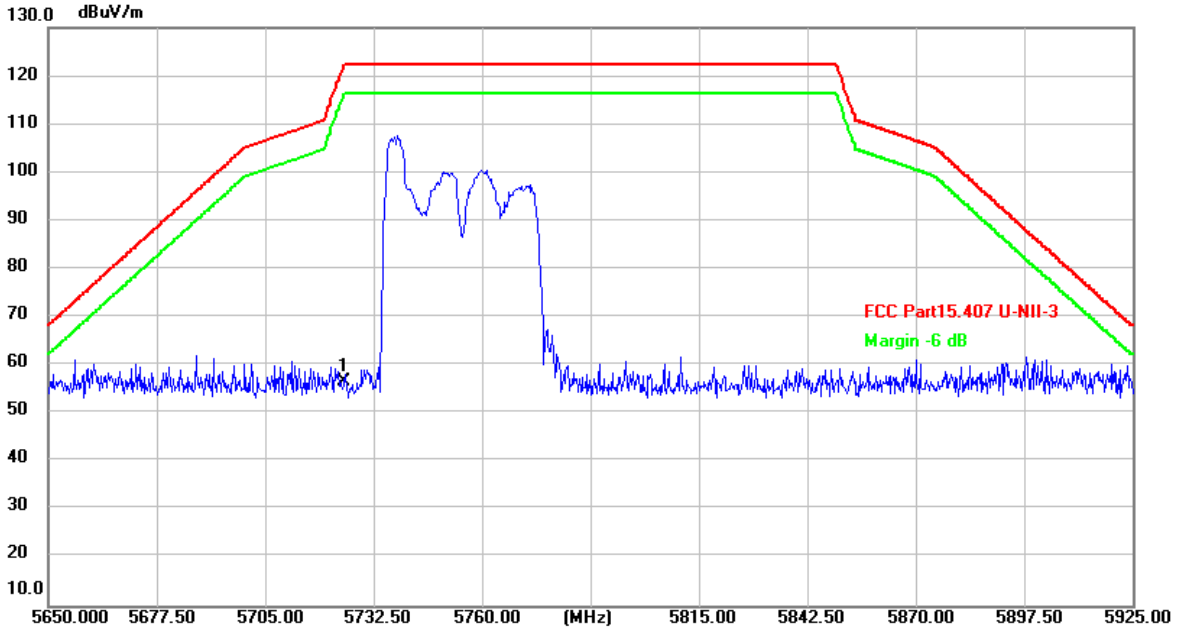

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.61	38.16	56.77	122.20	-65.43	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 106/53

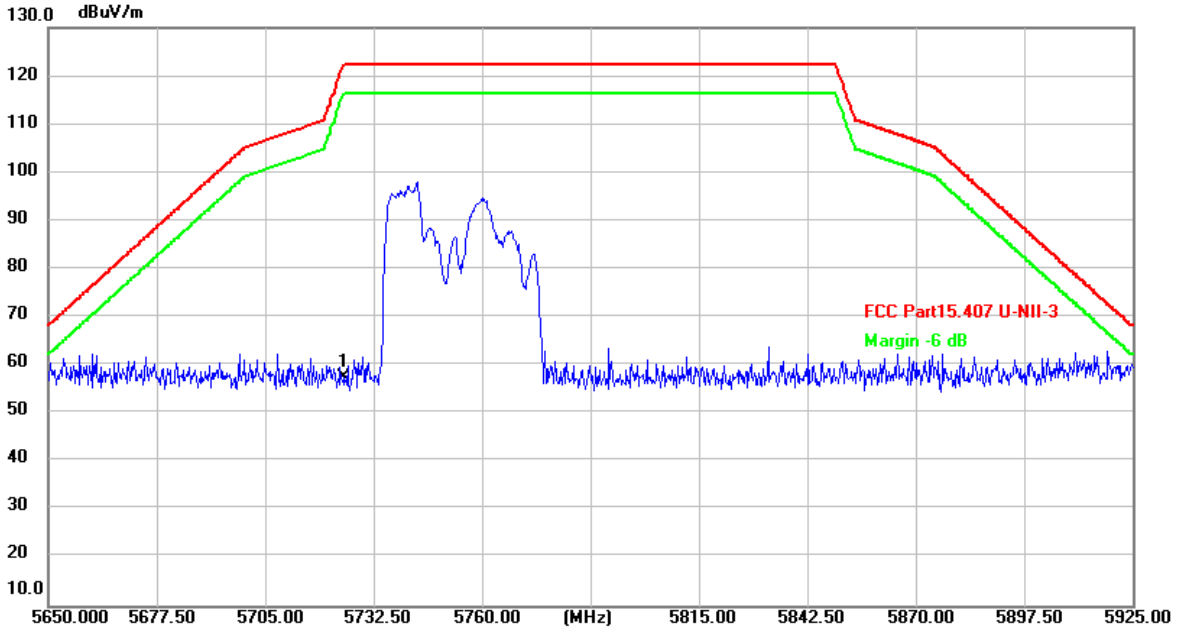

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.45	38.16	57.61	122.20	-64.59	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 106/53

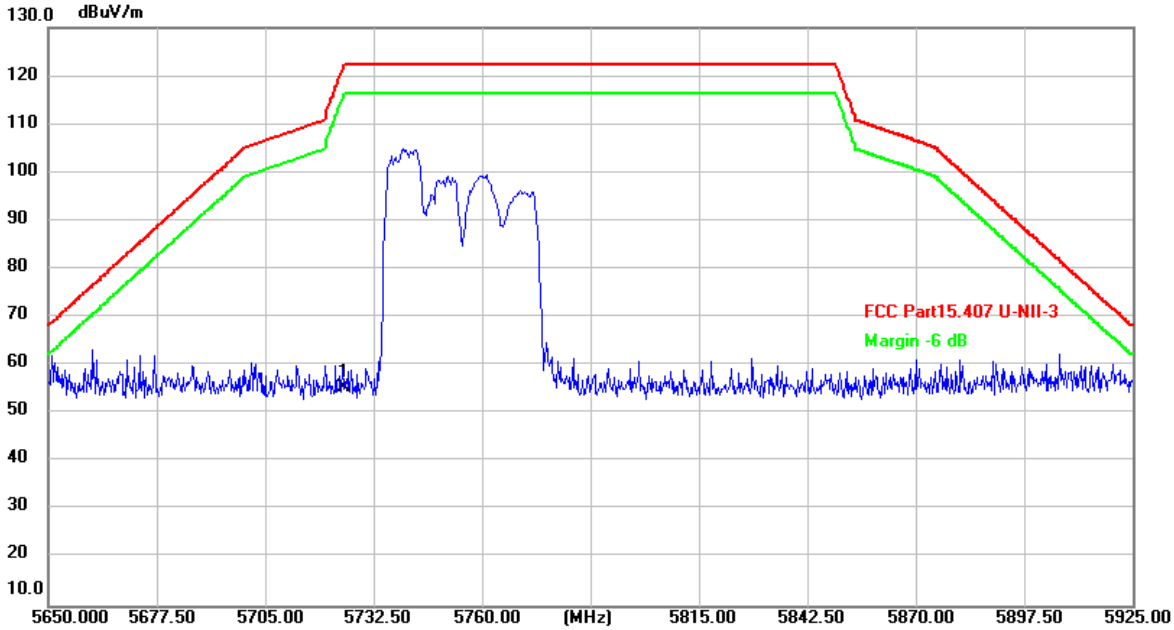

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	17.43	38.16	55.59	122.20	-66.61	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 242/61

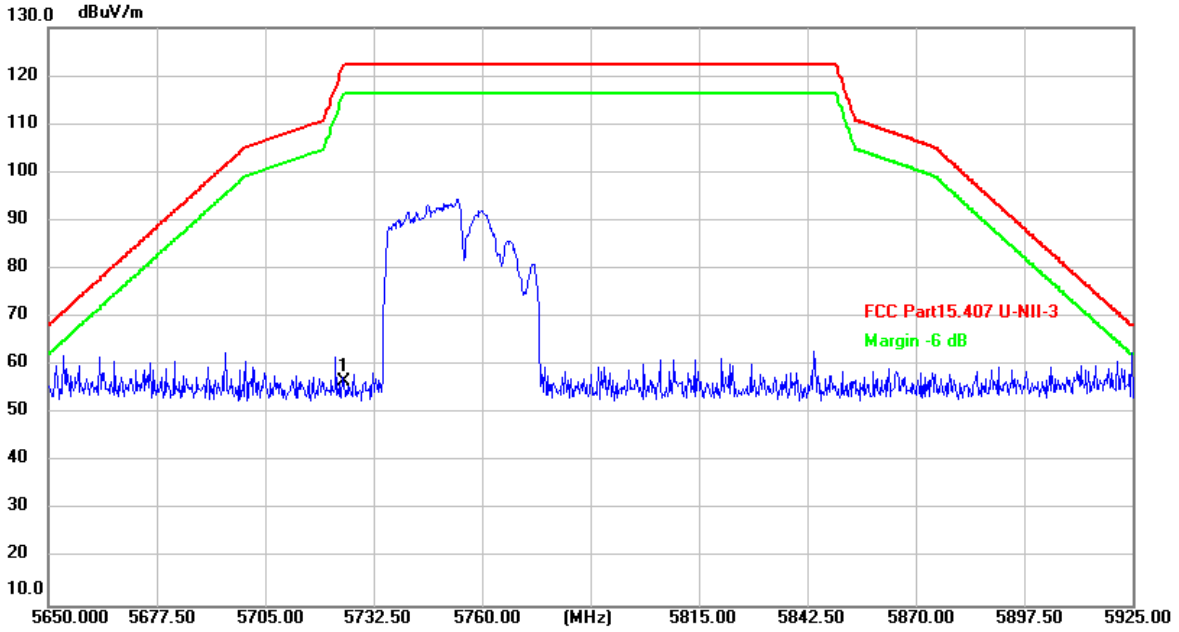

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.60	38.16	56.76	122.20	-65.44	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 242/61

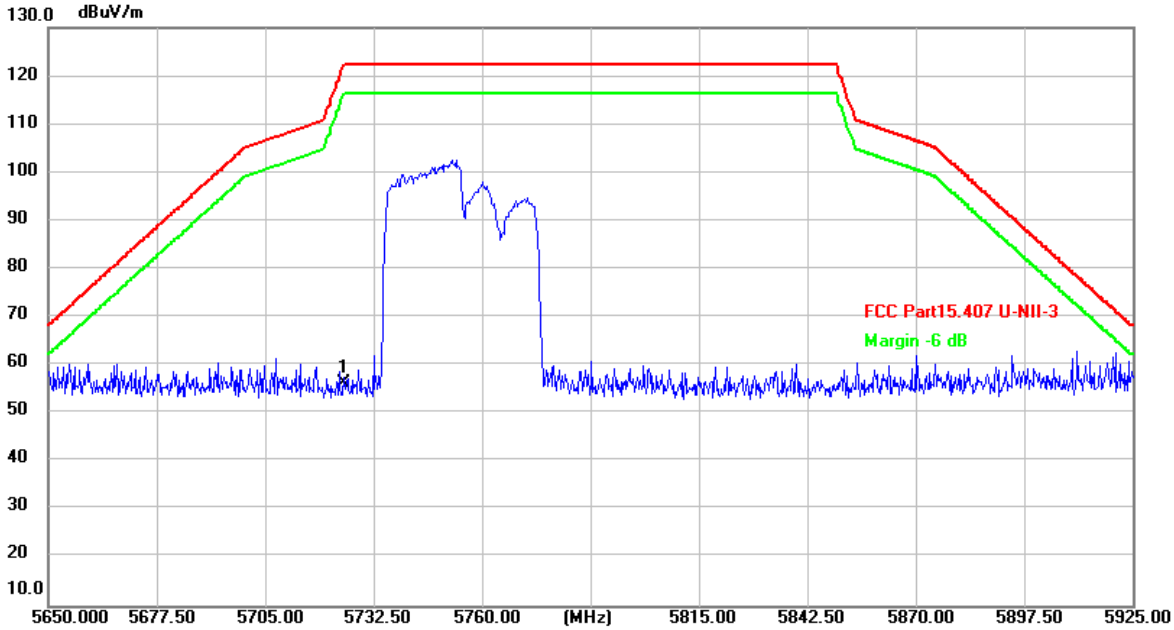

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.28	38.16	56.44	122.20	-65.76	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65

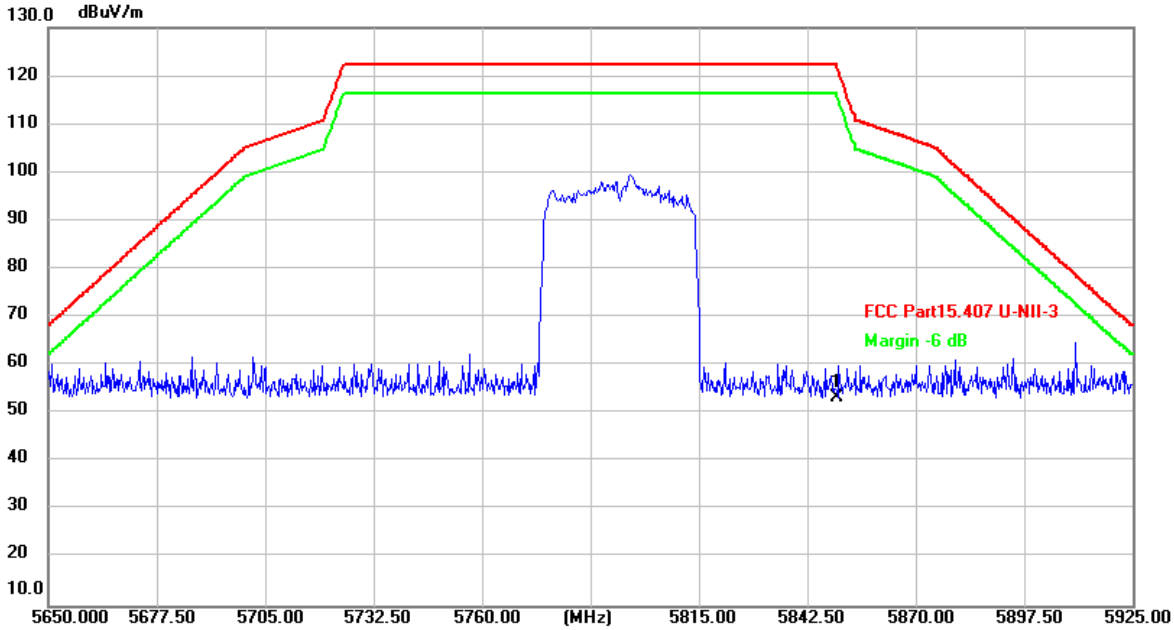

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	14.82	38.44	53.26	122.20	-68.94	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5755MHz (U-NII-3) 484/65

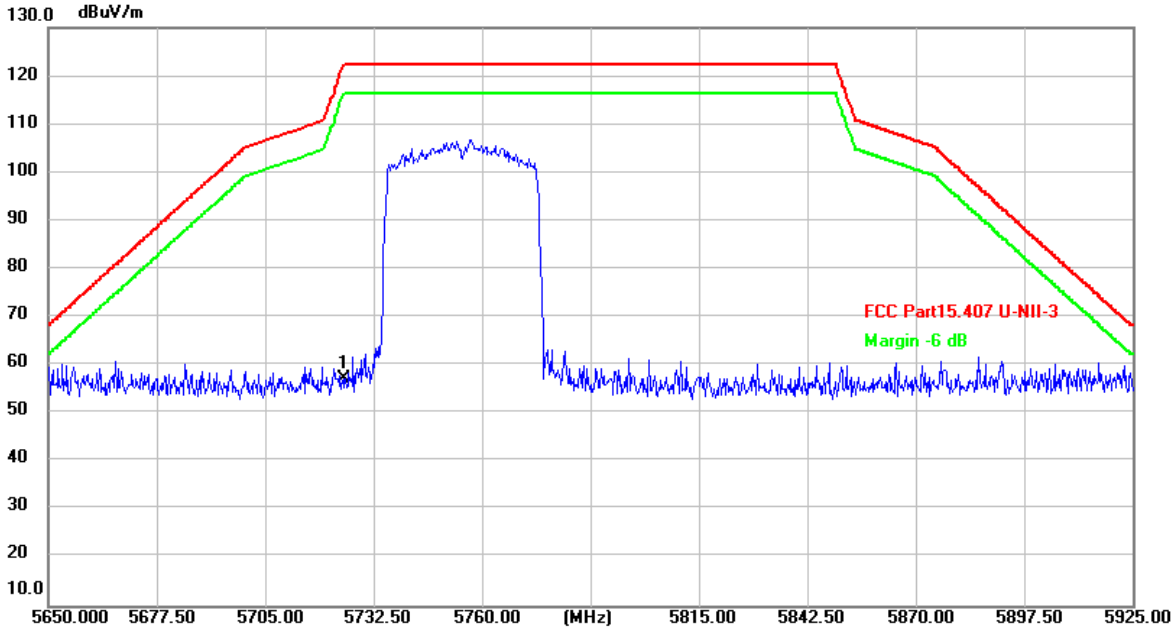

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.13	38.16	57.29	122.20	-64.91	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 26/17

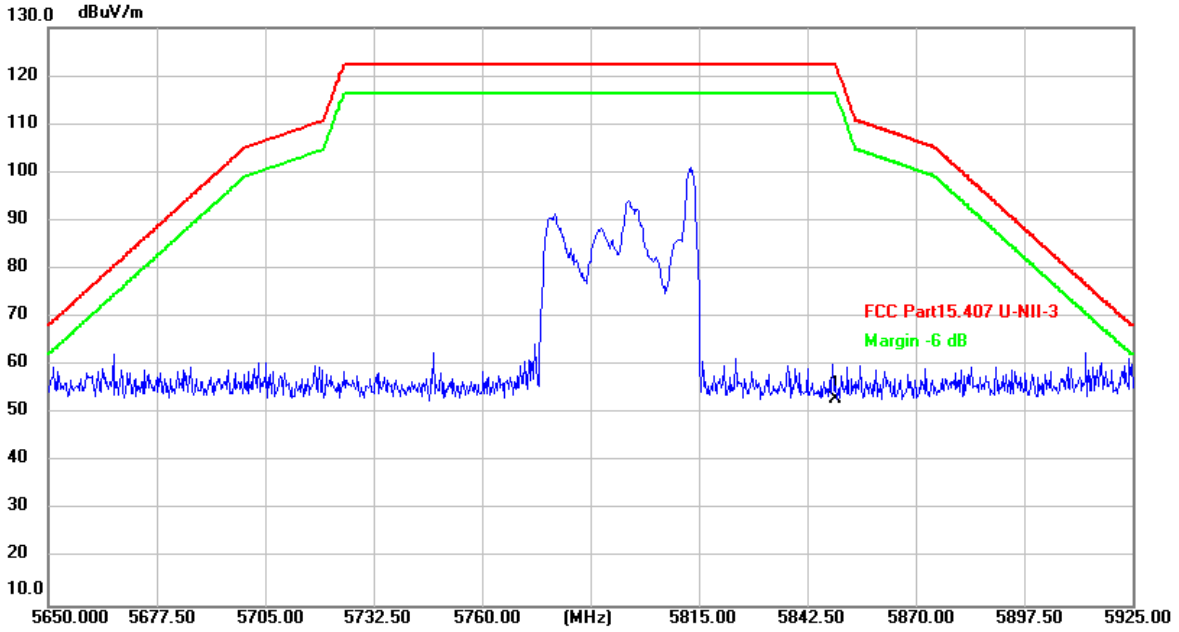

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	14.75	38.44	53.19	122.20	-69.01	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 26/17

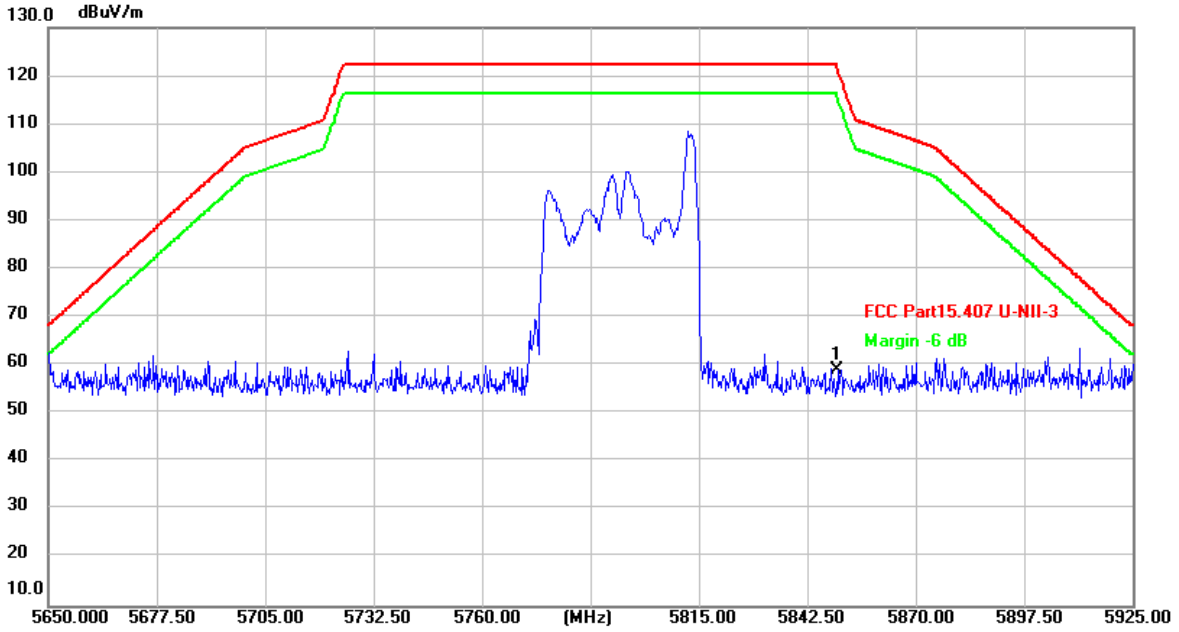

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	20.53	38.44	58.97	122.20	-63.23	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 52/44

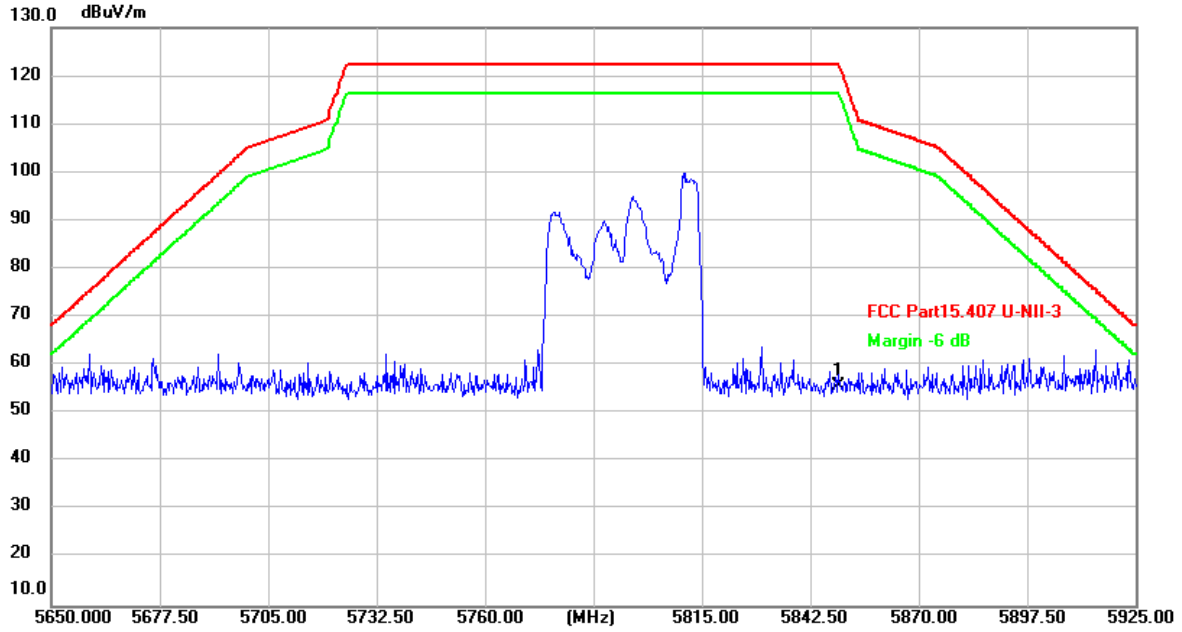

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.40	38.44	55.84	122.20	-66.36	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 52/44

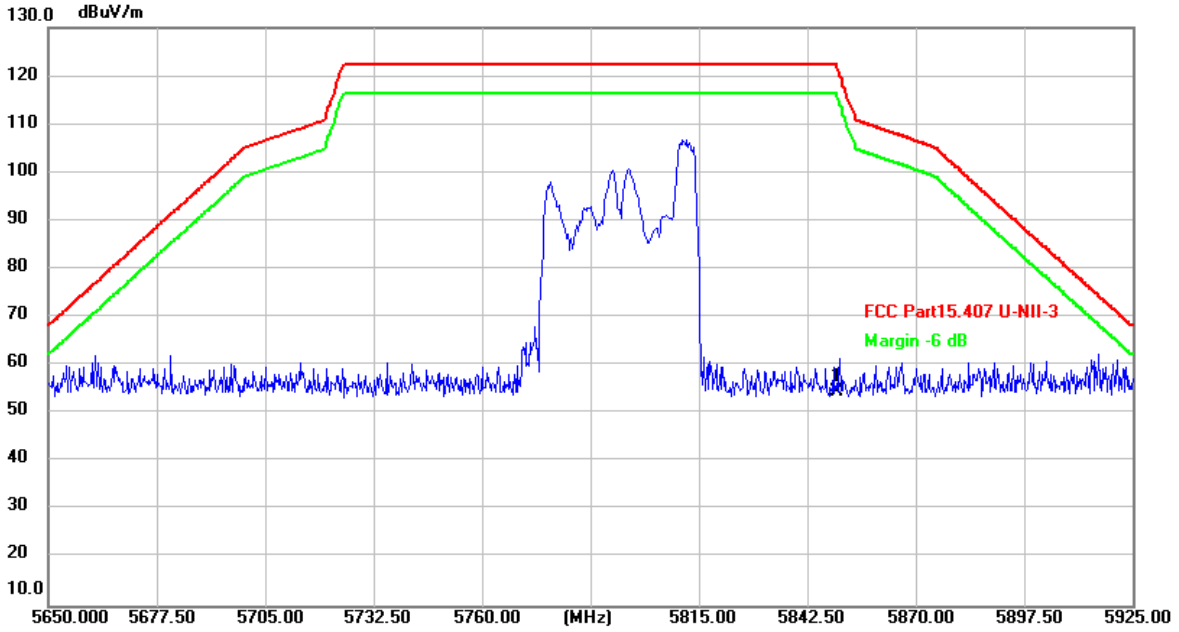

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.23	38.44	54.67	122.20	-67.53	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 106/56

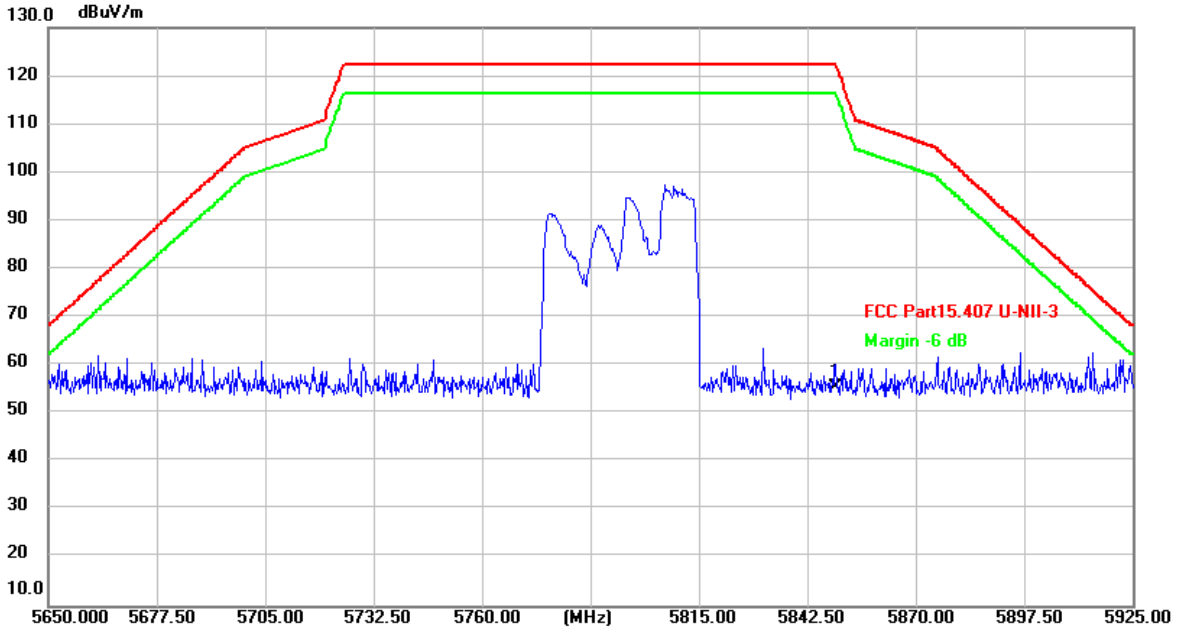

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.03	38.44	55.47	122.20	-66.73	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 106/56

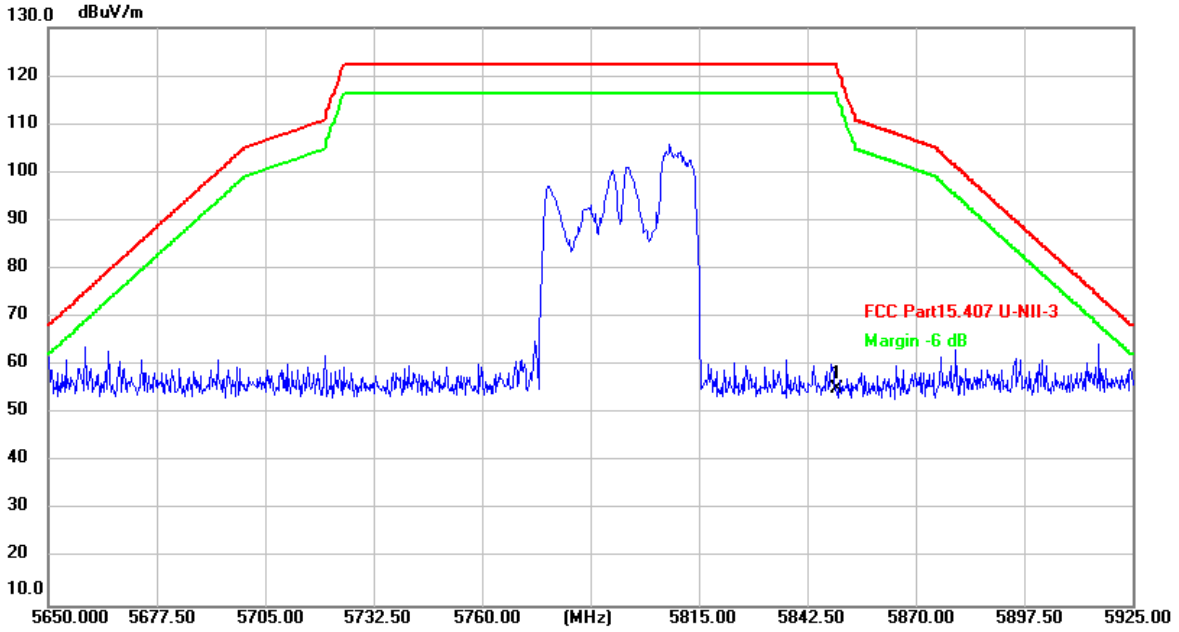

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.67	38.44	55.11	122.20	-67.09	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 242/62

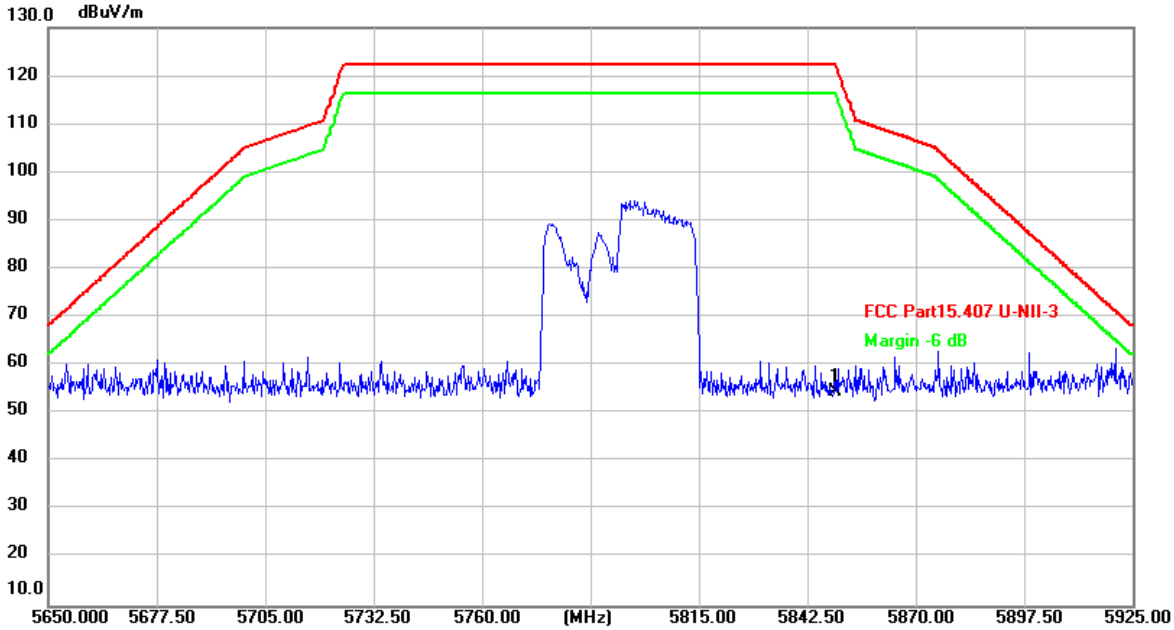

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.02	38.44	54.46	122.20	-67.74	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 242/62

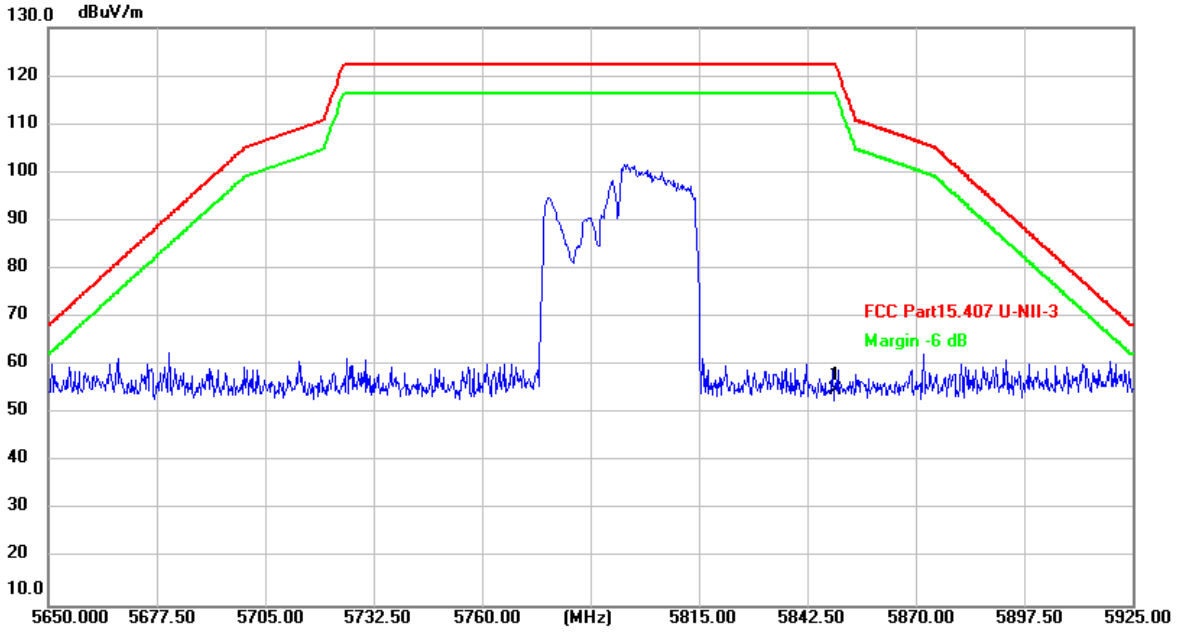

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.28	38.44	54.72	122.20	-67.48	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65

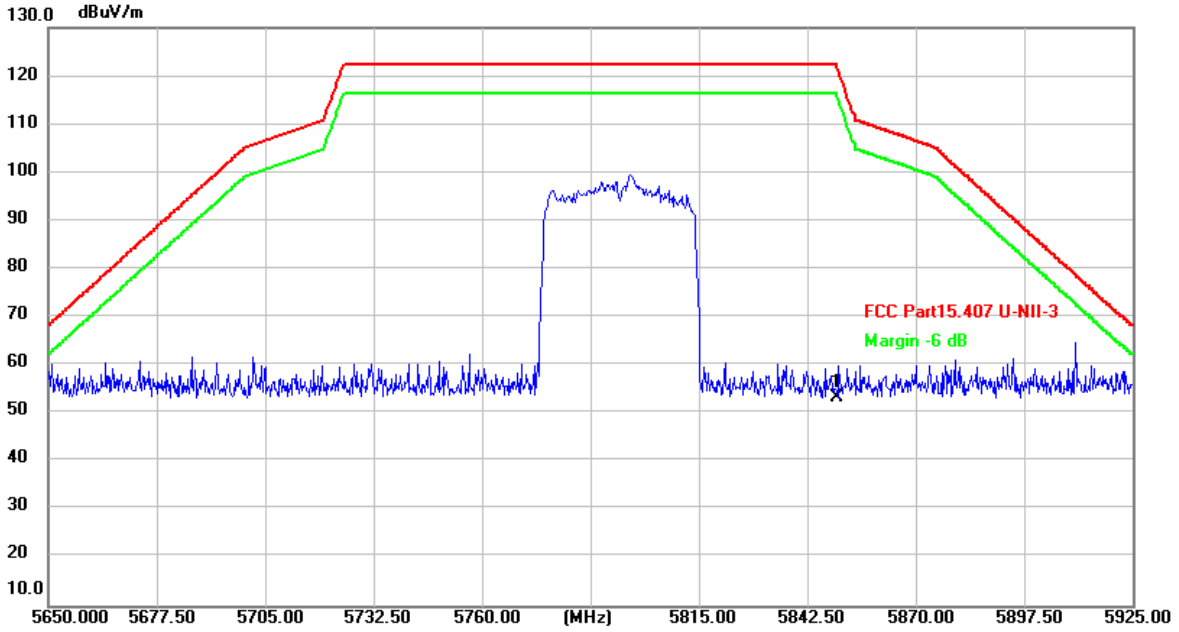

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	14.82	38.44	53.26	122.20	-68.94	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 5795MHz (U-NII-3) 484/65

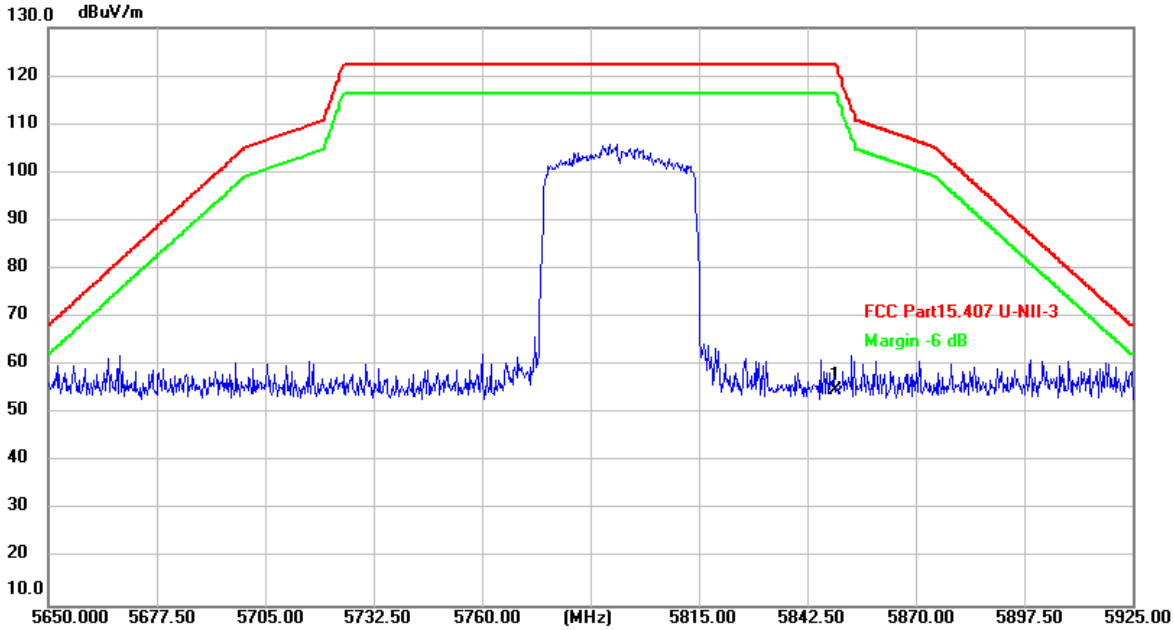

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.56	38.44	55.00	122.20	-67.20	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)

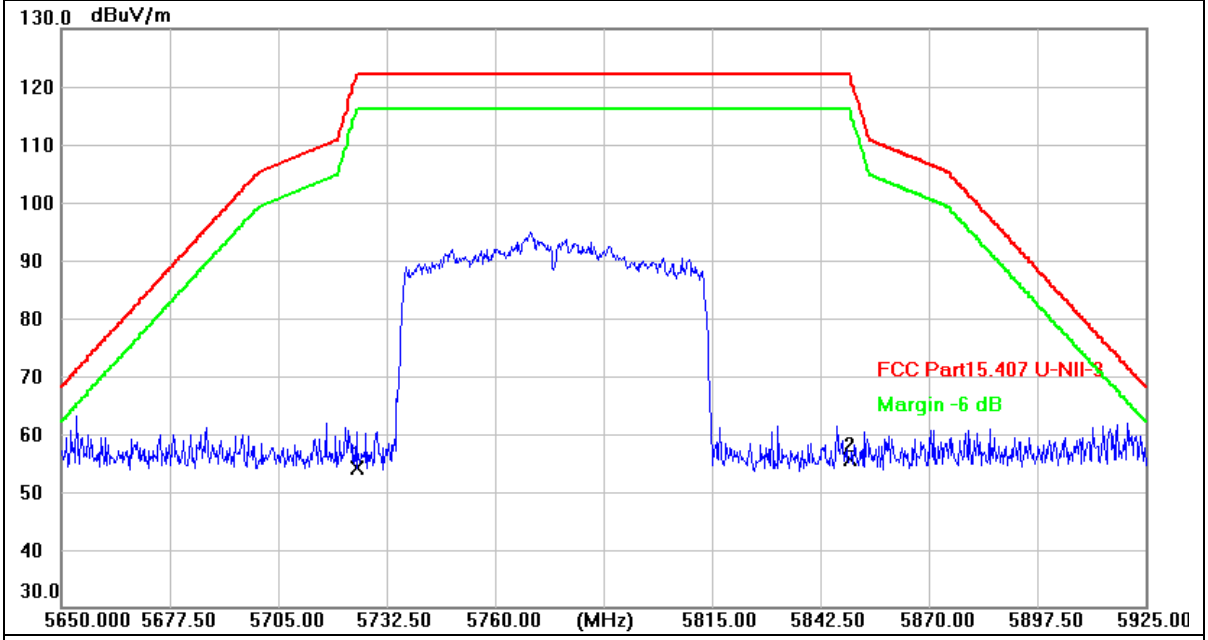

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.02	38.16	54.18	122.20	-68.02	peak
2 *	5850.000	17.10	38.44	55.54	122.20	-66.66	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)

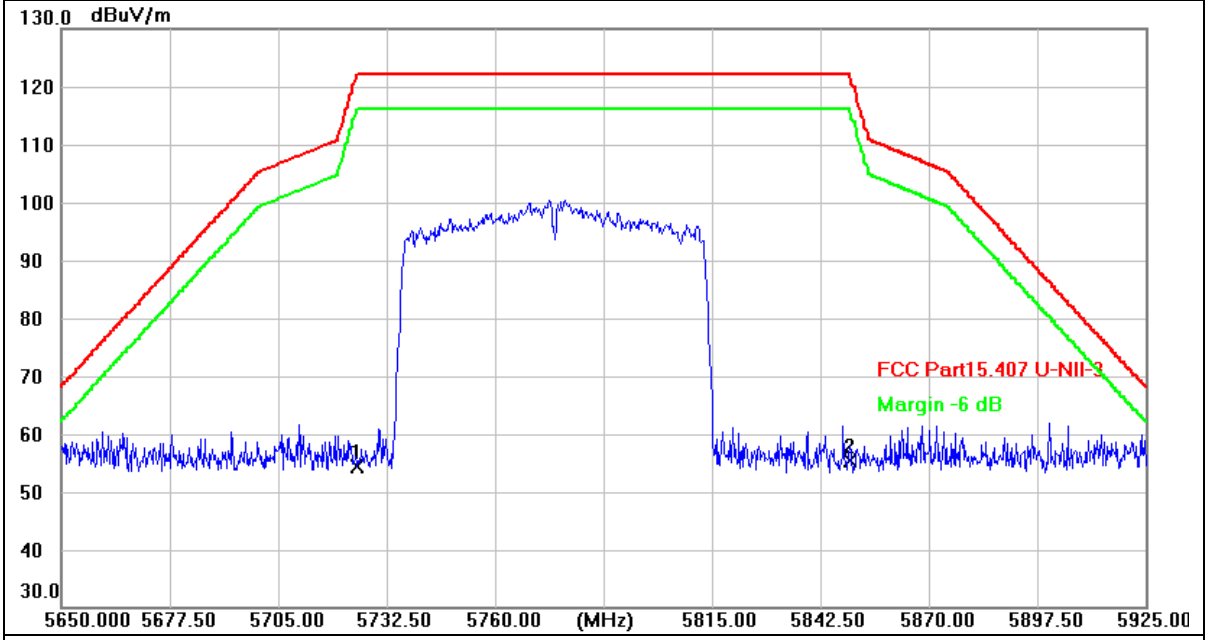

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	16.31	38.16	54.47	122.20	-67.73	peak
2 *	5850.000	16.82	38.44	55.26	122.20	-66.94	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 26/0

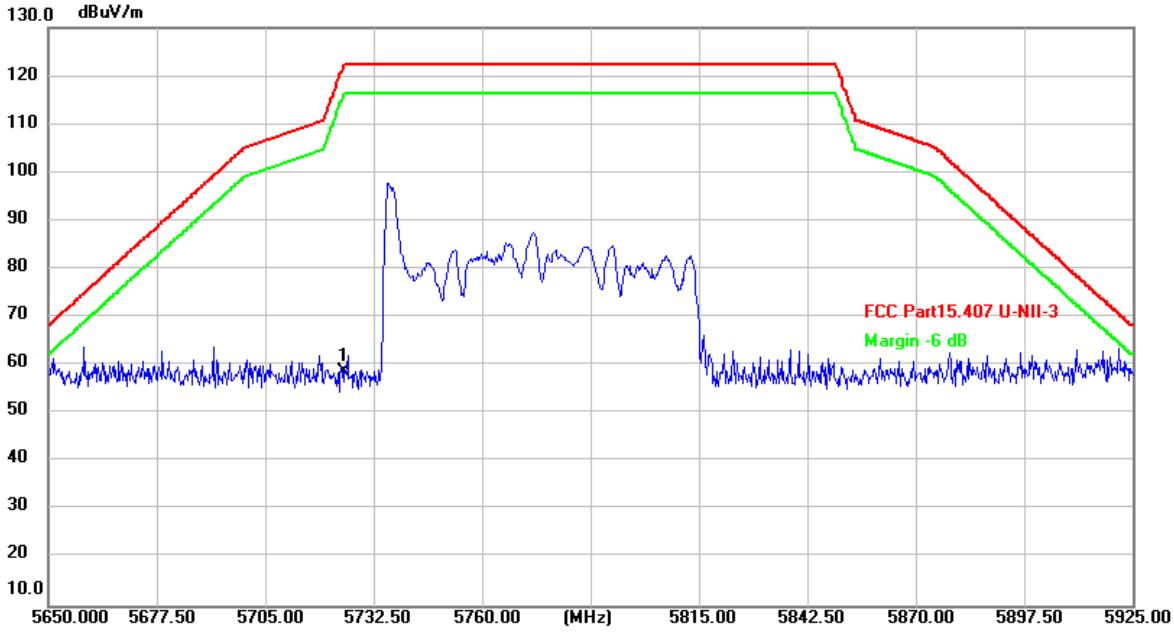

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	20.67	38.16	58.83	122.20	-63.37	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 26/0

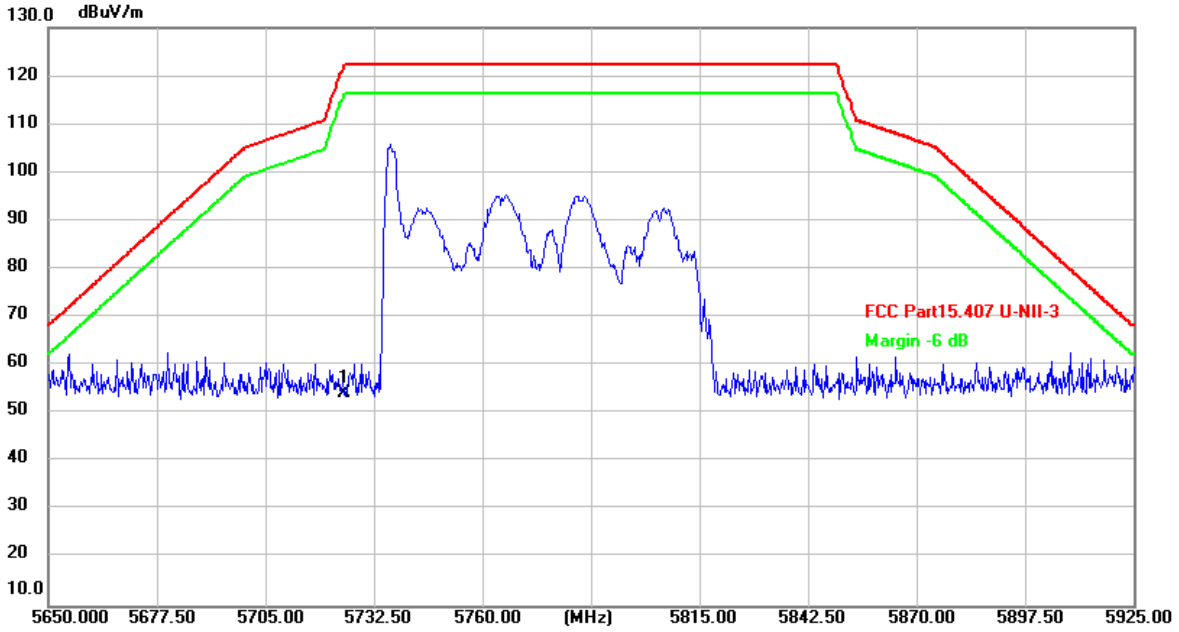

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	15.97	38.16	54.13	122.20	-68.07	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 52/37

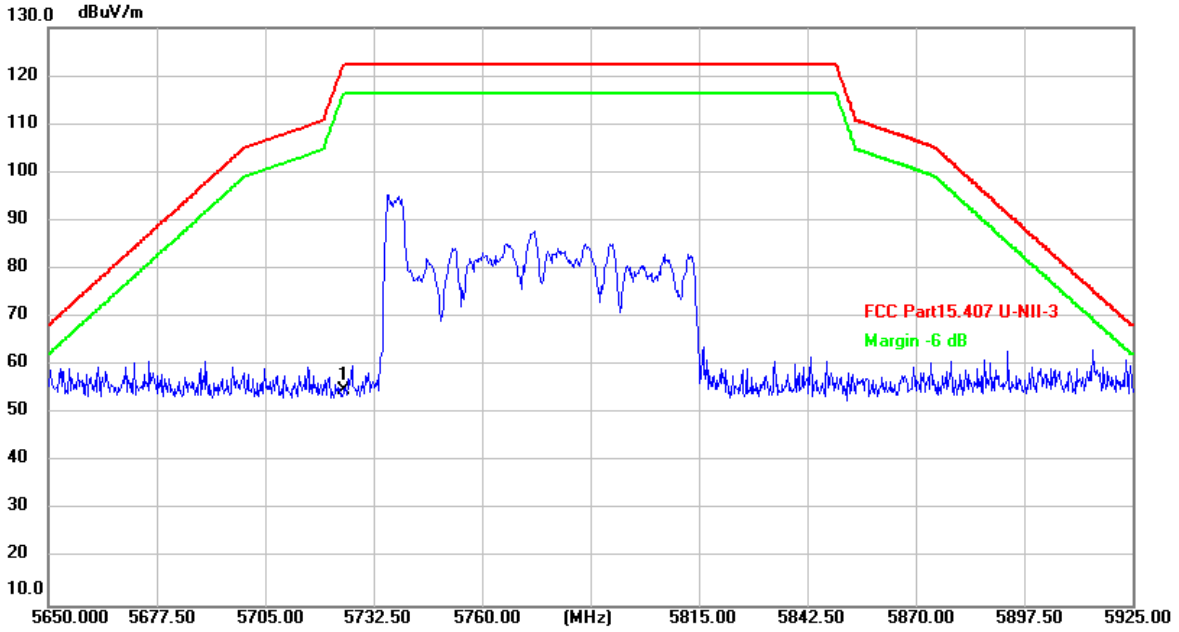

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.58	38.16	54.74	122.20	-67.46	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 52/37

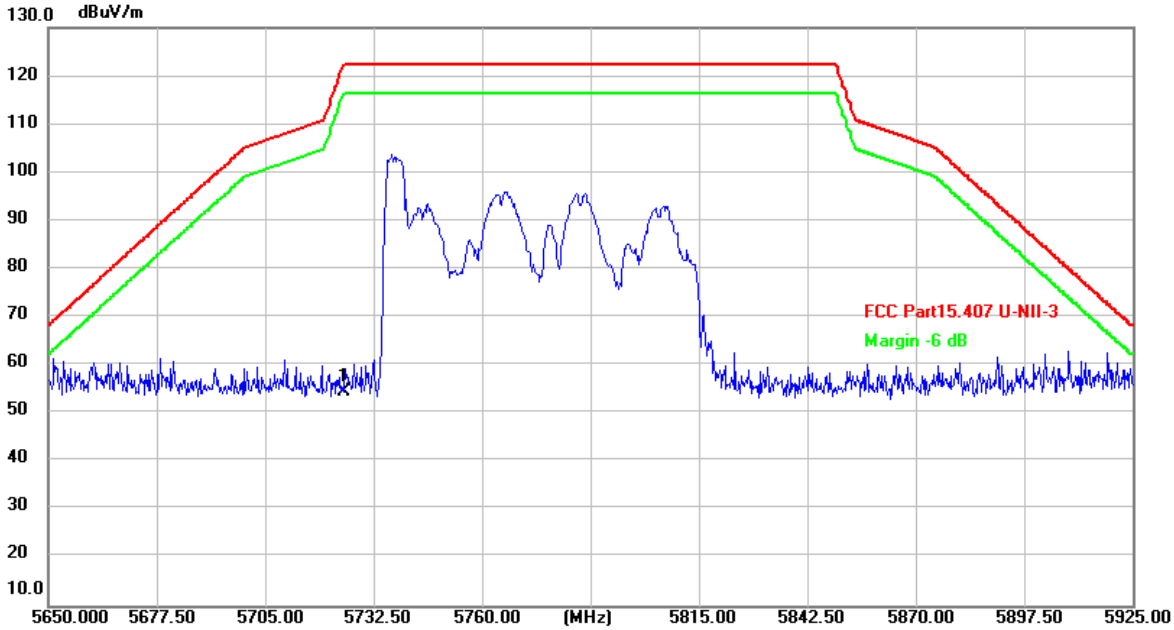

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	16.46	38.16	54.62	122.20	-67.58	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 106/53

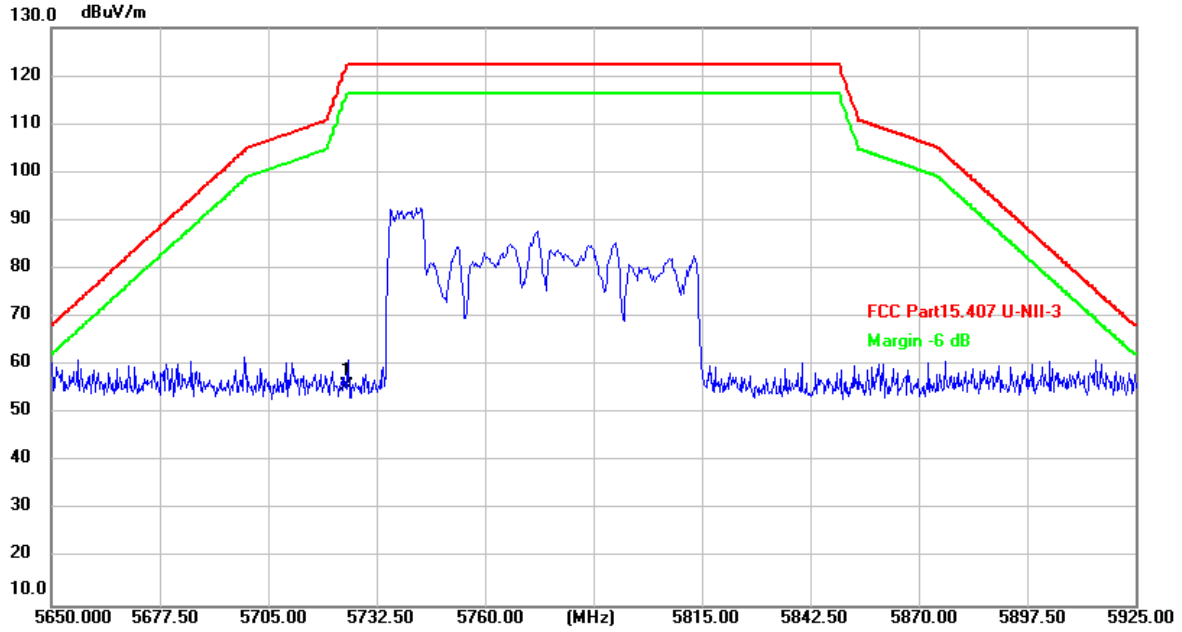

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	17.74	38.16	55.90	122.20	-66.30	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 106/53

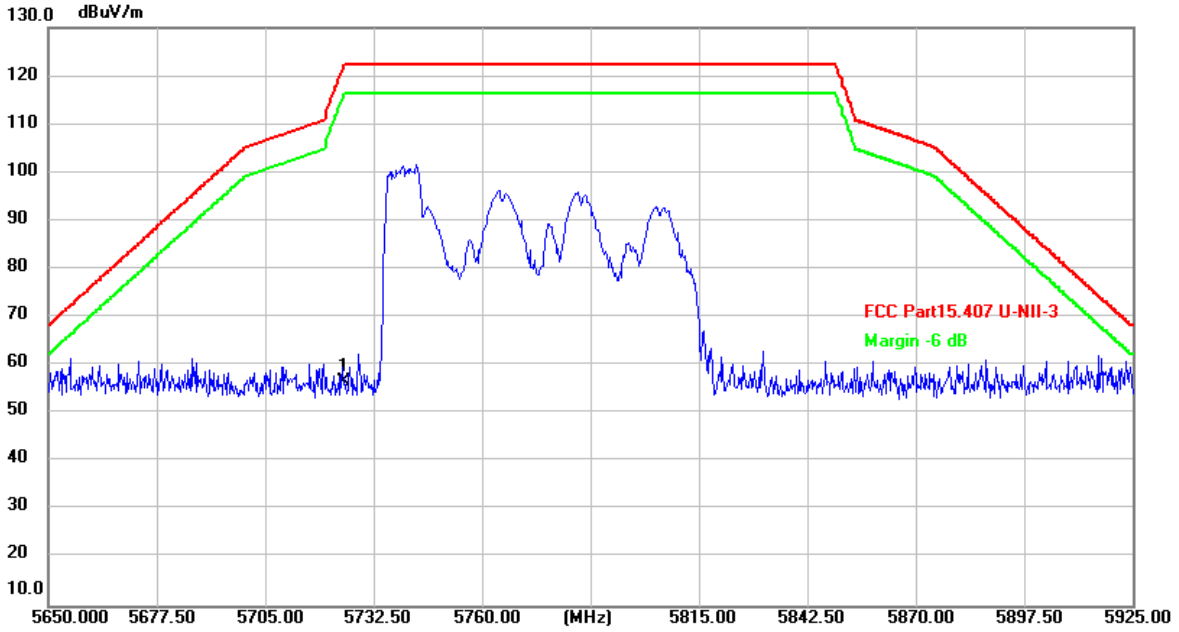

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	18.51	38.16	56.67	122.20	-65.53	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 242/61

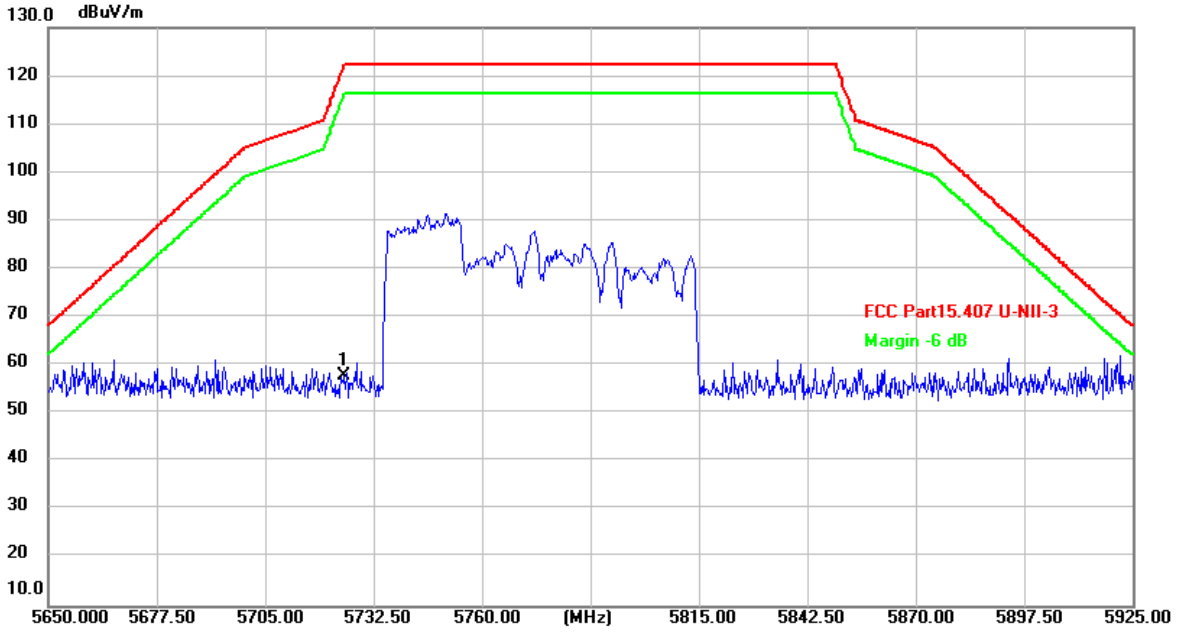

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.73	38.16	57.89	122.20	-64.31	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 242/61

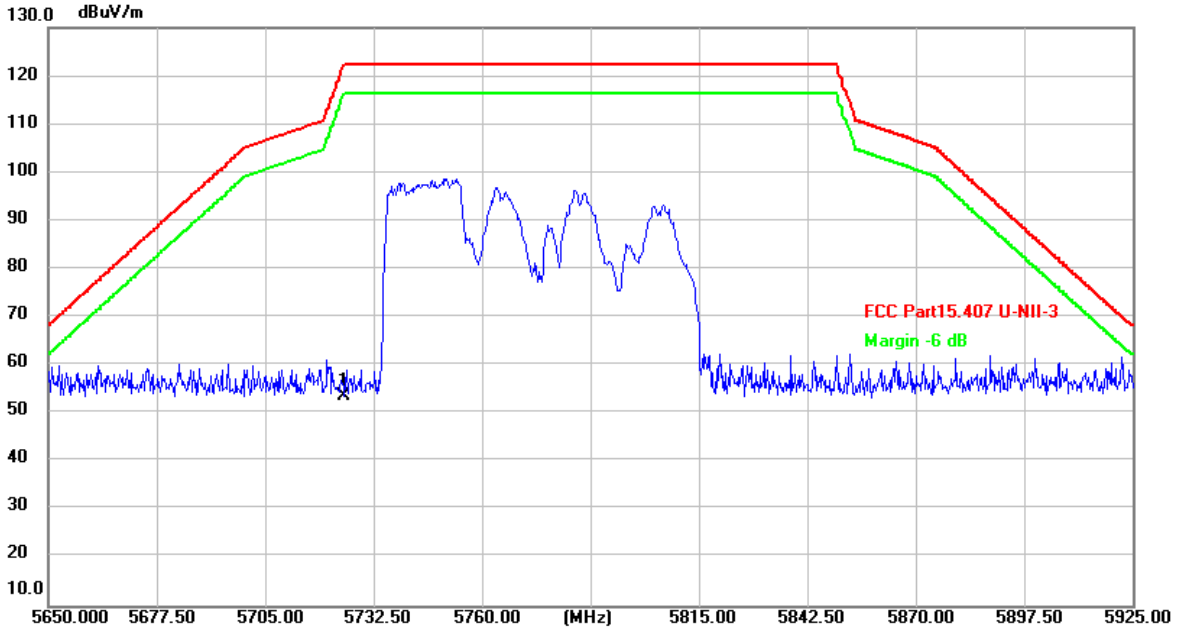

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	15.35	38.16	53.51	122.20	-68.69	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 484/65

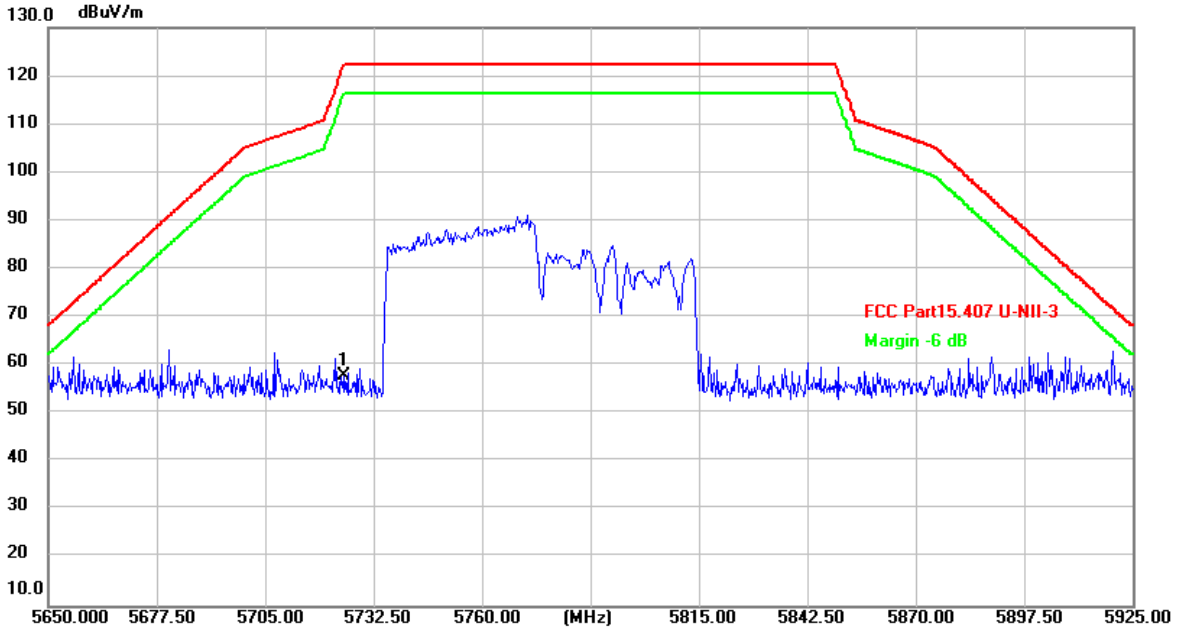

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	19.71	38.16	57.87	122.20	-64.33	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 484/65

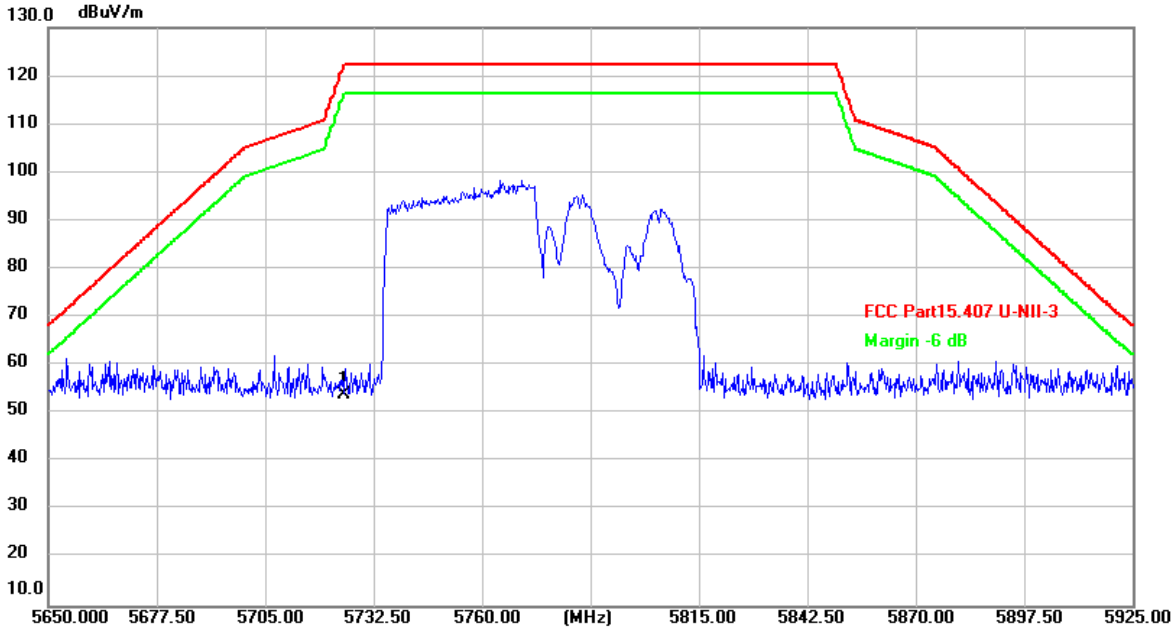

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	15.94	38.16	54.10	122.20	-68.10	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 26/36

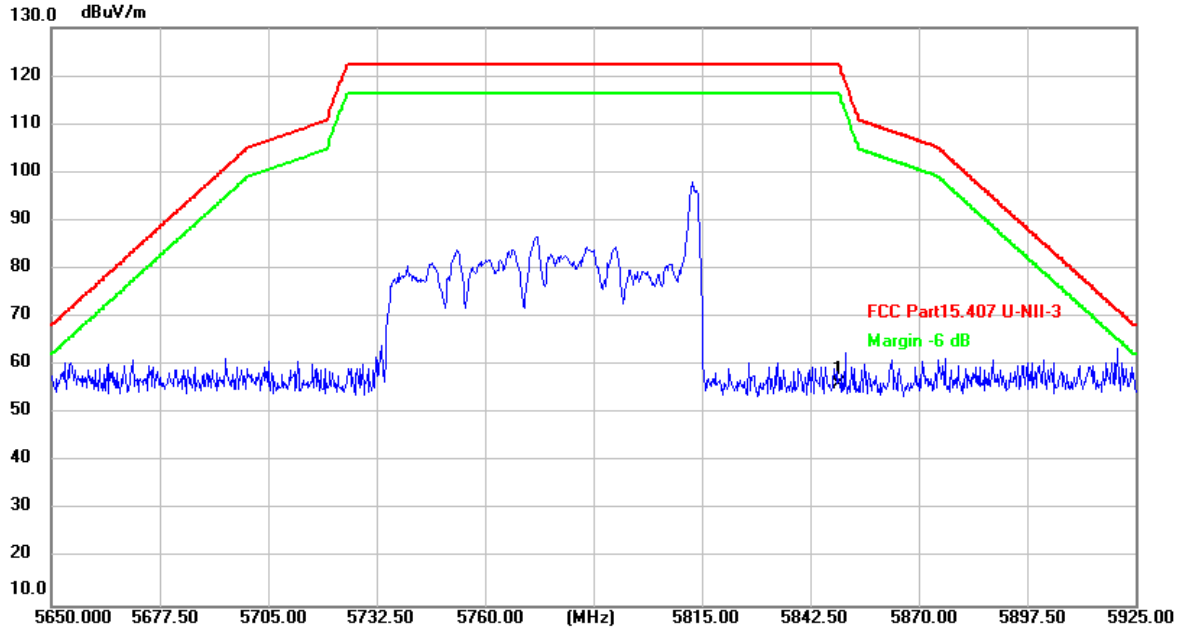

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.54	38.44	55.98	122.20	-66.22	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 26/36

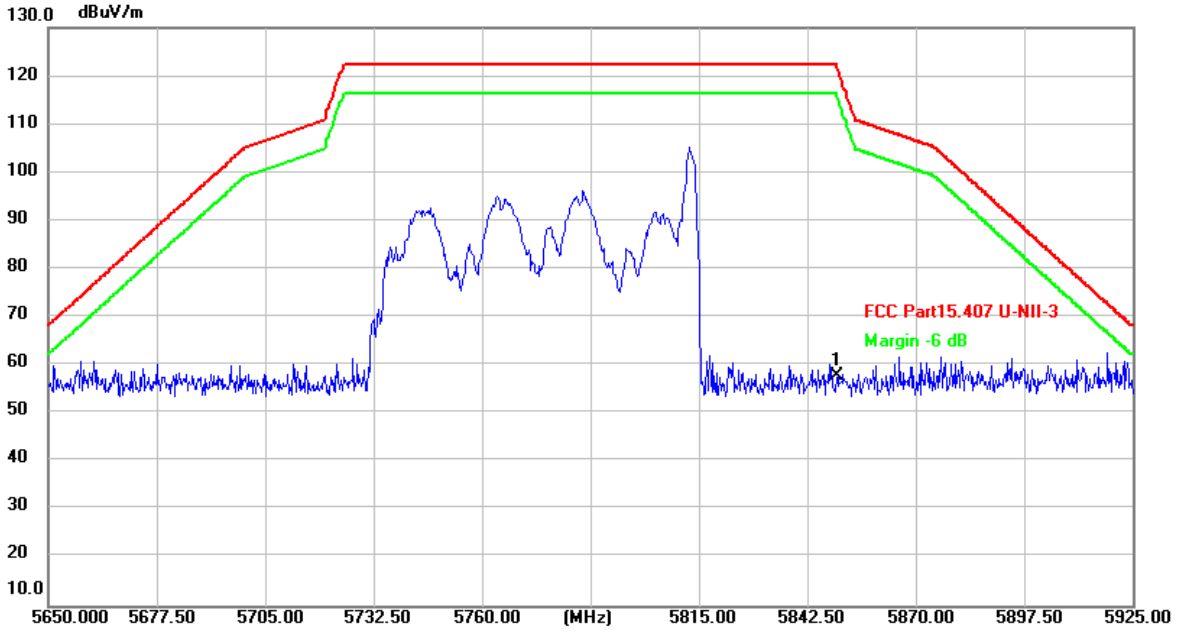

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	19.40	38.44	57.84	122.20	-64.36	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 52/52

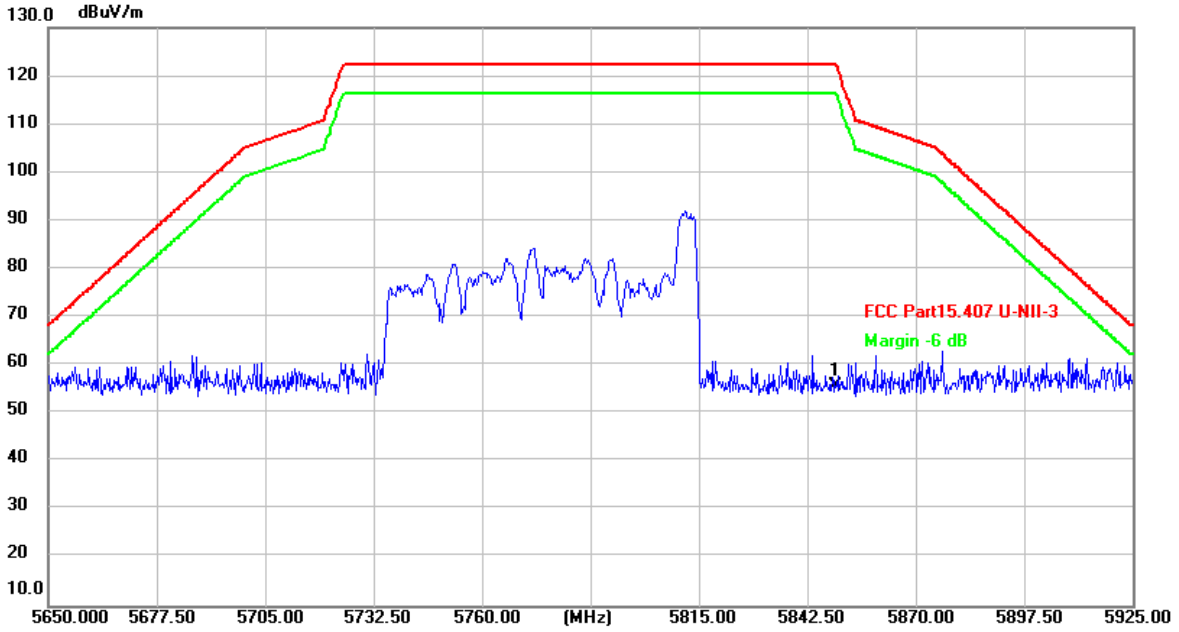

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	17.30	38.44	55.74	122.20	-66.46	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 52/52

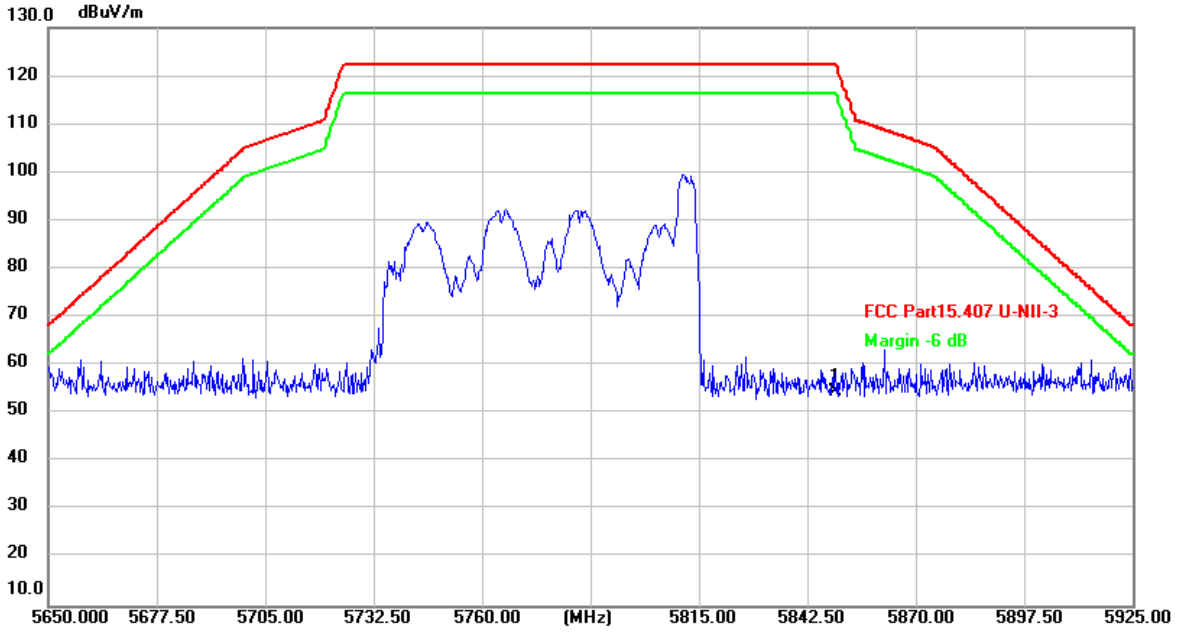

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.21	38.44	54.65	122.20	-67.55	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 106/60

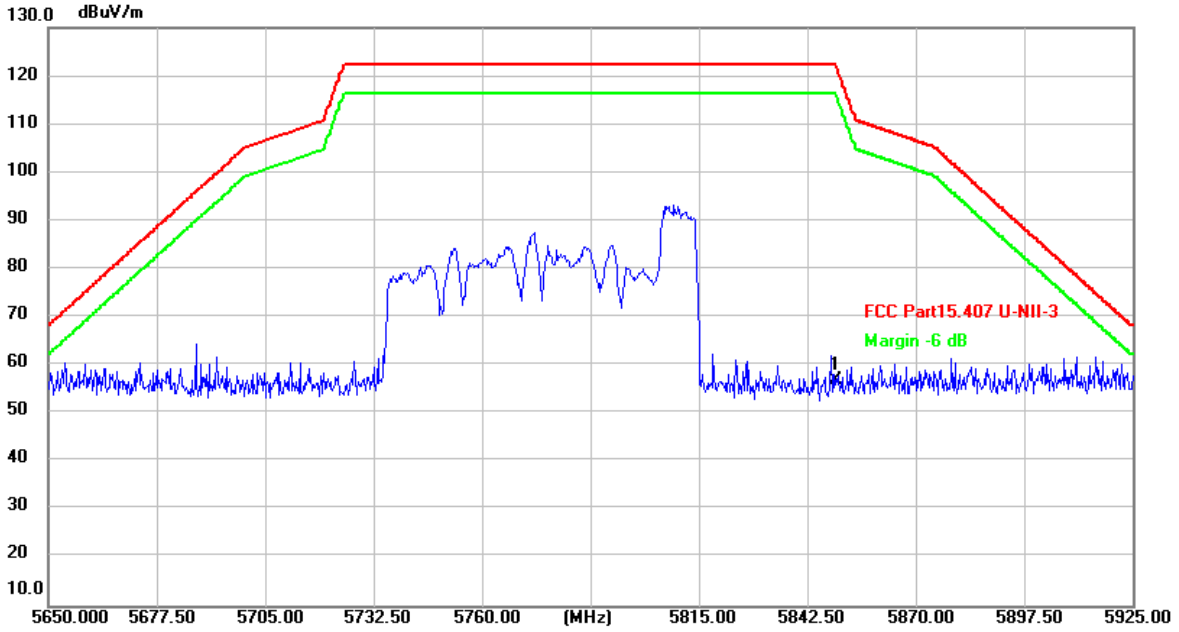

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	18.60	38.44	57.04	122.20	-65.16	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 106/60

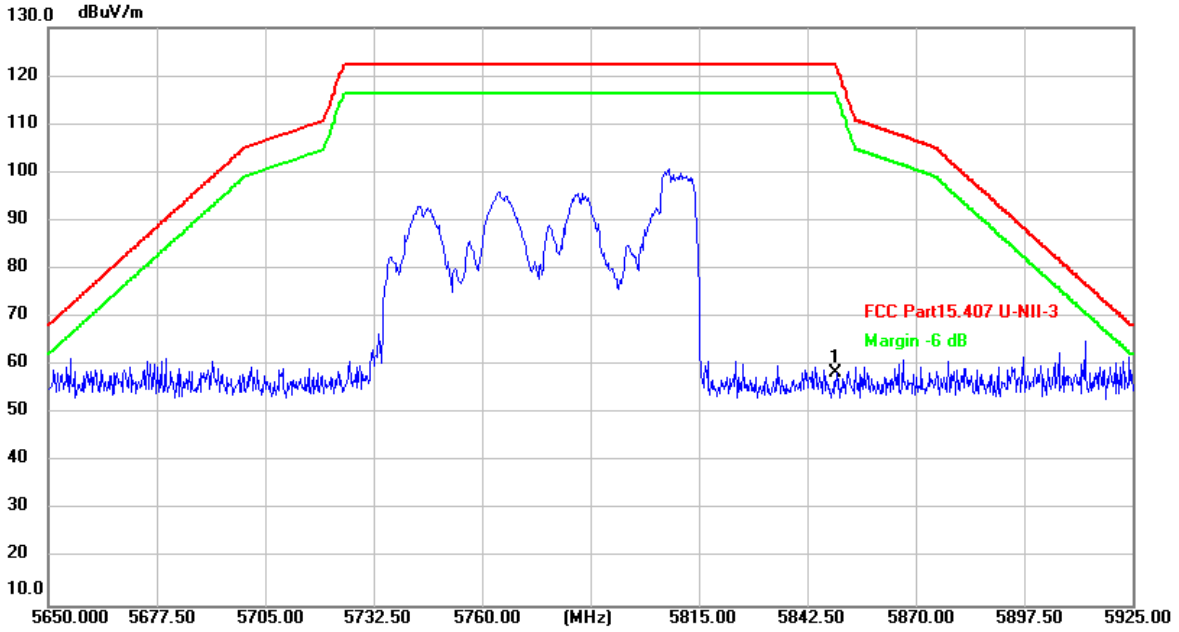

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	19.97	38.44	58.41	122.20	-63.79	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 242/64

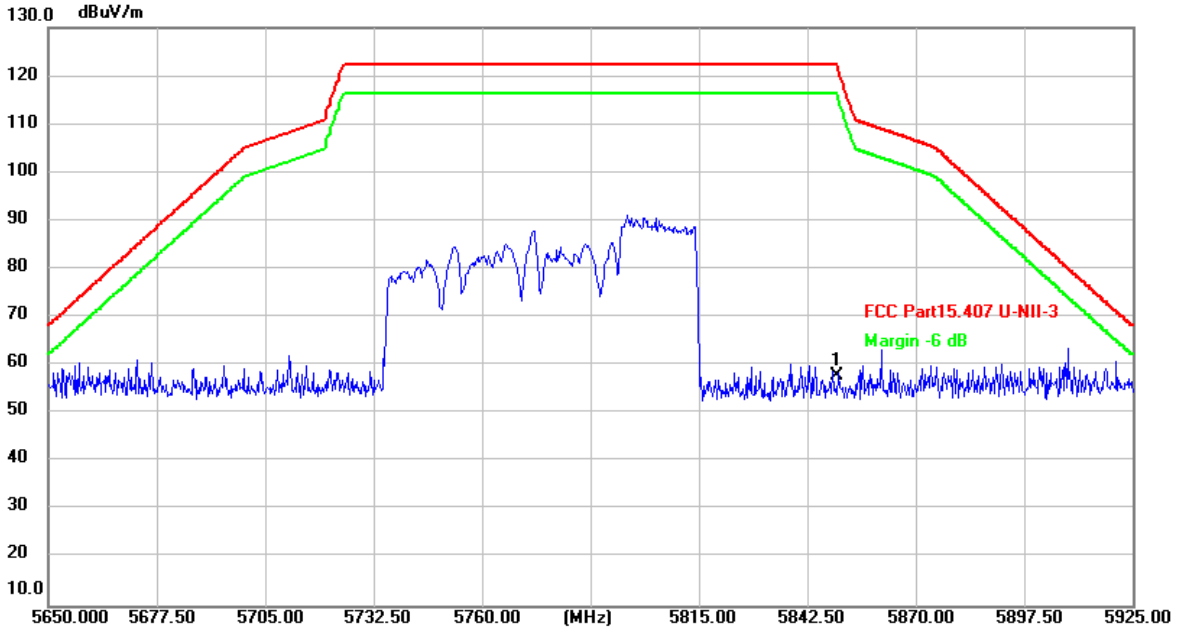

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	19.41	38.44	57.85	122.20	-64.35	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 242/64

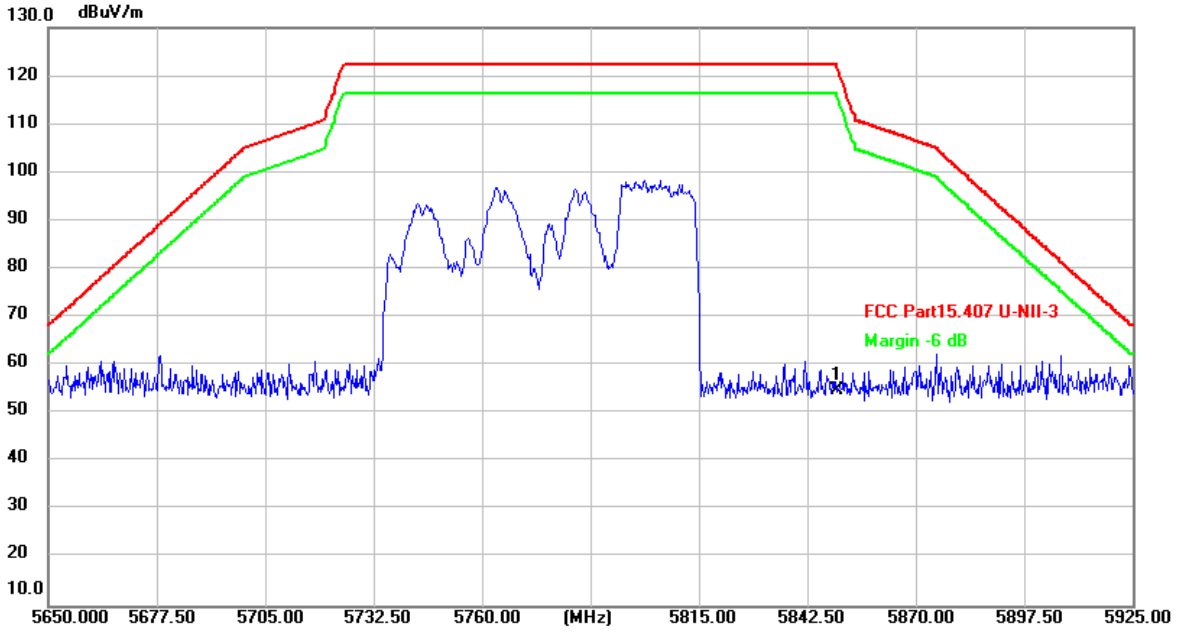

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.49	38.44	54.93	122.20	-67.27	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 484/66

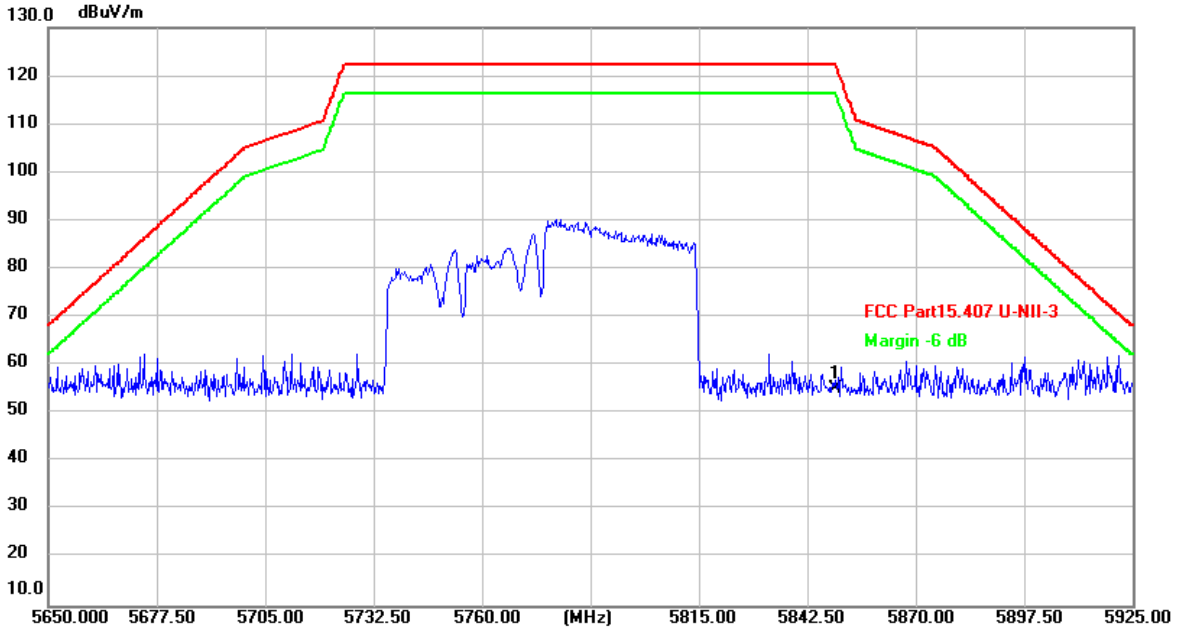

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	16.67	38.44	55.11	122.20	-67.09	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 484/66

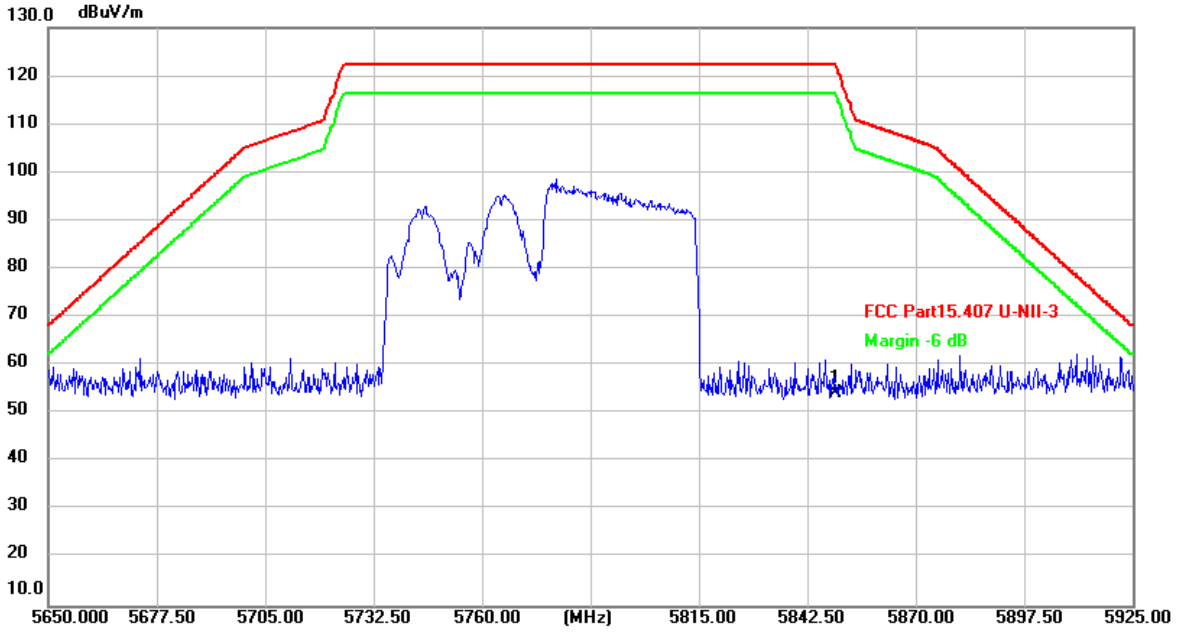

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5850.000	15.96	38.44	54.40	122.20	-67.80	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67

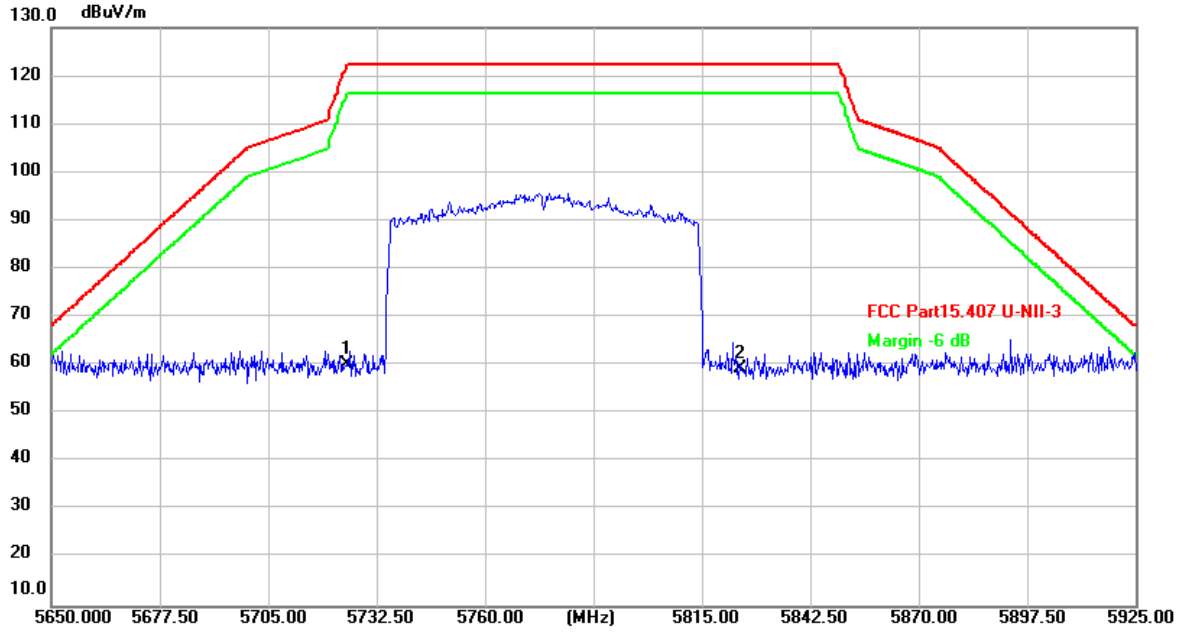

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	22.07	38.16	60.23	122.20	-61.97	peak
2	5825.000	20.94	38.40	59.34	122.20	-62.86	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

Ant. No.	Ant 1 + Ant 2
Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE80) Mode 5775MHz (U-NII-3) 996/67

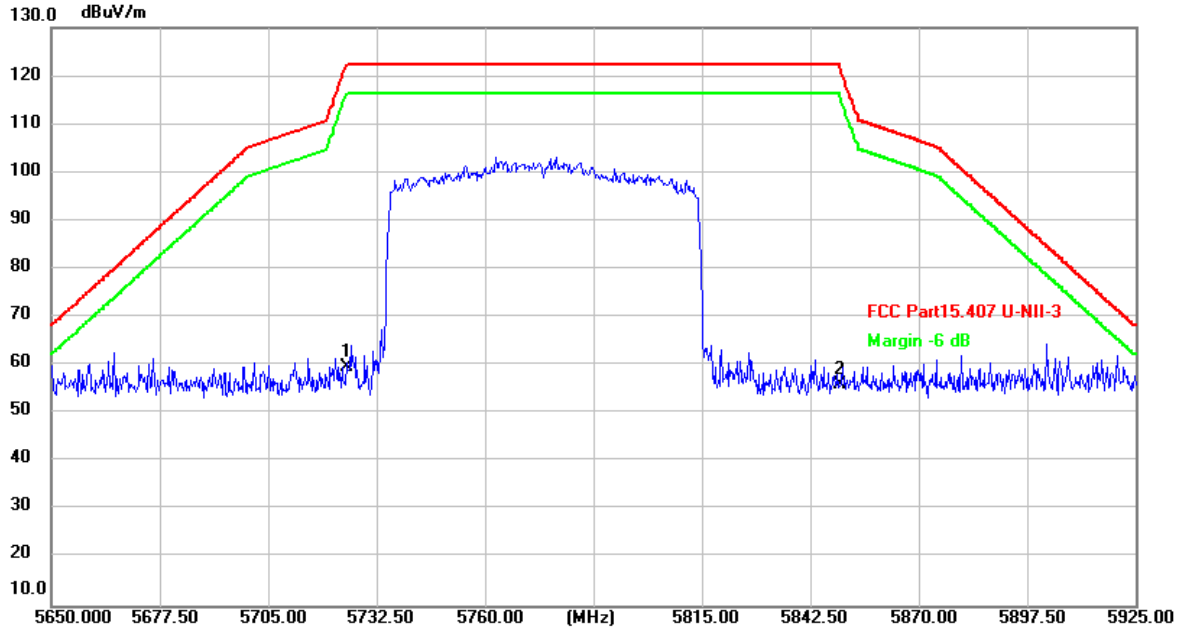

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	5725.000	21.48	38.16	59.64	122.20	-62.56	peak
2	5850.000	17.51	38.44	55.95	122.20	-66.25	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

3.4. Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart E Section 15.407(a) & (e)

Test Item	Limit	Frequency Range (MHz)
26dB Bandwidth& 99% Bandwidth	N/A	5150~5250
		5250~5350
		5500~5700
6 dB Bandwidth	≥500 kHz	5725~5850

Test Configuration



Test Procedure

Please refer to KDB789033 D02 for the measurement methods.

The setting of the spectrum analyzer as below:

26dB Bandwidth Test	
Spectrum Parameters	**Setting**
Attenuation	Auto
Span	>26 dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	>RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6dB Bandwidth Test	
Spectrum Parameters	**Setting**
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	≥ 3*RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth Test	
Spectrum Parameters	**Setting**
Attenuation	Auto
RBW	1% to 5% of the OBW
VBW	≥ 3*RBW
Detector	Peak
Trace	Max Hold

NOTE: The EUT was set to continuously transmitting in each mode and low, middle and high channel for the test.

Test Mode

Please refer to the clause 2.4.

Test Result

26dB Bandwidth

TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]
11A	Ant1	5180	20.00	5170.04	5190.04
	Ant2	5180	20.04	5169.88	5189.92
	Ant3	5180	19.88	5170.08	5189.96
	Ant4	5180	20.00	5169.96	5189.96
	Ant1	5200	19.88	5190.08	5209.96
	Ant2	5200	19.96	5190.16	5210.12
	Ant3	5200	19.76	5190.24	5210.00
	Ant4	5200	20.04	5190.04	5210.08
	Ant1	5240	20.00	5230.08	5250.08
	Ant2	5240	19.96	5230.12	5250.08
	Ant3	5240	20.00	5230.04	5250.04
	Ant4	5240	20.12	5229.88	5250.00
	Ant1	5260	19.84	5250.20	5270.04
	Ant2	5260	20.12	5250.04	5270.16
	Ant3	5260	19.88	5250.00	5269.88
	Ant4	5260	20.08	5250.00	5270.08
	Ant1	5280	20.12	5269.96	5290.08
	Ant2	5280	20.00	5269.96	5289.96
	Ant3	5280	19.80	5270.20	5290.00
	Ant4	5280	19.96	5270.04	5290.00
	Ant1	5320	19.88	5310.12	5330.00
	Ant2	5320	19.92	5310.04	5329.96
	Ant3	5320	19.88	5310.04	5329.92
	Ant4	5320	19.92	5310.12	5330.04
	Ant1	5500	19.96	5490.04	5510.00
	Ant2	5500	19.84	5490.04	5509.88
	Ant3	5500	19.84	5490.12	5509.96
	Ant4	5500	20.00	5489.96	5509.96
	Ant1	5580	20.04	5569.96	5590.00
	Ant2	5580	19.96	5570.04	5590.00
	Ant3	5580	20.12	5570.00	5590.12
	Ant4	5580	19.96	5570.00	5589.96
	Ant1	5700	19.96	5690.12	5710.08
	Ant2	5700	19.88	5689.96	5709.84
	Ant3	5700	19.88	5690.08	5709.96
	Ant4	5700	20.12	5689.92	5710.04
	Ant1	5745	19.92	5735.08	5755.00
	Ant2	5745	20.04	5735.00	5755.04
	Ant3	5745	19.88	5735.08	5754.96
	Ant4	5745	20.08	5735.00	5755.08
	Ant1	5785	20.08	5775.04	5795.12
	Ant2	5785	19.92	5775.08	5795.00
	Ant3	5785	20.04	5775.00	5795.04
	Ant4	5785	20.08	5775.00	5795.08
	Ant1	5825	20.00	5815.00	5835.00
	Ant2	5825	19.88	5815.04	5834.92
	Ant3	5825	19.80	5815.16	5834.96
	Ant4	5825	19.96	5815.08	5835.04
11N20MIMO	Ant1	5180	20.28	5169.96	5190.24
	Ant2	5180	20.16	5169.88	5190.04
	Ant3	5180	20.28	5169.76	5190.04
	Ant4	5180	19.96	5169.96	5189.92
	Ant1	5200	20.32	5189.80	5210.12
	Ant2	5200	20.32	5189.88	5210.20
	Ant3	5200	20.08	5189.92	5210.00
	Ant4	5200	20.00	5190.04	5210.04
	Ant1	5240	20.16	5229.92	5250.08
	Ant2	5240	20.20	5229.92	5250.12
	Ant3	5240	20.08	5229.92	5250.00

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

	Ant4	5240	20.20	5229.84	5250.04
	Ant1	5260	20.12	5249.92	5270.04
	Ant2	5260	20.20	5249.88	5270.08
	Ant3	5260	20.24	5250.00	5270.24
	Ant4	5260	20.28	5249.88	5270.16
	Ant1	5280	20.20	5270.00	5290.20
	Ant2	5280	20.28	5269.88	5290.16
	Ant3	5280	20.04	5269.96	5290.00
	Ant4	5280	20.08	5270.00	5290.08
	Ant1	5320	20.16	5309.96	5330.12
	Ant2	5320	20.20	5309.92	5330.12
	Ant3	5320	19.96	5310.08	5330.04
	Ant4	5320	20.08	5309.92	5330.00
	Ant1	5500	20.28	5489.92	5510.20
	Ant2	5500	20.24	5489.92	5510.16
	Ant3	5500	20.08	5489.96	5510.04
	Ant4	5500	20.16	5489.92	5510.08
	Ant1	5580	20.28	5569.84	5590.12
	Ant2	5580	20.20	5569.88	5590.08
	Ant3	5580	20.16	5569.88	5590.04
	Ant4	5580	20.32	5569.88	5590.20
	Ant1	5700	20.40	5689.80	5710.20
	Ant2	5700	20.24	5689.88	5710.12
	Ant3	5700	20.08	5690.04	5710.12
	Ant4	5700	20.04	5690.08	5710.12
	Ant1	5745	20.36	5734.80	5755.16
	Ant2	5745	20.24	5734.88	5755.12
	Ant3	5745	20.00	5735.04	5755.04
	Ant4	5745	20.24	5734.88	5755.12
	Ant1	5785	20.20	5774.92	5795.12
	Ant2	5785	20.16	5774.96	5795.12
	Ant3	5785	19.88	5774.96	5794.84
	Ant4	5785	20.48	5774.76	5795.24
	Ant1	5825	20.04	5815.04	5835.08
	Ant2	5825	20.24	5814.88	5835.12
	Ant3	5825	20.16	5814.80	5834.96
	Ant4	5825	20.00	5815.00	5835.00
11N40MIMO	Ant1	5190	40.32	5169.92	5210.24
	Ant2	5190	39.36	5170.32	5209.68
	Ant3	5190	40.08	5169.76	5209.84
	Ant4	5190	39.68	5170.16	5209.84
	Ant1	5230	40.80	5209.68	5250.48
	Ant2	5230	39.84	5210.08	5249.92
	Ant3	5230	40.64	5209.52	5250.16
	Ant4	5230	39.84	5210.00	5249.84
	Ant1	5270	40.08	5250.08	5290.16
	Ant2	5270	39.84	5250.24	5290.08
	Ant3	5270	40.08	5250.00	5290.08
	Ant4	5270	39.68	5250.08	5289.76
	Ant1	5310	40.08	5290.00	5330.08
	Ant2	5310	39.68	5290.08	5329.76
	Ant3	5310	40.40	5289.76	5330.16
	Ant4	5310	39.60	5290.24	5329.84
	Ant1	5510	40.32	5489.84	5530.16
	Ant2	5510	40.00	5490.00	5530.00
	Ant3	5510	39.84	5490.24	5530.08
	Ant4	5510	39.76	5490.32	5530.08
	Ant1	5550	40.16	5529.92	5570.08
	Ant2	5550	39.36	5530.56	5569.92
	Ant3	5550	39.76	5530.24	5570.00
	Ant4	5550	40.08	5530.08	5570.16
	Ant1	5670	40.32	5650.00	5690.32
	Ant2	5670	40.16	5650.00	5690.16
	Ant3	5670	39.68	5650.16	5689.84
	Ant4	5670	40.00	5650.16	5690.16

	Ant1	5755	40.16	5735.08	5775.24
	Ant2	5755	40.48	5734.84	5775.32
	Ant3	5755	39.84	5734.92	5774.76
	Ant4	5755	39.92	5735.00	5774.92
	Ant1	5795	40.24	5775.00	5815.24
	Ant2	5795	39.76	5775.08	5814.84
	Ant3	5795	39.52	5775.16	5814.68
	Ant4	5795	40.24	5774.92	5815.16
11AC20MIMO	Ant1	5180	20.08	5170.00	5190.08
	Ant2	5180	20.28	5169.88	5190.16
	Ant3	5180	19.96	5169.96	5189.92
	Ant4	5180	19.88	5170.08	5189.96
	Ant1	5200	20.32	5189.96	5210.28
	Ant2	5200	20.12	5189.96	5210.08
	Ant3	5200	20.12	5190.00	5210.12
	Ant4	5200	20.16	5189.92	5210.08
	Ant1	5240	20.12	5229.96	5250.08
	Ant2	5240	20.16	5229.96	5250.12
	Ant3	5240	20.08	5229.84	5249.92
	Ant4	5240	20.12	5230.00	5250.12
	Ant1	5260	20.08	5249.96	5270.04
	Ant2	5260	20.16	5249.92	5270.08
	Ant3	5260	20.16	5249.88	5270.04
	Ant4	5260	20.20	5249.92	5270.12
	Ant1	5280	20.24	5269.92	5290.16
	Ant2	5280	20.20	5269.88	5290.08
	Ant3	5280	20.12	5269.92	5290.04
	Ant4	5280	20.08	5269.96	5290.04
	Ant1	5320	20.16	5309.88	5330.04
	Ant2	5320	20.28	5309.88	5330.16
	Ant3	5320	20.04	5310.04	5330.08
	Ant4	5320	19.92	5310.04	5329.96
	Ant1	5500	20.08	5489.96	5510.04
	Ant2	5500	20.24	5489.88	5510.12
	Ant3	5500	19.92	5490.04	5509.96
	Ant4	5500	20.08	5489.96	5510.04
	Ant1	5580	20.16	5569.88	5590.04
	Ant2	5580	20.20	5569.92	5590.12
	Ant3	5580	19.92	5570.00	5589.92
	Ant4	5580	20.20	5569.84	5590.04
	Ant1	5700	20.20	5689.96	5710.16
	Ant2	5700	20.16	5689.92	5710.08
	Ant3	5700	19.96	5690.00	5709.96
	Ant4	5700	20.20	5689.84	5710.04
	Ant1	5745	20.24	5734.88	5755.12
	Ant2	5745	20.20	5734.88	5755.08
	Ant3	5745	20.24	5734.80	5755.04
	Ant4	5745	20.36	5734.88	5755.24
	Ant1	5785	20.28	5774.92	5795.20
	Ant2	5785	20.16	5774.92	5795.08
	Ant3	5785	19.92	5775.00	5794.92
	Ant4	5785	20.04	5775.08	5795.12
	Ant1	5825	20.24	5814.92	5835.16
	Ant2	5825	20.12	5814.92	5835.04
	Ant3	5825	19.96	5815.08	5835.04
	Ant4	5825	20.00	5815.00	5835.00
11AC40MIMO	Ant1	5190	40.48	5170.08	5210.56
	Ant2	5190	40.00	5169.92	5209.92
	Ant3	5190	39.68	5170.24	5209.92
	Ant4	5190	40.16	5170.00	5210.16
	Ant1	5230	39.76	5210.08	5249.84
	Ant2	5230	39.84	5210.16	5250.00
	Ant3	5230	40.56	5209.68	5250.24
	Ant4	5230	39.92	5210.00	5249.92
	Ant1	5270	40.32	5249.92	5290.24

	Ant2	5270	39.76	5250.08	5289.84
	Ant3	5270	40.00	5250.00	5290.00
	Ant4	5270	39.76	5250.08	5289.84
	Ant1	5310	39.92	5290.16	5330.08
	Ant2	5310	39.44	5290.40	5329.84
	Ant3	5310	39.76	5289.84	5329.60
	Ant4	5310	39.44	5290.24	5329.68
	Ant1	5510	40.08	5489.92	5530.00
	Ant2	5510	39.28	5490.24	5529.52
	Ant3	5510	39.76	5490.08	5529.84
	Ant4	5510	39.52	5490.32	5529.84
	Ant1	5550	40.64	5529.60	5570.24
	Ant2	5550	40.00	5530.00	5570.00
	Ant3	5550	39.84	5530.32	5570.16
	Ant4	5550	39.76	5529.92	5569.68
	Ant1	5670	40.08	5650.24	5690.32
	Ant2	5670	39.76	5650.16	5689.92
	Ant3	5670	40.08	5649.92	5690.00
	Ant4	5670	40.16	5649.76	5689.92
	Ant1	5755	40.64	5734.84	5775.48
	Ant2	5755	39.36	5735.32	5774.68
	Ant3	5755	39.92	5734.84	5774.76
	Ant4	5755	39.76	5735.24	5775.00
	Ant1	5795	40.24	5774.92	5815.16
	Ant2	5795	39.60	5775.32	5814.92
	Ant3	5795	39.68	5774.84	5814.52
	Ant4	5795	40.08	5775.16	5815.24
11AC80MIMO	Ant1	5210	79.36	5170.32	5249.68
	Ant2	5210	79.52	5170.32	5249.84
	Ant3	5210	79.52	5170.16	5249.68
	Ant4	5210	79.52	5170.16	5249.68
	Ant1	5290	79.52	5250.32	5329.84
	Ant2	5290	79.36	5250.32	5329.68
	Ant3	5290	79.68	5250.16	5329.84
	Ant4	5290	79.84	5250.16	5330.00
	Ant1	5530	79.52	5490.16	5569.68
	Ant2	5530	79.20	5490.32	5569.52
	Ant3	5530	79.20	5490.64	5569.84
	Ant4	5530	79.36	5490.48	5569.84
	Ant1	5610	79.68	5570.16	5649.84
	Ant2	5610	79.36	5570.48	5649.84
	Ant3	5610	79.36	5570.32	5649.68
	Ant4	5610	79.52	5570.32	5649.84
	Ant1	5775	79.68	5735.16	5814.84
	Ant2	5775	79.68	5735.16	5814.84
	Ant3	5775	79.20	5735.32	5814.52
	Ant4	5775	79.68	5735.16	5814.84

Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	26db BW [MHz]	FL [MHz]	FH [MHz]
AX20MIMO	Ant1	5180	242Tone	RU61	22.68	5168.44	5191.12
	Ant2	5180	242Tone	RU61	21.76	5168.96	5190.72
	Ant3	5180	242Tone	RU61	22.68	5169.00	5191.68
	Ant4	5180	242Tone	RU61	21.88	5168.72	5190.60
	Ant1	5200	242Tone	RU61	23.00	5188.32	5211.32
	Ant2	5200	242Tone	RU61	23.84	5187.68	5211.52
	Ant3	5200	242Tone	RU61	23.16	5188.40	5211.56
	Ant4	5200	242Tone	RU61	23.40	5189.08	5212.48
	Ant1	5240	242Tone	RU61	20.04	5229.96	5250.00
	Ant2	5240	242Tone	RU61	19.92	5230.04	5249.96
	Ant3	5240	242Tone	RU61	19.96	5230.04	5250.00
	Ant4	5240	242Tone	RU61	19.96	5230.04	5250.00
	Ant1	5260	242Tone	RU61	22.76	5248.84	5271.60
	Ant2	5260	242Tone	RU61	23.20	5248.60	5271.80
	Ant3	5260	242Tone	RU61	22.24	5248.56	5270.80
	Ant4	5260	242Tone	RU61	22.56	5248.32	5270.88
	Ant1	5280	242Tone	RU61	22.04	5269.20	5291.24
	Ant2	5280	242Tone	RU61	21.96	5269.16	5291.12
	Ant3	5280	242Tone	RU61	23.96	5268.16	5292.12
	Ant4	5280	242Tone	RU61	22.28	5268.68	5290.96
	Ant1	5320	242Tone	RU61	22.76	5308.40	5331.16
	Ant2	5320	242Tone	RU61	21.28	5309.44	5330.72
	Ant3	5320	242Tone	RU61	22.96	5308.64	5331.60
	Ant4	5320	242Tone	RU61	22.24	5309.32	5331.56
	Ant1	5500	242Tone	RU61	22.44	5488.60	5511.04
	Ant2	5500	242Tone	RU61	22.72	5488.40	5511.12
	Ant3	5500	242Tone	RU61	25.64	5486.92	5512.56
	Ant4	5500	242Tone	RU61	21.44	5489.32	5510.76
	Ant1	5580	242Tone	RU61	28.36	5568.80	5597.16
	Ant2	5580	242Tone	RU61	23.20	5568.40	5591.60
	Ant3	5580	242Tone	RU61	26.20	5566.12	5592.32
	Ant4	5580	242Tone	RU61	22.00	5569.04	5591.04
	Ant1	5700	242Tone	RU61	27.16	5687.92	5715.08
	Ant2	5700	242Tone	RU61	21.84	5689.08	5710.92
	Ant3	5700	242Tone	RU61	22.44	5688.36	5710.80
	Ant4	5700	242Tone	RU61	22.28	5688.68	5710.96
	Ant1	5745	242Tone	RU61	22.84	5732.88	5755.72
	Ant2	5745	242Tone	RU61	21.84	5734.20	5756.04
	Ant3	5745	242Tone	RU61	22.28	5733.68	5755.96
	Ant4	5745	242Tone	RU61	22.48	5734.08	5756.56
	Ant1	5785	242Tone	RU61	22.24	5774.00	5796.24
	Ant2	5785	242Tone	RU61	22.96	5773.92	5796.88
	Ant3	5785	242Tone	RU61	21.68	5774.16	5795.84
	Ant4	5785	242Tone	RU61	23.32	5772.92	5796.24
	Ant1	5825	242Tone	RU61	24.20	5811.92	5836.12
	Ant2	5825	242Tone	RU61	24.76	5812.24	5837.00
	Ant3	5825	242Tone	RU61	21.84	5814.20	5836.04
	Ant4	5825	242Tone	RU61	23.92	5812.20	5836.12
AX80MIMO	Ant1	5190	484Tone	RU65	39.76	5170.08	5209.84
	Ant2	5190	484Tone	RU65	39.84	5170.00	5209.84
	Ant3	5190	484Tone	RU65	39.68	5170.24	5209.92
	Ant4	5190	484Tone	RU65	39.60	5170.32	5209.92
	Ant1	5230	484Tone	RU65	39.60	5210.24	5249.84
	Ant2	5230	484Tone	RU65	39.60	5210.16	5249.76
	Ant3	5230	484Tone	RU65	39.76	5210.08	5249.84
	Ant4	5230	484Tone	RU65	39.76	5210.16	5249.92

99% Bandwidth

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.783	5171.7283	5188.5115	---	---
	Ant2	5180	16.623	5171.6484	5188.2717	---	---
	Ant3	5180	16.703	5171.6084	5188.3117	---	---
	Ant4	5180	16.823	5171.6084	5188.4316	---	---
	Ant1	5200	17.103	5191.5285	5208.6314	---	---
	Ant2	5200	16.823	5191.6484	5208.4715	---	---
	Ant3	5200	16.823	5191.5684	5208.3916	---	---
	Ant4	5200	17.063	5191.4086	5208.4715	---	---
	Ant1	5240	16.823	5231.6484	5248.4715	---	---
	Ant2	5240	16.903	5231.5684	5248.4715	---	---
	Ant3	5240	16.783	5231.7283	5248.5115	---	---
	Ant4	5240	16.983	5231.4885	5248.4715	---	---
	Ant1	5260	17.063	5251.3686	5268.4316	---	---
	Ant2	5260	16.863	5251.6084	5268.4715	---	---
	Ant3	5260	16.663	5251.6484	5268.3117	---	---
	Ant4	5260	16.743	5251.5285	5268.2717	---	---
	Ant1	5280	17.223	5271.1688	5288.3916	---	---
	Ant2	5280	16.743	5271.6084	5288.3516	---	---
	Ant3	5280	16.983	5271.4885	5288.4715	---	---
	Ant4	5280	16.863	5271.6084	5288.4715	---	---
	Ant1	5320	16.703	5311.6883	5328.3916	---	---
	Ant2	5320	17.063	5311.6883	5328.7512	---	---
	Ant3	5320	17.383	5311.1688	5328.5514	---	---
	Ant4	5320	17.223	5311.3686	5328.5914	---	---
	Ant1	5500	16.783	5491.5684	5508.3516	---	---
	Ant2	5500	16.623	5491.6883	5508.3117	---	---
	Ant3	5500	17.023	5491.6883	5508.7113	---	---
	Ant4	5500	16.783	5491.6084	5508.3916	---	---
	Ant1	5580	17.542	5571.2088	5588.7512	---	---
	Ant2	5580	16.783	5571.5285	5588.3117	---	---
	Ant3	5580	16.903	5571.5285	5588.4316	---	---
	Ant4	5580	17.143	5571.6084	5588.7512	---	---
	Ant1	5700	16.743	5691.6883	5708.4316	---	---
	Ant2	5700	17.303	5691.2887	5708.5914	---	---
	Ant3	5700	16.943	5691.4086	5708.3516	---	---
	Ant4	5700	16.943	5691.7283	5708.6713	---	---
	Ant1	5745	16.863	5736.6484	5753.5115	---	---
	Ant2	5745	16.983	5736.5285	5753.5115	---	---
	Ant3	5745	16.464	5736.8082	5753.2717	---	---
	Ant4	5745	16.583	5736.7283	5753.3117	---	---
	Ant1	5785	17.183	5776.4885	5793.6713	---	---
	Ant2	5785	17.103	5776.5285	5793.6314	---	---
	Ant3	5785	16.783	5776.6084	5793.3916	---	---
	Ant4	5785	17.263	5776.3287	5793.5914	---	---
	Ant1	5825	17.103	5816.3686	5833.4715	---	---
	Ant2	5825	16.743	5816.6883	5833.4316	---	---
	Ant3	5825	17.103	5816.3686	5833.4715	---	---
	Ant4	5825	16.703	5816.6883	5833.3916	---	---
11N20MIMO	Ant1	5180	17.782	5171.1289	5188.9111	---	---
	Ant2	5180	17.982	5170.9690	5188.9510	---	---
	Ant3	5180	17.662	5171.1289	5188.7912	---	---
	Ant4	5180	17.702	5171.0889	5188.7912	---	---
	Ant1	5200	17.902	5191.1289	5209.0310	---	---
	Ant2	5200	17.902	5191.0490	5208.9510	---	---
	Ant3	5200	17.942	5191.0889	5209.0310	---	---
	Ant4	5200	17.742	5191.0889	5208.8312	---	---
	Ant1	5240	17.822	5231.0889	5248.9111	---	---
	Ant2	5240	17.742	5231.1688	5248.9111	---	---
	Ant3	5240	17.822	5231.0889	5248.9111	---	---
	Ant4	5240	17.782	5231.1289	5248.9111	---	---
	Ant1	5260	17.702	5251.1688	5268.8711	---	---

中国国家认证认可监督管理委员会
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :
http://yz.cnca.cn

	Ant2	5260	17.942	5251.0090	5268.9510	---	---
	Ant3	5260	17.862	5250.9690	5268.8312	---	---
	Ant4	5260	17.862	5251.0889	5268.9510	---	---
	Ant1	5280	17.662	5271.2488	5288.9111	---	---
	Ant2	5280	17.822	5271.1289	5288.9510	---	---
	Ant3	5280	17.862	5271.0889	5288.9510	---	---
	Ant4	5280	17.822	5271.0490	5288.8711	---	---
	Ant1	5320	18.142	5310.8092	5328.9510	---	---
	Ant2	5320	17.782	5311.1289	5328.9111	---	---
	Ant3	5320	17.782	5311.1289	5328.9111	---	---
	Ant4	5320	17.782	5311.1688	5328.9510	---	---
	Ant1	5500	17.742	5491.2088	5508.9510	---	---
	Ant2	5500	17.862	5491.0889	5508.9510	---	---
	Ant3	5500	17.742	5491.1688	5508.9111	---	---
	Ant4	5500	17.982	5491.0490	5509.0310	---	---
	Ant1	5580	17.822	5571.0889	5588.9111	---	---
	Ant2	5580	18.022	5571.0889	5589.1109	---	---
	Ant3	5580	17.862	5571.0090	5588.8711	---	---
	Ant4	5580	17.742	5571.1289	5588.8711	---	---
	Ant1	5700	17.782	5691.1688	5708.9510	---	---
	Ant2	5700	18.022	5691.1688	5709.1908	---	---
	Ant3	5700	17.862	5690.9690	5708.8312	---	---
	Ant4	5700	17.902	5691.0090	5708.9111	---	---
	Ant1	5745	18.142	5736.0090	5754.1508	---	---
	Ant2	5745	17.782	5736.1289	5753.9111	---	---
	Ant3	5745	17.862	5736.0490	5753.9111	---	---
	Ant4	5745	17.742	5736.0889	5753.8312	---	---
	Ant1	5785	17.542	5776.2088	5793.7512	---	---
	Ant2	5785	17.622	5776.2088	5793.8312	---	---
	Ant3	5785	17.782	5776.0889	5793.8711	---	---
	Ant4	5785	17.782	5776.1289	5793.9111	---	---
	Ant1	5825	17.822	5816.0889	5833.9111	---	---
	Ant2	5825	17.902	5816.1688	5834.0709	---	---
	Ant3	5825	17.742	5816.0889	5833.8312	---	---
	Ant4	5825	17.702	5816.0889	5833.7912	---	---
11N40MIMO	Ant1	5190	36.204	5172.0979	5208.3017	---	---
	Ant2	5190	36.124	5172.1778	5208.3017	---	---
	Ant3	5190	35.724	5172.0180	5207.7423	---	---
	Ant4	5190	35.644	5172.2577	5207.9021	---	---
	Ant1	5230	35.964	5212.0180	5247.9820	---	---
	Ant2	5230	36.683	5211.8581	5248.5415	---	---
	Ant3	5230	35.564	5212.0979	5247.6623	---	---
	Ant4	5230	35.964	5211.9381	5247.9021	---	---
	Ant1	5270	36.044	5251.9381	5287.9820	---	---
	Ant2	5270	35.564	5252.2577	5287.8222	---	---
	Ant3	5270	35.884	5252.0180	5287.9021	---	---
	Ant4	5270	36.044	5252.1778	5288.2218	---	---
	Ant1	5310	36.044	5292.0180	5328.0619	---	---
	Ant2	5310	35.884	5292.0979	5327.9820	---	---
	Ant3	5310	35.644	5292.3377	5327.9820	---	---
	Ant4	5310	36.523	5292.0180	5328.5415	---	---
	Ant1	5510	36.044	5492.0180	5528.0619	---	---
	Ant2	5510	36.124	5492.0180	5528.1419	---	---
	Ant3	5510	35.884	5492.0979	5527.9820	---	---
	Ant4	5510	35.884	5492.1778	5528.0619	---	---
	Ant1	5550	36.124	5532.0180	5568.1419	---	---
	Ant2	5550	36.364	5531.7782	5568.1419	---	---
	Ant3	5550	35.804	5532.1778	5567.9820	---	---
	Ant4	5550	36.124	5532.0979	5568.2218	---	---
	Ant1	5670	36.124	5651.9381	5688.0619	---	---
	Ant2	5670	36.204	5651.9381	5688.1419	---	---
	Ant3	5670	36.284	5651.7782	5688.0619	---	---
	Ant4	5670	36.444	5651.9381	5688.3816	---	---
	Ant1	5755	35.804	5737.2577	5773.0619	---	---
	Ant2	5755	36.364	5737.0180	5773.3816	---	---