

# TEST REPORT

of

FCC Part 15 Subpart C §15.247  
IC RSS-247 Issue 4 and RSS-Gen Issue 5

FCC ID: 2BEYM-PT-1  
IC Certification: 32025-PT1

Equipment Under Test : Bluetooth Intercom  
Model Name : PT-1  
Variant Model Name(s) : -  
FCC Applicant : KIDO SPORTS CO., LTD.  
IC Applicant : KIDO SPORTS CO., LTD.  
Manufacturer : KIDO SPORTS CO., LTD.  
Date of Receipt : 2026.02.12  
Date of Test(s) : 2026.02.12 ~ 2026.05.06  
Date of Issue : 2026.05.22

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer.

Tested by:



Ethan Lim

Technical  
Manager:



Jinhyoung Cho

**SGS Korea Co., Ltd. Gunpo Laboratory**

# INDEX

| <u>Table of Contents</u>                                                         | Page |
|----------------------------------------------------------------------------------|------|
| 1. General Information -----                                                     | 3    |
| 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emissions ---- | 10   |
| 3. 20 dB Bandwidth & 99 % Bandwidth -----                                        | 56   |
| 4. Maximum Peak Conducted Output Power -----                                     | 71   |
| 5. Carrier Frequency Separation -----                                            | 74   |
| 6. Number of Hopping Frequencies -----                                           | 78   |
| 7. Time of Occupancy(Dwell Time) -----                                           | 81   |
| 8. AC Power Line Conducted Emission -----                                        | 89   |
| 9. Antenna Requirement -----                                                     | 95   |

## 1. General Information

### 1.1 Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Phone No. : +82 31 688 0901

Fax No. : +82 31 688 0921

### 1.2. Details of Applicant

FCC Applicant : KIDO SPORTS CO., LTD.

FCC Address : 395, Gonghang-daero, Gangseo-gu, Seoul, South Korea, 07590

IC Applicant : KIDO SPORTS CO., LTD.

IC Address : 395, Gonghang-daero, Gangseo-gu, Seoul, Korea (Repulic of), 07590

Contact Person : Kim, Gi-young

Phone No. : +82 10 8787 5611

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

|                             |                                   |                                 |
|-----------------------------|-----------------------------------|---------------------------------|
| <b>Kind of Product</b>      | Bluetooth Intercom                |                                 |
| <b>Model Name</b>           | PT-1                              |                                 |
| <b>Serial Number</b>        | Conducted: 1.0<br>Radiated: 1.0   |                                 |
| <b>Power Supply</b>         | DC 3.7 V                          |                                 |
| <b>Frequency Range</b>      | 2 402 MHz ~ 2 480 MHz (Bluetooth) |                                 |
| <b>Modulation Technique</b> | GFSK, $\pi/4$ DQPSK, 8DPSK        |                                 |
| <b>Number of Channels</b>   | 79 channels (Bluetooth)           |                                 |
| <b>Antenna Type</b>         | Ant. 1: PCB Pattern Antenna       | Ant. 2: Multilayer Chip Antenna |
| <b>Antenna Gain*</b>        | Ant. 1: 2.90 dB i                 | Ant. 2: 2.87 dB i               |
| <b>H/W Version</b>          | 1.0                               |                                 |
| <b>S/W Version</b>          | 1.0                               |                                 |
| <b>FVIN</b>                 | N/A                               |                                 |

## 1.5. Information about the FHSS characteristics:

### 1.5.1. Pseudorandom Frequency Hopping Sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

### 1.5.2. Equal Hopping Frequency Use

The channels of this system will be used equally over the long-term distribution of the hopsets.

### 1.5.3. Example of a 79 hopping sequence in data mode:

02, 05, 31, 24, 20, 10, 43, 36, 30, 23, 40, 06, 21, 50, 44, 09, 71, 78, 01, 13, 73, 07, 70, 72, 35, 62, 42, 11, 41, 08, 16, 29, 60, 15, 34, 61, 58, 04, 67, 12, 22, 53, 57, 18, 27, 76, 39, 32, 17, 77, 52, 33, 56, 46, 37, 47, 64, 49, 45, 38, 69, 14, 51, 26, 79, 19, 28, 65, 75, 54, 48, 03, 25, 66, 05, 16, 68, 74, 59, 63, 55

### 1.5.4. System Receiver Input Bandwidth

Each channel bandwidth is 1 MHz.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 1.5.5. Equipment Description

RSS-247 Issue 4, 6.2.1(a): The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

RSS-247 Issue 4, 3: Frequency hopping systems(FHS) employ a spread spectrum technology in which the carrier is modulated with coded information in a conventional manner, causing a conventional spreading of the radio frequency (RF) energy around the carrier frequency. The carrier frequency is not fixed, but changes at fixed intervals under the direction of a coded sequence.

FHS are not required to employ all available hopping frequencies during each transmission. However, the system comprising both the transmitter and the receiver, must be designed to comply with all of the requirements in this section in case the transmitter is presented with a continuous data or information stream. In addition, a system employing short transmission bursts must comply with the definition of frequency hopping equipment and must distribute its transmissions over the minimum number of hopping channels specified in this section.

Incorporation of intelligence into an FHS that enables it to recognize other users of the band and to avoid occupied frequencies is permitted, provided that the FHS chooses or adapts its hopset without having to synchronize with another or several other systems. The coordination of FHS in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

## 1.6. Test Equipment List

| Equipment                   | Manufacturer                | Model                                | S/N                   | Cal. Date                | Cal. Interval | Cal. Due                 |
|-----------------------------|-----------------------------|--------------------------------------|-----------------------|--------------------------|---------------|--------------------------|
| Spectrum Analyzer           | R&S                         | FSV30                                | 103454                | 12/17/2025               | Annual        | 12/17/2026               |
| DC Power Supply             | Agilent                     | U8002A                               | MY50020026            | 12/02/2025               | Annual        | 12/02/2026               |
| Attenuator                  | AEROFLEX/ INMET             | 40AH2W-6                             | 2                     | 05/19/2026               | Annual        | 05/19/2027               |
| Power Sensor                | R&S                         | NRP-Z81                              | 100418                | 02/02/2026               | Annual        | 02/02/2027               |
| Loop Antenna                | Schwarzbeck Mess-Elektronik | FMZB 1519                            | 1519-039              | 10/01/2025               | Biennial      | 10/01/2027               |
| Bilog Antenna               | Schwarzbeck Mess-Elektronik | VULB 9163                            | 01126                 | 03/09/2026               | Biennial      | 03/09/2028               |
| Horn Antenna <sup>1)</sup>  | R&S                         | HF906                                | 100326                | 02/24/2025<br>03/03/2026 | Annual        | 02/24/2026<br>03/03/2027 |
| Horn Antenna                | Schwarzbeck Mess-Elektronik | BBHA 9170                            | 9170-540              | 12/05/2025               | Annual        | 12/05/2026               |
| Turn Table                  | Innco systems GmbH          | DS 1200 S                            | N/A                   | N.C.R.                   | N/A           | N.C.R.                   |
| Controller                  | Innco systems GmbH          | CONTROLLER CO3000-4P                 | CO3000/963/38330516/L | N.C.R.                   | N/A           | N.C.R.                   |
| Antenna Mast                | Innco systems GmbH          | MA4640-XP-ET                         | MA4640/536/38330516/L | N.C.R.                   | N/A           | N.C.R.                   |
| Anechoic Chamber            | SY Corporation              | L × W × H<br>(9.6 m × 6.4 m × 6.6 m) | N/A                   | N.C.R.                   | N/A           | N.C.R.                   |
| Coaxial Cable <sup>2)</sup> | SENSORVIEW                  | NMST-13A26-NMST-5 m                  | TPC2402190004         | 10/13/2025<br>04/17/2026 | Semi-Annual   | 04/13/2026<br>10/17/2026 |
| Coaxial Cable <sup>3)</sup> | SENSORVIEW                  | NMST-13A26-NMST-10 m                 | TPC2402190001         | 10/13/2025<br>04/17/2026 | Semi-Annual   | 04/13/2026<br>10/17/2026 |
| Coaxial Cable <sup>4)</sup> | Qualwave                    | QT50P-40-KK-1.5                      | 24270074              | 10/10/2025<br>04/10/2026 | Semi-Annual   | 04/10/2026<br>10/10/2026 |
| Spectrum Analyzer           | Agilent                     | N9020A                               | MY53421758            | 09/10/2025               | Annual        | 09/10/2026               |
| Spectrum Analyzer           | Agilent                     | N9030A                               | US51350132            | 12/03/2025               | Annual        | 12/03/2026               |
| SIGNAL CONDITIONING UNIT    | R&S                         | SCU18F                               | 100959                | 01/05/2026               | Annual        | 01/05/2027               |
| Preamplifier <sup>5)</sup>  | H.P.                        | 8447F                                | 2944A03909            | 08/07/2025               | Annual        | 08/07/2026               |
| Preamplifier                | MITEQ Inc.                  | JS44-18004000-35-8P                  | 1546891               | 10/20/2025               | Annual        | 10/20/2026               |
| Low Pass Filter             | Mini-Circuits               | NLP-1200+                            | V8979400903-2         | 02/02/2026               | Annual        | 02/02/2027               |
| High Pass Filter            | Wainwright Instrument GmbH  | WHKX3.0/18G-6SS                      | 4                     | 06/09/2025               | Annual        | 06/09/2026               |
| High Pass Filter            | Wainwright Instrument GmbH  | WHNX6-6320-8000-26500-40CC           | 6                     | 10/22/2025               | Annual        | 10/22/2026               |
| EMI Test Receiver           | R&S                         | ESU26                                | 100109                | 01/21/2026               | Annual        | 01/21/2027               |
| Two-Line V-Network          | R&S                         | ENV216                               | 100190                | 06/05/2025               | Annual        | 06/05/2026               |
| Shield Room                 | SY Corporation              | L × W × H<br>(6.5 m × 3.5 m × 3.5 m) | N/A                   | N.C.R.                   | N/A           | N.C.R.                   |

### Note;

- 1) The equipment was not used for testing during the period from 02/24/2026 to 03/05/2026.
- 2) The equipment was not used for testing during the period from 04/13/2026 to 04/17/2026.
- 3) The equipment was not used for testing during the period from 04/13/2026 to 04/17/2026.
- 4) The equipment was not used for testing during the period from 04/10/2026 to 04/10/2026.
- 5) The equipment was not used for testing during the period from 08/07/2026 to 08/07/2026.

## 1.7. Declaration by the Manufacturer

- Adaptive Frequency Hopping is supported and use at least 20 channels.

## 1.8. Summary of Test Results

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part15 Subpart C, IC RSS-247 Issue 4 and RSS-Gen Issue 5 |                                                         |                                                                            |        |
|--------------------------------------------------------------------------------|---------------------------------------------------------|----------------------------------------------------------------------------|--------|
| Section in FCC                                                                 | Section in IC                                           | Test Item(s)                                                               | Result |
| 15.205(a)<br>15.209<br>15.247(d)                                               | RSS-247 Issue 4<br>6.6<br>RSS-Gen Issue 5<br>8.9        | Transmitter Radiated Spurious Emissions<br>and Conducted Spurious Emission | Pass   |
| 15.247(a)(1)                                                                   | RSS-247 Issue 4<br>6.2.3.1(a)<br>RSS-Gen Issue 5<br>6.7 | 20 dB Bandwidth and 99 % Bandwidth                                         | Pass   |
| 15.247(a)(1)<br>15.247(b)(1)                                                   | RSS-247 Issue 4<br>6.2.3.1(a)<br>6.2.3.2(a)(b)(c)       | Maximum Peak Conducted Output Power                                        | Pass   |
| 15.247(a)(1)                                                                   | RSS-247 Issue 4<br>6.2.3.1(a)                           | Carrier Frequency Separation                                               | Pass   |
| 15.247(a)(1)(iii)                                                              | RSS-247 Issue 4<br>6.2.3.1(b)                           | Number of Hopping Frequencies                                              | Pass   |
| 15.247(a)(1)(iii)                                                              | RSS-247 Issue 4<br>6.2.3.1(b)                           | Time of Occupancy<br>(Dwell Time)                                          | Pass   |
| 15.207                                                                         | RSS-Gen Issue 5<br>8.8                                  | AC Power Line Conducted Emission                                           | Pass   |

## 1.9. Test Procedure(s)

The measurement procedures described in the American National Standard of Procedure for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2020 for FCC and ANSI C63.10-2020+Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024 for ISED), as well as the guidance provided in KDB 558074 D01 15.247 Meas Guidance v05r02, were used in the measurement of the DUT.

All measurement procedures in the test report comply with both ANSI versions, with no effect on the test results

## 1.10. Sample Calculation

Where relevant, the following sample calculation is provided:

### 1.10.1. Conducted Test

Offset value (dB) = Attenuator (dB) + Cable loss (dB)

### 1.10.2. Radiation Test

Field strength level (dB $\mu$ V/m) = Measured level (dB $\mu$ V) + Antenna factor (dB/m) + Cable loss (dB) - Amplifier gain (dB)  
+ Duty factor (dB)

## 1.11. Information of power setting and software for test

- The EUT was tested using Bluetest3 for Desktop (v3.3.18), and transmit it's maximum rated output power setting

## 1.12. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                           | Uncertainty |         |
|-------------------------------------|-------------|---------|
| Maximum Peak Conducted Output Power | 0.35 dB     |         |
| 99 % Bandwidth                      | 0.01 MHz    |         |
| 20 dB Bandwidth                     | 0.02 MHz    |         |
| Conducted Spurious Emission         | 0.86 dB     |         |
| Time of Occupancy                   | 0.01 ms     |         |
| AC Conducted Emission               | 3.10 dB     |         |
| Radiated Emission, 9 kHz to 30 MHz  | H           | 3.60 dB |
|                                     | V           | 3.60 dB |
| Radiated Emission, below 1 GHz      | H           | 5.50 dB |
|                                     | V           | 5.10 dB |
| Radiated Emission, above 1 GHz      | H           | 3.50 dB |
|                                     | V           | 3.40 dB |

All measurement uncertainty values are shown with a coverage factor  $k = 2$  to indicate a 95 % level of confidence.

## 1.13. Test Report Revision

| Revision | Report Number        | Date of Issue | Description |
|----------|----------------------|---------------|-------------|
| 0        | F690501-RF-RTL006971 | 2026.05.22    | Initial     |

## 1.14. Device Capabilities

| Mode                 | SISO   |        |
|----------------------|--------|--------|
|                      | Ant. 1 | Ant. 2 |
| Bluetooth            | O      | O      |
| Bluetooth Low Energy | X      | O      |
| O-QPSK               | O      | X      |

## 1.14. Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

### Ant. 1

| Modulation    | Packet type | Frequency(MHz) | RF Peak Output power (dBm) |
|---------------|-------------|----------------|----------------------------|
| GFSK          | DH1         | 2 402          | 15.10                      |
|               | DH3         | 2 402          | 15.13                      |
|               | DH5         | 2 402          | <b><u>15.18</u></b>        |
| $\pi/4$ DQPSK | 2DH1        | 2 402          | 16.64                      |
|               | 2DH3        | 2 402          | 16.65                      |
|               | 2DH5        | 2 402          | 16.67                      |
| 8DPSK         | 3DH1        | 2 402          | 16.73                      |
|               | 3DH3        | 2 402          | 16.67                      |
|               | 3DH5        | 2 402          | <b><u>16.87</u></b>        |

**Ant. 2**

| Modulation    | Packet type | Frequency(MHz) | RF Peak Output power (dBm) |
|---------------|-------------|----------------|----------------------------|
| GFSK          | DH1         | 2 480          | 7.76                       |
|               | DH3         | 2 480          | 8.89                       |
|               | DH5         | 2 480          | <b><u>8.94</u></b>         |
| $\pi/4$ DQPSK | 2DH1        | 2 480          | 7.94                       |
|               | 2DH3        | 2 480          | 7.94                       |
|               | 2DH5        | 2 480          | 8.18                       |
| 8DPSK         | 3DH1        | 2 480          | 8.80                       |
|               | 3DH3        | 2 480          | 8.35                       |
|               | 3DH5        | 2 480          | <b><u>8.84</u></b>         |

**Note;**

For transmitter radiated spurious emissions, conducted spurious emission, carrier frequency separation and number of hopping frequencies, GFSK / DH5 and 8DPSK / 3DH5 are tested as worst condition.

For 20 dB bandwidth and maximum peak conducted output power, GFSK / DH5,  $\pi/4$ DQPSK / 2DH5 and 8DPSK / 3DH5 are tested as worst condition.


For Time of Occupancy, GFSK / DH5 and 8DPSK / 3DH5 are tested as worst condition.

## 2. Transmitter Radiated Spurious Emissions and Conducted Spurious Emissions


### 2.1. Test Setup

#### 2.1.1. Transmitter Radiated Spurious Emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz.

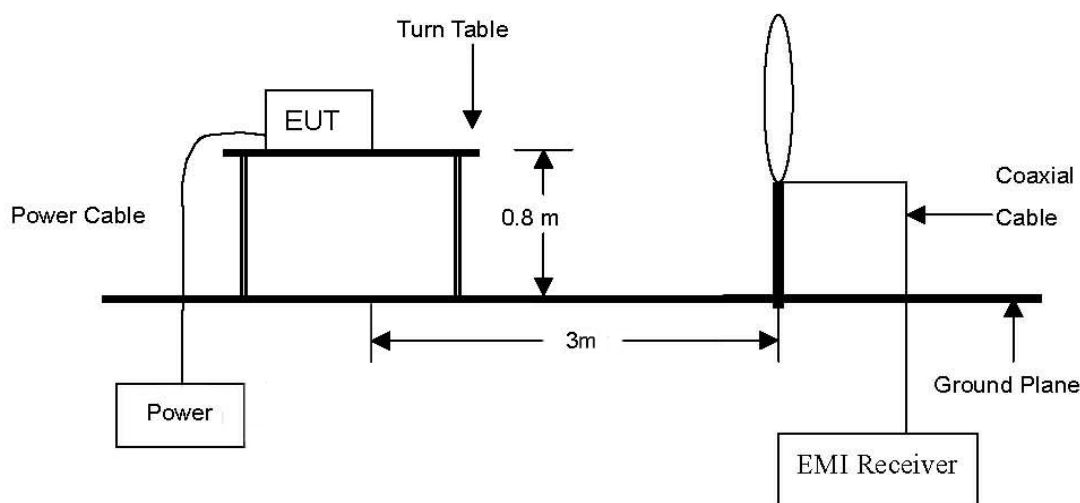


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

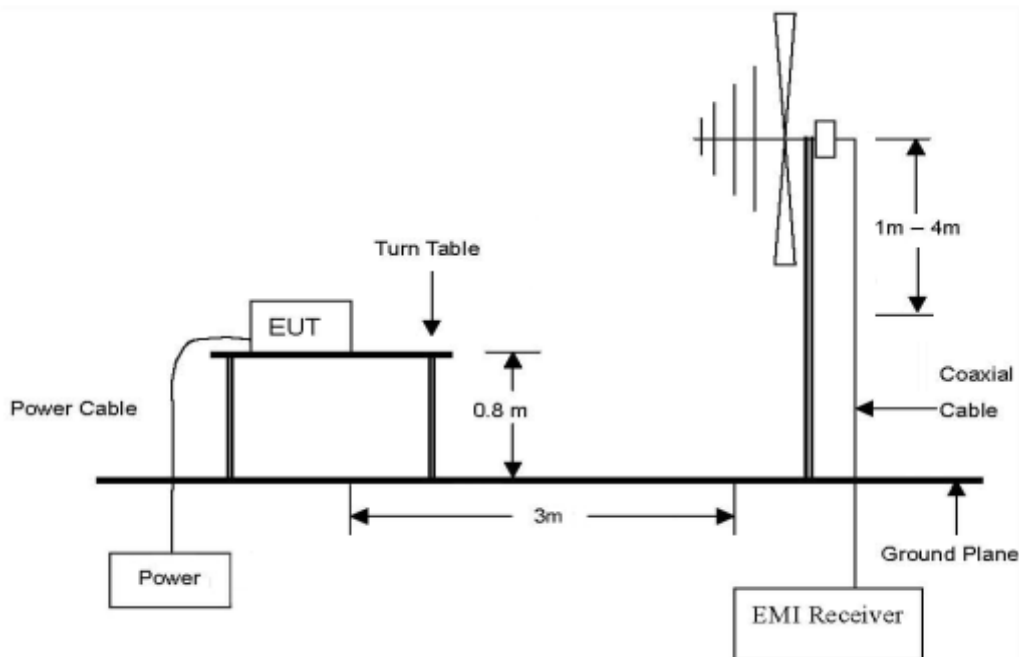

The diagram below shows the test setup that is utilized to make the measurements for emission. The spurious emissions were investigated from 1 GHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

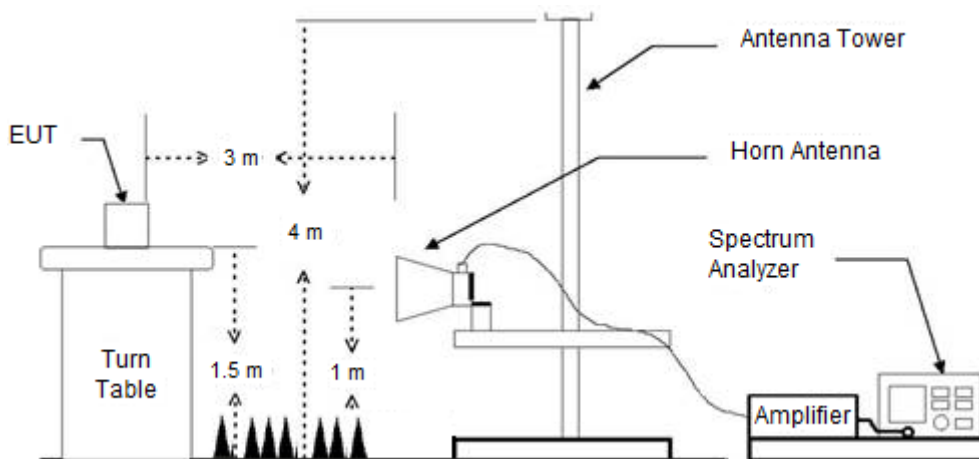

## 2.1.2. Conducted Spurious Emissions

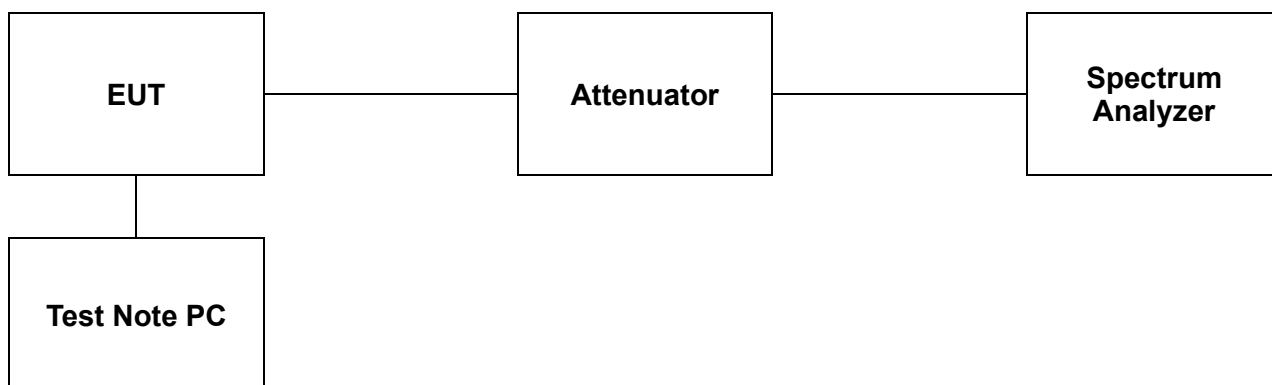

## 2.2. Limit

### 2.2.1. FCC

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emission which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency<br>(MHz) | Field Strength<br>( $\mu\text{V/m}$ ) | Measurement Distance<br>(Meters) |
|--------------------|---------------------------------------|----------------------------------|
| 0.009-0.490        | 2 400/F(kHz)                          | 300                              |
| 0.490-1.705        | 24 000/F(kHz)                         | 30                               |
| 1.705-30.0         | 30                                    | 30                               |
| 30-88              | 100**                                 | 3                                |
| 88-216             | 150**                                 | 3                                |
| 216-960            | 200**                                 | 3                                |
| Above 960          | 500                                   | 3                                |

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

### 2.2.2. IC

According to RSS-247 Issue 4, 6.6, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement– provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

According to RSS-Gen Issue 5, 8.9, except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 – General Field Strength Limits at frequencies above 30 MHz**

| Frequency (MHz) | Field Strength ( $\mu V/m$ at 3 m) |
|-----------------|------------------------------------|
| 30-88           | 100                                |
| 88-216          | 150                                |
| 216-960         | 200                                |
| Above 960       | 500                                |

**Table 6 – General Field Strength Limits at frequencies below 30 MHz**

| Frequency              | Magnetic Field Strength (H-Field) ( $\mu A/m$ ) | Measurement Distance (meters) |
|------------------------|-------------------------------------------------|-------------------------------|
| 9-490 kHz <sup>1</sup> | 6.37/F (F in kHz)                               | 300                           |
| 490-1 705 kHz          | 63.7/F (F in kHz)                               | 30                            |
| 1.705-30 MHz           | 0.08                                            | 30                            |

**Note<sup>1</sup>:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2020 (for FCC) and ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 (for ISSED).

### 2.3.1. Test Procedures for emission below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum Hold Mode.

### 2.3.2. Test Procedures for emission from above 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site below 1 GHz and 1.5 meter above the ground at a 3 meter anechoic chamber test site above 1 GHz. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a bi-log antenna, a horn antenna and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. For measurements below 1 GHz resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.
6. For measurements Above 1 GHz resolution bandwidth is set to 1 MHz, the video bandwidth is set to 3 MHz for peak measurements.

### 2.3.3. Test Procedures for Average measurements

Radiated emissions for average measurements were according to section 7.8.8.2 of ANSI C63.10-2020 (for FCC) and ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 (for ISSED).

Where average measurements of an emission are required it is permitted to determine the average value over 100 ms after accounting for the maximum dwell time per 1 MHz in any 100 ms period. The dwell time in any 100 ms period can include multiple hops on that frequency for devices which have a short dwell time.

The maximum dwell time per 1 MHz does need to account for cases where the channel spacing is less than the 1 MHz measurement bandwidth and for cases where the occupied bandwidth exceeds the channel spacing and the channels overlap. The maximum dwell time per 1 MHz is determined as follows:

Maximum dwell time per 1 MHz = dwell time per 100 ms per channel × (channel separation correction + overlapping channel correction) where:

- Channel separation correction =  $[1 / \text{channel separation (MHz)}]$  for channel separation < 1 MHz, and = 1 for channel separation  $\geq 1$  MHz, as determined using the procedures of 7.8.2. If the average measurements are performed on the Nth harmonic, the channel separation value is N times the separation at the fundamental frequency.
- Overlapping channel correction = 0 when the 20 dB channel bandwidth < channel separation and 1 for when the 20 dB channel bandwidth > channel separation.

The average value may be determined as follows:

- a) From the peak value of the emission: The measured peak value in dB $\mu$ V/m is corrected by  $20 \log(\text{maximum dwell time in 100 ms} / 100)$ .
- b) From the average value of the emission: When the average value has been measured with the device continuously transmitting (100% duty cycle) the measured average value in dB $\mu$ V/m is corrected by  $X \log(\text{maximum dwell time in 100 ms} / 100)$  where X = 10 if using an rms-average power detector (with output data in power terms) and X = 20 if using a linear voltage average detector (with output data in voltage terms).

## Ant. 1

on time on Channel

dwelt time per 100 ms per channel



In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time 3DH5 packet is observed.

the period to have 3DH5 packet completing one hopping sequence is  $2.88 \text{ ms} \times 20 \text{ channels} = 57.60 \text{ ms}$

There cannot be 2 complete hopping sequences within 100 ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100 \text{ ms} / 57.60 \text{ ms}] = 2 \text{ hops}$

Thus, the possible dwell time per 100 ms per channel:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

For the 3DH5, the channel separation is 1 MHz, Channel separation correction = 1

For the 3DH5, 20 dB channel bandwidth > channel separation, Overlapping channel correction = 1

Maximum dwell time in 100 ms = dwell time per 100 ms per channel  $\times$  (channel separation correction + overlapping channel correction)

$$5.76 \text{ ms} \times (1 + 1) = 11.52 \text{ ms}$$


Correction factor for average value is follow:

$$20 \times \log (11.52 \text{ ms}/100 \text{ ms}) = -18.77 \text{ dB}$$

## Ant. 2

on time on Channel

dwll time per 100 ms per channel

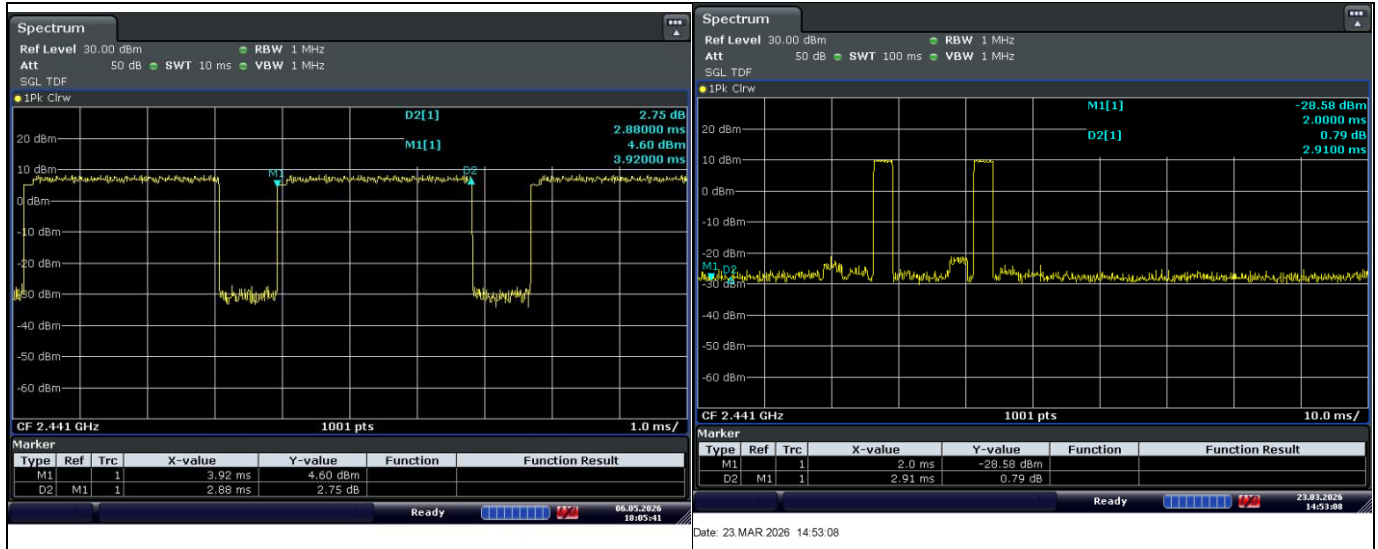

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time 3DH5 packet is observed.

the period to have 3DH5 packet completing one hopping sequence is  $2.88 \text{ ms} \times 20 \text{ channels} = 57.60 \text{ ms}$

There cannot be 2 complete hopping sequences within 100 ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period.  $[100 \text{ ms} / 57.60 \text{ ms}] = 2 \text{ hops}$

Thus, the possible dwell time per 100 ms per channel:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

For the 3DH5, the channel separation is 1 MHz, Channel separation correction = 1

For the 3DH5, 20 dB channel bandwidth > channel separation, Overlapping channel correction = 1

Maximum dwell time in 100 ms = dwell time per 100 ms per channel  $\times$  (channel separation correction + overlapping channel correction)

$$5.76 \text{ ms} \times (1 + 1) = 11.52 \text{ ms}$$

Correction factor for average value is follow:

$$20 \times \log(11.52 \text{ ms}/100 \text{ ms}) = -18.77 \text{ dB}$$

## **2.3.4. Test Procedures for Conducted Spurious Emissions**

### **2.3.4.1. Band-edge Compliance of RF Conducted Emissions**

The transmitter output was connected to the spectrum analyzer.

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.

RBW  $\geq$  100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

### **2.3.4.2. Spurious RF Conducted Emissions**

The transmitter output was connected to the spectrum analyzer.

RBW = 1 MHz

VBW = 3 MHz

Sweep = auto

Detector function = peak

Trace = max hold

### **2.3.4.3. TDF function**

- For plots showing conducted spurious emissions from 9 kHz to 25 GHz, all path loss of wide frequency range was investigated and compensated to spectrum analyzer as TDF function.

So, the reading values shown in plots were final result.

## 2.4. Test Results

Ambient temperature : (23 ± 1) °C  
Relative humidity : 47 %

### 2.4.1. Radiated Spurious Emission below 1 000 MHz

The frequency spectrum from 9 kHz to 1 000 MHz was investigated.

#### Ant. 1

| Radiated Emissions |                   |                | Ant. | Correction Factors<br>(dB/m) | Total              | Limit             |                |
|--------------------|-------------------|----------------|------|------------------------------|--------------------|-------------------|----------------|
| Frequency<br>(MHz) | Reading<br>(dBμV) | Detect<br>Mode | Pol. |                              | Actual<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
| 849.92             | 23.71             | Quasi<br>Peak  | H    | 3.90                         | 27.61              | 46.00             | 18.39          |
| Above<br>900.00    | Not<br>detected   | -              | -    | -                            | -                  | -                 | -              |

#### Remark;

- Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
- Test from 30 MHz to 1 000 MHz was performed using the software of ELEKTRA(V5.02) from Rohde & Schwarz GmbH & Co. KG.
- Reported spurious emissions are in **EDR / 3DH5 / Low channel** as worst case among other modes.
- Radiated spurious emission measurement as below.  
(Actual = Reading + Correction)  
(Correction = Antenna Factor + AMP Factor + Cable Loss)
- According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

#### Ant. 2



| Radiated Emissions |                   |                | Ant. | Correction Factors<br>(dB/m) | Total              | Limit             |                |
|--------------------|-------------------|----------------|------|------------------------------|--------------------|-------------------|----------------|
| Frequency<br>(MHz) | Reading<br>(dBμV) | Detect<br>Mode | Pol. |                              | Actual<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
| 32.69              | 35.79             | Quasi<br>Peak  | V    | -10.72                       | 25.07              | 40.00             | 14.93          |
| 60.66              | 31.75             | Quasi<br>Peak  | V    | -8.51                        | 23.24              | 40.00             | 16.76          |
| 166.39             | 43.12             | Quasi<br>Peak  | H    | -10.77                       | 32.35              | 43.50             | 11.15          |
| 848.84             | 23.73             | Quasi<br>Peak  | H    | 3.89                         | 27.62              | 46.00             | 18.38          |
| Above<br>900.00    | Not<br>detected   | -              | -    | -                            | -                  | -                 | -              |

#### Remark;



- Spurious emissions for all channels and modes were investigated and almost the same below 1 GHz.
- Test from 30 MHz to 1 000 MHz was performed using the software of ELEKTRA(V5.02) from Rohde & Schwarz GmbH & Co. KG.
- Reported spurious emissions are in **BDR / DH5 / High channel** as worst case among other modes.
- Radiated spurious emission measurement as below.  
(Actual = Reading + Correction)  
(Correction = Antenna Factor + AMP Factor + Cable Loss)
- According to §15.31(o), emission levels are not report much lower than the limits by over 20 dB.

## - Test plots

### Ant. 1

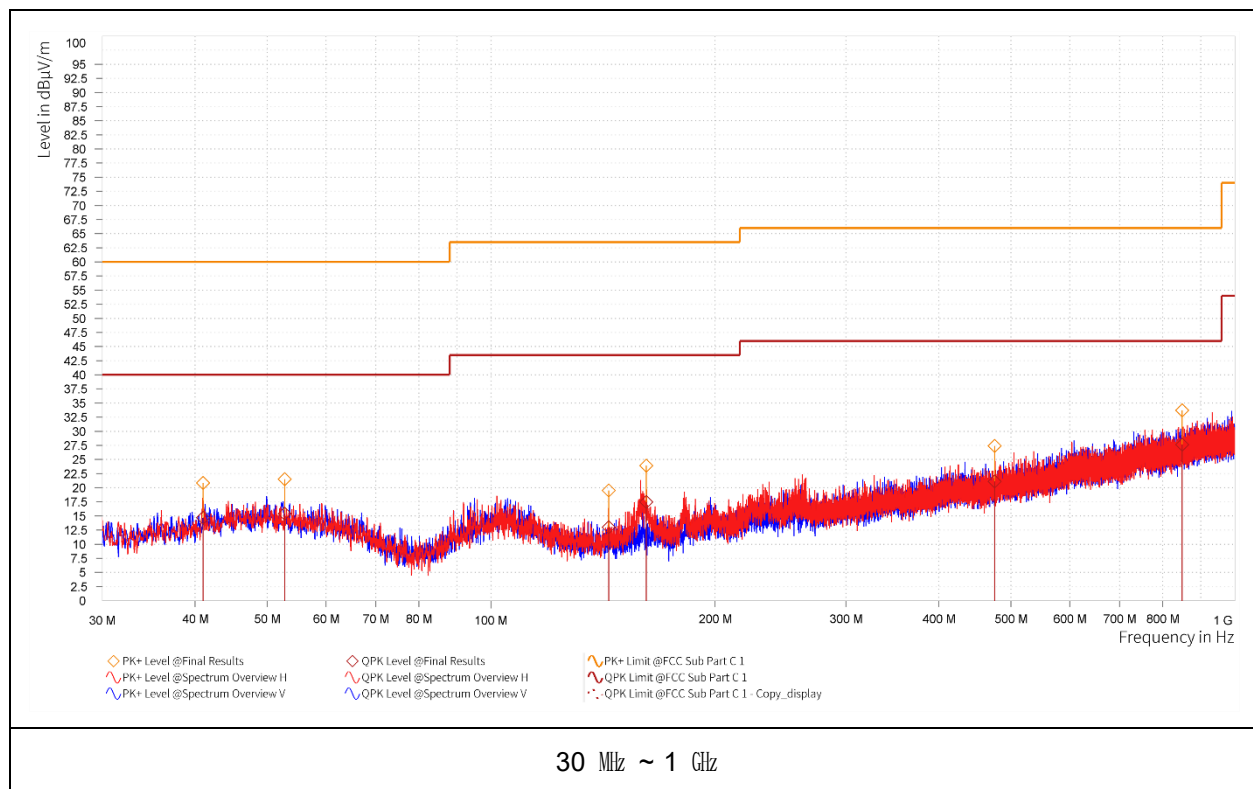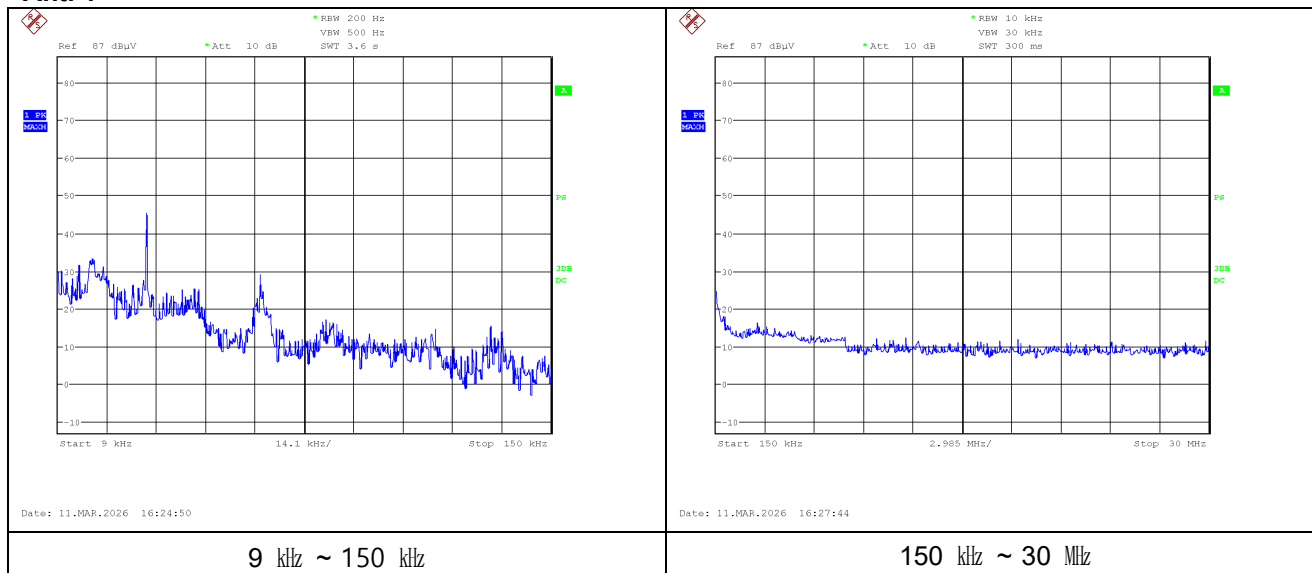

## Ant. 2

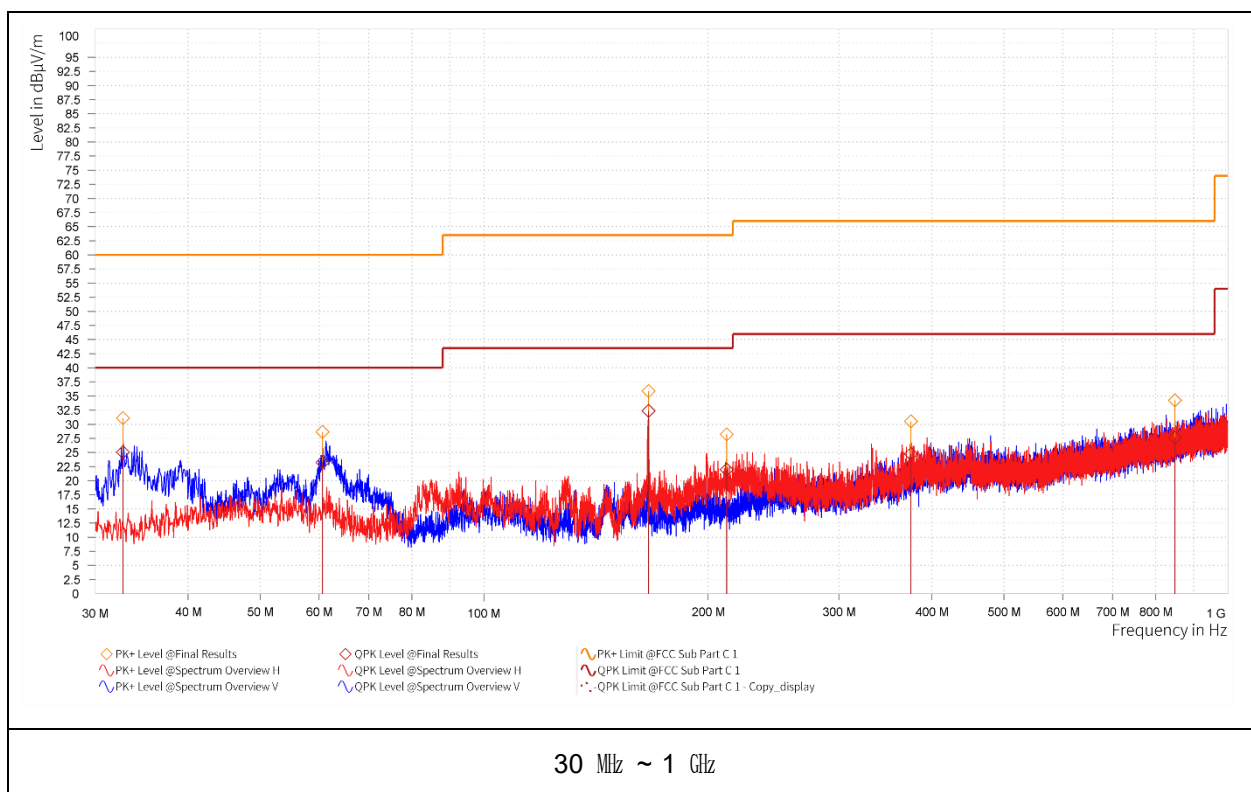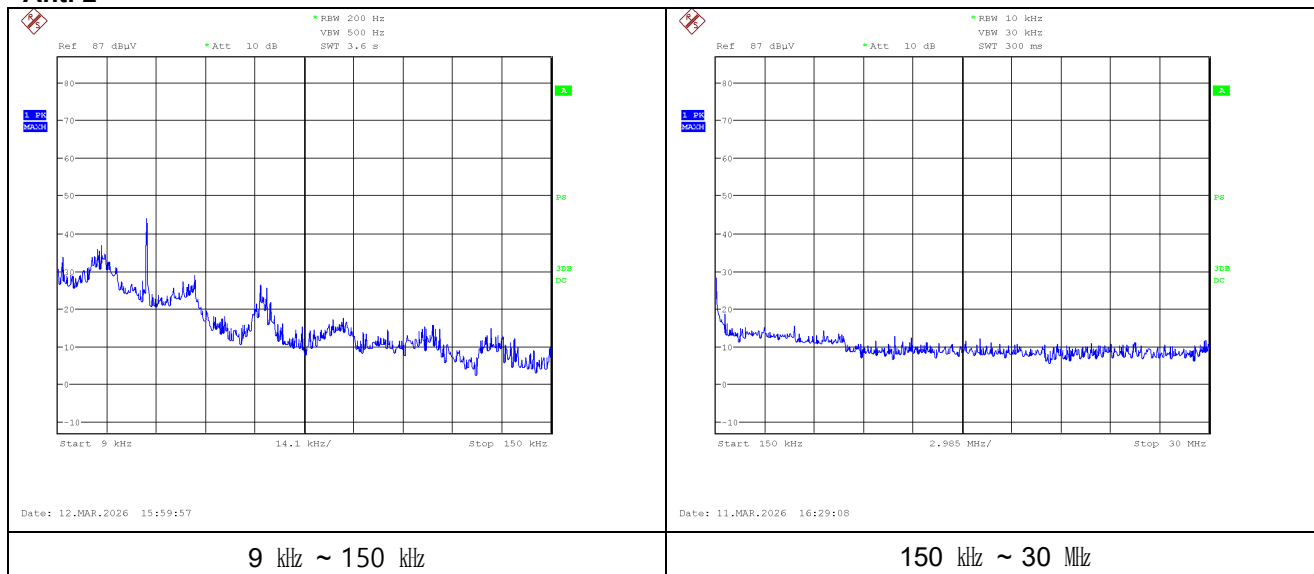

## 2.4.2. Radiated Spurious Emission above 1 000 MHz

The frequency spectrum above 1 000 MHz was investigated. All reading values are peak values.

### Ant. 1

#### Operating Mode: GFSK

##### A. Low Channel (2 402 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |         |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *2 310.00          | 13.65          | Peak        | H    | 28.06              | 7.33    | -       | 49.04           | 74.00          | 24.96       |
| *2 310.00          | -              | Average     | H    | -                  | -       | -18.77  | 30.27           | 54.00          | 23.73       |
| *2 361.63          | 17.01          | Peak        | H    | 28.28              | 7.38    | -       | 52.67           | 74.00          | 21.33       |
| *2 361.63          | -              | Average     | H    | -                  | -       | -18.77  | 33.90           | 54.00          | 20.10       |
| *2 390.00          | 15.40          | Peak        | H    | 28.22              | 7.59    | -       | 51.21           | 74.00          | 22.79       |
| *2 390.00          | -              | Average     | H    | -                  | -       | -18.77  | 32.44           | 54.00          | 21.56       |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 804.38          | 50.83          | Peak        | H    | 32.72              | -28.91      | -       | 54.64           | 74.00          | 19.36       |
| *4 804.38          | -              | Average     | H    | -                  | -           | -18.77  | 35.87           | 54.00          | 18.13       |
| 7 206.35           | 48.70          | Peak        | H    | 35.91              | -24.99      | -       | 59.62           | 74.00          | 14.38       |
| 9 607.27           | 43.86          | Peak        | V    | 37.59              | -24.34      | -       | 57.11           | 74.00          | 16.89       |
| *12 009.33         | 36.03          | Peak        | V    | 38.60              | -21.46      | -       | 53.17           | 74.00          | 20.83       |
| Above 12 100.00    | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

B. Middle Channel (2 441 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 882.19          | 56.04                | Peak        | V    | 33.03              | -28.25      | -       | 60.82                 | 74.00                | 13.18       |
| *4 882.19          | -                    | Average     | V    | -                  | -           | -18.77  | 42.05                 | 54.00                | 11.95       |
| *7 322.49          | 51.20                | Peak        | V    | 36.24              | -25.66      | -       | 61.78                 | 74.00                | 12.22       |
| *7 322.49          | -                    | Average     | V    | -                  | -           | -18.77  | 43.01                 | 54.00                | 10.99       |
| 9 763.31           | 48.68                | Peak        | V    | 37.53              | -24.13      | -       | 62.08                 | 74.00                | 11.92       |
| Above 9 800.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

C. High Channel (2 480 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |         |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *2 483.50          | 19.01          | Peak        | H    | 28.40              | 7.58    | -       | 54.99           | 74.00          | 19.01       |
| *2 483.50          | -              | Average     | H    | -                  | -       | -18.77  | 36.22           | 54.00          | 17.78       |
| *2 483.70          | 21.65          | Peak        | H    | 28.40              | 7.58    | -       | 57.63           | 74.00          | 16.37       |
| *2 483.70          | -              | Average     | H    | -                  | -       | -18.77  | 38.86           | 54.00          | 15.14       |
| *2 500.00          | 13.50          | Peak        | H    | 28.50              | 7.74    | -       | 49.74           | 74.00          | 24.26       |
| *2 500.00          | -              | Average     | H    | -                  | -       | -18.77  | 30.97           | 54.00          | 23.03       |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 959.75          | 53.73          | Peak        | V    | 33.22              | -28.03      | -       | 58.92           | 74.00          | 15.08       |
| *4 959.75          | -              | Average     | V    | -                  | -           | -18.77  | 40.15           | 54.00          | 13.85       |
| *7 440.45          | 49.78          | Peak        | H    | 36.22              | -26.42      | -       | 59.58           | 74.00          | 14.42       |
| *7 440.45          | -              | Average     | H    | -                  | -           | -18.77  | 40.81           | 54.00          | 13.19       |
| 9 919.33           | 49.69          | Peak        | V    | 37.64              | -22.77      | -       | <b>64.56</b>    | 74.00          | 9.44        |
| Above 10 000.00    | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**Operating Mode: 8DPSK**

A. Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 13.29                | Peak        | H    | 28.06              | 7.33    | -       | 48.68                 | 74.00                | 25.32       |
| *2 310.00          | -                    | Average     | H    | -                  | -       | -18.77  | 29.91                 | 54.00                | 24.09       |
| *2 389.67          | 16.38                | Peak        | H    | 28.22              | 7.58    | -       | 52.18                 | 74.00                | 21.82       |
| *2 389.67          | -                    | Average     | H    | -                  | -       | -18.77  | 33.41                 | 54.00                | 20.59       |
| *2 390.00          | 14.28                | Peak        | H    | 28.22              | 7.59    | -       | 50.09                 | 74.00                | 23.91       |
| *2 390.00          | -                    | Average     | H    | -                  | -       | -18.77  | 31.32                 | 54.00                | 22.68       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 804.03          | 55.39                | Peak        | V    | 32.72              | -28.91      | -       | 59.20                 | 74.00                | 14.80       |
| *4 804.03          | -                    | Average     | V    | -                  | -           | -18.77  | 40.43                 | 54.00                | 13.57       |
| 7 206.07           | 49.75                | Peak        | H    | 35.91              | -24.99      | -       | 60.67                 | 74.00                | 13.33       |
| 9 607.91           | 46.04                | Peak        | V    | 37.58              | -24.34      | -       | 59.28                 | 74.00                | 14.72       |
| *12 009.83         | 37.90                | Peak        | V    | 38.60              | -21.44      | -       | 55.06                 | 74.00                | 18.94       |
| *12 009.83         | -                    | Average     | V    | -                  | -           | -18.77  | 36.29                 | 54.00                | 17.71       |
| Above 12 100.00    | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

B. Middle Channel (2 441 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 881.98          | 57.34                | Peak        | V    | 33.03              | -28.26      | -       | 62.11                 | 74.00                | 11.89       |
| *4 881.98          | -                    | Average     | V    | -                  | -           | -18.77  | 43.34                 | 54.00                | 10.66       |
| *7 323.45          | 53.15                | Peak        | H    | 36.25              | -25.68      | -       | 63.72                 | 74.00                | 10.28       |
| *7 323.45          | -                    | Average     | H    | -                  | -           | -18.77  | 44.95                 | 54.00                | 9.05        |
| 9 763.89           | 49.29                | Peak        | V    | 37.53              | -24.14      | -       | 62.68                 | 74.00                | 11.32       |
| *12 204.74         | 35.38                | Peak        | V    | 38.60              | -20.78      | -       | 53.20                 | 74.00                | 20.80       |
| Above 12 300.00    | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

C. High Channel (2 480 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 483.50          | 26.05                | Peak        | H    | 28.40              | 7.58    | -       | 62.03                 | 74.00                | 11.97       |
| *2 483.50          | -                    | Average     | H    | -                  | -       | -18.77  | 43.26                 | 54.00                | 10.74       |
| *2 483.80          | 26.69                | Peak        | H    | 28.40              | 7.59    | -       | 62.68                 | 74.00                | 11.32       |
| *2 483.80          | -                    | Average     | H    | -                  | -       | -18.77  | 43.91                 | 54.00                | 10.09       |
| *2 500.00          | 13.77                | Peak        | H    | 28.50              | 7.74    | -       | 50.01                 | 74.00                | 23.99       |
| *2 500.00          | -                    | Average     | H    | -                  | -       | -18.77  | 31.24                 | 54.00                | 22.76       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 959.92          | 56.37                | Peak        | V    | 33.22              | -28.03      | -       | 61.56                 | 74.00                | 12.44       |
| *4 959.92          | -                    | Average     | V    | -                  | -           | -18.77  | 42.79                 | 54.00                | 11.21       |
| *7 439.99          | 56.65                | Peak        | H    | 36.22              | -26.42      | -       | 66.45                 | 74.00                | 7.55        |
| *7 439.99          | -                    | Average     | H    | -                  | -           | -18.77  | <b>47.68</b>          | 54.00                | 6.32        |
| 9 920.58           | 51.25                | Peak        | V    | 37.64              | -22.82      | -       | 66.07                 | 74.00                | 7.93        |
| Above 10 000.00    | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

## Ant. 2

### Operating Mode: GFSK

#### A. Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 18.49                | Peak        | V    | 28.06              | 7.33    | -       | 53.88                 | 74.00                | 20.12       |
| *2 310.00          | -                    | Average     | V    | -                  | -       | -18.77  | 35.11                 | 54.00                | 18.89       |
| *2 369.10          | 19.91                | Peak        | V    | 28.26              | 7.43    | -       | 55.60                 | 74.00                | 18.40       |
| *2 369.10          | -                    | Average     | V    | -                  | -       | -18.77  | 36.83                 | 54.00                | 17.17       |
| *2 390.00          | 17.99                | Peak        | V    | 28.22              | 7.59    | -       | 53.80                 | 74.00                | 20.20       |
| *2 390.00          | -                    | Average     | V    | -                  | -       | -18.77  | 35.03                 | 54.00                | 18.97       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 803.81          | 45.45                | Peak        | H    | 32.72              | -28.91      | -       | 49.26                 | 74.00                | 24.74       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

#### B. Middle Channel (2 441 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 881.63          | 46.44                | Peak        | V    | 33.03              | -28.26      | -       | 51.21                 | 74.00                | 22.79       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

C. High Channel (2 480 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |         |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *2 483.50          | 27.09          | Peak        | V    | 28.40              | 7.58    | -       | 63.07           | 74.00          | 10.93       |
| *2 483.50          | -              | Average     | V    | -                  | -       | -18.77  | 44.30           | 54.00          | 9.70        |
| *2 483.57          | 27.75          | Peak        | V    | 28.40              | 7.58    | -       | 63.73           | 74.00          | 10.27       |
| *2 483.57          | -              | Average     | V    | -                  | -       | -18.77  | <b>44.96</b>    | 54.00          | 9.04        |
| *2 500.00          | 18.17          | Peak        | V    | 28.50              | 7.74    | -       | 54.41           | 74.00          | 19.59       |
| *2 500.00          | -              | Average     | V    | -                  | -       | -18.77  | 35.64           | 54.00          | 18.36       |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 959.90          | 40.75          | Peak        | V    | 33.22              | -28.03      | -       | 45.94           | 74.00          | 28.06       |
| Above 5 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**Operating Mode: 8DPSK**

A. Low Channel (2 402 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |         |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|---------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *2 310.00          | 18.11                | Peak        | V    | 28.06              | 7.33    | -       | 53.50                 | 74.00                | 20.50       |
| *2 310.00          | -                    | Average     | V    | -                  | -       | -18.77  | 34.73                 | 54.00                | 19.27       |
| *2 343.08          | 19.86                | Peak        | V    | 28.26              | 7.29    | -       | 55.41                 | 74.00                | 18.59       |
| *2 343.08          | -                    | Average     | V    | -                  | -       | -18.77  | 36.64                 | 54.00                | 17.36       |
| *2 390.00          | 18.52                | Peak        | V    | 28.22              | 7.59    | -       | 54.33                 | 74.00                | 19.67       |
| *2 390.00          | -                    | Average     | V    | -                  | -       | -18.77  | 35.56                 | 54.00                | 18.44       |

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 804.19          | 44.13                | Peak        | H    | 32.72              | -28.91      | -       | 47.94                 | 74.00                | 26.06       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

B. Middle Channel (2 441 MHz)

| Radiated Emissions |                      |             | Ant. | Correction Factors |             |         | Total                 | Limit                |             |
|--------------------|----------------------|-------------|------|--------------------|-------------|---------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ V) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
| *4 881.90          | 46.18                | Peak        | V    | 33.03              | -28.26      | -       | 50.95                 | 74.00                | 23.05       |
| Above 4 900.00     | Not detected         | -           | -    | -                  | -           | -       | -                     | -                    | -           |

C. High Channel (2 480 MHz)

| Radiated Emissions |                |             | Ant. | Correction Factors |         |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|---------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *2 483.50          | 26.92          | Peak        | V    | 28.40              | 7.58    | -       | 62.90           | 74.00          | 11.10       |
| *2 483.50          | -              | Average     | V    | -                  | -       | -18.77  | 44.13           | 54.00          | 9.87        |
| *2 483.57          | 27.08          | Peak        | V    | 28.40              | 7.58    | -       | 63.06           | 74.00          | 10.94       |
| *2 483.57          | -              | Average     | V    | -                  | -       | -18.77  | <b>44.29</b>    | 54.00          | 9.71        |
| *2 500.00          | 19.22          | Peak        | V    | 28.50              | 7.74    | -       | 55.46           | 74.00          | 18.54       |
| *2 500.00          | -              | Average     | V    | -                  | -       | -18.77  | 36.69           | 54.00          | 17.31       |

| Radiated Emissions |                |             | Ant. | Correction Factors |             |         | Total           | Limit          |             |
|--------------------|----------------|-------------|------|--------------------|-------------|---------|-----------------|----------------|-------------|
| Frequency (MHz)    | Reading (dBμV) | Detect Mode | Pol. | AF (dB/m)          | AMP+CL (dB) | DF (dB) | Actual (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
| *4 960.16          | 41.80          | Peak        | V    | 33.22              | -28.03      | -       | 46.99           | 74.00          | 27.01       |
| Above 5 000.00     | Not detected   | -           | -    | -                  | -           | -       | -               | -              | -           |

**Remark;**


1. “\*” means the restricted band.
2. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Actual = Reading + AF + CL + (DF) or Reading + AF + AMP + CL + (DF).
5. According to § 15.31(o), emission levels are not reported much lower than the limits by over 20 dB.
6. The maximized peak measured value complies with the average limit, to perform an average measurement is unnecessary.

## - Test plots


Ant.1

Mode: GFSK


Low channel band edge (Peak)

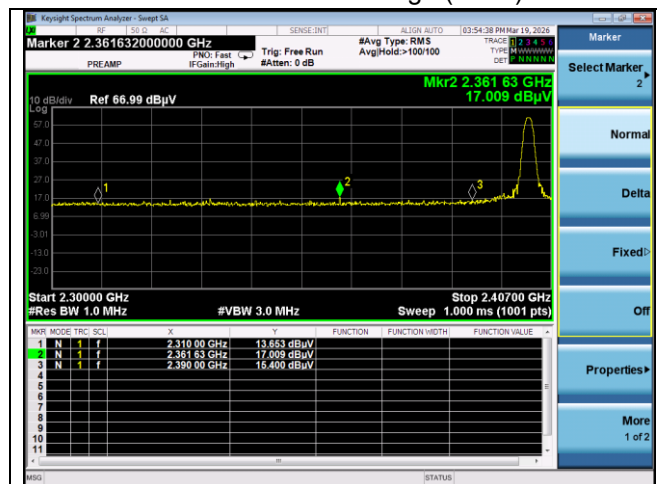


Low channel 2<sup>nd</sup> harmonic (Peak)

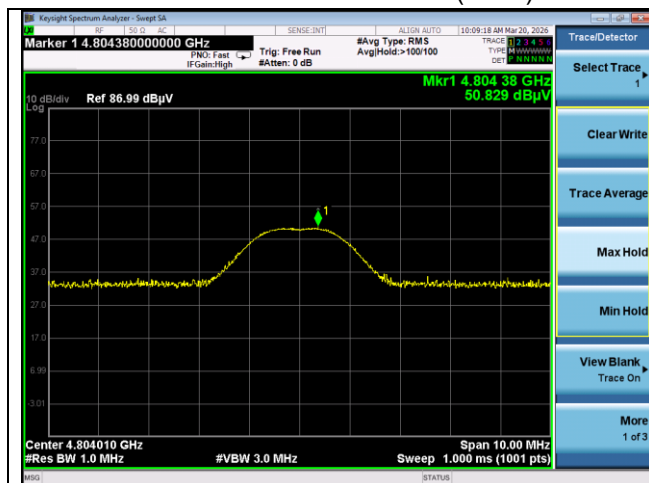


Low channel 3<sup>rd</sup> harmonic (Peak)

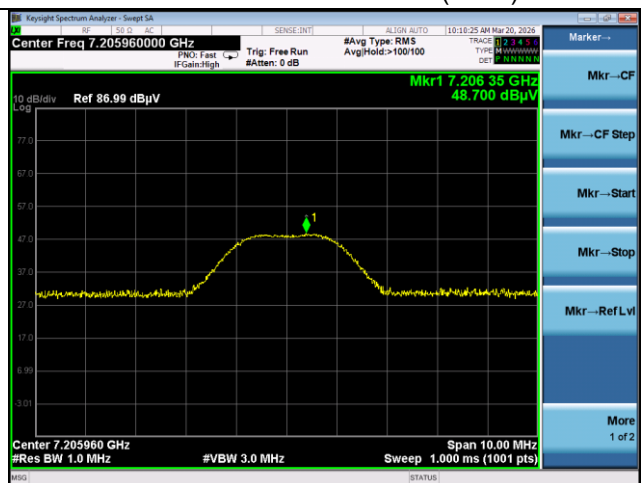


Low channel 4<sup>th</sup> harmonic (Peak)

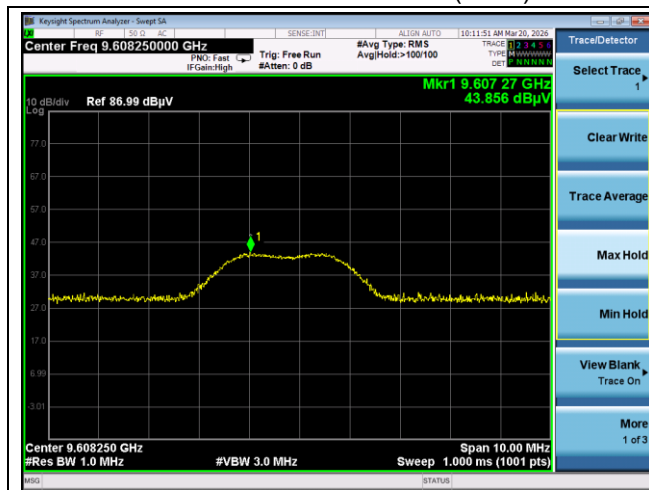


Low channel 5<sup>th</sup> harmonic (Peak)

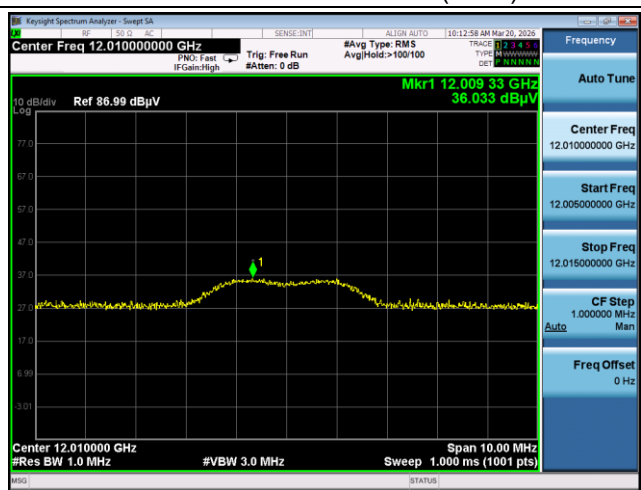

Middle channel 2<sup>nd</sup> harmonic (Peak)

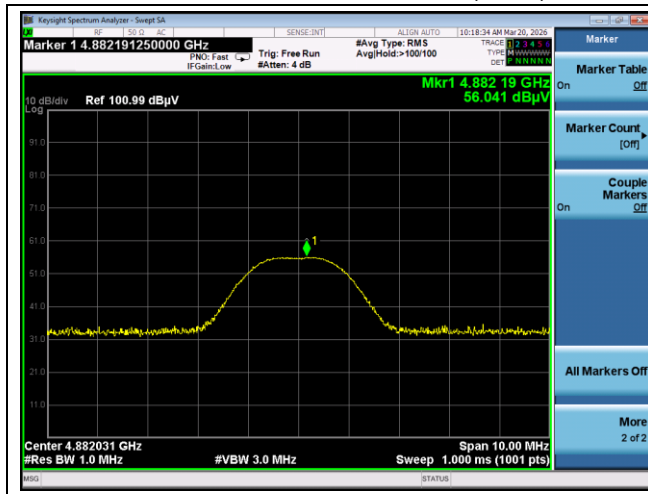

Middle channel 3<sup>rd</sup> harmonic (Peak)

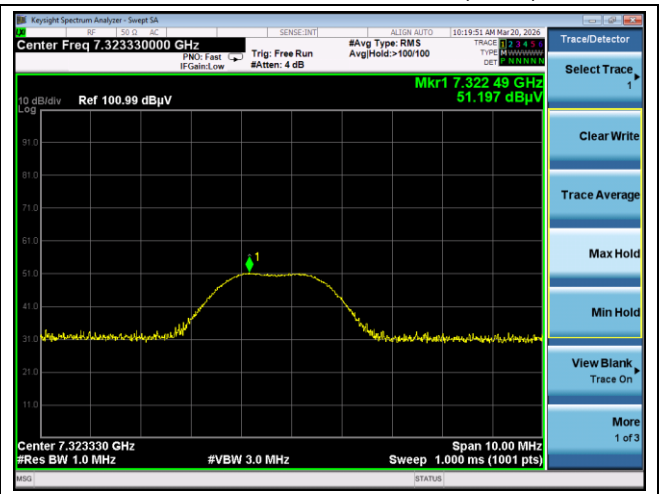

Middle channel 4<sup>th</sup> harmonic (Peak)

