RF Test Report

For

Applicant Name:	Faurecia clarion electronics Europe
Address:	Batiment Lumière – 40 Avenue des Terroirs de France, 75012 Paris – France
EUT Name:	IN Vehicle Infotainment
Brand Name:	Faurecia
Model Number:	Crony 2
Series Model Number:	Refer to section 2

Issued By

Company Name:	**BTF Testing Lab (Shenzhen) Co., Ltd.**
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Report Number:	BTF240125R00503
Test Standards:	47 CFR Part 15E
Test Conclusion:	Pass
FCC ID:	2BEZMCRONY2
Test Date:	2024-01-14 to 2024-01-25
Date of Issue:	2024-01-25
Prepared By:	Chris.Liu / Project Engineer
Date:	2024-01-25
Approved By:	Ryan.CJ / EMC Manager
Date:	2024-01-25

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2024-01-25	Original
Note: Once the revision has been made, then previous versions reports are invalid.		

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Table of Contents

1 INTRODUCTION 5
1.1 Identification of Testing Laboratory 5
1.2 Identification of the Responsible Testing Location 5
1.3 Announcement 5
2 PRODUCT INFORMATION 6
2.1 Application Information 6
2.2 Manufacturer Information 6
2.3 Factory Information 6
2.4 General Description of Equipment under Test (EUT) 6
2.5 Technical Information 6
3 SUMMARY OF TEST RESULTS 7
3.1 Test Standards 7
3.2 Uncertainty of Test 7
3.3 Summary of Test Result 7
4 TEST CONFIGURATION 8
4.1 Test Equipment List 8
4.2 Test Auxiliary Equipment 14
4.3 Test Modes 14
4.4 Test Setup 15
5 EVALUATION RESULTS (EVALUATION) 17
5.1 Antenna requirement 17
5.1.1 Conclusion: 17
6 RADIO SPECTRUM MATTER TEST RESULTS (RF) 18
6.1 Duty Cycle 18
6.1.1 E.U.T. Operation: 18
6.1.2 Test Data: 18
6.2 Maximum conducted output power 19
6.2.1 E.U.T. Operation: 21
6.2.2 Test Data: 21
6.3 Power spectral density 22
6.3.1 E.U.T. Operation: 24
6.3.2 Test Data: 24
6.4 Emission bandwidth and occupied bandwidth 25
6.4.1 E.U.T. Operation: 26
6.4.2 Test Data: 26
6.5 Frequency Stability 27
6.5.1 E.U.T. Operation: 27
6.5.2 Test Data: 27
6.6 Band edge emissions (Radiated) 28
6.6.1 E.U.T. Operation: 29
6.6.2 Test Data: 30
6.7 Undesirable emission limits (below 1GHz) 32
6.7.1 E.U.T. Operation: 33
6.7.2 Test Data: 34
6.8 Undesirable emission limits (above 1GHz) 36
6.8.1 E.U.T. Operation: 37
6.8.2 Test Data: 37

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

7 TEST SETUP PHOTOS 41
8 EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS) 41
APPENDIX..... 42

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

1 Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Announcement

(1) The test report reference to the report template version v0.
(2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
(3) The test report is invalid if there is any evidence and/or falsification.
(4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
(5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
(6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

2 Product Information

2.1 Application Information

Company Name:	Faurecia clarion electronics Europe
Address:	Batiment Lumière – 40 Avenue des Terroirs de France, 75012 Paris – France

2.2 Manufacturer Information

Company Name:	Clarion Hungary electronics KFT.
Address:	Jászberényi út 116, 2760 Nagykáta - Hungary

2.3 Factory Information

Company Name:	Clarion Hungary electronics KFT.
Address:	Jászberényi út 116, 2760 Nagykáta - Hungary

2.4 General Description of Equipment under Test (EUT)

EUT Name:	IN Vehicle Infotainment
Test Model Number:	Crony 2
Series Model Number:	/
Description of Model name differentiation:	/
Hardware Version:	HW05
Software Version:	3.13.0

2.5 Technical Information

Power Supply:	DC 12V from Battery
Operation Frequency:	802.11ac(HT20) : U-NII Band 3: 5745MHz to 5825MHz; 802.11ac(HT40) : U-NII Band 3: 5755MHz to 5795MHz;
Number of Channels:	802.11ac(HT20): U-NII Band 3: 5; 802.11ac(HT40): U-NII Band 3: 2;
Modulation Type:	802.11ac: OFDM(BPSK, QPSK, 16QAM, 64QAM);
Antenna Type:	Chip antenna
Antenna Gain#:	3.5 dBi

Note:

#: The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:
47 CFR Part 15E: Unlicensed National Information Infrastructure Devices

3.2 Uncertainty of Test

Item	Measurement Uncertainty
Conducted Emission Test	2.56dB
Occupied Channel Bandwidth	69 KHz
All emissions, radiated(<1GHz)	4.12 dB
All emissions, radiated(>1GHz)	4.89dB
Temperature	0.82 °C
Humidity	4.1 %
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15E	Part 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15E	47 CFR Part 15.207(a)	N/A
Maximum conducted output power	47 CFR Part 15E	47 CFR Part 15.407(a)(3)(i)	Pass
Power spectral density	47 CFR Part 15E	47 CFR Part 15.407(a)(3)(i)	Pass
Emission bandwidth and occupied bandwidth	47 CFR Part 15E	only for report use. 47 CFR Part 15.407(e)	Pass
Band edge emissions (Radiated)	47 CFR Part 15E	47 CFR Part 15.407(b)(10)	Pass
Frequency Stability	47 CFR Part 15E	47 CFR Part 15.407 (g)	Pass
Undesirable emission limits (below 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(9)	Pass
Undesirable emission limits (above 1GHz)	47 CFR Part 15E	47 CFR Part 15.407(b)(4) 47 CFR Part 15.407(b)(10)	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Pulse Limiter	SCHWARZBECK	VTSD 9561-F	00953	2023-11-24	2024-11-23
Coaxial Switcher	SCHWARZBECK	CX210	CX210	2023-11-24	2024-11-23
V-LISN	SCHWARZBECK	NSLK 8127	01073	2023-11-24	2024-11-23
LISN	AFJ	LS16/110VAC	16010020076	2023-02-23	2024-02-22
EMI Receiver	ROHDE&SCHWARZ	ESCI3	101422	2023-11-24	2024-11-23

Duty Cycle					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Maximum conducted output power					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Power spectral density					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Emission bandwidth and occupied bandwidth					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Channel Availability Check Time					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

TESTER					
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

U-NII Detection Bandwidth					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Statistical Performance Check					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Channel Move Time, Channel Closing Transmission Time					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co.,	etm-6050c	20211026123	2023-11-24	2024-11-23

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	LTD				
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Non-Occupancy Period Test					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

DFS Detection Thresholds					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
RFTest software	/	V1.00	/	/	/
RF Control Unit	Techy	TR1029-1	/	2023-11-24	2024-11-23
RF Sensor Unit	Techy	TR1029-2	/	2023-11-24	2024-11-23
Programmable constant temperature and humidity box	ZZCKONG	ZZ-K02A	20210928007	2023-11-24	2024-11-23
Adjustable Direct Current Regulated Power Supply	Dongguan Tongmen Electronic Technology Co., LTD	etm-6050c	20211026123	2023-11-24	2024-11-23
WIDEBAND RADIO COMMNUNICATION TESTER	Rohde & Schwarz	CMW500	161997	2023-11-24	2024-11-23
MXA Signal Analyzer	KEYSIGHT	N9020A	MY50410020	2023-11-24	2024-11-23

Band edge emissions (Radiated)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1	21101568	2023-11-24	2024-11-23

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

		m			
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-28	2025-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-24	2024-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2023-11-28	2025-11-27

Undesirable emission limits (below 1GHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-28	2025-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-24	2024-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2023-11-28	2025-11-27

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Undesirable emission limits (above 1GHz)					
Equipment	**Manufacturer**	**Model No**	**Inventory No**	**Cal Date**	**Cal Due Date**
Coaxial cable Multiflex 141	Schwarzbeck	N/SMA 0.5m	517386	2023-03-24	2024-03-23
Preamplifier	SCHWARZBECK	BBV9744	00246	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-10m	21101566	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-10m	21101570	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF1-SMASMAM-1m	21101568	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-1m	21101576	2023-11-24	2024-11-23
RE Cable	REBES Talent	UF2-NMNM-2.5m	21101573	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Horn Antenna	SCHWARZBECK	BBHA9170	01157	2023-11-28	2025-11-27
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI7	101032	2023-11-24	2024-11-23
SIGNAL ANALYZER	ROHDE&SCHWARZ	FSQ40	100010	2023-11-24	2024-11-23
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Broadband Preamplilifier	SCHWARZBECK	BBV9718D	00008	2023-03-24	2024-03-23
Horn Antenna	SCHWARZBECK	BBHA9120D	2597	2022-05-22	2024-05-21
EZ_EMC	Frad	FA-03A2 RE+	/	/	/
POSITIONAL CONTROLLER	SKET	PCI-GPIB	/	/	/
Log periodic antenna	SCHWARZBECK	VULB 9168	01328	2023-11-28	2025-11-27

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4.2 Test Auxiliary Equipment

Item	Equipment	Manufacturer	Model/Type No.	Series No.	Note
1	Adapter	Clarion Hungary	CH01	/	
2	GPS antenna	Clarion Hungary	CH02	/	
3	Camera	Clarion Hungary	CH03	/	
4	Display	Clarion Hungary	CH04	/	
5	Controller	Clarion Hungary	CH05	/	

4.3 Test Modes

No.	Test Modes	Description
TM1	802.11ac mode	Keep the EUT connect to AC power line and works in continuously transmitting mode with 802.11ac modulation type. All data rates has been tested and found the data rate @ MCS0 is the worst case. Only the data of worst case is recorded in the report.
TM2	Normal Operating	Keep the EUT works in normal operating mode and connect to companion device

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4.4 Test Setup

Test Setup 1

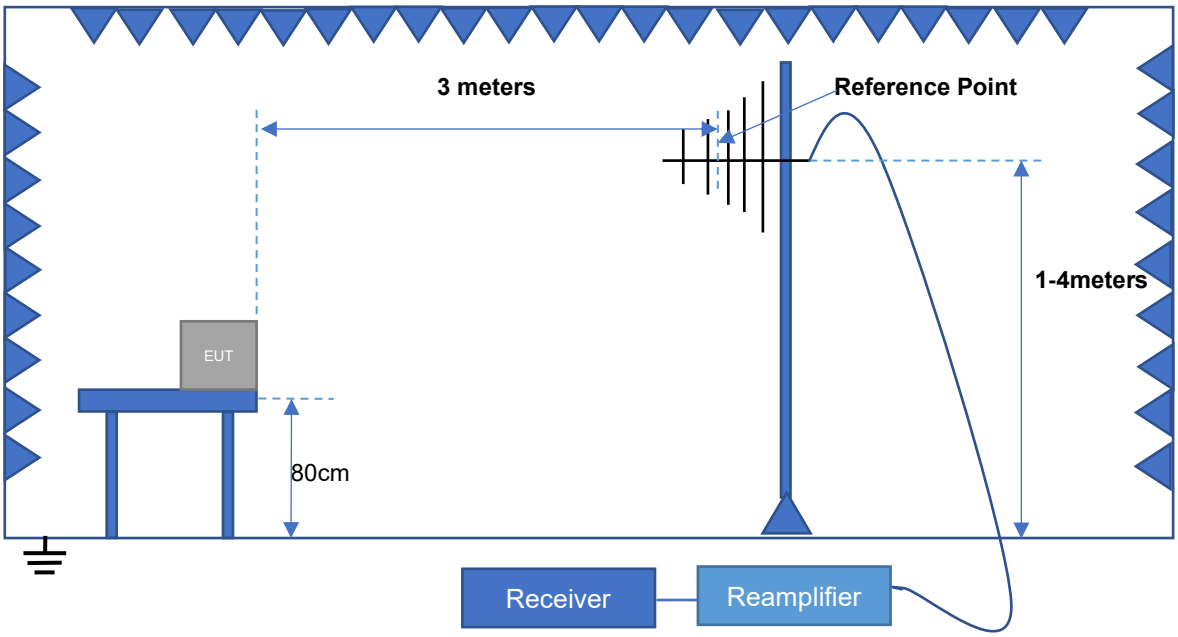

Radiation Test (30MHz – 1GHz)

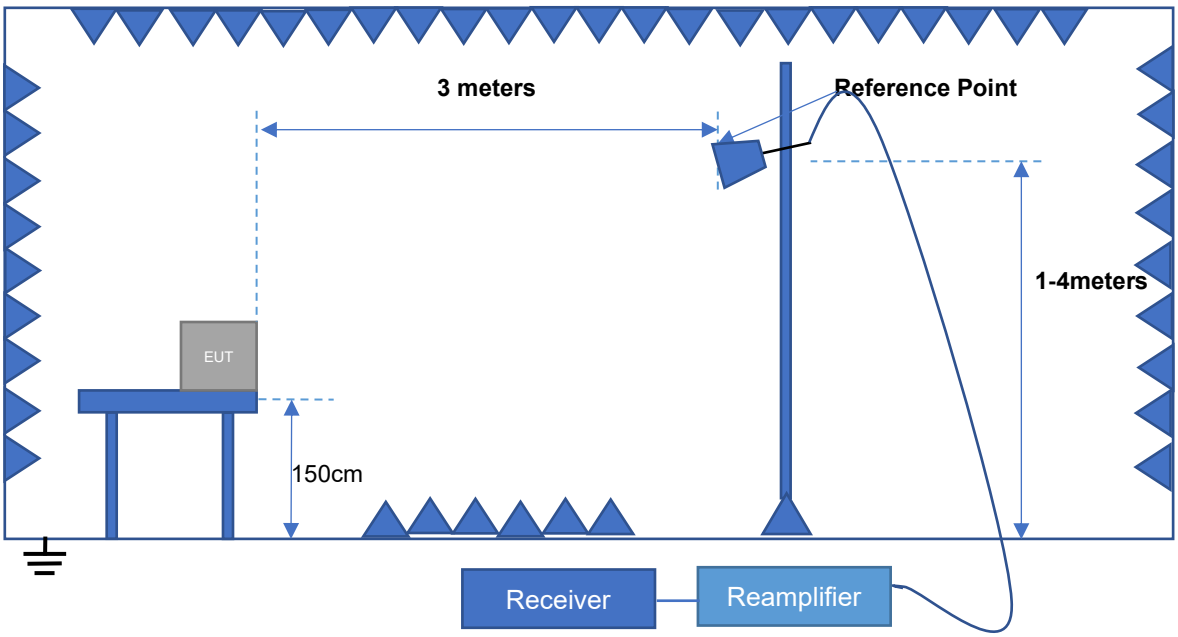

Radiation Test (Above 1GHz)

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test Setup 2

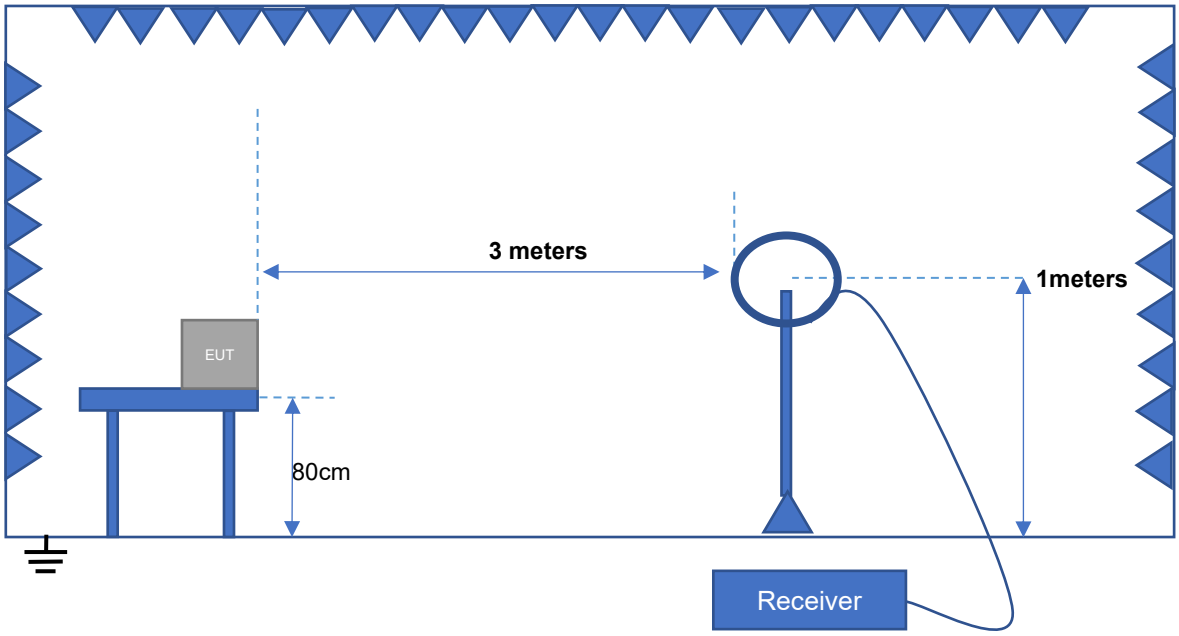

Radiation Test (9k - 30MHz)

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

5 Evaluation Results (Evaluation)

5.1 Antenna requirement

Test Requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

5.1.1 Conclusion:

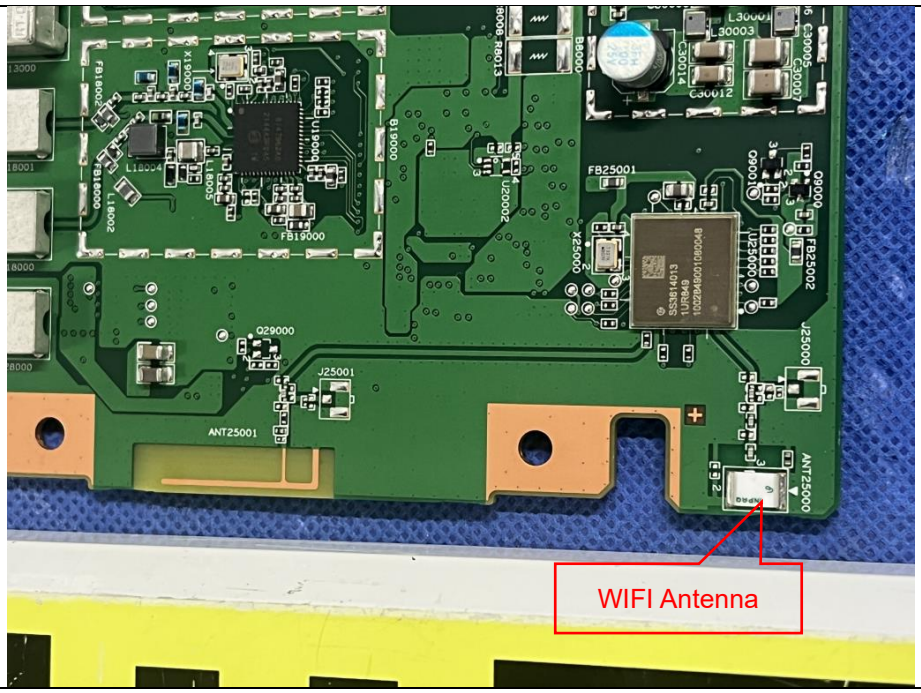

6 Radio Spectrum Matter Test Results (RF)

6.1 Duty Cycle

Test Requirement:	All measurements are to be performed with the EUT transmitting at 100% duty cycle at its maximum power control level; however, if 100% duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.
Test Method:	ANSI C63.10-2013 section 12.2 (b)
Test Limit:	No limits, only for report use.
Procedure:	i) Set the center frequency of the instrument to the center frequency of the transmission. ii) Set RBW >= EBW if possible; otherwise, set RBW to the largest available value. iii) Set VBW >= RBW. iv) Set detector = peak. v) The zero-span measurement method shall not be used unless both RBW and VBW are > 50/T, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100.
Test Setup Diagram	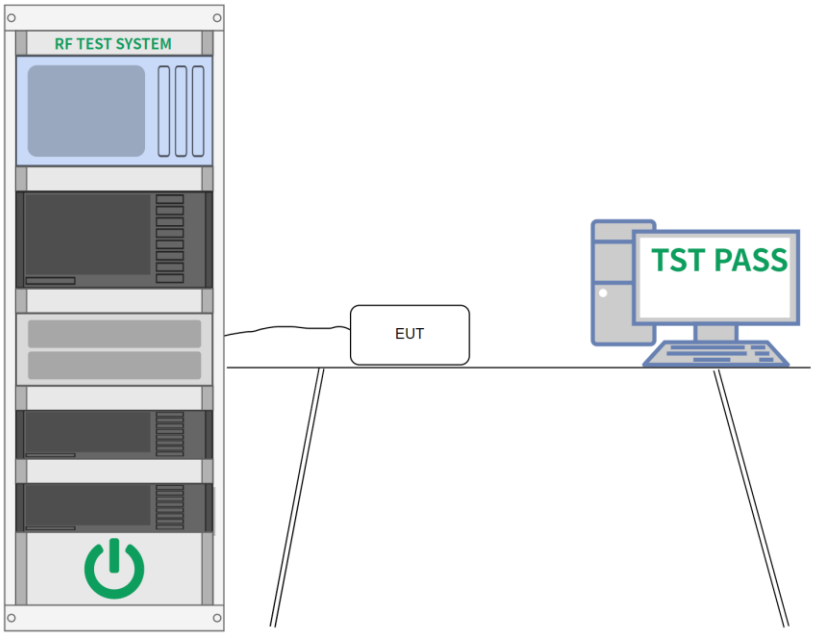

6.1.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.1.2 Test Data:

Please Refer to Appendix for Details.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.2 Maximum conducted output power

Test Requirement:	47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2013, section 12.3
Test Limit:	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Procedure:	Method SA-1 a) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal. b) Set RBW = 1 MHz. c) Set VBW >= 3 MHz. d) Number of points in sweep >= [2 × span / RBW]. (This gives bin-to-bin spacing <= RBW / 2, so that narrowband signals are not lost between frequency bins.) e) Sweep time = auto. f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. g) If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle >= 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.” h) Trace average at least 100 traces in power averaging (rms) mode. i) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test Setup Diagram	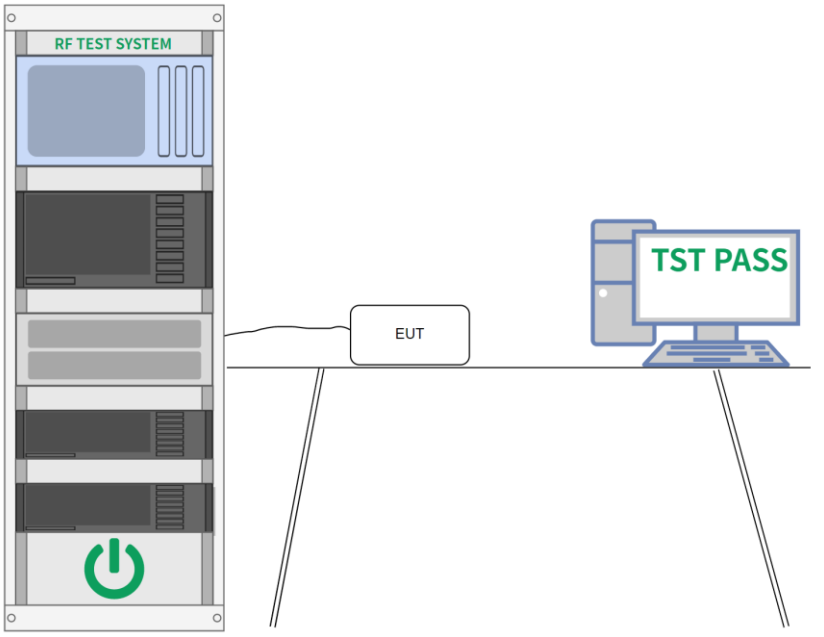

6.2.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.2.2 Test Data:

Please Refer to Appendix for Details.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.3 Power spectral density

Test Requirement:	47 CFR Part 15.407(a)(3)(i)
Test Method:	ANSI C63.10-2013, section 12.5
Test Limit:	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For the band 5.725-5.850 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
Procedure:	a) Create an average power spectrum for the EUT operating mode being tested by following the instructions in 12.3.2 for measuring maximum conducted output power using a spectrum analyzer or EMI receiver; that is, select the appropriate test method (SA-1, SA-2, SA-3, or their respective alternatives) and apply it up to, but not including, the step labeled, “Compute power….” (This procedure is required even if the maximum conducted output power measurement was performed using the power meter method PM.) b) Use the peak search function on the instrument to find the peak of the spectrum. c) Make the following adjustments to the peak value of the spectrum, if applicable: 1) If method SA-2 or SA-2A was used, then add [10 log (1 / D)], where D is the duty cycle, to the peak of the spectrum. 2) If method SA-3A was used and the linear mode was used in step h) of 12.3.2.7, add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. d) The result is the PPSD. e) The procedure in item a) through item c) requires the use of 1 MHz resolution bandwidth to satisfy the 1 MHz measurement bandwidth specified by some regulatory authorities.This requirement also permits use of resolution bandwidths less than 1 MHz “provided that the measured power is integrated to show the total power over the measurement bandwidth” (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 1 MHz bandwidth, the following adjustments to the procedures apply: 1) Set RBW >= 1 / T, where T is defined in 12.2 a). 2) Set VBW >= [3 × RBW]. 3) Care shall be taken such that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Test Setup Diagram	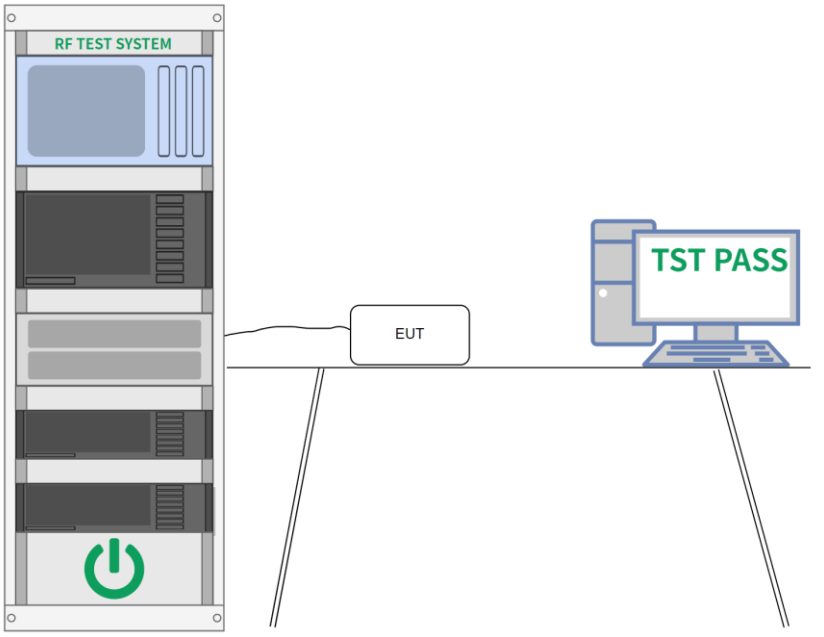

6.3.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.3.2 Test Data:

Please Refer to Appendix for Details.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.4 Emission bandwidth and occupied bandwidth

Test Requirement:	U-NII 3, U-NII 4: 47 CFR Part 15.407(e)
Test Method:	ANSI C63.10-2013, section 6.9.3 & 12.4 KDB 789033 D02, Clause C.2
Test Limit:	U-NII 3, U-NII 4: Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.
Procedure:	Emission bandwidth: a) Set RBW = approximately 1% of the emission bandwidth. b) Set the VBW > RBW. c) Detector = peak. d) Trace mode = max hold. e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. Occupied bandwidth: a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than [10 log (OBW/RBW)] below the reference level. Specific guidance is given in 4.1.5.2. d) Step a) through step c) might require iteration to adjust within the specified range. e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used. f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth. g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	the difference between these two frequencies. h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s). 6 dB emission bandwidth: a) Set RBW = 100 kHz. b) Set the video bandwidth (VBW) ≥ 3 >= RBW. c) Detector = Peak. d) Trace mode = max hold. e) Sweep = auto couple. f) Allow the trace to stabilize. g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
Test Setup Diagram	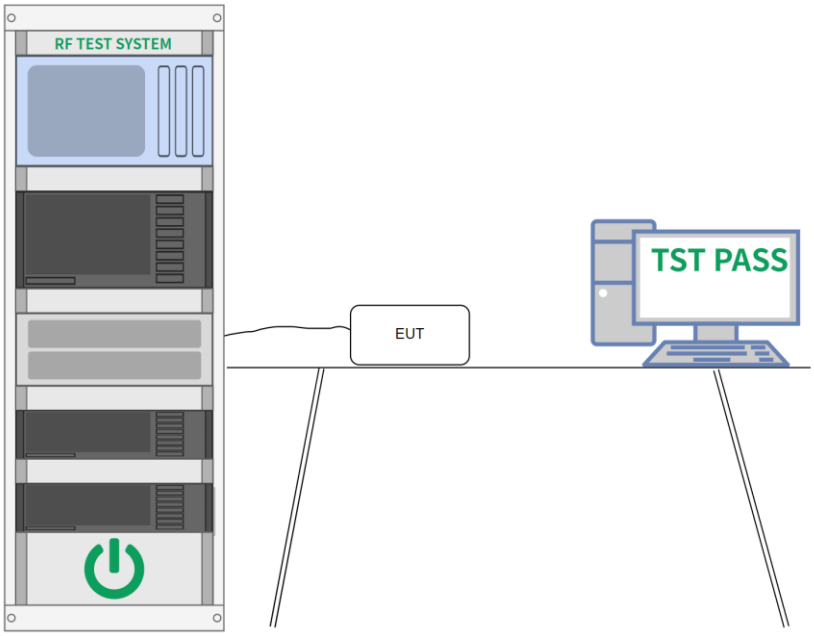

6.4.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.4.2 Test Data:

Please Refer to Appendix for Details.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.5 Frequency Stability

Test Requirement:	U-NII 3, U-NII 4: 47 CFR Part 15.407(g)
Test Method:	ANSI C63.10-2013
Test Limit:	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.
Procedure:	1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage. 2. Set EUT as normal operation. 3. Turn the EUT on and couple its output to spectrum. 4. Turn the EUT off and set the chamber to the highest temperature specified. 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency. 6. Repeat step with the temperature chamber set to the lowest temperature.
Test Setup Diagram	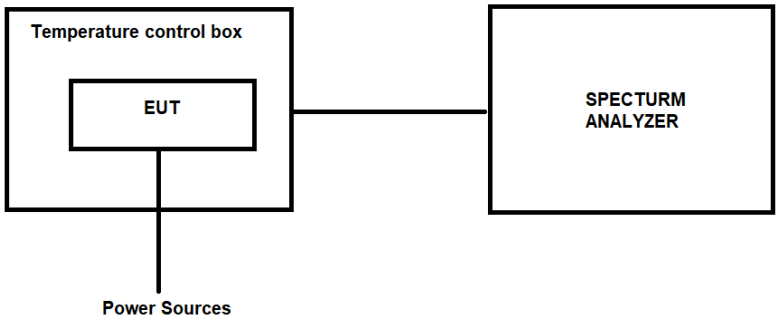

6.5.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.5.2 Test Data:

Please Refer to Appendix for Details.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.6 Band edge emissions (Radiated)

Test Requirement:	47 CFR Part 15.407(b)(10)
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6
Test Limit:	For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. MHz / MHz / MHz / GHz 0.090-0.110 / 16.42-16.423 / 399.9-410 / 4.5-5.15 [1]0.495-0.505 / 16.69475-16.69525 / 608-614 / 5.35-5.46 2.1735-2.1905 / 16.80425-16.80475 / 960-1240 / 7.25-7.75 4.125-4.128 / 25.5-25.67 / 1300-1427 / 8.025-8.5 4.17725-4.17775 / 37.5-38.25 / 1435-1626.5 / 9.0-9.2 4.20725-4.20775 / 73-74.6 / 1645.5-1646.5 / 9.3-9.5 6.215-6.218 / 74.8-75.2 / 1660-1710 / 10.6-12.7 6.26775-6.26825 / 108-121.94 / 1718.8-1722.2 / 13.25-13.4 6.31175-6.31225 / 123-138 / 2200-2300 / 14.47-14.5 8.291-8.294 / 149.9-150.05 / 2310-2390 / 15.35-16.2 8.362-8.366 / 156.52475-156.52525 / 2483.5-2500 / 17.7-21.4 8.37625-8.38675 / 156.7-156.9 / 2690-2900 / 22.01-23.12 8.41425-8.41475 / 162.0125-167.17 / 3260-3267 / 23.6-24.0 12.29-12.293 / 167.72-173.2 / 3332-3339 / 31.2-31.8 12.51975-12.52025 / 240-285 / 3345.8-3358 / 36.43-36.5 12.57675-12.57725 / 322-335.4 / 3600-4400 / ([2]) 13.36-13.41 [1]Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. [2]Above 38.6 The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300 0.490-1.705 / 24000/F(kHz) / 30 1.705-30.0 / 30 / 30 30-88 / 100 ** / 3

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.		
Test Setup	See section 4.4 for test setup 1. The photo of test setup please refer to ANNEX		

6.6.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.6.2 Test Data:

UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	89.03	-31.87	57.16	68.20	-11.04	peak	P
2	5700.000	95.98	-31.98	64.00	105.60	-41.60	peak	P
3	5720.000	96.89	-32.04	64.85	110.8	-45.95	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	88.96	-31.58	57.38	68.20	-10.82	peak	P
2	5700.000	95.91	-31.69	64.22	105.60	-41.38	peak	P
3	5720.000	96.82	-31.75	65.07	110.8	-45.73	peak	P

UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	89.06	-31.84	57.22	122.20	-64.98	peak	P
2	5875.000	96.01	-31.95	64.06	110.80	-46.74	peak	P
3	5925.000	96.92	-32.01	64.91	68.20	-3.29	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	89.38	-31.78	57.60	122.20	-64.60	peak	P
2	5875.000	96.33	-31.89	64.44	110.80	-46.36	peak	P
3	5925.000	97.24	-31.95	65.29	68.20	-2.91	peak	P

UNII-3_40M_5755MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	87.97	-31.45	56.52	68.20	-11.68	peak	P
2	5700.000	94.92	-31.56	63.36	105.60	-42.24	peak	P
3	5720.000	95.82	-31.62	64.20	110.8	-46.60	peak	P

UNII-3_40M_5755MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5650.000	89.06	-31.44	57.62	68.20	-10.58	peak	P
2	5700.000	96.01	-31.55	64.46	105.60	-41.14	peak	P
3	5720.000	96.92	-31.61	65.31	110.8	-45.49	peak	P

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

UNII-3_40M_5795MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	88.33	-31.55	56.78	122.20	-65.42	peak	P
2	5875.000	95.28	-31.66	63.62	110.80	-47.18	peak	P
3	5925.000	96.18	-31.72	64.46	68.20	-3.74	peak	P

UNII-3_40M_5795MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	5850.000	87.63	-31.64	55.99	122.20	-66.21	peak	P
2	5875.000	94.58	-31.75	62.83	110.80	-47.97	peak	P
3	5925.000	95.48	-31.81	63.67	68.20	-4.53	peak	P

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.7 Undesirable emission limits (below 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(9)
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6
Test Limit:	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300 0.490-1.705 / 24000/F(kHz) / 30 1.705-30.0 / 30 / 30 30-88 / 100 ** / 3 88-216 / 150 ** / 3 216-960 / 200 ** / 3 Above 960 / 500 / 3
Procedure:	Below 1GHz: a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
Test Setup	See section 4.4 for test setup 1&3. The photo of test setup please refer to ANNEX

6.7.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.7.2 Test Data:

Note: All the mode have been tested, and only the worst case mode are in the report
TM1 / Polarization: Horizontal / Band: U-NII 1 / BW: 20 / CH: L

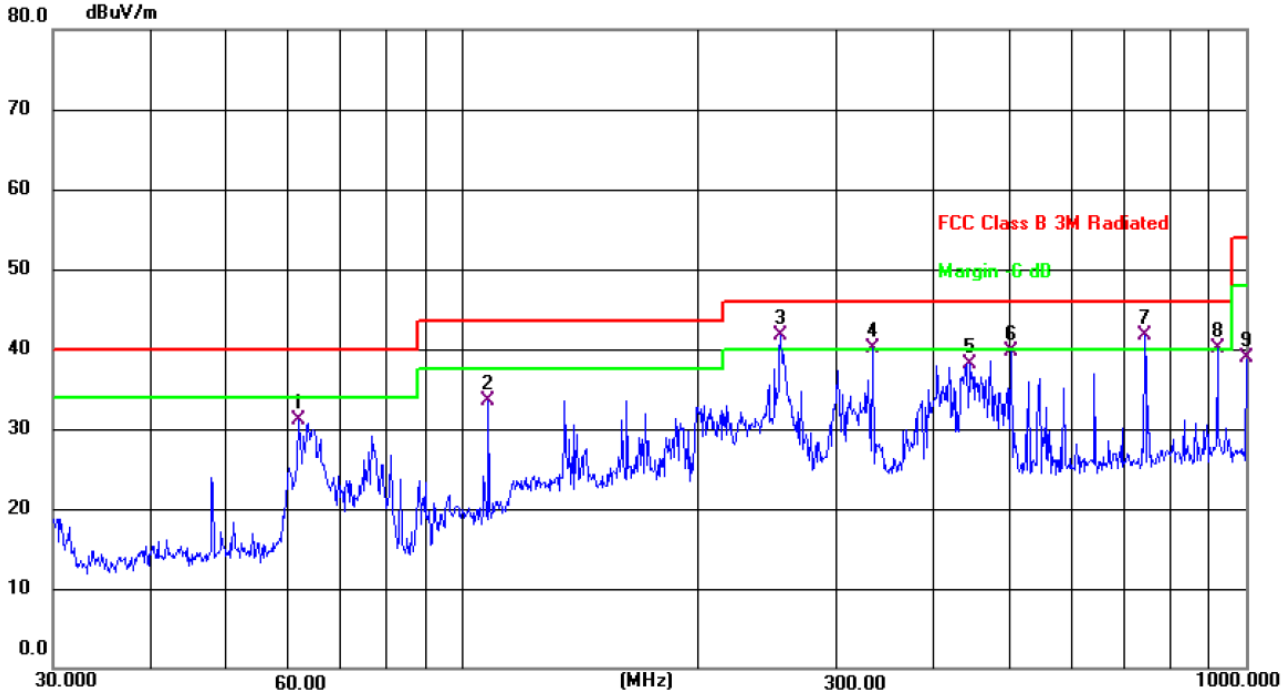

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		61.7779	44.19	-13.18	31.01	40.00	-8.99	QP
2		107.8876	50.07	-16.53	33.54	43.50	-9.96	QP
3	*	254.7281	54.34	-12.61	41.73	46.00	-4.27	QP
4	!	333.6865	51.01	-10.87	40.14	46.00	-5.86	QP
5		444.8514	46.80	-8.77	38.03	46.00	-7.97	QP
6		501.1788	47.17	-7.52	39.65	46.00	-6.35	QP
7	!	742.2586	44.87	-3.20	41.67	46.00	-4.33	QP
8	!	919.2865	40.32	-0.23	40.09	46.00	-5.91	QP
9		1000.000	37.95	0.93	38.88	54.00	-15.12	QP

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

TM1 / Polarization: Vertical / Band: U-NII 1 / BW: 20 / CH: L

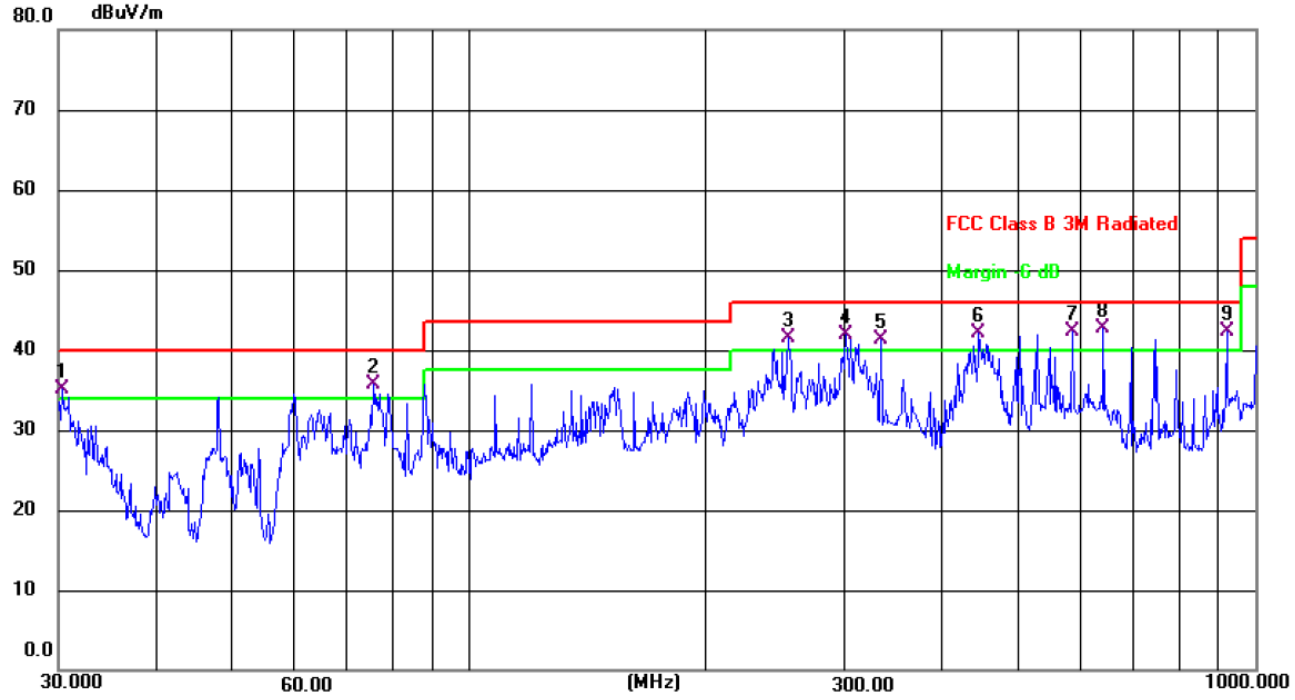

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	30.3170	50.99	-15.98	35.01	40.00	-4.99	QP
2	!	75.4462	52.36	-16.57	35.79	40.00	-4.21	QP
3	!	254.7281	54.03	-12.61	41.42	46.00	-4.58	QP
4	!	301.4223	53.40	-11.40	42.00	46.00	-4.00	QP
5	!	333.6865	52.21	-10.87	41.34	46.00	-4.66	QP
6	!	444.8514	50.96	-8.77	42.19	46.00	-3.81	QP
7	!	584.7894	48.60	-6.33	42.27	46.00	-3.73	QP
8	*	640.6109	47.85	-5.20	42.65	46.00	-3.35	QP
9	!	919.2865	42.44	-0.23	42.21	46.00	-3.79	QP

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6.8 Undesirable emission limits (above 1GHz)

Test Requirement:	47 CFR Part 15.407(b)(10)
Test Method:	ANSI C63.10-2013, section 12.7.4, 12.7.5, 12.7.6
Test Limit:	For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz. For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz. For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of −27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. MHz / MHz / MHz / GHz 0.090-0.110 / 16.42-16.423 / 399.9-410 / 4.5-5.15 [1]0.495-0.505 / 16.69475-16.69525 / 608-614 / 5.35-5.46 2.1735-2.1905 / 16.80425-16.80475 / 960-1240 / 7.25-7.75 4.125-4.128 / 25.5-25.67 / 1300-1427 / 8.025-8.5 4.17725-4.17775 / 37.5-38.25 / 1435-1626.5 / 9.0-9.2 4.20725-4.20775 / 73-74.6 / 1645.5-1646.5 / 9.3-9.5 6.215-6.218 / 74.8-75.2 / 1660-1710 / 10.6-12.7 6.26775-6.26825 / 108-121.94 / 1718.8-1722.2 / 13.25-13.4 6.31175-6.31225 / 123-138 / 2200-2300 / 14.47-14.5 8.291-8.294 / 149.9-150.05 / 2310-2390 / 15.35-16.2 8.362-8.366 / 156.52475-156.52525 / 2483.5-2500 / 17.7-21.4 8.37625-8.38675 / 156.7-156.9 / 2690-2900 / 22.01-23.12 8.41425-8.41475 / 162.0125-167.17 / 3260-3267 / 23.6-24.0 12.29-12.293 / 167.72-173.2 / 3332-3339 / 31.2-31.8 12.51975-12.52025 / 240-285 / 3345.8-3358 / 36.43-36.5 12.57675-12.57725 / 322-335.4 / 3600-4400 / ([2]) 13.36-13.41 [1]Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. [2]Above 38.6 The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35apply to these measurements. Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: Frequency (MHz) / Field strength (microvolts/meter) / Measurement distance (meters) 0.009-0.490 / 2400/F(kHz) / 300

	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
Procedure:	Above 1GHz: a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel, the middle channel, the Highest channel. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete. Remark: 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor 2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report. 4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.		
Test Setup	See section 4.4 for test setup 1. The photo of test setup please refer to ANNEX		

6.8.1 E.U.T. Operation:

Operating Environment:	
Temperature:	25.5 °C
Humidity:	50.6 %
Atmospheric Pressure:	1010 mbar

6.8.2 Test Data:

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

UNII-3_20M_5745MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3510.445	78.30	-28.16	50.14	68.20	-18.06	peak	P
2	5487.745	80.04	-28.67	51.37	68.20	-16.83	peak	P
3	8102.825	81.70	-28.89	52.81	68.20	-15.39	peak	P
4	9083.095	82.78	-29.67	53.11	68.20	-15.09	peak	P
5	11384.986	83.49	-30.16	53.33	68.20	-14.87	peak	P

UNII-3_20M_5745MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3513.541	78.84	-28.03	50.81	68.20	-17.39	peak	P
2	5490.841	80.58	-28.54	52.04	68.20	-16.16	peak	P
3	8105.921	82.24	-28.76	53.48	68.20	-14.72	peak	P
4	9086.191	83.32	-29.54	53.78	68.20	-14.42	peak	P
5	11388.082	84.03	-30.03	54.00	68.20	-14.20	peak	P
6	15046.693	84.88	-32.42	52.46	68.20	-15.74	peak	P

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

UNII-3_20M_5785MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4001.514	78.19	-28.00	50.19	68.20	-18.01	peak	P
2	5978.814	79.93	-28.51	51.42	68.20	-16.78	peak	P
3	8593.894	81.59	-28.73	52.86	68.20	-15.34	peak	P
4	9574.164	82.67	-29.51	53.16	68.20	-15.04	peak	P
5	11876.055	83.38	-30.00	53.38	68.20	-14.82	peak	P
6	15534.666	84.23	-32.39	51.84	68.20	-16.36	peak	P

UNII-3_20M_5785MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4005.547	78.87	-27.49	51.38	68.20	-16.82	peak	P
2	5982.847	80.61	-28.00	52.61	68.20	-15.59	peak	P
3	8597.927	82.27	-28.22	54.05	68.20	-14.15	peak	P
4	9578.197	83.35	-29.00	54.35	68.20	-13.85	peak	P
5	11880.088	84.06	-29.49	54.57	68.20	-13.63	peak	P
6	15538.699	84.91	-31.88	53.03	68.20	-15.17	peak	P

UNII-3_20M_5825MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4011.514	78.86	-27.59	51.27	68.20	-16.93	peak	P
2	5988.814	80.60	-28.10	52.50	68.20	-15.70	peak	P
3	8603.894	82.26	-28.32	53.94	68.20	-14.26	peak	P
4	9584.164	83.34	-29.10	54.24	68.20	-13.96	peak	P
5	11886.055	84.05	-29.59	54.46	68.20	-13.74	peak	P
6	15544.666	84.90	-31.98	52.92	68.20	-15.28	peak	P

UNII-3_20M_5825MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	4152.541	79.37	-27.19	52.18	68.20	-16.02	peak	P
2	6129.841	81.11	-27.70	53.41	68.20	-14.79	peak	P
3	8744.921	82.77	-27.92	54.85	68.20	-13.35	peak	P
4	9725.191	83.85	-28.70	55.15	68.20	-13.05	peak	P
5	12027.082	84.56	-29.19	55.37	68.20	-12.83	peak	P
6	15685.693	85.41	-31.58	53.83	68.20	-14.37	peak	P

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

UNII-3_40M_5755MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	2909.532	74.28	-30.99	43.29	68.20	-24.91	peak	P
2	4010.130	74.76	-31.60	43.16	68.20	-25.04	peak	P
3	6285.695	77.99	-31.81	46.18	68.20	-22.02	peak	P
4	9585.684	82.76	-33.09	49.67	68.20	-18.53	peak	P
5	11467.005	83.53	-34.66	48.87	68.20	-19.33	peak	P
6 *	17013.540	81.17	-31.29	49.88	68.20	-18.32	peak	P

UNII-3_40M_5755MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3663.544	78.95	-27.31	51.64	68.20	-16.56	peak	P
2	5640.844	80.69	-27.82	52.87	68.20	-15.33	peak	P
3	8255.924	82.35	-28.04	54.31	68.20	-13.89	peak	P
4	9236.194	83.54	-28.82	54.72	68.20	-13.48	peak	P
5	11538.085	84.25	-29.31	54.94	68.20	-13.26	peak	P
6	15196.696	85.10	-31.70	53.40	68.20	-14.80	peak	P

UNII-3_40M_5795MHz_Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3613.554	78.64	-28.16	50.48	68.20	-17.72	peak	P
2	5590.854	80.38	-28.67	51.71	68.20	-16.49	peak	P
3	8205.934	82.04	-28.89	53.15	68.20	-15.05	peak	P
4	9186.204	83.23	-29.67	53.56	68.20	-14.64	peak	P
5	11488.095	83.94	-30.16	53.78	68.20	-14.42	peak	P
6	15146.706	84.79	-32.55	52.24	68.20	-15.96	peak	P

UNII-3_40M_5795MHz_Vertical

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1	3414.551	78.16	-28.13	50.03	68.20	-18.17	peak	P
2	5391.851	79.90	-28.64	51.26	68.20	-16.94	peak	P
3	8006.931	81.56	-28.86	52.70	68.20	-15.50	peak	P
4	8987.201	82.75	-29.64	53.11	68.20	-15.09	peak	P
5	11289.092	83.46	-30.13	53.33	68.20	-14.87	peak	P
6	14947.703	84.31	-32.52	51.79	68.20	-16.41	peak	P

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

7 Test Setup Photos

Please refer to the setup photos

8 EUT Constructional Details (EUT Photos)

Please refer to the external photos and internal photos.

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

Appendix

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

1. Duty Cycle

1.1 Ant1

1.1.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	ac20	5745	Ant1	95.46	0.2
NVNT	ac20	5785	Ant1	95.42	0.2
NVNT	ac20	5825	Ant1	95.42	0.2
NVNT	ac40	5755	Ant1	91.6	0.38
NVNT	ac40	5795	Ant1	91.58	0.38

1.1.2 Test Graph

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_LCH_5745MHz_Ant1_NTNV

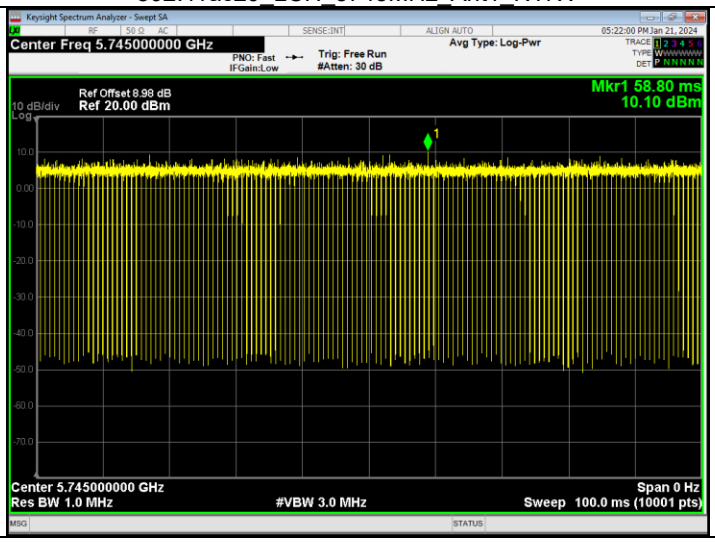

802.11ac20_MCH_5785MHz_Ant1_NTNV

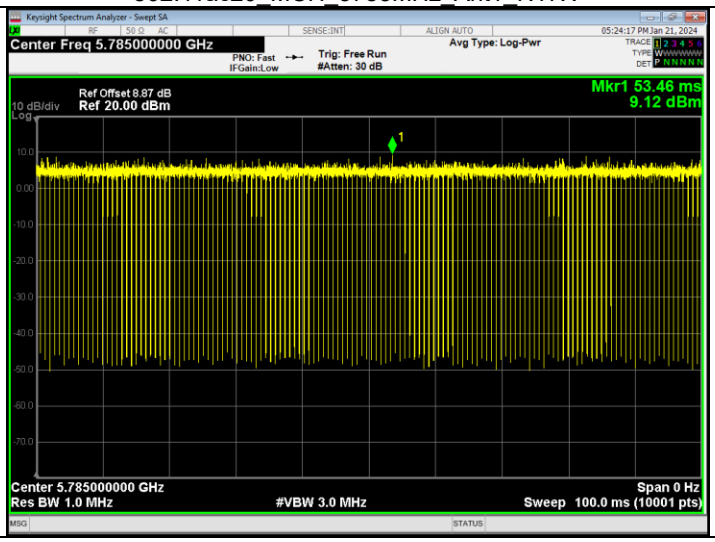

802.11ac20_HCH_5825MHz_Ant1_NTNV

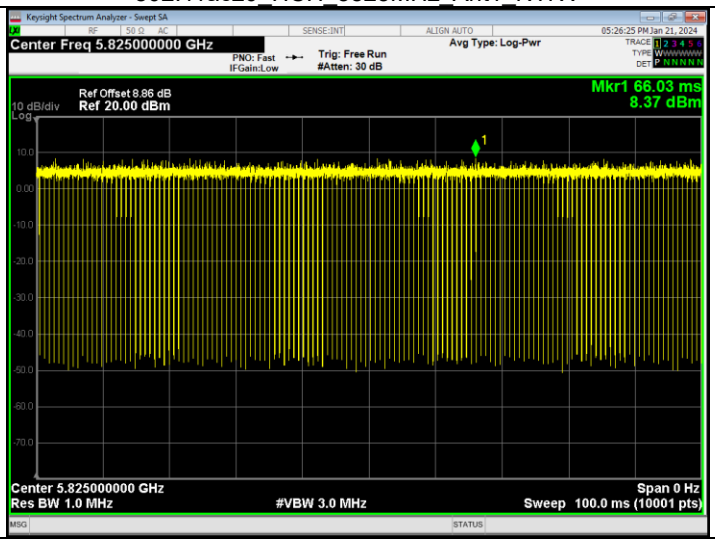

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac40_LCH_5755MHz_Ant1_NTNV

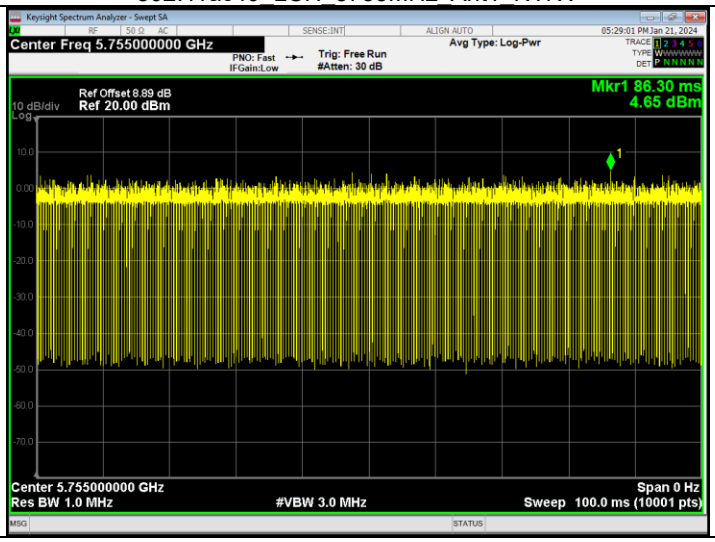

802.11ac40_HCH_5795MHz_Ant1_NTNV

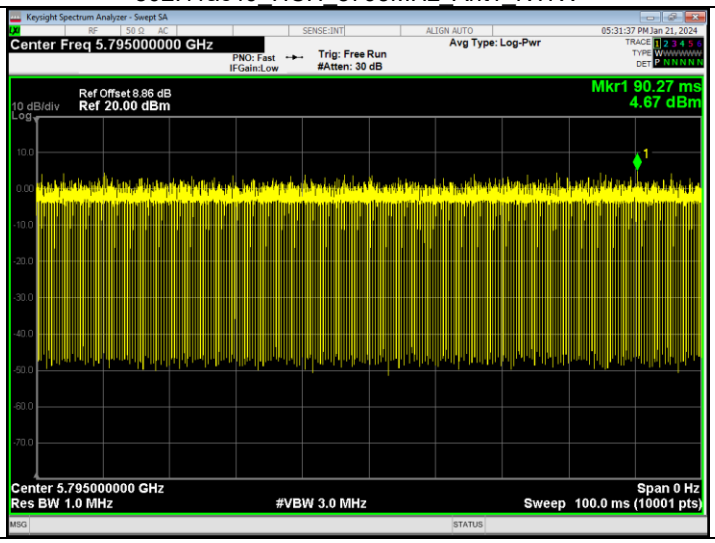

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

2. Bandwidth

2.1 OBW

2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz) Result	Verdict
802.11ac20	SISO	5745	1	17.52111254	Pass
		5785	1	17.53527245	Pass
		5825	1	17.56038583	Pass
802.11ac40	SISO	5755	1	36.01734266	Pass
		5795	1	35.94232767	Pass

2.1.2 Test Graph

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_LCH_5745MHz_Ant1_NTNV

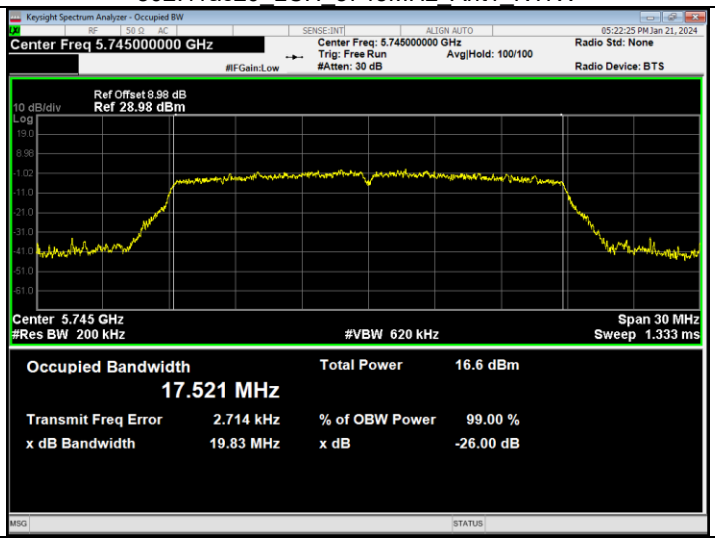

802.11ac20_MCH_5785MHz_Ant1_NTNV

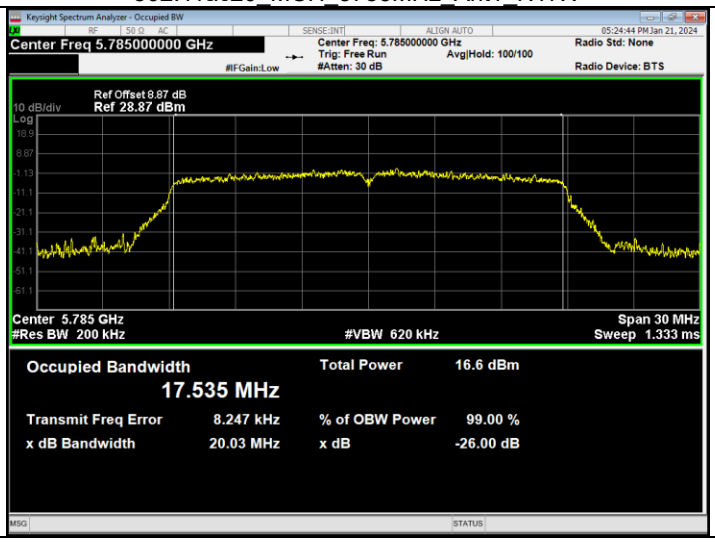

802.11ac20_HCH_5825MHz_Ant1_NTNV

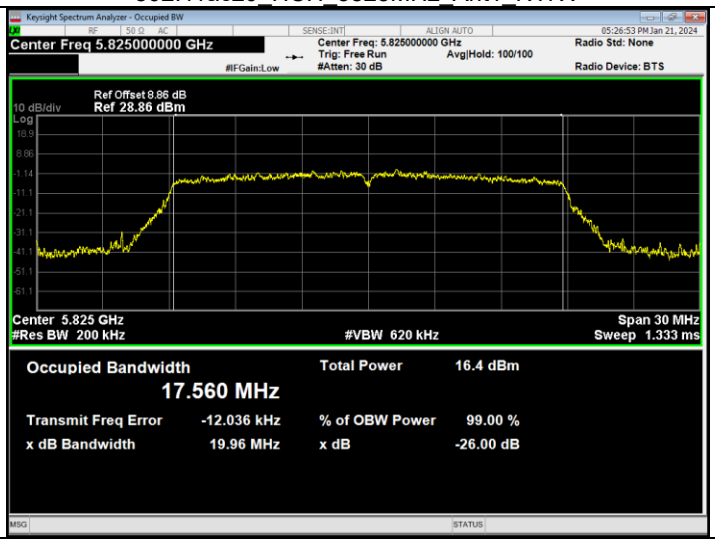

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac40_LCH_5755MHz_Ant1_NTNV

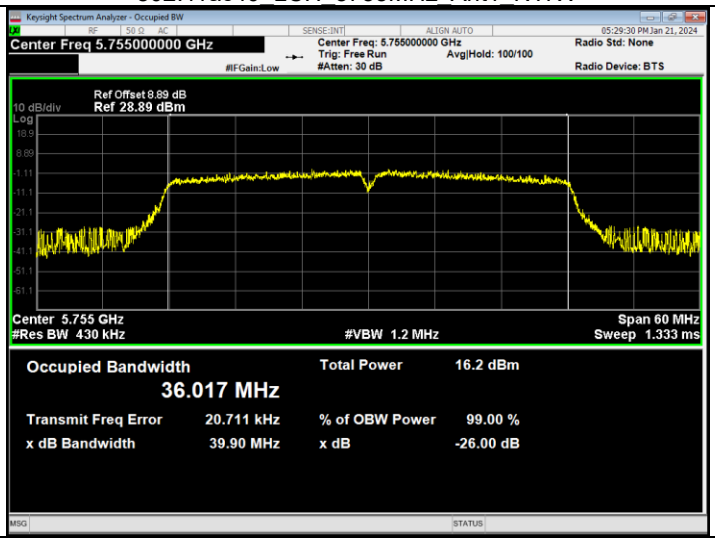

802.11ac40_HCH_5795MHz_Ant1_NTNV

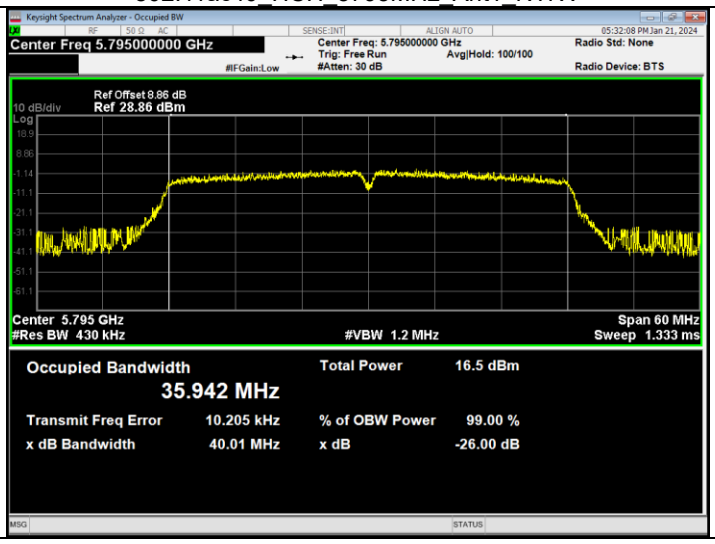

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

2.2 6dB BW

2.2.1 Test Result

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
802.11ac20	SISO	5745	1	15.121	>=0.5	Pass
		5785	1	15.114	>=0.5	Pass
		5825	1	15.402	>=0.5	Pass
802.11ac40	SISO	5755	1	35.057	>=0.5	Pass
		5795	1	35.105	>=0.5	Pass

2.2.2 Test Graph

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_LCH_5745MHz_Ant1_NTNV

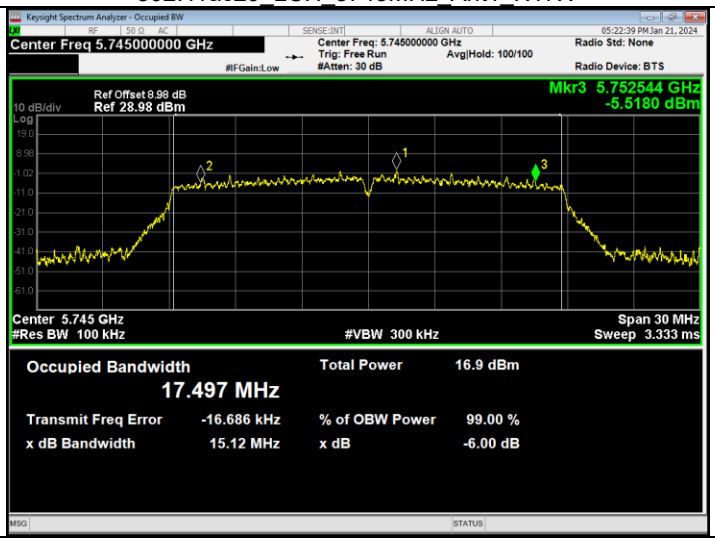

802.11ac20_MCH_5785MHz_Ant1_NTNV

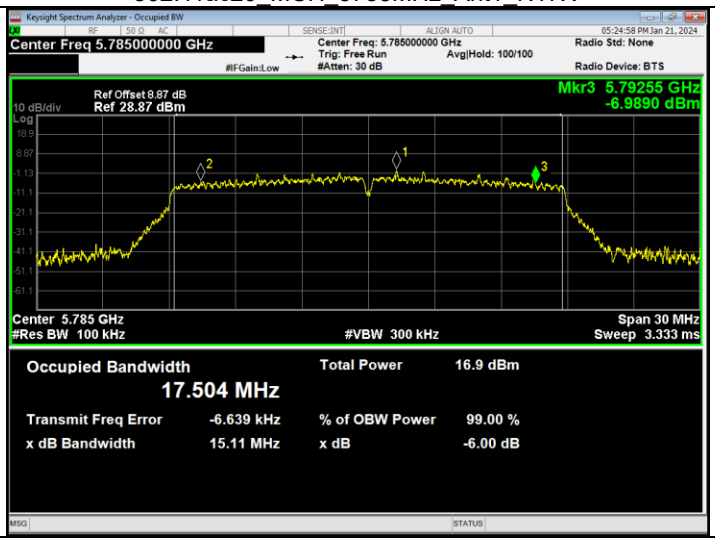

802.11ac20_HCH_5825MHz_Ant1_NTNV

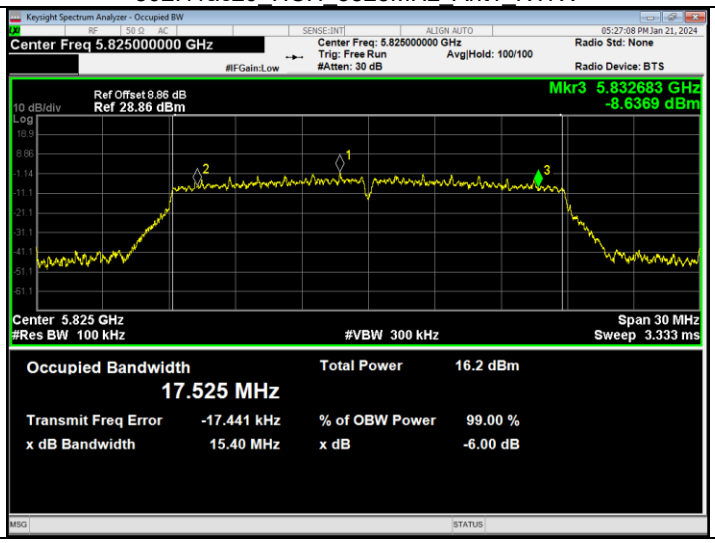

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac40_LCH_5755MHz_Ant1_NTNV

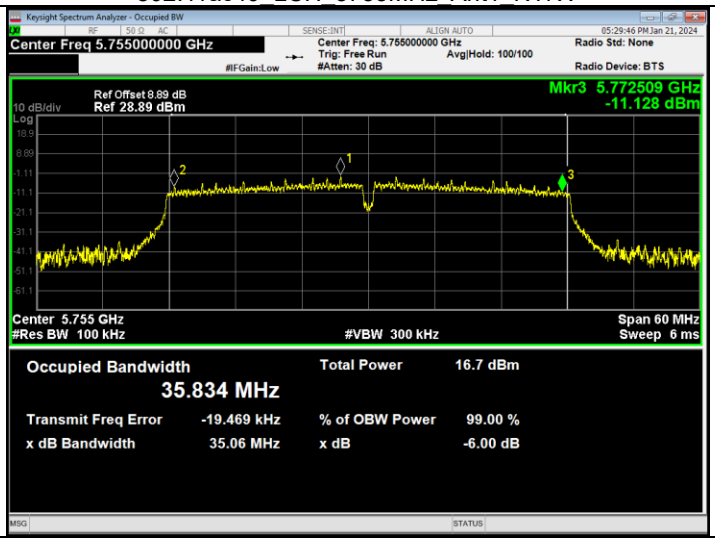

802.11ac40_HCH_5795MHz_Ant1_NTNV

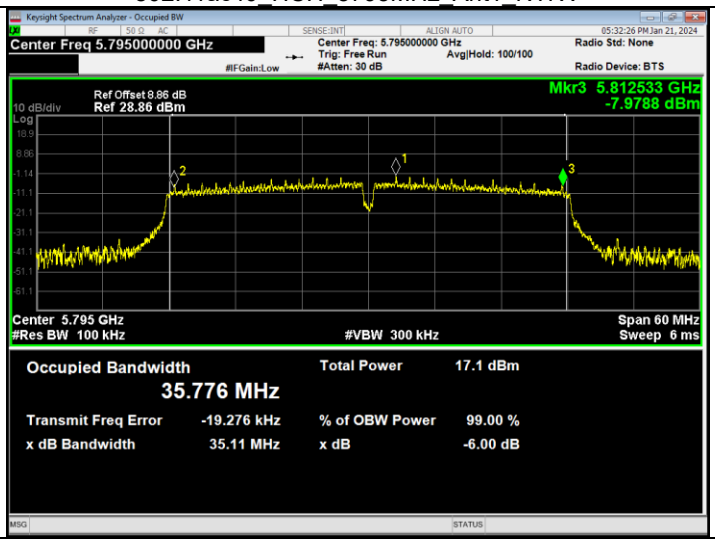

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3. Maximum Conducted Output Power

3.1 Power

3.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Maximum Average Conducted Output Power (dBm)				Verdict
			Reading (dBm)	Duty cycle Factor (dB)	Total Power (dBm)	Limit	
802.11ac20	SISO	5745	10.82	0.2	11.02	<=23.98	Pass
		5785	10.77	0.2	10.97	<=23.98	Pass
		5825	10.51	0.2	10.71	<=23.98	Pass
802.11ac40	SISO	5755	10.09	0.38	10.47	<=23.98	Pass
		5795	10.44	0.38	10.82	<=23.98	Pass
Note1: Antenna Gain: Ant1: 1.7dBi; 2: Total Power= Reading+Duty cycle factor							

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

3.1.2 Test Graph

802.11ac20_LCH_5745MHz_Ant1_NTNV

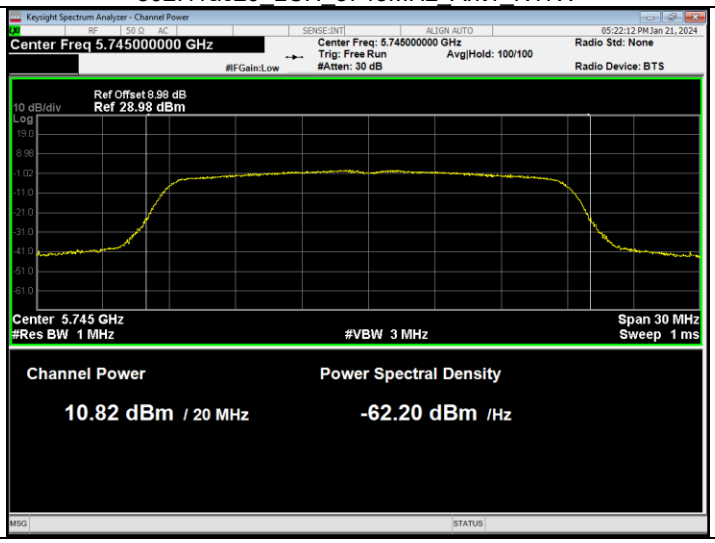

802.11ac20_MCH_5785MHz_Ant1_NTNV

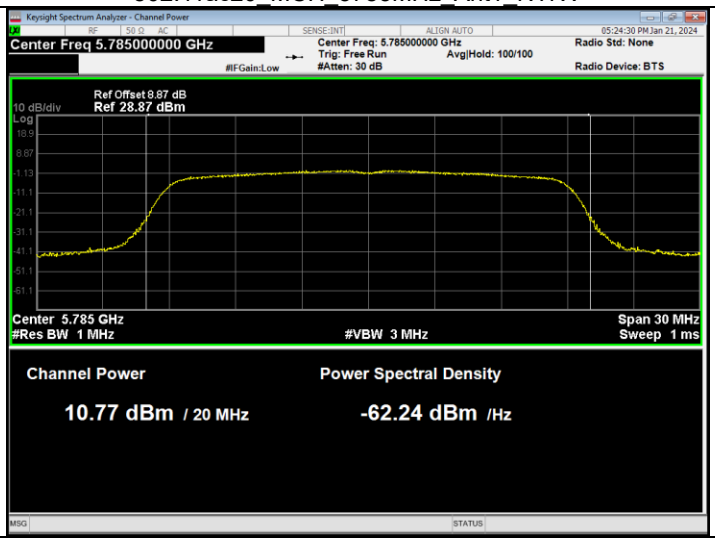

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_HCH_5825MHz_Ant1_NTNV
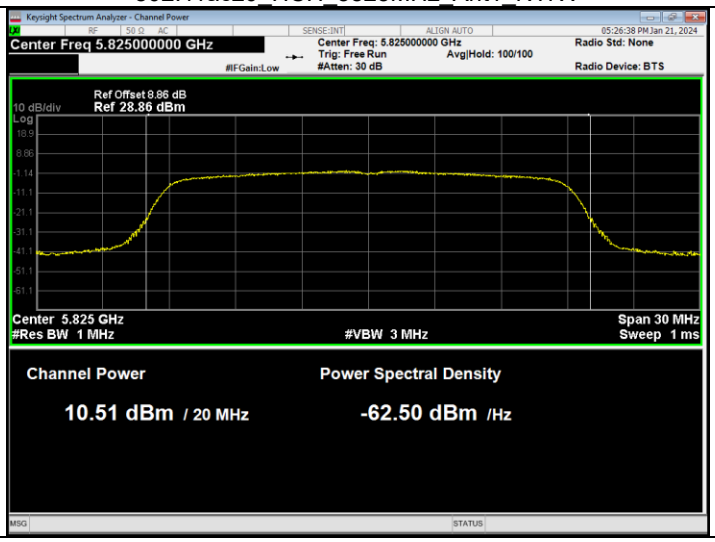

802.11ac40_LCH_5190MHz_Ant1_NTNV

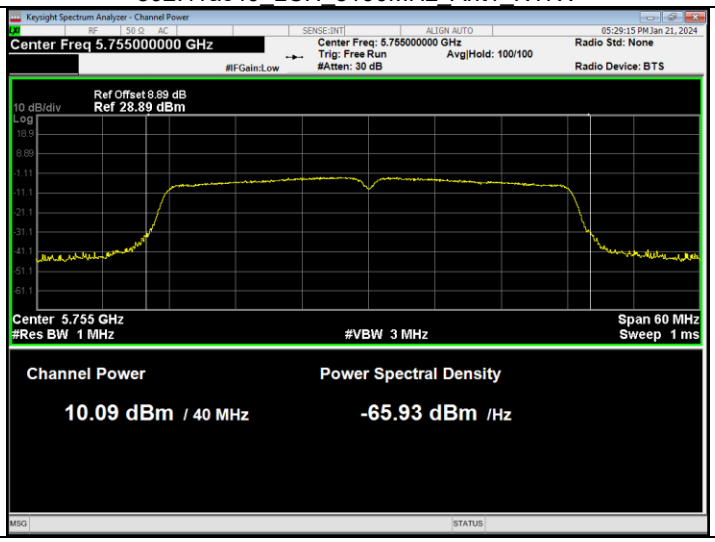

802.11ac40_HCH_5230MHz_Ant1_NTNV

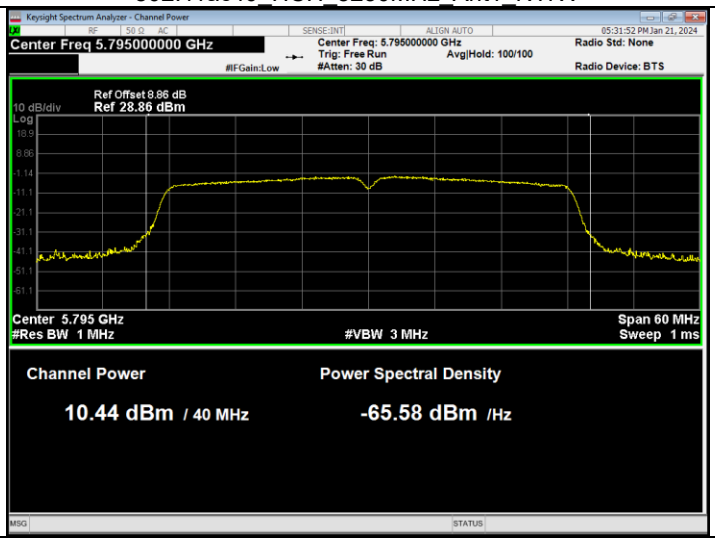

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

4. Maximum Power Spectral Density

4.1 PSD-Band3

4.1.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5745	Ant1	-1.979	0.2	-1.779	30	Pass
NVNT	ac20	5785	Ant1	-1.691	0.2	-1.491	30	Pass
NVNT	ac20	5825	Ant1	-2.632	0.2	-2.432	30	Pass
NVNT	ac40	5755	Ant1	-5.419	0.38	-5.039	30	Pass
NVNT	ac40	5795	Ant1	-4.967	0.38	-4.587	30	Pass
Note1: Antenna Gain: Ant1: 1.7dBi; 2Total PSD (dBm)= Max PSD (dBm)+ Duty Factor (dB)								

4.2.2 Test Graph

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_LCH_5745MHz_Ant1_NTNV

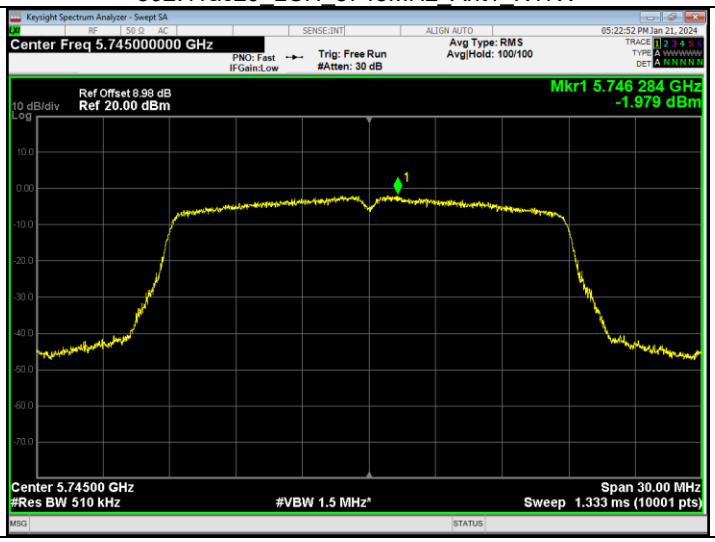

802.11ac20_MCH_5785MHz_Ant1_NTNV

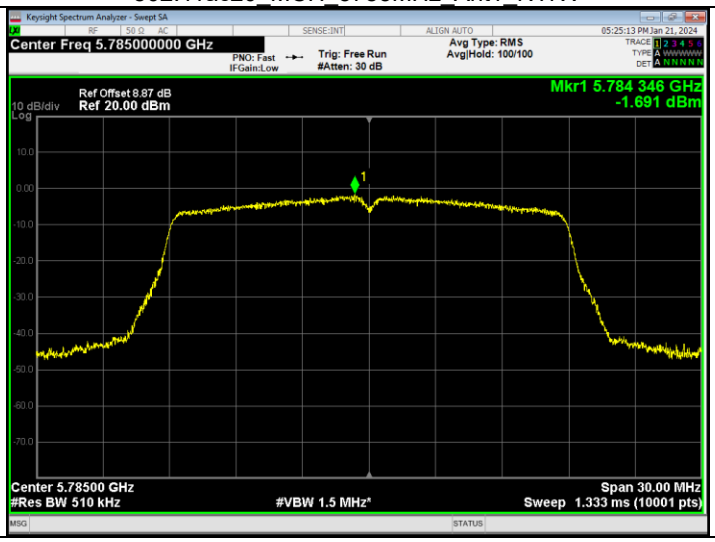

802.11ac20_HCH_5825MHz_Ant1_NTNV

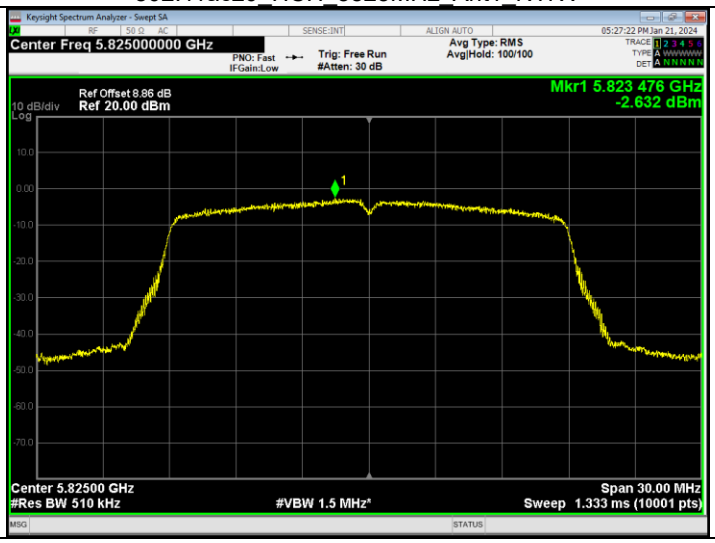

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac40_LCH_5755MHz_Ant1_NTNV

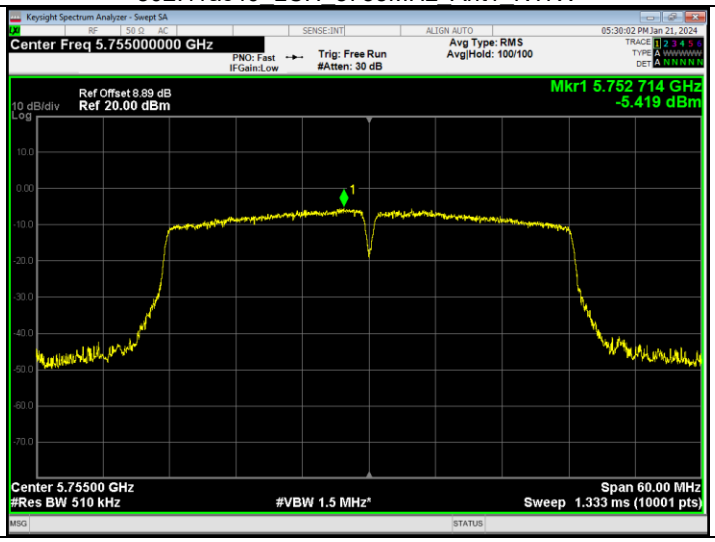

802.11ac40_HCH_5795MHz_Ant1_NTNV

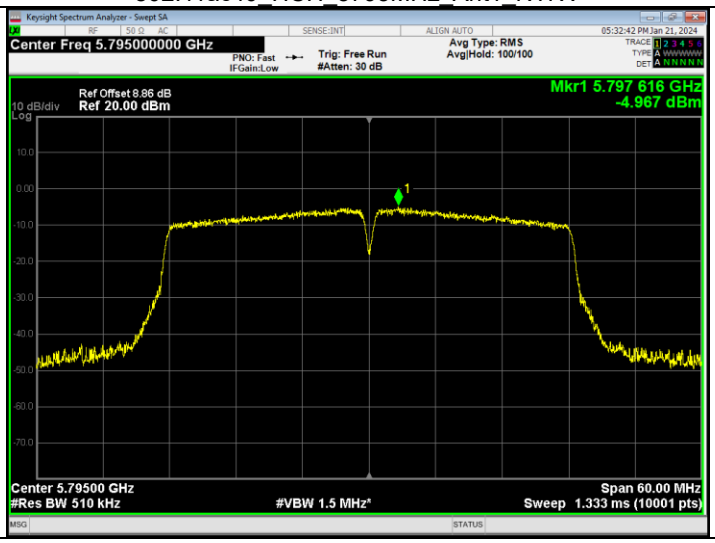

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

5. Frequency Stability

5.1 Ant1

5.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Temperature (°C)	Voltage (VAC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
Carrier Wave	SISO	5745	20	10.8	5744.968	5725 to 5850	Pass
				12.0	5744.967	5725 to 5850	Pass
				13.2	5744.966	5725 to 5850	Pass
			-30	12.0	5744.967	5725 to 5850	Pass
			-20	12.0	5744.967	5725 to 5850	Pass
			-10	12.0	5744.967	5725 to 5850	Pass
			0	12.0	5744.967	5725 to 5850	Pass
			10	12.0	5744.966	5725 to 5850	Pass
			30	12.0	5744.968	5725 to 5850	Pass
			40	12.0	5744.966	5725 to 5850	Pass
			50	12.0	5744.967	5725 to 5850	Pass
		5785	20	10.8	5784.966	5725 to 5850	Pass
				12.0	5784.966	5725 to 5850	Pass
				13.2	5784.967	5725 to 5850	Pass
			-30	12.0	5784.966	5725 to 5850	Pass
			-20	12.0	5784.966	5725 to 5850	Pass
			-10	12.0	5784.965	5725 to 5850	Pass
			0	12.0	5784.966	5725 to 5850	Pass
			10	12.0	5784.966	5725 to 5850	Pass
			30	12.0	5784.966	5725 to 5850	Pass
			40	12.0	5784.966	5725 to 5850	Pass
			50	12.0	5784.966	5725 to 5850	Pass
		5825	20	10.8	5824.966	5725 to 5850	Pass
				12.0	5824.967	5725 to 5850	Pass
				13.2	5824.966	5725 to 5850	Pass
			-30	12.0	5824.965	5725 to 5850	Pass
			-20	12.0	5824.966	5725 to 5850	Pass
			-10	12.0	5824.966	5725 to 5850	Pass
			0	12.0	5824.966	5725 to 5850	Pass
			10	12.0	5824.965	5725 to 5850	Pass
			30	12.0	5824.965	5725 to 5850	Pass
			40	12.0	5824.965	5725 to 5850	Pass
			50	12.0	5824.964	5725 to 5850	Pass
		5755	20	10.8	5754.966	5725 to 5850	Pass
				12.0	5754.967	5725 to 5850	Pass
				13.2	5754.966	5725 to 5850	Pass
			-30	12.0	5754.967	5725 to 5850	Pass
			-20	12.0	5754.966	5725 to 5850	Pass
			-10	12.0	5754.966	5725 to 5850	Pass
			0	12.0	5754.968	5725 to 5850	Pass
			10	12.0	5754.966	5725 to 5850	Pass
			30	12.0	5754.965	5725 to 5850	Pass
			40	12.0	5754.968	5725 to 5850	Pass
			50	12.0	5754.966	5725 to 5850	Pass
		5795	20	10.8	5794.966	5725 to 5850	Pass
				12.0	5794.966	5725 to 5850	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

				13.2	5794.968	5725 to 5850	Pass
			-30	12.0	5794.965	5725 to 5850	Pass
			-20	12.0	5794.965	5725 to 5850	Pass
			-10	12.0	5794.967	5725 to 5850	Pass
			0	12.0	5794.965	5725 to 5850	Pass
			10	12.0	5794.967	5725 to 5850	Pass
			30	12.0	5794.965	5725 to 5850	Pass
			40	12.0	5794.965	5725 to 5850	Pass
			50	12.0	5794.965	5725 to 5850	Pass

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

6. Band Edge

6.1 Test Result

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	ac20	5745	Ant1	-30.4		Pass
NVNT	ac20	5825	Ant1	-38.23		Pass
NVNT	ac40	5755	Ant1	-24.25		Pass
NVNT	ac40	5795	Ant1	-35.87		Pass
Note1: Antenna Gain: Ant1: 1.7dBi The Ref offset contain the antenna gain.						

6.2 Test Graph

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac20_LCH_5745MHz_Ant1_NTNV

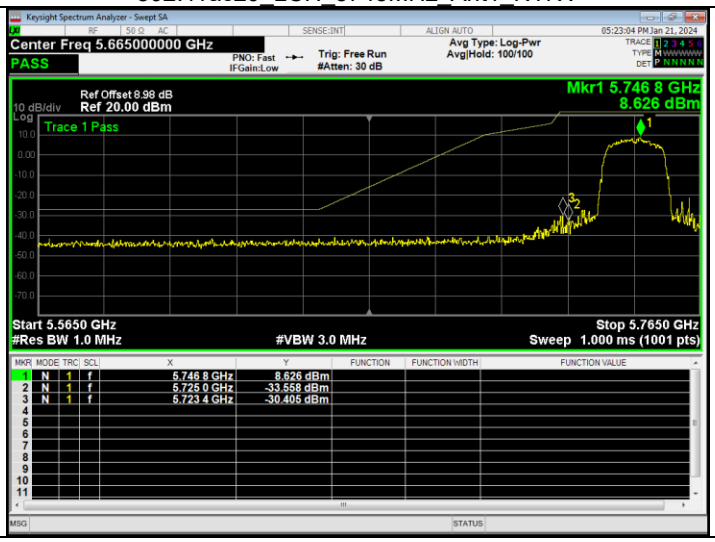

802.11ac20_HCH_5825MHz_Ant1_NTNV

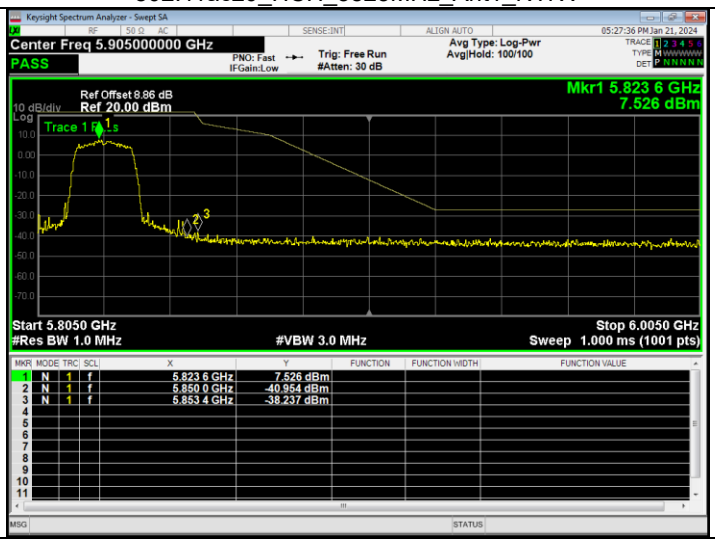

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

802.11ac40_LCH_5755MHz_Ant1_NTNV

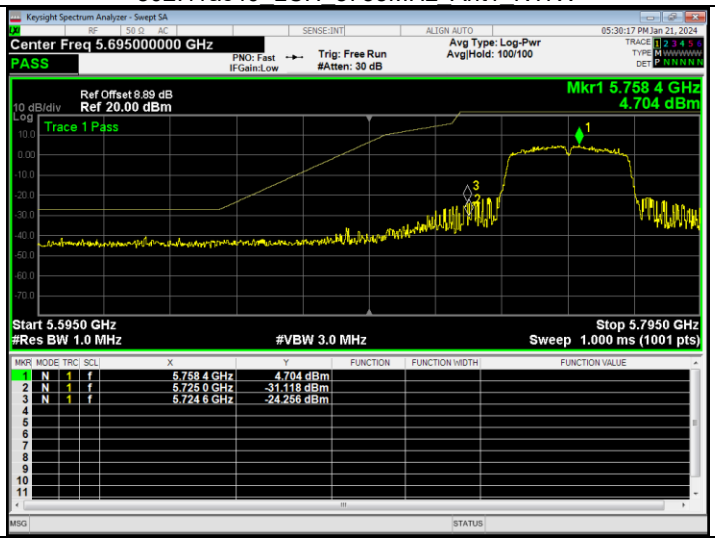

802.11ac40_HCH_5795MHz_Ant1_NTNV

Total or partial reproduction of this document without permission of the Laboratory is not allowed.

BTF Testing Lab (Shenzhen) Co., Ltd.
F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China

www.btf-lab.com

-- END OF REPORT --

Total or partial reproduction of this document without permission of the Laboratory is not allowed.