

SW6652-50B1(2)

IEEE 802.11a/b/g/n/ac/ax 2T2R + BT 5.4 Combo Module



Disclaimers and Copyright Notice

Information in this document, including URL references, is subject to change without notice.

This document is provided "As is" with no whatsoever, including any warranty of merchantability, noninfringement, fitness for any purpose, or any warranty otherwise arising out of any proposal, specification or samples.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Bluetooth logo and symbol belong to the Bluetooth SIG Inc.

The Wi-Fi Alliance Member Logo is a trademark of the Wi-Fi Alliance.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright ITON Technology Corp. All rights reserved.

Contents

1. Device Overview 3

 1.1 Features3

 1.1.1 General Features 3

 1.1.2 Wi-Fi Key Features3

 1.1.3 Bluetooth Key Features3

 1.2 Applications 4

 1.3 Descriptions 4

 1.4 Functional Block Diagram4

2. Pin Configuration and Functions5

 2.1 Module Pin Diagram 5

 2.2 Pin Functions 5

3. Specifications 6

 3.1 General Characteristics 6

 3.2 Temperature Range 6

 3.3 RF Characteristics 7

 3.3.1 Receiver RF Specifications 7

 3.3.2 Transmitter RF Specifications 9

 3.3.3 Bluetooth RF Specifications 11

 3.4 DC Characteristics 11

 3.4.1 Absolute Maximum Ratings 11

 3.4.2 Recommended Operating Conditions 11

 3.5 Power Sequence 12

4. Application, Implementation, and Layout13

 4.1 Application Diagram 13

 4.2 Layout Guideline 13

5. Mechanical and Package 14

 5.1 Module Size 14

 5.2 Package Information 14

6. Thermal Reflow 14

7. Certification Information 15

8. Ordering Information 15

9. Revision History 15

1. Device Overview

1.1 Features

1.1.1 General Features

- Supports VBAT range from 3.0V to 3.6V
- Supports WPA,WPA2,WPA3,WAPI
- Supports WOW
- Supports TCP/UDP checksum offload
- Package:LGA-50Pin.15.0mm*13.0mm

1.1.2 Wi-Fi Key Features

- IEEE 802.11 a/b/g/n/ac/ax (supports wave-2)
- Supports IEEE 802.11 d/e/h/i/k/mc/r/v/w
- Dual-stream spatial multiplexing data rate of up to 1200 Mbps
- Supports multiple single-mode operation modes such as Wi Fi STA, AP, P2P, TDLS
- Supports multi-mode coexistence modes such as DBDC and DBSC
- Supports 2G 40MHz bandwidth, 5G 80MHz bandwidth
- Supports two antennas(SW6652-50B1) and three antennas(SW6652-50B2)
- Supports up to 1024QAM modulation, supports LDPC, STBC
- Supports UL/DL OFDMA、 Supports UL/DL MU-MIMO
- Supports QoS, Supports WFA WMM, WMM PS
- Supports RSSI and CSI reporting
- Supports as a Beamformer, supporting 2x2/2x1 Tx Beamforming
- Supports as a Beamformee and supports 4X2 Tx Beamforming
- Supports features such as BSS Color and Spatial Reuse to improve air port utilization
- Supports TWT
- Supports high-precision indoor positioning function
- Supports standard SDIO v3.0, compatible with SDIO v2.0 HOST interfaces.

1.1.3 Bluetooth Key Features

- Supports Bluetooth (BT+BLE) v2.1、 v3.0、 v4.2、 v5.4
- Supports HS-UART/SDIO interface for BT data transmission
- Supports PCM/I2S interface for audio data transfer, supports VOHCI
- Supports BR/EDR/LE 1M/LE 2M/LE LR
- Supports SCO and eSCO links
- Supports low power mode (sniff、 sniff sub-rating)
- Supports AOA/AOD
- Supports LE Audio
- Supports coexistence schemes for BT Share and BT Standalone antenna modes

1.2 Applications

- Tablet Computer
- OTT Box
- Portable Devices

1.3 Descriptions

The SW6652-50B1(2) is a highly integrated module that supports 2T2R 802.11 a/b/g/n/ac/ax with Wireless LAN (WLAN) SDIO3.0 interface controller and Bluetooth 5.4 HS-UART interface controller. It combined with BPSK, QPSK, 16QAM, 64QAM, 256QAM and up to 1024QAM modulation of the individual subcarriers, and compatible coding rate of 1/2, 2/3, 3/4, 5/6, provide up to 1201Mbps for IEEE 802.11ax MIMO OFDM. In addition, this compact module is a total solution for a combination of Wi-Fi + BT technologies. The module is specifically developed for tablet, OTT box and portable devices.

1.4 Functional Block Diagram

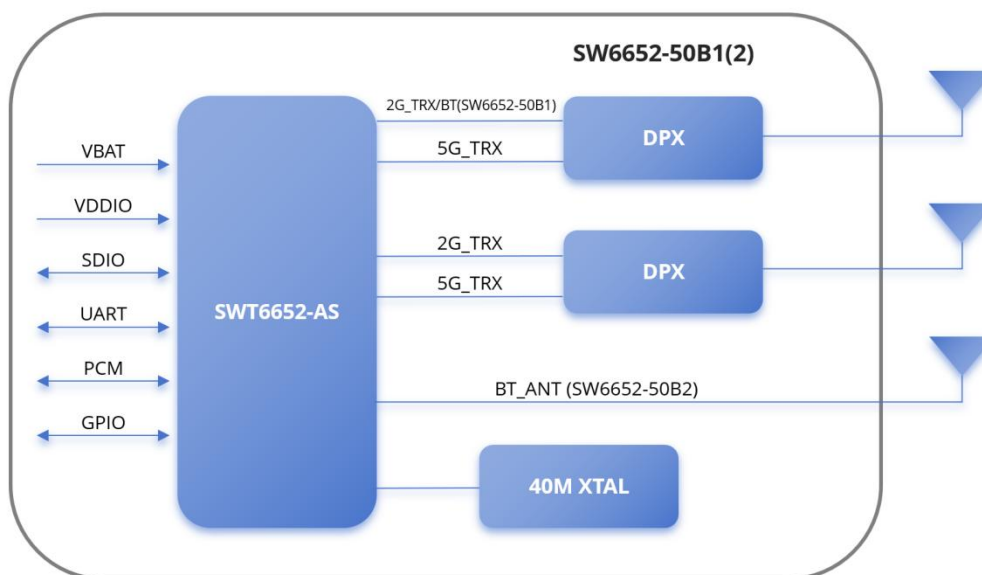


Figure 1. Block Diagram of SW6652-50B1(2)

2.Pin Configuration and Functions

2.1 Module Pin Diagram

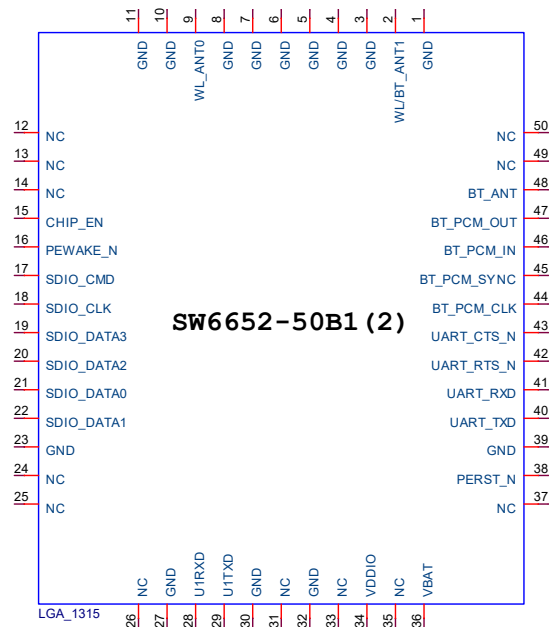


Figure 2. Pin Diagram of SW6652-50B1(2)

2.2 Pin Functions

Pin	Name	Description	Pin	Name	Description
1	GND	Ground	26	NC	No connect, keep floating
2	WL/BT_ANT1	RF input/output of path DIV WLAN and BT (SW6652-501) RF input/output of path DIV WLAN (SW6652-502)	27	GND	Ground
3	GND	Ground	28	U1RXD	UART1 RXD,just for test on PC.
4	GND	Ground	29	U1TXD	UART1 TXD,just for test on PC.
5	GND	Ground	30	GND	Ground
6	GND	Ground	31	NC	No connect, keep floating
7	GND	Ground	32	GND	Ground
8	GND	Ground	33	NC	No connect, keep floating
9	WL_ANT0	RF input/output of path PRI WLAN	34	VDDIO	Digital/Bluetooth/SDIO/ I/O Voltage
10	GND	Ground	35	NC	No connect, keep floating
11	GND	Ground	36	VBAT	Power supply Voltage
12	NC	No connect, keep floating	37	NC	No connect, keep floating
13	NC	No connect, keep floating	38	PERST_N	Host wake up BT
14	NC	No connect, keep floating	39	GND	Ground
15	CHIP_EN	Chip enable.	40	UART_TXD	High-Speed UART Data Out
16	PEWAKE_N	BT wake up Host	41	UART_RXD	High-Speed UART Data In
17	SDIO_CMD	SDIO command line	42	UART_RTS_N	High-Speed UART RTS
18	SDIO_CLK	SDIO clock line	43	UART_CTS_N	High-Speed UART CTS
19	SDIO_DATA3	SDIO port data 3	44	BT_PCM_CLK	PCM clock
20	SDIO_DATA2	SDIO port data 2	45	BT_PCM_SYNC	PCM sync signal
21	SDIO_DATA0	SDIO port data 0	46	BT_PCM_IN	PCM data input
22	SDIO_DATA1	SDIO port data 1	47	BT_PCM_OUT	PCM data output
23	GND	Ground	48	BT_ANT	RF input/output of path BT (SW6652-502)
24	NC	No connect, keep floating	49	NC	No connect, keep floating
25	NC	No connect, keep floating	50	NC	No connect, keep floating

3. Specifications

Caution! The absolute maximum ratings in the following table indicates voltages levels where permanent physical damage to the device can occur, even if these limits were exceeded for only a brief duration.

3.1 General Characteristics

Category	Descriptions	
Dimension	L*W*H :15.0mm (±0.2mm)*13.0mm (±0.2mm)*1.6mm (±0.1mm)	
Chip-set	SWT6652-AS	
Standard	IEEE 802.11a/b/g/n/ac/ax+BT 5.4	
Modulation Type	CCK, DBPSK, DQPSK, OFDM, OFDMA	
Frequency Band	2402~2484MHz,5180-5825MHz	
Interface	WLAN: SDIO, Bluetooth: SDIO	
Data Security	WPA,WPA2,WPA3,WAPI	
Transmit Power	2.4G: 11b 11M:18dBm±2dBm 11g 54M: 16dBm±2dBm 11n HT20 MCS7: 16dBm±2dBm 11n HT40 MCS7: 16dBm±2dBm 11ac VHT20 MCS8: 14dBm±2dBm 11ac VHT40 MCS9: 14dBm±2dBm 11ac VHT80 MCS9: 13dBm±2dBm 11ax HE20 MCS11: 12dBm±2dBm 11ax HE40 MCS11: 12dBm±2dBm	5G: 11a 54M: 16dBm±2dBm 11n HT20 MCS7: 16dBm±2dBm 11n HT40 MCS7: 16dBm±2dBm 11ac VHT20 MCS8: 14dBm±2dBm 11ac VHT40 MCS9: 14dBm±2dBm 11ac VHT80 MCS9: 13dBm±2dBm 11ax HE20 MCS11: 12dBm±2dBm 11ax HE40 MCS11: 12dBm±2dBm 11ax HE80 MCS11: 11dBm±2dBm
Rx Sensitivity	2.4G: 11b 11M: -89dBm @8% PER 11g 54M: -76dBm @10% PER 11n HT20 MCS7: -73 dBm @10% PER 11ax HE20 MCS11: -64 dBm @10% PER	5G: 11a 54M: -76 dBm @10% PER 11n HT20 MCS7: -73 dBm @10% PER 11n HT40 MCS7: -72 dBm @10% PER 11ac VTH20 MCS8: -68 dBm @10% PER 11ac VTH40 MCS9: -64 dBm @10% PER 11ac VTH80 MCS9: -61 dBm @10% PER 11ax HE20 MCS11: -62 dBm @10% PER 11ax HE40 MCS11: -60 dBm @10% PER 11ax HE80 MCS11: -57 dBm @10% PER
Data Rate	802.11b [11,5.5,2 and 1Mbps] 802.11g [54,48,36,24,18,12,9&6Mbps] 802.11n HT20:up to 144.4Mbps 802.11n HT40:up to 300Mbps 802.11ac VHT80:up to 866.7Mbps 802.11ax HE20:up to 286.8Mbps 802.11ax HE40:up to 573.6Mbps 802.11ax HE80:up to 1201Mbps	
Frequency Error	<±20 ppm	
Storage Humidity	Less than 60%	
Antenna	External antenna	
Operating System	Linux,Android	
Operating Voltage	VBAT:3.0V~3.6V(Typical:3.3V) VDDIO:1.62V~1.92V(Typical:1.8V)	

3.2 Temperature Range

Category	Descriptions
Operating Temperature	-30℃~+70℃
Storage Temperature	-40℃~+85℃

3.3 RF Characteristics

All measurements are made under nominal supply voltage & room temperature, and conducted conditions at each antenna port rather than antenna.

3.3.1 Receiver RF Specifications

Parameter	Conditions		Minimum	Typical	Maximum	Unit
Receive Input Frequency						
2.4GHz	802.11b/g/n/ax mode		2412	-	2484	MHz
Receiver Sensitivity						
802.11b	1Mbps	FER<8%, Packet size=1,024bytes	-	-	-82	dBm
	2Mbps		-	-	-80	dBm
	5.5Mbps		-	-	-78	dBm
	11Mbps		-	-	-76	dBm
802.11g	6Mbps	PER<10%, Packet size=1,024bytes	-	-	-82	dBm
	9Mbps		-	-	-81	dBm
	12Mbps		-	-	-79	dBm
	18Mbps		-	-	-77	dBm
	24Mbps		-	-	-74	dBm
	36Mbps		-	-	-70	dBm
	48Mbps		-	-	-66	dBm
	54Mbps		-	-	-65	dBm
802.11n (HT20)	MCS0.	PER<10%, Packet size=4,096bytes	-	-	-82	dBm
	MCS1.		-	-	-79	dBm
	MCS2		-	-	-77	dBm
	MCS3.		-	-	-74	dBm
	MCS4.		-	-	-70	dBm
	MCS5.		-	-	-66	dBm
	MCS6.		-	-	-65	dBm
	MCS7.		-	-	-64	dBm
802.11n (HT40)	MCS0.	PER<10%, Packet size=4,096bytes	-	-	-79	dBm
	MCS1.		-	-	-77	dBm
	MCS2		-	-	-74	dBm
	MCS3.		-	-	-71	dBm
	MCS4.		-	-	-67	dBm
	MCS5.		-	-	-63	dBm
	MCS6.		-	-	-62	dBm
	MCS7.		-	-	-61	dBm
802.11ax (HE20)	MCS0.	PER<10%, Packet size=4,096bytes	-	-	-82	dBm
	MCS1.		-	-	-79	dBm
	MCS2		-	-	-77	dBm
	MCS3.		-	-	-74	dBm
	MCS4.		-	-	-70	dBm
	MCS5.		-	-	-66	dBm
	MCS6.		-	-	-65	dBm
	MCS7.		-	-	-64	dBm
	MCS8.		-	-	-59	dBm
	MCS9.		-	-	-57	dBm
	MCS10.		-	-	-54	dBm
	MCS11.		-	-	-52	dBm
Maximum Input Level						
802.11b	FER<8%		-10	-	-	dBm
802.11g	FER<10%		-20	-	-	dBm
802.11n	FER<10%		-30	-	-	dBm
802.11ax	FER<10%		-20	-	-	dBm

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Receive Input Frequency					
5GHz	802.11a/n/ac/ax mode	5180	-	5825	MHz
Receiver Sensitivity					
802.11a	6Mbps	-	-	-82	dBm
	9Mbps	-	-	-81	dBm
	12Mbps	-	-	-79	dBm
	18Mbps	-	-	-77	dBm
	24Mbps	-	-	-74	dBm
	36Mbps	-	-	-70	dBm
	48Mbps	-	-	-66	dBm
	54Mbps	-	-	-65	dBm
802.11n (HT20)	MCS0.	-	-	-82	dBm
	MCS1.	-	-	-79	dBm
	MCS2	-	-	-77	dBm
	MCS3.	-	-	-74	dBm
	MCS4.	-	-	-70	dBm
	MCS5.	-	-	-66	dBm
	MCS6.	-	-	-65	dBm
	MCS7.	-	-	-64	dBm
802.11n (HT40)	MCS0.	-	-	-79	dBm
	MCS1.	-	-	-77	dBm
	MCS2	-	-	-74	dBm
	MCS3.	-	-	-71	dBm
	MCS4.	-	-	-67	dBm
	MCS5.	-	-	-63	dBm
	MCS6.	-	-	-62	dBm
	MCS7.	-	-	-61	dBm
802.11ac (VHT80)	MCS0.	-	-	-76	dBm
	MCS1.	-	-	-73	dBm
	MCS2	-	-	-71	dBm
	MCS3.	-	-	-68	dBm
	MCS4.	-	-	-64	dBm
	MCS5.	-	-	-60	dBm
	MCS6.	-	-	-59	dBm
	MCS7.	-	-	-58	dBm
	MCS8.	-	-	-53	dBm
	MCS9.	-	-	-51	dBm
802.11ax (HE80)	MCS0.	-	-	-76	dBm
	MCS1.	-	-	-73	dBm
	MCS2	-	-	-71	dBm
	MCS3.	-	-	-68	dBm
	MCS4.	-	-	-64	dBm
	MCS5.	-	-	-60	dBm
	MCS6.	-	-	-59	dBm
	MCS7.	-	-	-58	dBm
	MCS8.	-	-	-53	dBm
	MCS9.	-	-	-51	dBm
	MCS10.	-	-	-48	dBm
	MCS11.	-	-	-46	dBm
Maximum Input Level					
802.11a	FER<10%	-30	-	-	dBm
802.11n	FER<10%	-30	-	-	dBm
802.11ac	FER<10%	-30	-	-	dBm
802.11ax	FER<10%	-30	-	-	dBm

3.3.2 Transmitter RF Specifications

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Receive Input Frequency					
802.11b/g/n/ax	2.4GHz	2412	-	2484	MHz
Transmit Power					
802.11b	11Mbps	16	18	20	dBm
802.11g	54Mbps	14	16	18	dBm
802.11n	HT20, MCS7	14	16	18	dBm
	HT40, MCS7	14	16	18	dBm
802.11ax	HE20,MCS11	10	12	14	dBm
	HE40,MCS11	10	12	14	dBm
Spectrum Mask					
802.11b	$fc-22MHz < f < fc-11MHz$ & $fc+11MHz < f < fc+22MHz$	-	-	-30	dBr
	$fc-55MHz < f < fc-22MHz$ & $fc+22MHz < f < fc+55MHz$	-	-	-50	dBr
802.11g	$fc \pm 9MHz$	-	-	0	dBr
	$fc \pm 11MHz$	-	-	-20	dBr
	$fc \pm 20MHz$	-	-	-28	dBr
	$fc \pm 30MHz$	-	-	-40	dBr
802.11n	$fc \pm 9MHz$	-	-	0	dBr
	$fc \pm 11MHz$	-	-	-20	dBr
	$fc \pm 20MHz$	-	-	-28	dBr
	$fc \pm 30MHz$	-	-	-45	dBr
802.11ax (HE20)	$fc \pm 9.75MHz$	-	-	0	dBr
	$fc \pm 10.5MHz$	-	-	-20	dBr
	$fc \pm 20MHz$	-	-	-28	dBr
	$fc \pm 30MHz$	-	-	-40	dBr
Center Frequency Tolerance					
802.11b		-20	-	+20	ppm
802.11g/n/ax		-20	-	+20	ppm
EVM (Error Vector Magnitude)*					
802.11b	1Mbps	-	-	35	%
	2Mbps	-	-	35	%
	5.5Mbps	-	-	35	%
	11Mbps	-	-	35	%
802.11g	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB
	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
802.11ax	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
	MCS10.	-	-	-35	dB
	MCS11.	-	-	-35	dB

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Receive Input Frequency					
802.11a/n/ac/ax	5 GHz	5180	-	5825	MHz
Transmit Power					
802.11a	54Mbps	14	16	18	dBm
802.11n	HT20, MCS7	14	16	18	dBm
	HT40, MCS7	14	16	18	dBm
802.11ac	VHT20,MCS8	12	14	16	dBm
	VHT40,MCS9	12	14	16	dBm
	VHT80,MCS9	11	13	15	dBm
802.11ax	HE20,MCS11	10	12	14	dBm
	HE40,MCS11	10	12	14	dBm
	HE80,MCS11	9	11	13	dBm
Spectrum Mask					
802.11a	fc±9MHz	-	-	0	dBr
	fc±11MHz	-	-	-20	dBr
	fc±20MHz	-	-	-28	dBr
	fc±30MHz	-	-	-40	dBr
802.11n	fc±9MHz	-	-	0	dBr
	fc±11MHz	-	-	-20	dBr
	fc±20MHz	-	-	-28	dBr
	fc±30MHz	-	-	-45	dBr
802.11ac (VHT80)	fc±39MHz	-	-	0	dBr
	fc±41MHz	-	-	-20	dBr
	fc±80MHz	-	-	-28	dBr
	fc±120MHz	-	-	-40	dBr
802.11ax (HE80)	fc±39.5MHz	-	-	0	dBr
	fc±40.5MHz	-	-	-20	dBr
	fc±80MHz	-	-	-28	dBr
	fc±120MHz	-	-	-40	dBr
Center Frequency Tolerance					
802.11a/n/ac/ax		-20	-	+20	ppm
EVM (Error Vector Magnitude)*					
802.11a	6Mbps	-	-	-5	%
	9Mbps	-	-	-8	dB
	12Mbps	-	-	-10	dB
	18Mbps	-	-	-13	dB
	24Mbps	-	-	-16	dB
	36Mbps	-	-	-19	dB
	48Mbps	-	-	-22	dB
	54Mbps	-	-	-25	dB
802.11n	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-28	dB
802.11ac	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB
	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
802.11ax	MCS9.	-	-	-32	dB
	MCS0.	-	-	-5	dB
	MCS1.	-	-	-10	dB
	MCS2	-	-	-13	dB
	MCS3.	-	-	-16	dB
	MCS4.	-	-	-19	dB
	MCS5.	-	-	-22	dB

	MCS6.	-	-	-25	dB
	MCS7.	-	-	-27	dB
	MCS8.	-	-	-30	dB
	MCS9.	-	-	-32	dB
	MCS10.	-	-	-35	dB
	MCS11.	-	-	-35	dB

3.3.3 Bluetooth RF Specifications

Parameter	Conditions	Minimum	Typical	Maximum	Unit
Frequency Range		2402		2480	MHz
RX Sensitivity	Sensitivity@BER=0.1% for GFSK(1Mbps)	-	-94	-	dBm
	Sensitivity@BER=0.01% for $\pi/4$ -DQPSK(2Mbps)	-	-92	-	dBm
	Sensitivity@BER=0.01% for 8DPSK (3Mbps)	-	-87	-	dBm
	Sensitivity@PER=30.8% for LE (1Mbps)	-	-97	-	dBm
	Sensitivity@PER=30.8% for LE (2Mbps)	-	-94	-	dBm
Output Power	BDR	-	10	-	dBm
	EDR	-	10	-	dBm
	LE	-	10	-	dBm

3.4 DC Characteristics

3.4.1 Absolute Maximum Ratings

Rating	Symbol	Maximum	Unit
DC Supply For VBAT	VBAT	5.25	V
DC Supply Voltage For Digital/Bluetooth/SDIO I/O	VDDIO	5.25	V

3.4.2 Recommended Operating Conditions

Parameter	Symbol	Value			
		Minimum	Typical	Maximum	Unit
DC Supply Voltage For VBAT	VBAT	3.0	3.3	3.6	V
DC Supply Voltage For Digital/Bluetooth/SDIO I/O	VDDIO	1.62	1.8	1.92	V
		3.0	3.3	3.6	V

3.5 Power Sequence

➤ Power on/off and Reset timing

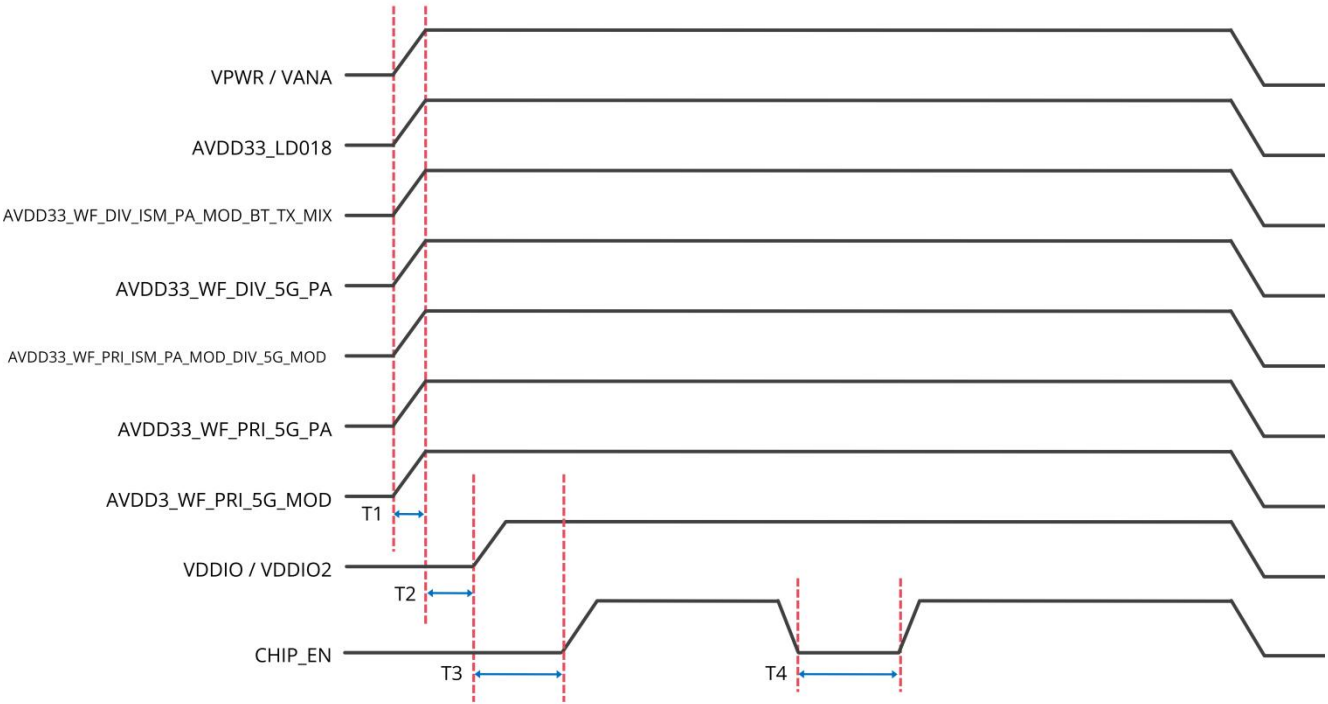


Figure 3. Power on/off and Reset timing of SW6652-50B1(2)

Parameter	Description	Minimum	Typical	Maximum
T1	3.3V Ramp up time	200us	500us	-
T2	VDDIO/VDDIO2 should be powered on after 3.3V is powered on	0	-	-
T3	CHIP_EN should be powered on after VDDIO/VDDIO2 is powered on	0	-	-
T4	CHIP_EN reset time	50ms	-	-

4. Application, Implementation, and Layout

4.1 Application Diagram

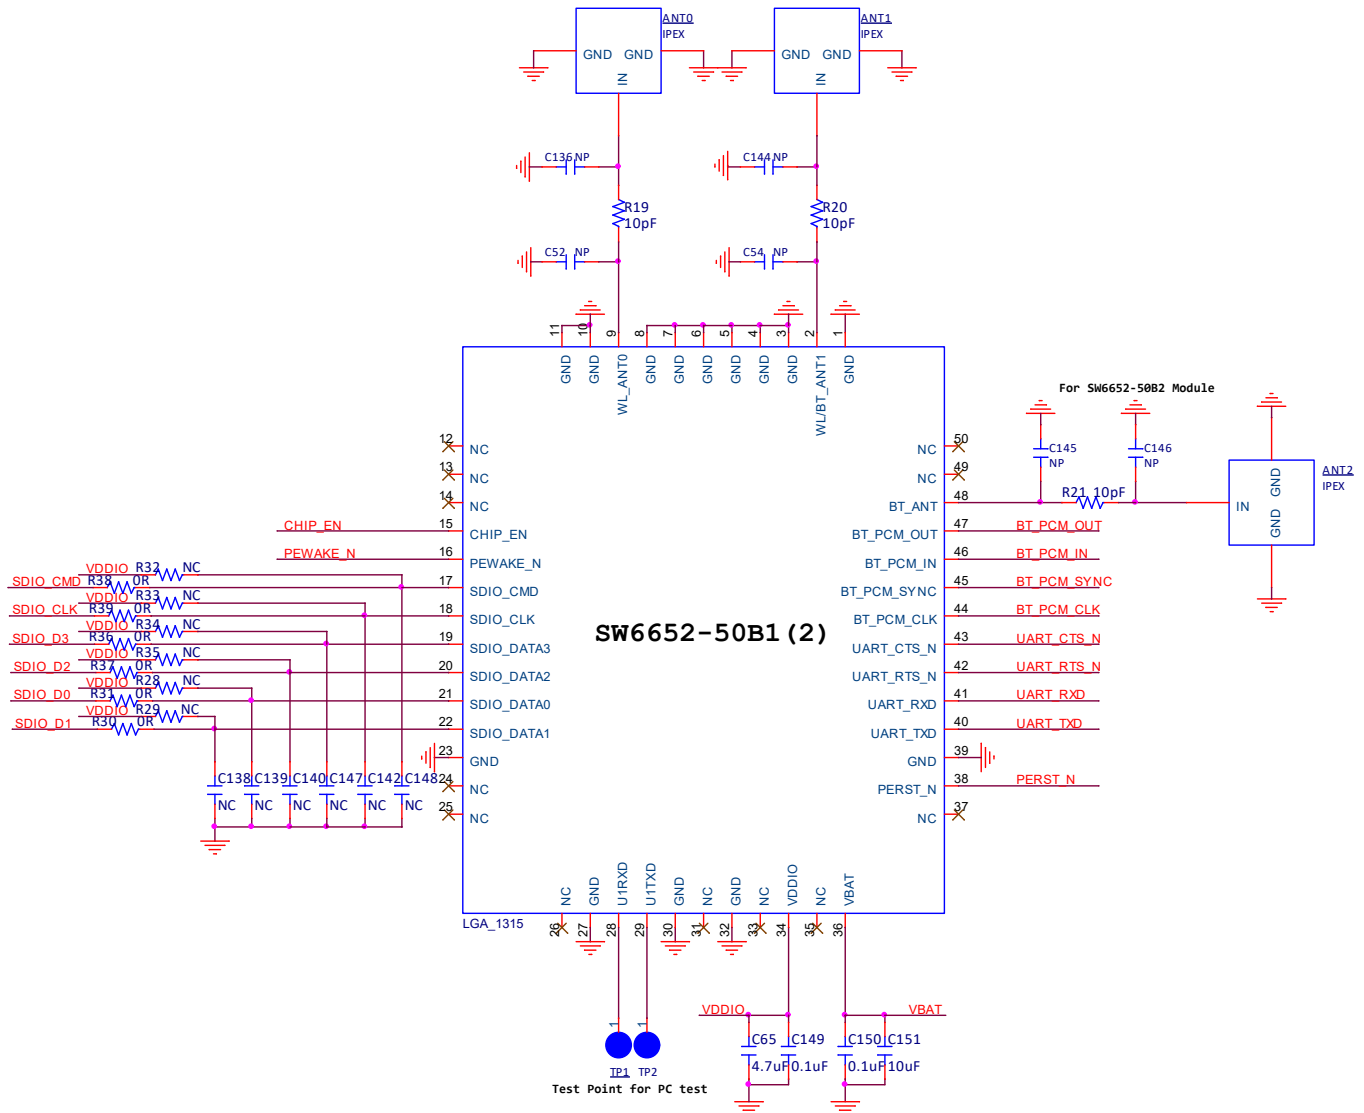


Figure 4. Application Schematic Diagram of SW6652-50B1(2)

4.2 Layout Guideline

- Keep RF traces with 50 Ohm impedance.
- The antenna needs to have enough clearance area.
- The filter capacitor should be as close as possible to the module.
- Do not place strong interference lines under the module.

5. Mechanical and Package

5.1 Module Size

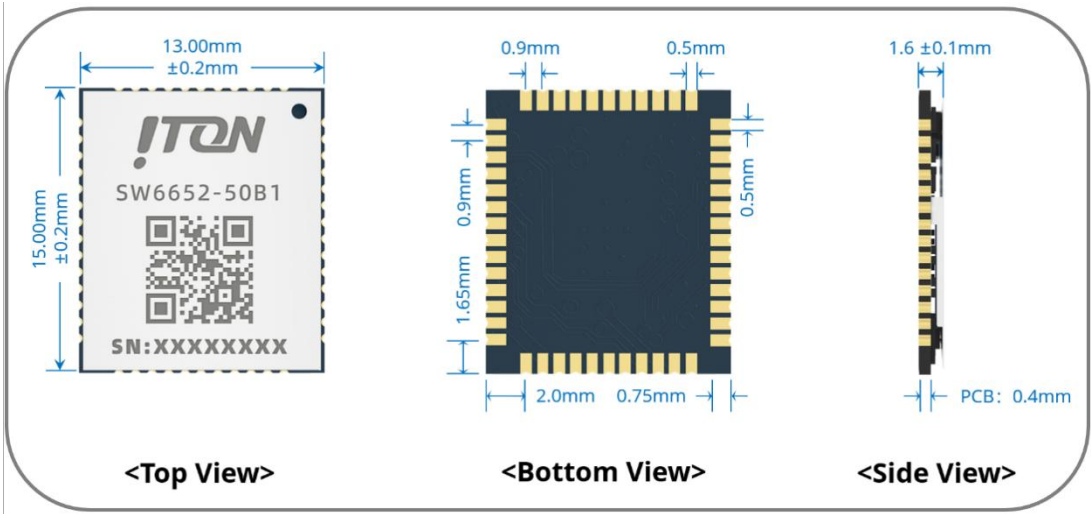


Figure 5. Module Size of SW6652-50B1(2)

5.2 Package Information

Part NO.	MOQ(PCS)	Shipment Packaging	No. of Modules Per Reel	No. Of Reels Per Case
SW6652-50B1	6000	Tape & Reel	1000	6
SW6652-50B2	6000	Tape & Reel	1000	6

6. Thermal Reflow

- Referred to IPC/JEDEC standard.
- Peak temperature: <250°C
- Number of times: ≤2

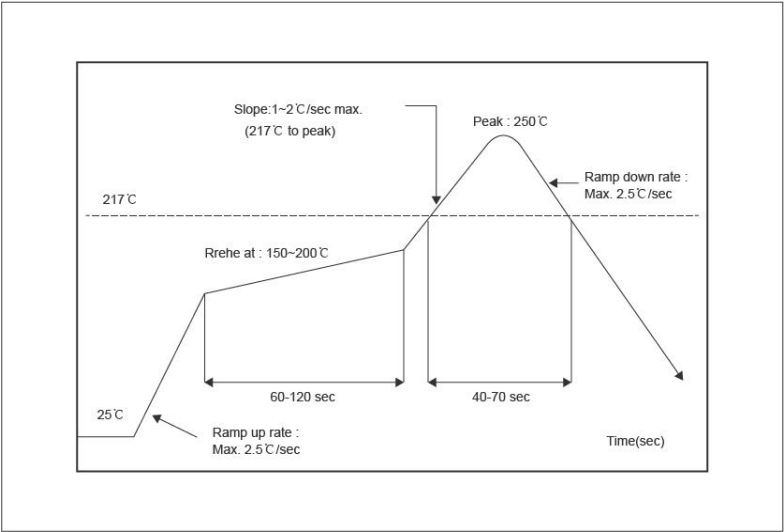


Figure 6. Recommended Reflow for Lead Free Solder

- Note: The module is recommended not to go through reflow over twice.

7.Certification Information

➤ None

8.Ordering Information

Part NO.	ANT	Shielding Cover	Remark
SW6652-50B1	External Antenna	Included	2 Antennas
SW6652-50B2	External Antenna	Included	3 Antennas

➤ The Key Material List

Item	Part Name	Description	Manufacturer
1	PCB	SW6652-50B1(2),FR4,4L	HS,BQ
2	Chipset	SWT6652-AS. QFN68L	Seekwave
3	Crystal	2016,40M,9pF	YL
4	Diplexer	1608,2.4G&5G	Sunlord.FTR

9.Revision History

Version	Change Content	Reviser	Date
V0.1	Draft Version	Phil Ye	2024.02.27
V0.2	Update RF Spec	Phil Ye	2024.04.09
V0.3	Update Module Pin Update Application Diagram	Phil Ye	2024.04.25
V1.0	Initial Version Update IC PN Update RF spec Update Module Pin Update Application Diagram	Phil Ye	2024.10.18
V1.1	Add dimensional tolerance	Phil Ye	2024.11.04
V1.2	Add LE power parameters	Phil Ye	2024.11.06

FCC Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

*RF warning for Mobile device:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

The OEM must certify the final end product to comply with unintentional radiators (FCC Sections 15.107 and 15.109) before declaring compliance of the final product to Part 15 of the FCC rules and regulations. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change.

The OEM must comply with the FCC labeling requirements. If the module's label is not visible when installed, then an additional permanent label must be applied on the outside of the finished product which states: "Contains transmitter module FCC ID: 2BF4V-SW6652-50B1".

Additionally, the following statement should be included on the label and in the final product's user manual:

"This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interferences, and
- (2) this device must accept any interference received, including interference that may cause undesired operation." The module is limited to installation in applications. Separate approval is required for all other operating configurations, including portable configuration with respect to Part 2.1093 and different antenna configurations. A module or modules can only be used without additional authorizations if they have been tested and granted under the same intended end - use operational conditions, including simultaneous transmission operations. When they have not been tested and granted in this manner, additional testing and/or FCC application filing may be required. The most straightforward approach to address additional testing conditions is to have the grantee responsible for the certification of at least one of the modules submit a permissive change application. When having a module grantee file a permissive change is not practical or feasible, the following guidance provides some additional options for host manufacturers. Integrations using modules where additional testing and/or FCC application filing(s) may be required are: (A) a module used in devices requiring additional RF exposure compliance information (e.g., MPE evaluation or SAR testing); (B) limited and/or split modules not meeting all of the module requirements; and (C) simultaneous transmissions for independent collocated transmitters not previously granted together. This Module is full modular approval, it is limited to OEM installation ONLY. Integration into devices that are directly or indirectly connected to AC lines must add with Class II Permissive Change. (OEM) Integrator has to assure compliance of the entire end product include the integrated Module.

Additional measurements (15B) and/or equipment authorizations (e.g. Verification) may need to be addressed depending on co-location or simultaneous transmission issues if applicable. (OEM) Integrator is reminded to assure that these installation instructions will not be made available to the end user.

Integration instructions for host product manufacturers according to KDB 996369 D03 OEMManual v01

2.2 List of applicable FCC rules

FCC Part 15 Subpart C 15.247 & 15.207 & 15.209 & 15.205
FCC Part 15 Subpart E 15.407

2.3 Specific operational use conditions

When installed in smart terminal products, the host manufacturer must negotiate with the module manufacturer on the final installation method in the system. The module can be used for mobile applications with a maximum 3.16 dBi antenna. The host manufacturer installing this module into their product must ensure that the final compost product complies with the FCC requirements by a technical assessment or evaluation to the FCC rules, including the transmitter

operation. The host manufacturer has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

The module should be installed and operated with minimum distance 20cm between the radiator & your body. and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. When the host is a portable device, it is necessary to take a SAR test with your set mounting this module. Class II permissive change application is necessary using the SAR report. Please contact kevin (kevin@sziton.com). And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note) Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm. Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm.

1. According to the following requirements of the power supply DC3.3V, power up, about 3 seconds to to complete the initial.
2. iphone/Android mobile phone BT/WIFI function to open, search to the corresponding Wireless network adapter name (name can be changed according to customer production requirements), click the name of the BT/WIFI and select the connection.
3. open application software (need to install the company's specific application software development, application software interface can be customized according to customer's product requirements).

2.4 Limited module procedures

The module is a Single module.

Requirement per 15.212 and KDB 996369 D01	Explanation from Grantee (do not write yes/no, but explain why product complies/how it is achieved)
The radio elements must have the radio frequency circuitry shielded. Physical components and tuning capacitor(s) may be located external to the shield, but must be on the module assembly.	Has RF shielding.
The module must have buffered modulation/data inputs to ensure that the device will comply with Part 15 requirements with any type of input signal.	The modular have buffered modulation/data inputs.
The module must contain power supply regulation on the module.	The modular transmitter have its own power supply regulation.(DC 3.3V)
The module must contain a permanently attached antenna, or contain a unique antenna connector, and be marketed and operated only with specific antenna(s), per §§ 15.203, 15.204(b), 15.204(c), 15.212(a), 2.929(b).	Antenna restrictions are added in the manual.The antenna needs to be professionally installed.
The module must demonstrate compliance in a stand-alone configuration.	The module was tested in a stand-alone configuration, please refer to the Setup Photo for the detail

The module must be labeled with its permanently affixed FCC ID label, or use an electronic display (see KDB Publication 784748).	Please refer to label sample exhibit - host labeling is described in integration manual
The module must comply with all specific rules applicable to the transmitter, including all the conditions provided in the integration instructions by the grantee.	The required FCC rule has been fulfilled and all the instructions for the maintaining compliance have been clearly stated in the User Manual.
The module must comply with RF exposure requirements	The MPE evaluation with 20cm distance restriction is submitted for the compliance of RF Exposure requirement.


2.5 Trace antenna designs

Please perform the Trace antenna design that followed the specifications of the antenna. The concrete contents of a check are the following three points.


- 1) It is the same type as the antenna type of antenna specifications. Confirm the same size as the Gerber file.
- 2) An antenna gain is lower than a gain given in antenna specifications. Measure the gain, and confirm the peak gain is less than 3.16dBi.
- 3) The emission level is not getting worse. Measure the spurious, and confirm degradation of less than 3dB than spurious value of worst of report used for the application.

Rod Antenna specification

You can see antenna size is 108±2mm*7.9mm* From below Specification.

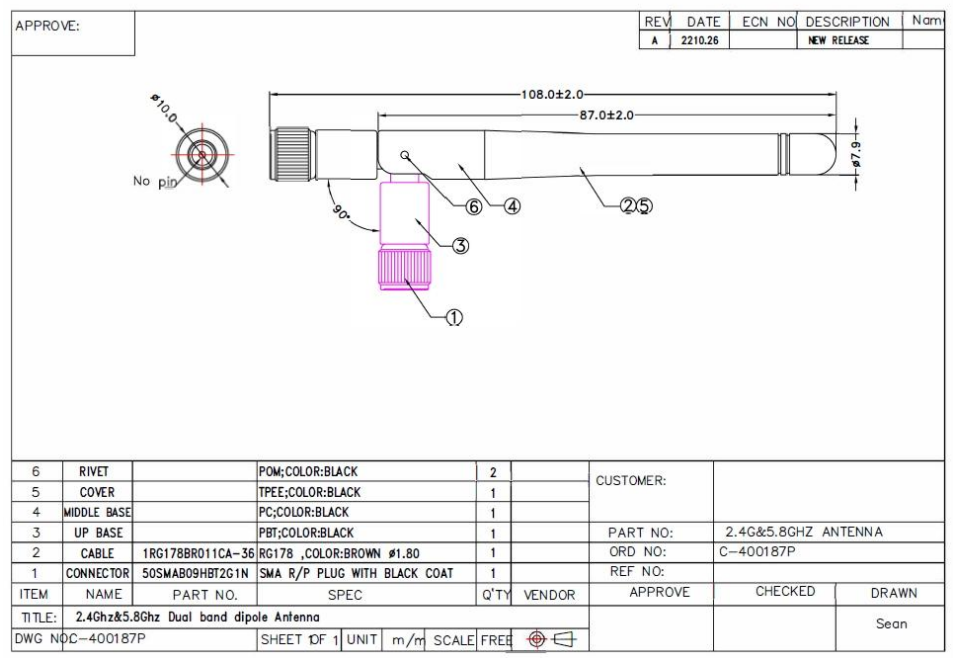

Please refer to the chart below for PCB size of RF line terminal.

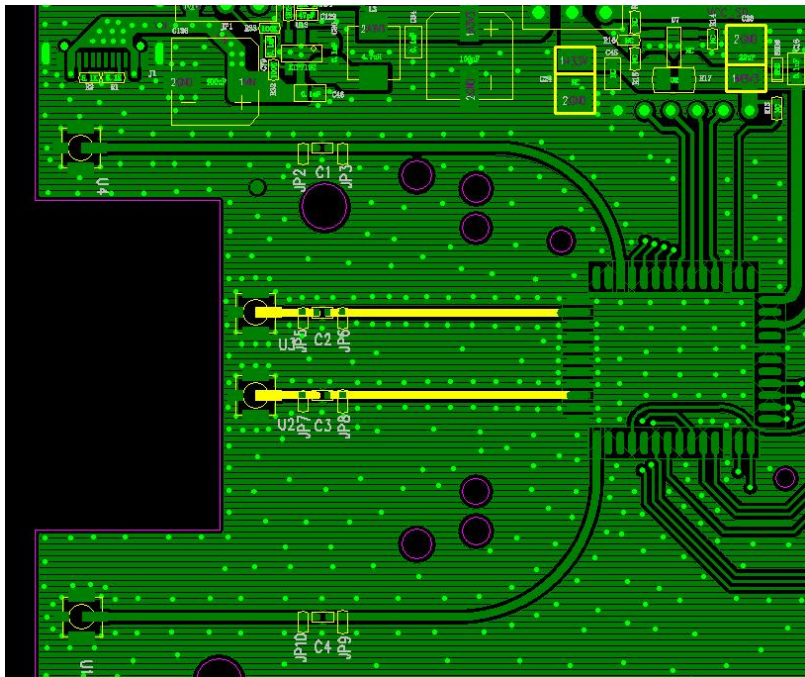

This device is intended only for host manufacturers under the following conditions: The transmitter module may not be co-located with any other transmitter or antenna; The module shall be only used with the External antenna(s) that has been originally tested and certified with this module. The antenna must be either permanently attached or employ a 'unique' antenna coupler.

As long as the conditions above are met, further transmitter test will not be required. However, the host manufacturer is still responsible for testing their end-product for any additional compliance requirements required with this module installed (for example, digital device emissions, PC peripheral requirements, etc.).

2.8 Label and compliance information

Host product manufacturers need to provide a physical or e-label stating "Contains FCC ID: 2BF4V-SW6652-50B1 With their finished product.

2.9 Information on test modes and additional testing requirements

The module complies with FCC radiation exposure limits set forth for an uncontrolled environment. The module should be installed and operated with minimum distance 20cm between the radiator & your body. and if RF exposure statement or module layout is changed, then the host product manufacturer required to take responsibility of the module through a change in FCC ID or new application. The FCC ID of the module cannot be used on the final product. In these circumstances, the host manufacturer will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization. When the host is a portable device, it is necessary to take a SAR test with your set mounting this module. Class II permissive change application is necessary using the SAR report. Please contact kevin (kevin@sziton.com). And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.

Note) Portable equipment : Equipment for which the spaces between human body and antenna are used within 20cm. Mobile equipment : Equipment used at position in which the spaces between human body and antenna exceeded 20cm. Host manufacturer must perform test of radiated & conducted emission and spurious emission, etc according to the actual test modes for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

Only when all the test results of test modes comply with FCC requirements, then the end product can be sold legally.

2.10 Additional testing, Part 15 Subpart B disclaimer

The modular transmitter is only FCC authorized for FCC Part 15 Subpart C 15.247 & 15.407 & 15.207 & 15.209 & 15.205 and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

2.11 The user manual of the end product should include:

- a) Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- b) The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons.
- c) This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may

cause undesired operation.

d) This device is restricted to indoor use.

The antenna(s) used for this transmitter must not transmit simultaneously with any other antenna or transmitter.