

FCC PART 15.249

TEST REPORT

For

Toplight Sensor Technology (Xiamen) Co.,Ltd.

Unit 301, No. 52, Huli Industrial Park, Meixi Road, Tongan District, Xiamen, Fujian, China

FCC ID: 2BF56-T218

Report Type: Original Report	Product Name: 24GHz Millimeter Wave Radar Module
Report Number:	RXM251120050-00A
Report Date:	2026-05-12
Reviewed By:	Jenny Yang Jenny Yang
Approved By:	Kyle Xu Kyle Xu
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	3
GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
JUSTIFICATION	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	11
TEST EQUIPMENT LIST	12
§1.1307 (B) (3) &§2.1091 – RF EXPOSURE	14
APPLICABLE STANDARD	14
FCC§15.203 - ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (A) - AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
TEST SYSTEM SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION.....	18
APPLICABLE STANDARD	18
TEST SYSTEM SETUP.....	18
TEST EQUIPMENT SETUP	21
TEST PROCEDURE	21
TEST RESULTS SUMMARY	22
TEST DATA: SEE APPENDIX	22
FCC §15.215(C) - 20 DB BANDWIDTH TESTING.....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA: SEE APPENDIX	24
APPENDIX - TEST DATA.....	25
CONDUCTED EMISSIONS	25
RADIATED EMISSIONS	30
FUNDAMENTAL AND BAND EDGE TEST	40
20 DB BANDWIDTH TESTING	42
EUT PHOTOGRAPHS	43
TEST SETUP PHOTOGRAPHS	44

REPORT REVISION HISTORY

Number of Revisions	Report No.	Issue Date	Description
0	RXM251120050-00A	2026-05-12	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Toplight Sensor Technology (Xiamen) Co.,Ltd.
Tested Model:	T218
Product Name:	24GHz Millimeter Wave Radar Module
Power Supply:	DC 5V / 12V
RF Function:	24G SRD
Operating Band/Frequency:	24.035-24.225 GHz
Maximum Field Strength of Fundamental:	96.96 dB μ V/m @3m
Modulation Type:	FMCW
Antenna Type:	PCB Antenna
★Maximum Antenna Gain:	8.2251 dBi

Note:

1. The maximum antenna gain is provided by the applicant.
2. The EUT has 8 configurations, the difference between configuration 1-8 as below:

External enclosure type	Input Voltage configuration	Input interface type	configuration
Ultrasonic	5V	Vertical with wire	configuration 1
	12V	Vertical with wire	configuration 2
	5V	Vertical without wire	configuration 3
	12V	Vertical without wire	configuration 4
Glue filling	5V	Vertical with wire	configuration 5
	5V	Horizontal with wire	configuration 6
	12V	Vertical with wire	configuration 7
	12V	Horizontal with wire	configuration 8

All measurement and test data in this report was gathered from production sample serial number: RXM251120050-1 (configuration 1), RXM251120050-2 (configuration 2). Based on above differences, we choose RXM251120050-2 (configuration 2) for full test, RXM251120050-1 (configuration 1) tests CONDUCTED EMISSIONS, RADIATED EMISSIONS (Below 1 GHz) (Assigned by BACL (Kunshan). The EUT supplied by the applicant was received on 2025-11-20.)

Objective

This type approval report is prepared for *Toplight Sensor Technology (Xiamen) Co.,Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209, 15.215 and 15.249 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19 dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
	40GHz ~50GHz	4.92dB
	50GHz ~75GHz	5.16dB
	75GHz ~100GHz	5.64dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION**Justification**

Operation Frequency Details:

Sweep Start Frequency (GHz)	Sweep Stop Frequency (GHz)
24.035	24.225

EUT Exercise Software

The system was configured for testing in an engineering mode, which was provided by manufacturer

Engineer Mode was used during the test.

★Power level: Default

Note: The power level was declared by the applicant.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Debug board	/	/
ZHAOXIN	DC Source	RXN-605D	21R605D08132677
Shenzhen Zhaoxin Electronic Instrument	DC Source	PS-6005D	18P6005D10724
/	Power strip	/	/
Lenovo	Notebook	Y700P	PF2B7PL5
/	Adapter	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
CE			
Data Cable 1	1.5	EUT	Debug board
Power Cable 1	1.0	Notebook	Adapter
Power Cable 2	1.0	EUT	DC Source
Power Cable 3	1.0	Adapter/DC Source	LISN
Power Cable 4	1.0	LISN	AC Source
RE(Below 1GHz)			
Data Cable 1	1.5	EUT	Debug board
Data Cable 2	1.0	Debug board	Notebook
Power Cable 1	1.0	EUT	DC Source
Power Cable 2	1.0	DC Source	AC Source
RE(Above 1GHz)			
Data Cable 1	1.5	EUT	Debug board
Power Cable 1	3.0	Power Strip	AC Source
Power Cable 2	1.0	DC Source	Power Strip
Power Cable 3	1.0	Notebook	Adapter
Power Cable 4	1.0	Adapter	Power Strip
Power Cable 5	1.5	DC Source	EUT

Block Diagram of Test Setup

For Conducted Emissions (Configuration 1):

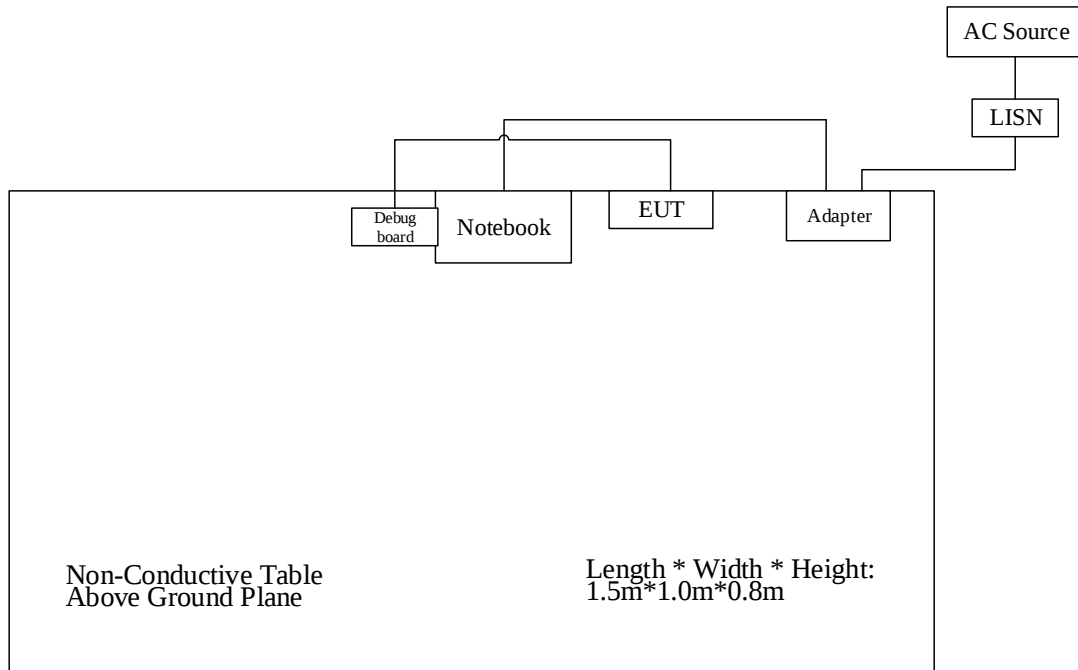


For Conducted Emissions (Configuration 2):

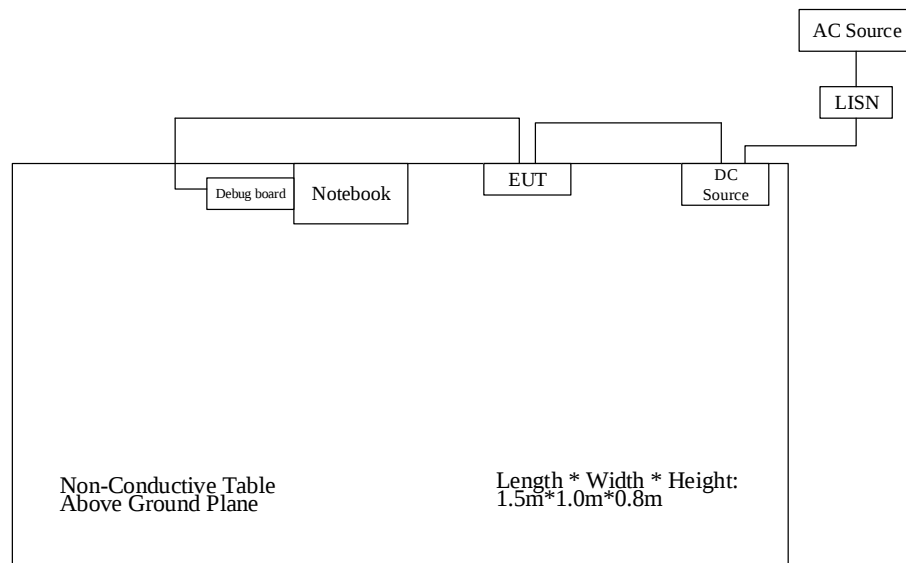


For Radiated Emissions(Below 1GHz):


Configuration 1

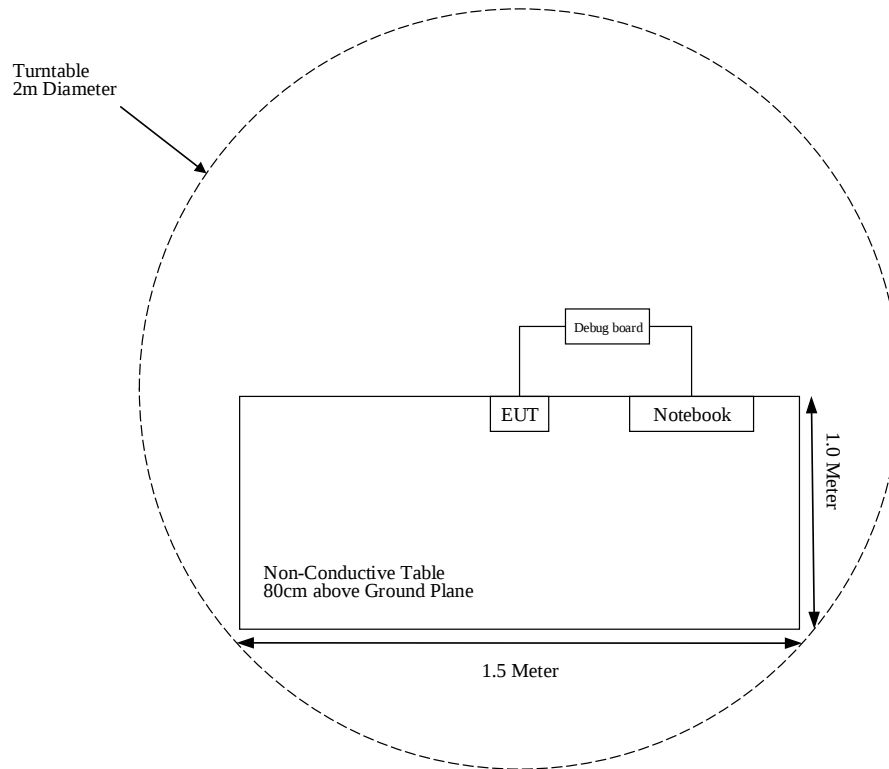

Configuration 2

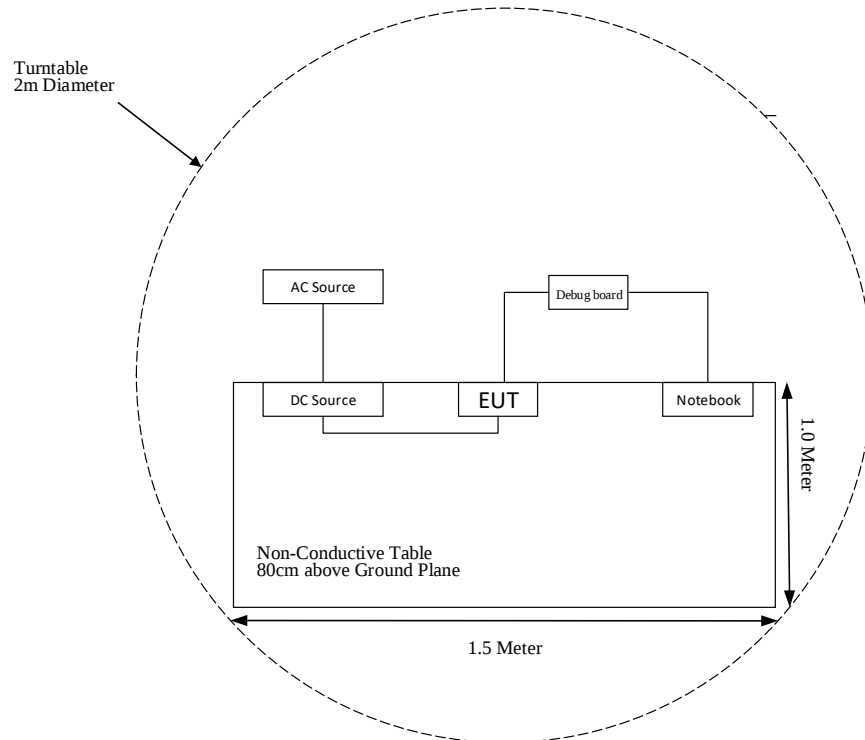

For Radiated Emissions(Above 1GHz):

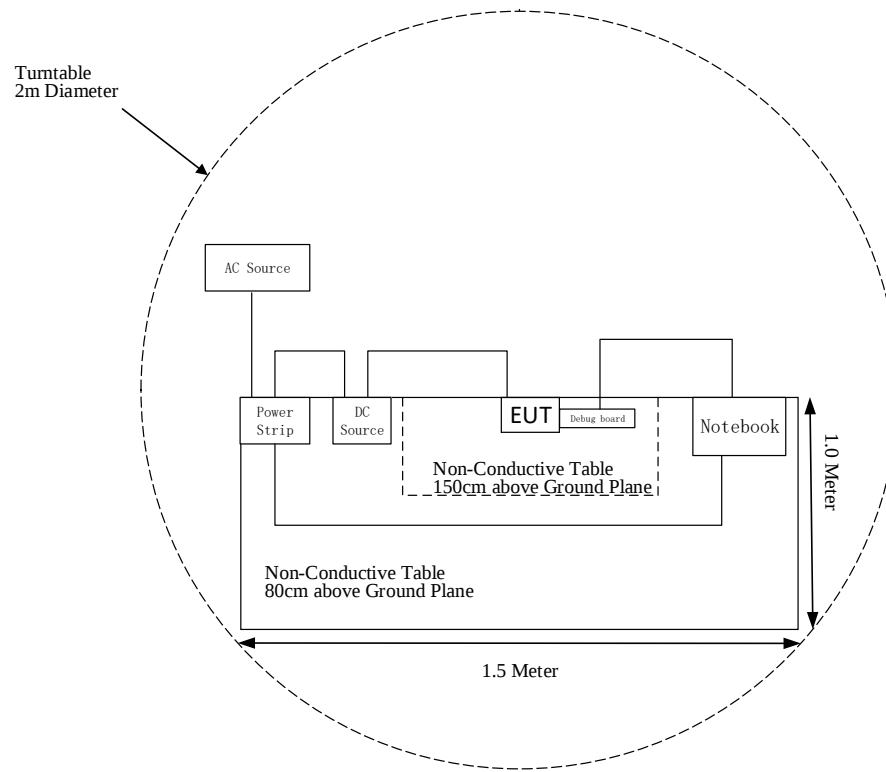

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
15.205, §15.209, §15.249	Radiated Emissions& Out of Band Emission	Compliant
§15.215 (c)	20 dB Bandwidth	Compliant
§1.1307 (b) (3) &§2.1091	RF EXPOSURE	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Sunol Sciences	Hybrid Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Sonoma Instrument	Pre-amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
BACL	Active Loop Antenna	1313-1A	4041511	2025-08-10	2028-08-09
Narda	6 dB Attenuator	773-6	10690812-2-1	2024-11-08	2027-11-07
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2025-04-09	2026-04-08
				2026-03-16	2027-03-15
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2024-11-03	2027-11-02
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2025-04-09	2026-04-08
SELECTOR	Amplifier	EM18G40G	60726	2025-04-09	2026-04-08
				2026-03-16	2027-03-15
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
				2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
				2026-03-13	2027-03-12
MICRO-COAX	Coaxial Cable	Cable-13	013	2025-04-09	2026-04-08
				2026-03-13	2027-03-12
FMI	Horn Antenna	24245-AB	51	2025-04-09	2026-04-08
HP	Harmonic Mixer	11970U	2332A00837	2025-04-09	2026-04-08
SAGE	WR-15 Rectangular Gain Horn	SAR-2408-15-S2	13563-08	2025-04-09	2026-04-08
HP	Harmonic Mixer	11970V	611	2025-04-09	2026-04-08
SAGE	Horn Antenna	SAR-2309-10-S2	15633-04	2025-04-09	2026-04-08
HP	Harmonic Mixer	11970W	2521A00535	2025-04-09	2026-04-08
Narda	Attenuator	10dB	10dB-01	2025-04-08	2026-04-07
				2026-03-12	2027-03-11
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
				2026-03-13	2027-03-12

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2025-09-01	2026-08-31
Rohde & Schwarz	LISN	ENV216	101115	2025-04-08	2026-04-07
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2025-04-08	2026-04-07
MICRO-COAX	Coaxial Cable	Cable-15	015	2025-04-08	2026-04-07

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§1.1307 (b) (3) & §2.1091 – RF EXPOSURE

Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2 / f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

Result

Mode	Frequency Range (GHz)	★Tune up EIRP (dBm)	★Tune up ERP		Evaluation Distance (m)	ERP Limit (W)
			(dBm)	(W)		
SRD	24.035-24.225	1.76	-0.39	0.00091	0.2	0.768

Note:

1. For SRD, the power of EUT: E Field@3m is 96.96 dBuV/m, so the eirp = 1.76 dBm
2. $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.
3. The tune-up power provide by applicant.
4. $\text{ERP} = \text{EIRP} - 2.15$ dB.

Result: Compliance

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has four TX and four RX integrated PCB antennas, which were permanently attached to the EUT, fulfill the requirement of this section, please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) - AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

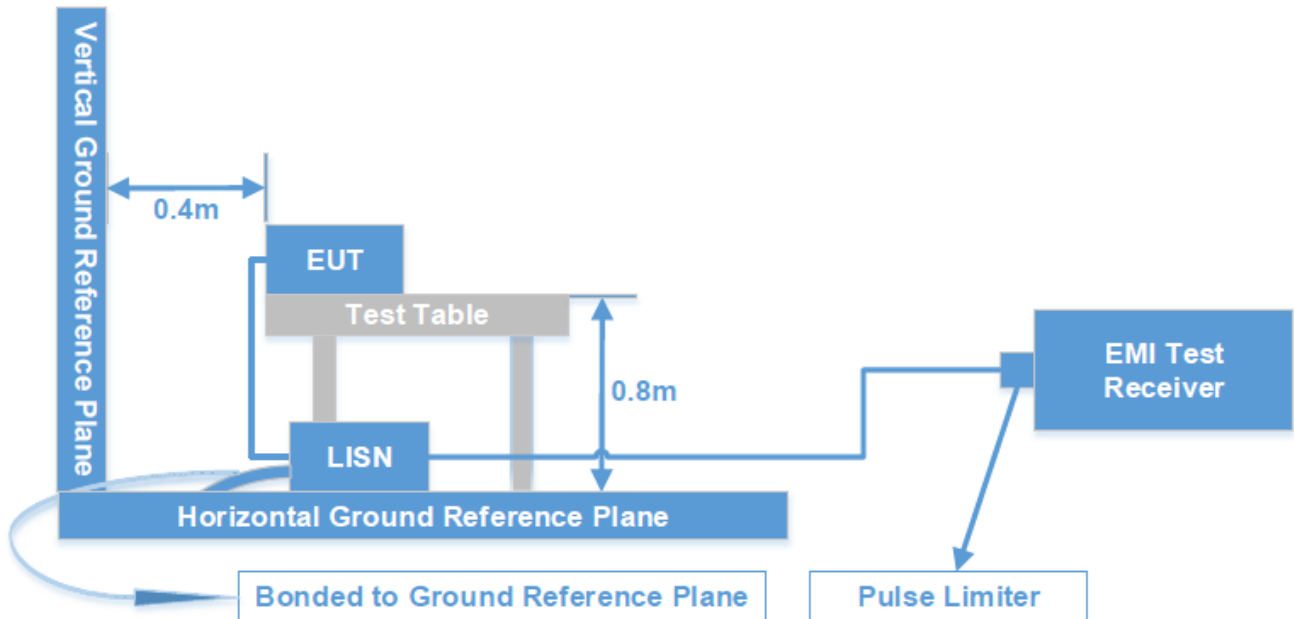

The measurement procedure of EUT setup is according with ANSI C63.10-2020. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW
150 kHz - 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2020 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dBμV) = Read level (dBμV) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dBμV) - Limit (dBμV)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS& OUT OF BAND EMISSION

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24GHz-24.25GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Test System Setup


9 kHz - 30 MHz:


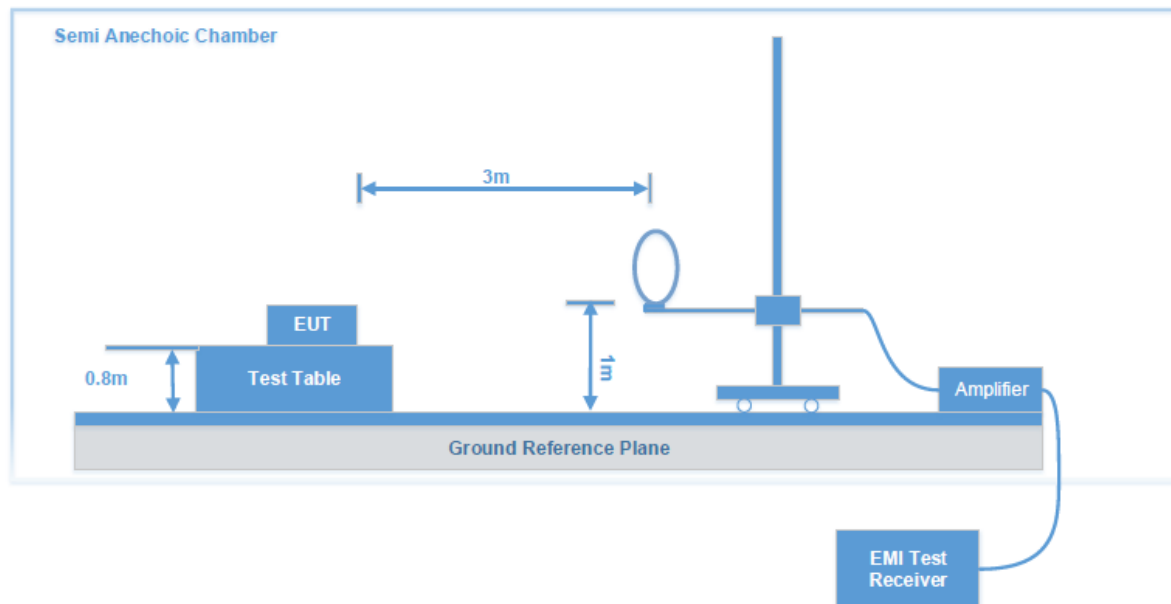


30 MHz - 1 GHz:

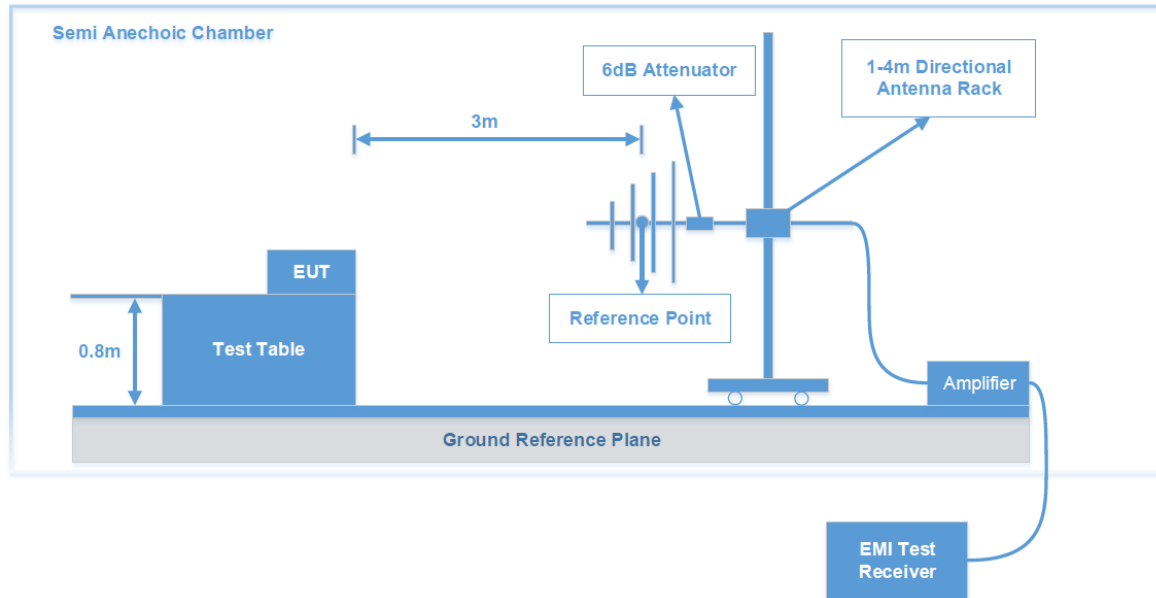

1 GHz - 18 GHz:

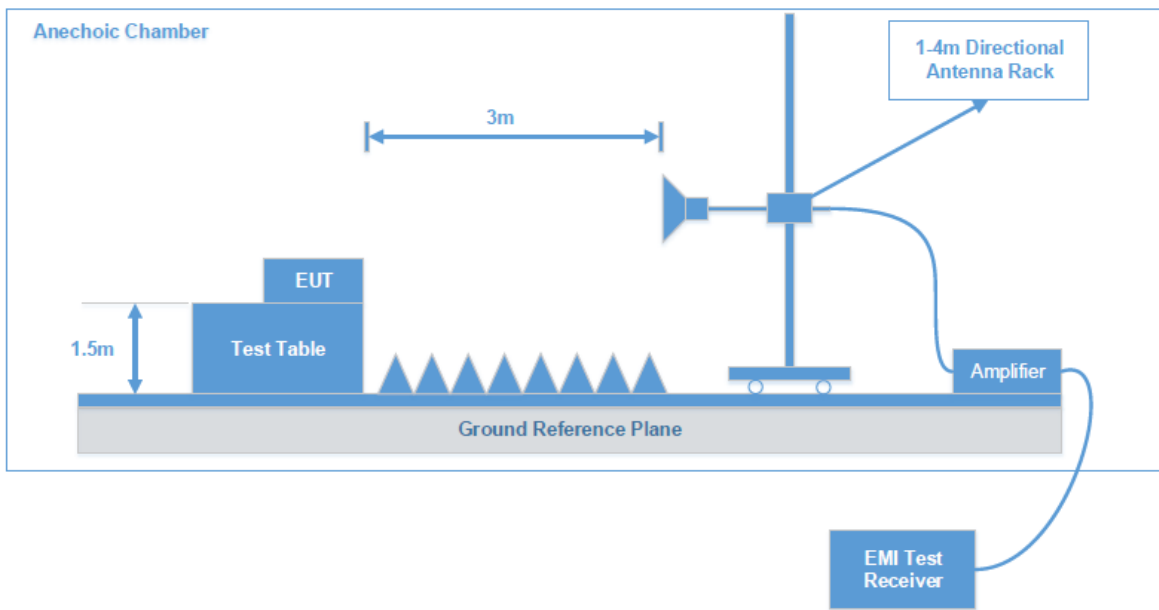

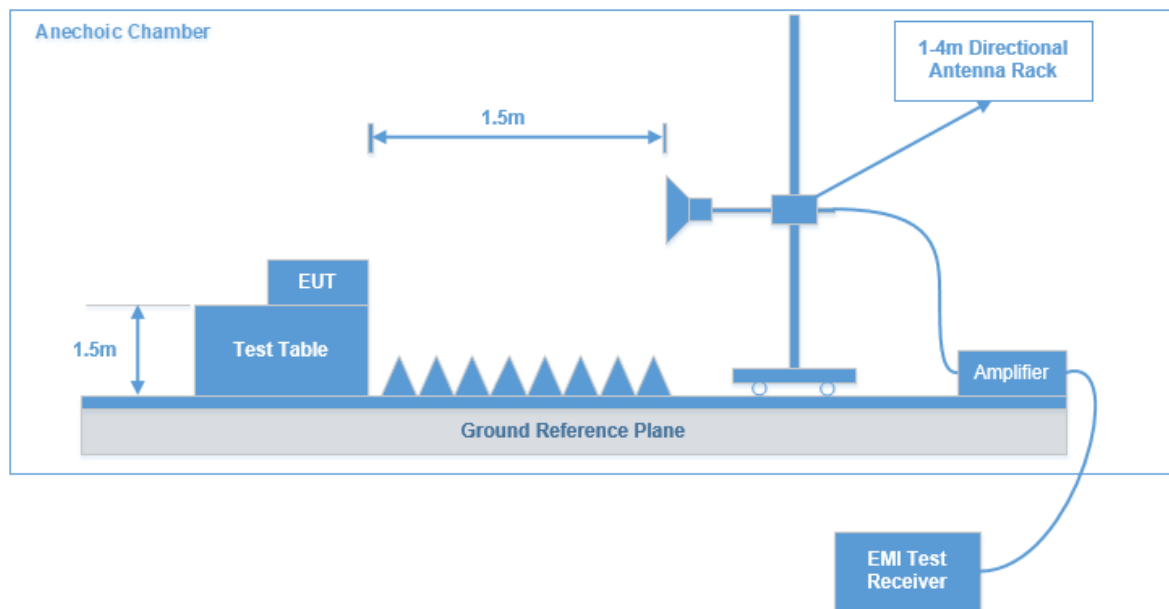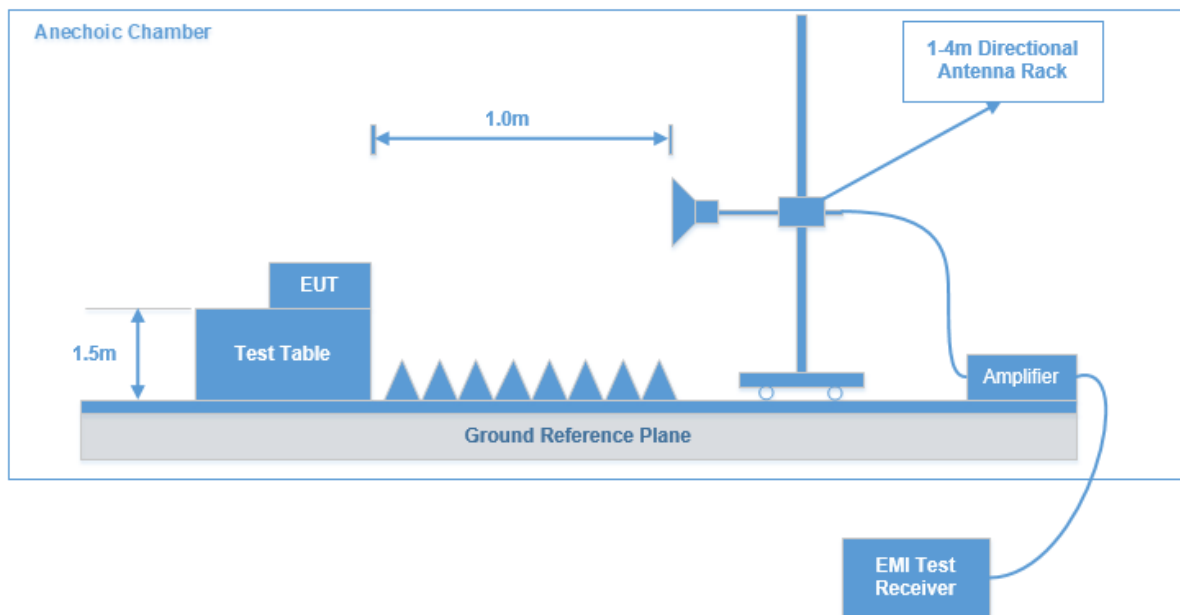18 GHz - 40 GHz:**40 GHz - 100 GHz:**

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Detector	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak	Peak
	/	/	120 kHz	QP	QP
1 GHz-40 GHz	1MHz	3 MHz	/	Peak	Peak
	1MHz	3 MHz	/	Average	Average
40 GHz-100 GHz	1MHz	3 MHz	/	Peak	Peak
	1MHz	10Hz	/	Peak	Average

Note: If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform a QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 10 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

Note: The QuasiPeak (dBμV/m), MaxPeak (dBμV/m), Average (dBμV/m) which shown in the data table are all Corrected Amplitude.

The “**Margin/ Over Limit**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)
Over Limit (dB) = Level (dBμV/m) - Limit (dBμV/m)

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249.

Test Data: See Appendix

The minimum test distance for the frequency range 40GHz-100GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance $R_m(m)$
FMI 24245-AB	40-60	37.5	0.56
SAGE SAR-2408-15-S2	50-75	37.5	0.70
SAGE SAR-2309-10-S2	75-100	22.5	0.34

Note: The test distances used were 1.0 m from 40 GHz to 100 GHz . It can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

FCC §15.215(c) - 20 dB BANDWIDTH TESTING


Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test System Setup

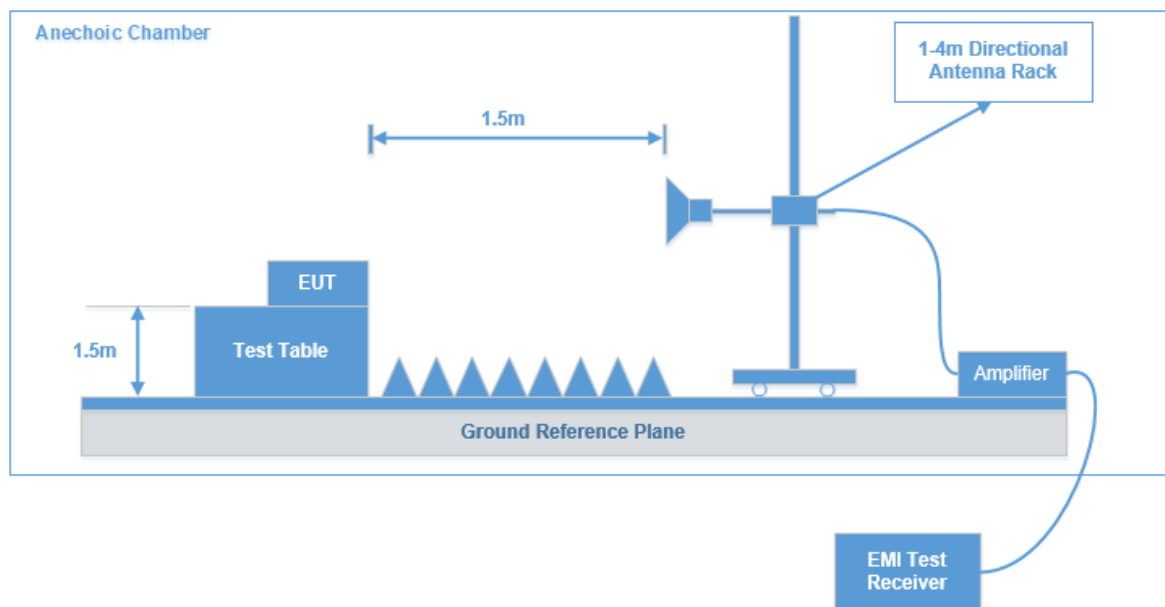

Test Data: See Appendix

APPENDIX - TEST DATA

CONDUCTED EMISSIONS


Environmental Conditions & Test Information

Test Date:	2026-01-06
Temperature:	15.6℃
Relative Humidity:	40 %
ATM Pressure:	103.1 kPa
Test Result:	Pass
Test Engineer:	Jack He

Configuration 1

Line:

Date: 2026-01-06

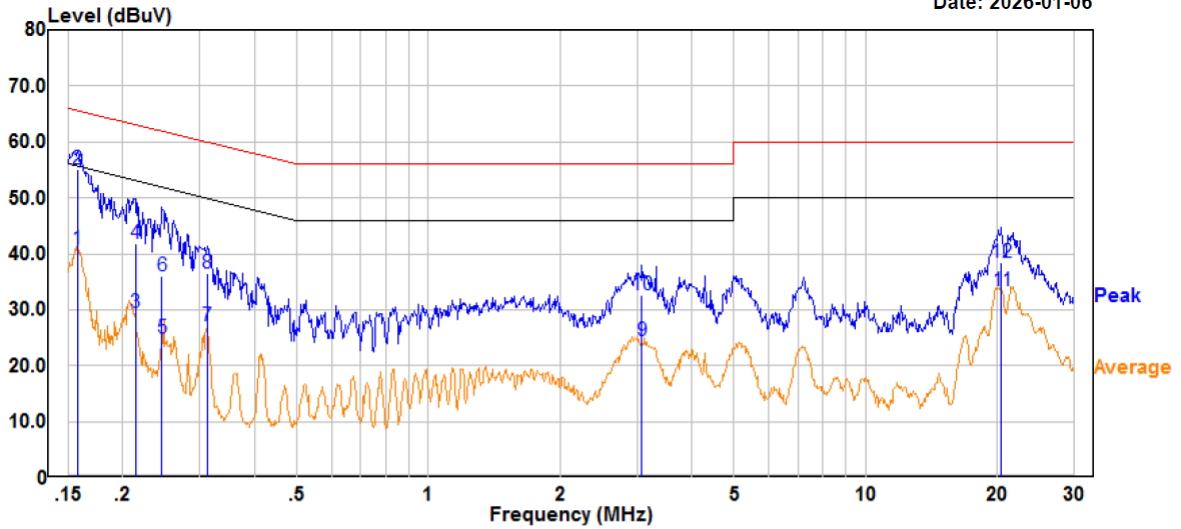


Trace: 1

Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
 : DET:Peak
 Project No. : RXM251120050
 Model : T218
 Phase : L
 Voltage : 120V/60Hz
 Mode : Transmitting
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
 Temperature : 15.6°C
 Humidity : 40%
 Atmospheric pressure: 103.1kPa
 Test Engineer : Jack He

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.158	20.40	20.42	40.82	55.59	-14.77	Average
2	0.158	34.80	20.42	55.22	65.59	-10.37	QP
3	0.214	9.11	20.45	29.56	53.06	-23.50	Average
4	0.214	21.41	20.45	41.86	63.06	-21.20	QP
5	0.246	4.40	20.41	24.81	51.90	-27.09	Average
6	0.246	15.50	20.41	35.91	61.90	-25.99	QP
7	0.312	6.60	20.37	26.97	49.91	-22.94	Average
8	0.312	16.10	20.37	36.47	59.91	-23.44	QP
9	3.075	4.10	20.24	24.34	46.00	-21.66	Average
10	3.075	12.30	20.24	32.54	56.00	-23.46	QP
11	20.438	12.90	20.51	33.41	50.00	-16.59	Average
12	20.438	18.00	20.51	38.51	60.00	-21.49	QP

Neutral:

Date: 2026-01-06

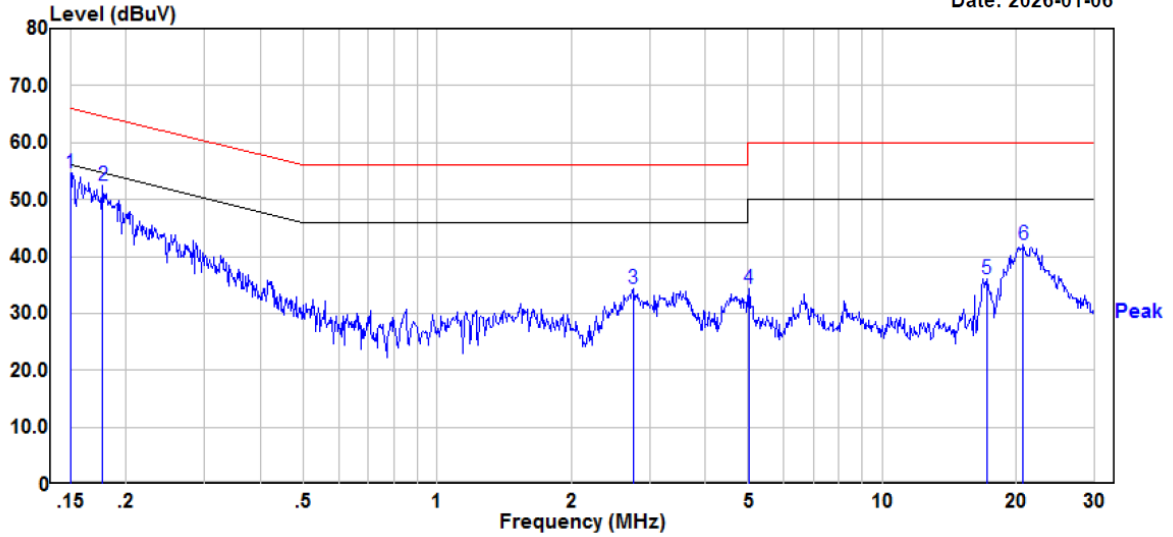


Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
 : DET:Peak
 Project No. : RXM251120050
 Model : T218
 Phase : N
 Voltage : 120V/60Hz
 Mode : Transmitting
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
 Temperature : 15.6°C
 Humidity : 40%
 Atmospheric pressure: 103.1kPa
 Test Engineer : Jack He

	Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.150	34.21	20.39	54.60	66.00	-11.40 Peak
2	0.177	32.04	20.41	52.45	64.63	-12.18 Peak
3	2.756	14.08	20.25	34.33	56.00	-21.67 Peak
4	5.012	14.28	20.16	34.44	60.00	-25.56 Peak
5	17.166	15.74	20.38	36.12	60.00	-23.88 Peak
6	20.746	21.53	20.54	42.07	60.00	-17.93 Peak

Configuration 2

Line:

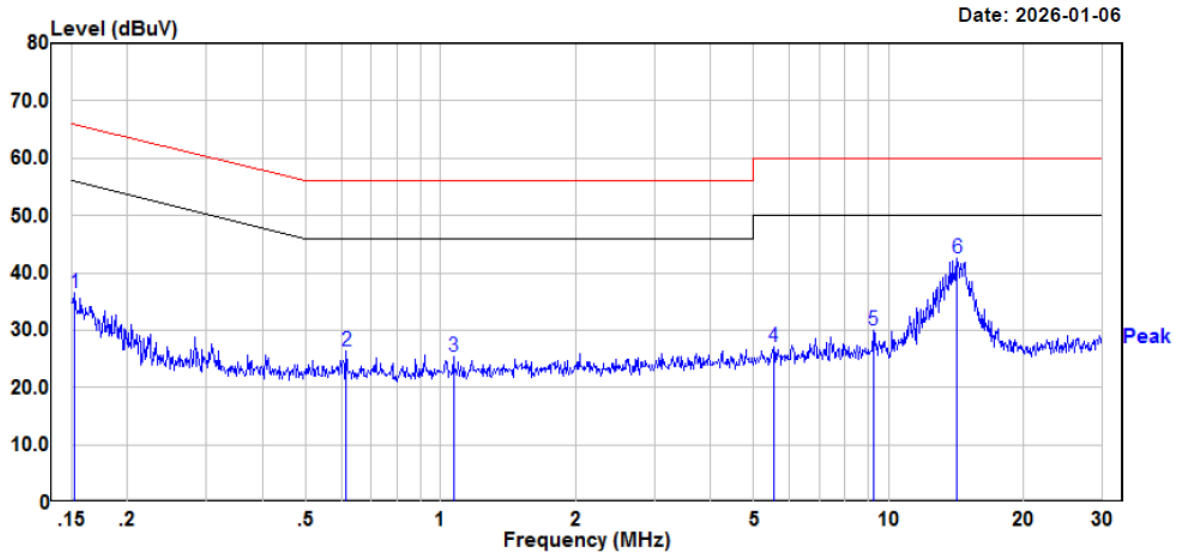


Site : CE
 Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Line
 : DET:Peak
 Project No. : RXM251120050
 Model : T218
 Phase : L
 Voltage : AC 120V
 Mode : Transmitting
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz, Sweep Time: Auto
 Temperature : 15.6°C
 Humidity : 40%
 Atmospheric pressure: 103.1kPa
 Test Engineer : Jack He

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.152	16.15	20.41	36.56	65.88	-29.32	Peak
2	0.615	6.08	20.22	26.30	56.00	-29.70	Peak
3	1.069	5.27	20.18	25.45	56.00	-30.55	Peak
4	5.537	7.06	20.13	27.19	60.00	-32.81	Peak
5	9.253	9.90	20.16	30.06	60.00	-29.94	Peak
6	14.204	22.17	20.26	42.43	60.00	-17.57	Peak

Neutral:

Date: 2026-01-06

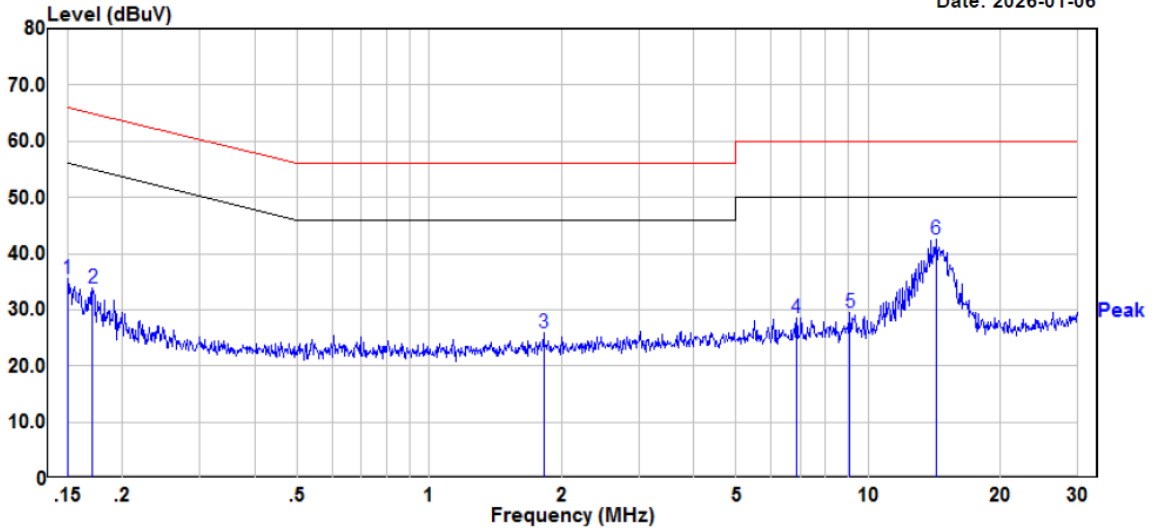

Site : CE
Condition : limit\FCC PART 15.207\FCC 15.207 QP.csv Neutral
: DET:Peak
Project No. : RXM251120050
Model : T218
Phase : N
Voltage : AC 120V
Mode : Transmitting
Test Equipment : ENV216,ESR3
Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
Temperature : 15.6℃
Humidity : 40%
Atmospheric pressure: 103.1kPa
Test Engineer : Jack He

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	15.04	20.39	35.43	66.00	-30.57	Peak
2	0.171	13.45	20.41	33.86	64.92	-31.06	Peak
3	1.822	5.63	20.27	25.90	56.00	-30.10	Peak
4	6.861	8.31	20.15	28.46	60.00	-31.54	Peak
5	9.070	9.25	20.18	29.43	60.00	-30.57	Peak
6	14.275	22.25	20.26	42.51	60.00	-17.49	Peak

RADIATED EMISSIONS**Environmental Conditions & Test Information**

Test Item:	RADIATED EMISSIONS				
	9kHz - 30MHz	30MHz - 1 GHz	1 GHz - 18 GHz	18 GHz - 40 GHz	40 GHz - 100 GHz
Test Date:	2025-12-10	2025-12-09	2025-12-10	2026-04-03	2025-12-19 to 2026-01-17
Temperature:	17.4 °C	17.4 °C	17.4 °C	22.1 °C	16.3-20.2 °C
Relative Humidity:	44 %	44 %	44 %	55 %	41-50 %
ATM Pressure:	102.5 kPa	102.7 kPa	102.5 kPa	103.1 kPa	102.1-102.6 kPa
Test Result:	Pass	Pass	Pass	Pass	Pass
Test Engineer:	Scarf Yang	Scarf Yang	Destine Hu	Hugh Wu	Hugh Wu

Test Item:	RADIATED EMISSIONS				
	Fundamental and band edge Test	/	/	/	/
Test Date:	2026-05-11	/	/	/	/
Temperature:	21.8 °C	/	/	/	/
Relative Humidity:	43 %	/	/	/	/
ATM Pressure:	101.2 kPa	/	/	/	/
Test Result:	Pass	/	/	/	/
Test Engineer:	Hugh Wu	/	/	/	/


Test Result: Compliant*EUT operation mode: Transmitting**After pre-scan in the X, Y and Z axes of orientation, the worst case X axes is below:*

Configuration-1


9 kHz-30MHz: (Transmitting)

Parallel (worst case):

9 kHz-150 kHz

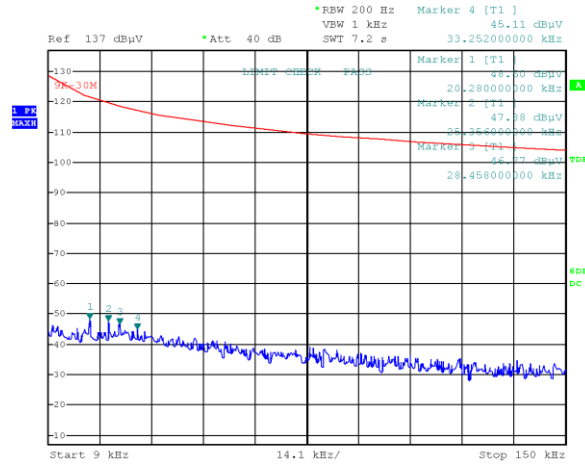

150 kHz -30 MHz

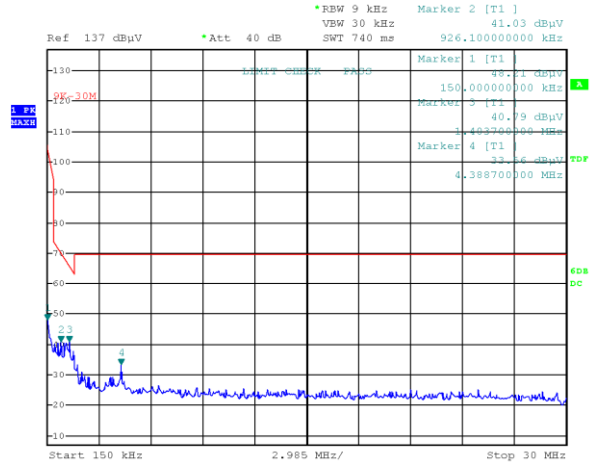

Project No.RXM251120050
Date: 10.DEC.2025 19:28:46

Tester:Scarfe Yang

Project No.RXM251120050
Date: 10.DEC.2025 19:35:14

Tester:Scarfe Yang

9 kHz-150 kHz:


Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m @ 3m)	Margin (dB)
0.02028	48.5	PK	-0.56	121.46	72.96
0.025356	47.88	PK	-0.59	119.52	71.64
0.028458	46.77	PK	-0.6	118.52	71.75
0.033252	45.11	PK	-1.13	117.17	72.06

150 kHz-30 MHz:

Frequency (MHz)	Corrected Amplitude (dBμV/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dBμV/m @ 3m)	Margin (dB)
0.150000	48.21	PK	-11.34	104.08	55.87
0.926100	41.03	PK	-27.09	68.27	27.24
1.403700	40.79	PK	-28.94	64.66	23.87
4.388700	33.56	PK	-31.97	69.54	35.98

30 MHz - 1 GHz: (Transmitting)**Common Information**

Project No: RXM251120050
EUT Model: T218
Test Mode: Transmitting
Standard: FCC Part 15.249
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW:100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 17.4°C
Humidity: 44%
Barometric Pressure: 102.7kPa
Test Engineer: Scarf Yang
Test Date: 2025/12/09

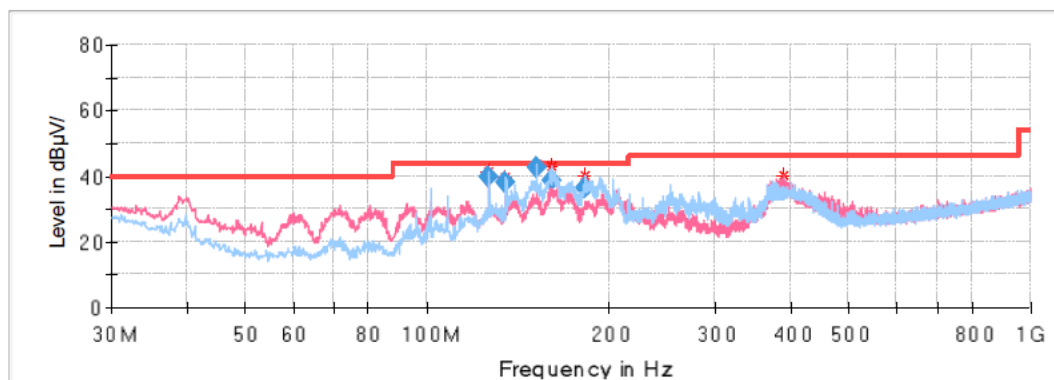**Final Result**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
126.636250	39.79	43.50	3.71	H	-11.0
135.123750	38.16	43.50	5.34	H	-11.1
151.977500	42.46	43.50	1.04	H	-11.8
161.192500	38.71	43.50	4.79	H	-12.2
183.260000	36.56	43.50	6.94	H	-12.8
390.961250	35.98	46.00	10.02	V	-8.2

Configuration 2


9 kHz-30MHz: (Transmitting)

Parallel (worst case):

9 kHz-150 kHz

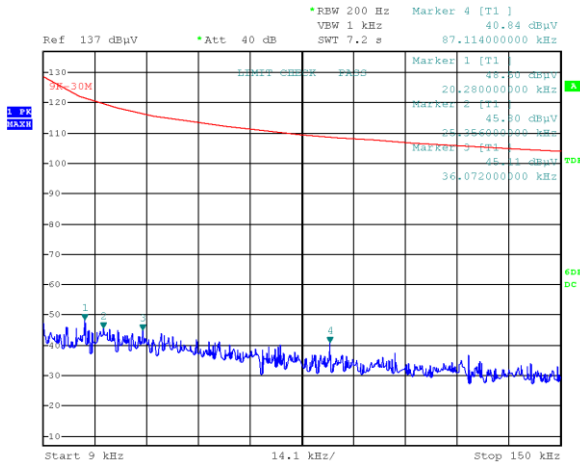

150 kHz -30 MHz

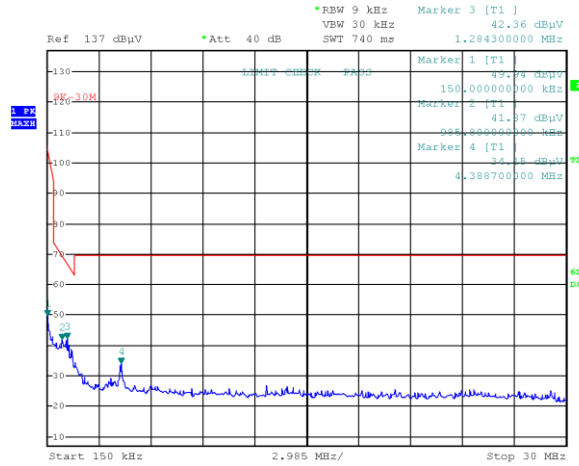

Project No.RXM251120050
 Date: 10.DEC.2025 19:13:58

Tester:Scarfe Yang

Project No.RXM251120050
 Date: 10.DEC.2025 19:23:24

Tester:Scarfe Yang

9 kHz-150 kHz:


Frequency	Corrected Amplitude	Detector	Corrected Factor	Limit	Margin
(MHz)	(dBμV/m) @3m	PK/QP/Ave.	(dB/m)	(dBμV/m @ 3m)	(dB)
0.020280	48.50	PK	-0.56	121.46	72.96
0.025356	45.80	PK	-0.59	119.52	73.72
0.036072	45.11	PK	-1.58	116.46	71.35
0.087114	40.84	PK	-7.99	108.80	67.96

150 kHz-30 MHz:

Frequency	Corrected Amplitude	Detector	Corrected Factor	Limit	Margin
(MHz)	(dBμV/m) @3m	PK/QP/Ave.	(dB/m)	(dBμV/m @ 3m)	(dB)
0.150000	49.94	PK	-11.34	104.08	54.14
0.985800	41.87	PK	-27.51	67.73	25.86
1.284300	42.36	PK	-28.55	65.43	23.07
4.388700	34.15	PK	-31.97	69.54	35.39

30 MHz - 1 GHz: (Transmitting)**Common Information**

Project No: RXM251120050
EUT Model: T218
Test Mode: Transmitting
Standard: FCC Part 15.249
Test Equipment: ESCI, JB3, 310N
Receiver Setting: RBW:100 kHz, VBW: 300 kHz, Sweep Time: Auto
Temperature: 17.4°C
Humidity: 44%
Barometric Pressure: 102.7kPa
Test Engineer: Scarf Yang
Test Date: 2025/12/09

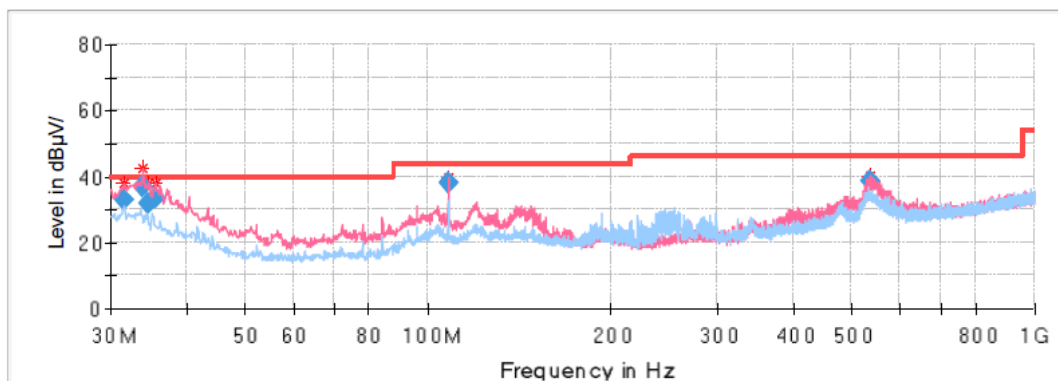
**Final_Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
31.576250	33.11	40.00	6.89	V	-6.1
33.880000	36.91	40.00	3.09	V	-7.7
34.607500	31.86	40.00	8.14	V	-7.7
35.456250	33.34	40.00	6.66	V	-7.8
107.963750	37.77	43.50	5.73	V	-12.9
535.612500	38.42	46.00	7.58	V	-4.9

1 GHz – 18 GHz**Common Information**

Project No.: RXM251120050
EUT Model: T218
Test Mode: Transmitting
Standard: FCC Part 15.249& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 17.4°C
Humidity: 44%
Atmospheric Pressure: 102.5kPa
Test Engineer: Destine Hu
Test Date: 2025/12/10


Full Spectrum

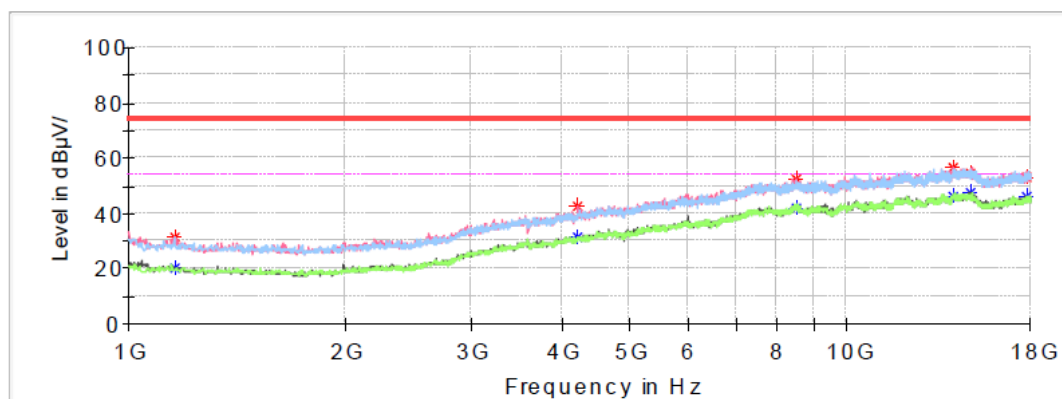**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1159.800000	31.81	---	74.00	42.19	H	-14.6
1159.800000	---	20.62	54.00	33.38	H	-14.6
4226.600000	42.78	---	74.00	31.22	V	-4.6
4226.600000	---	31.79	54.00	22.21	V	-4.6
8476.600000	---	41.72	54.00	12.28	V	4.6
8476.600000	52.57	---	74.00	21.43	V	4.6
14039.000000	56.65	---	74.00	17.35	V	11.2
14039.000000	---	46.04	54.00	7.96	V	11.2
14855.000000	54.85	---	74.00	19.15	H	10.8
14855.000000	---	47.52	54.00	6.48	H	10.8
17816.400000	---	46.25	54.00	7.75	H	11.3
17816.400000	53.49	---	74.00	20.51	H	11.3

18 GHz - 40 GHz:

Horizontal

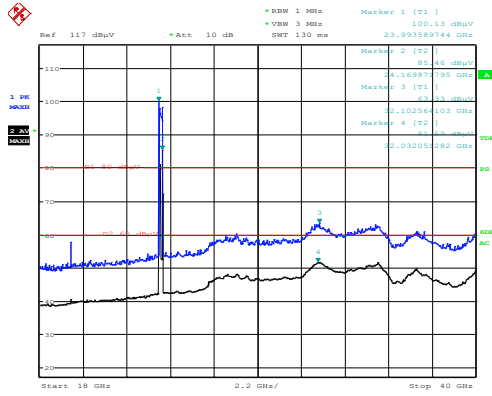

Vertical

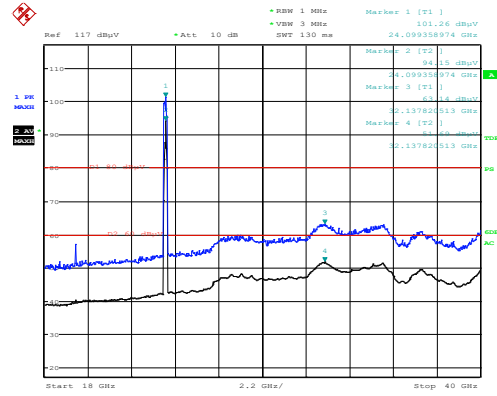

Project No :RXM251120050 Tester :Hugh Wu
Date: 3.APR.2026 09:46:56

Project No :RXM251120050 Tester :Hugh Wu
Date: 3.APR.2026 10:20:28


18 GHz - 40 GHz

Frequency (GHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Pol	Corr. (dB/m)
32.14	---	51.69	60	8.31	V	23.28
32.14	63.14	---	80	16.86	V	23.28
32.03	---	51.59	60	8.41	H	23.17
32.1	63.33	---	80	16.67	H	23.24


Note: Extrapolation factor of 20dB/decade from 3m to 1.5m
Distance extrapolation factor =20 log (specific distance [3m]/test distance [1.5m]) dB
Limit = Specific limits(dBμV/m) + distance extrapolation factor (6 dB)

40 GHz - 50 GHz:



Horizontal

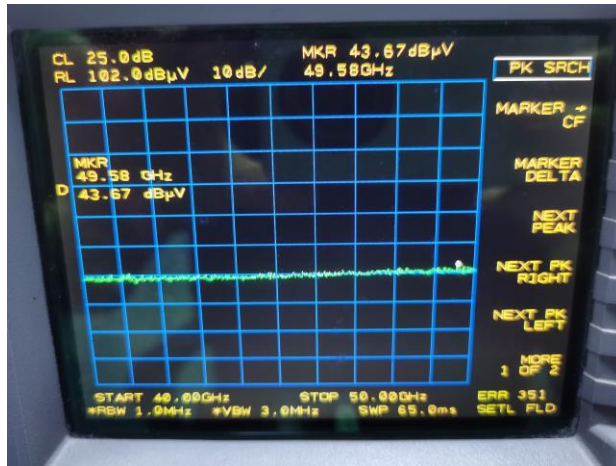

Vertical

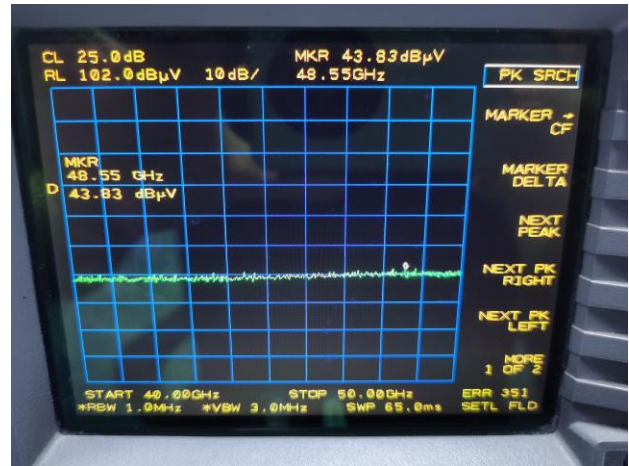

Frequency (GHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)
49.58	43.67	97.50	53.83	150	H	25
48.55	43.83	97.50	53.67	150	V	25

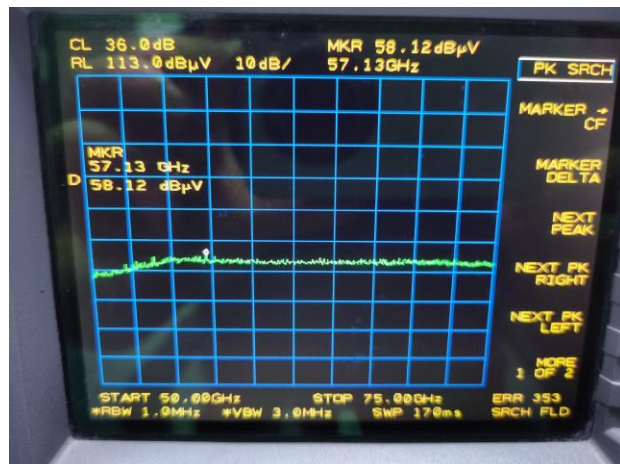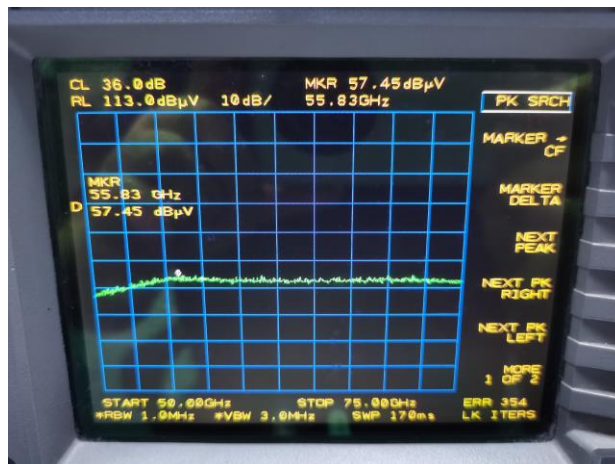50 GHz - 75 GHz:**Horizontal****Vertical**

Frequency (GHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)
57.13	58.12	83.54	25.42	150	H	36
55.83	57.45	83.54	26.09	200	V	36

Note: The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, when the measured peak level of the emissions is at least 20 dB below the peak emission limit, there's no need to record the measured AV level of the emissions.


Extrapolation factor of 20dB/decade from 3m to 1.0m

Distance extrapolation factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1m]})$ dB


Limit = Specific limits(dBμV/m) + distance extrapolation factor (9.54dB)

75 GHz - 100 GHz:

Horizontal

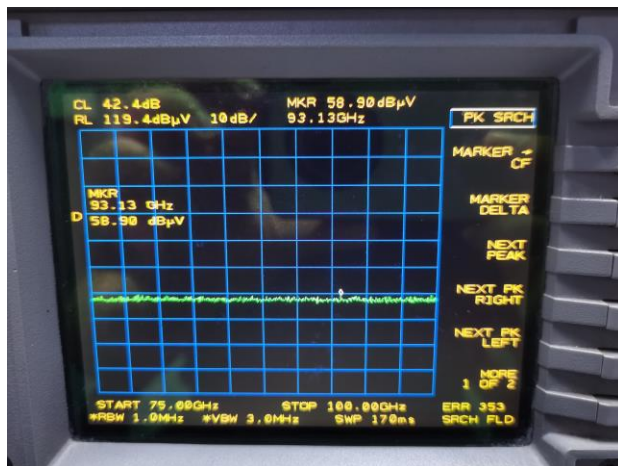

Vertical

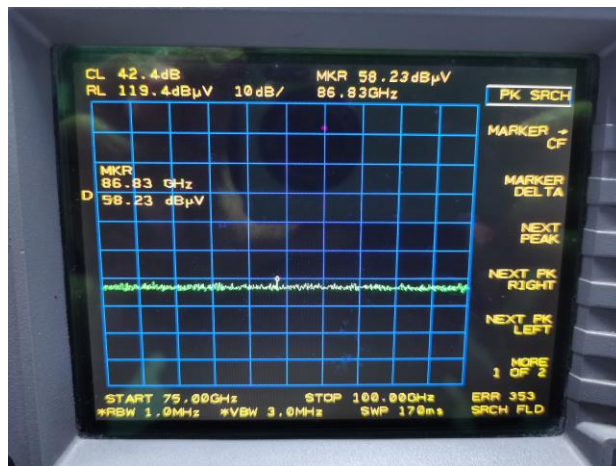

Frequency (GHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)
93.13	58.90	83.54	24.64	150	H	42.4
86.83	58.23	83.54	25.31	150	V	42.4

Note: The limit on the peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, when the measured peak level of the emissions is at least 20 dB below the peak emission limit, there's no need to record the measured AV level of the emissions.

Extrapolation factor of 20dB/decade from 3m to 1.0m


Distance extrapolation factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.0m]})$ dB

Limit = Specific limits(dBμV/m) + distance extrapolation factor (9.54dB)

Fundamental :

Fundamental

Horizontal

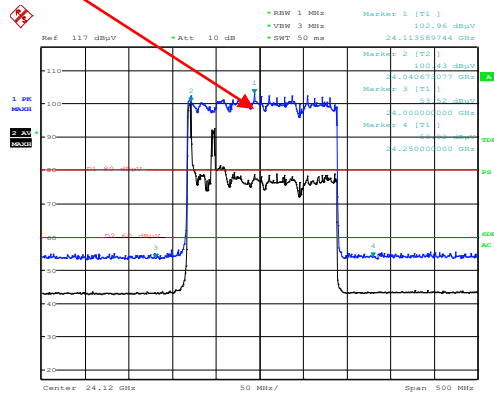


Project No : RXM251120050
Date: 11.MAY.2026 18:03:03

Tester :Hugh Wu

Vertical

Fundamental

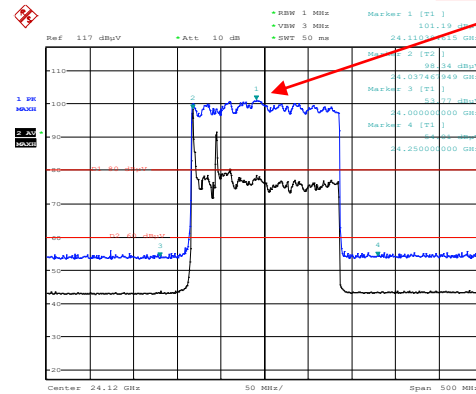


Project No : RXM251120050
Date: 11.MAY.2026 18:45:18

Tester :Hugh Wu

Band Edge:

Fundamental

Horizontal

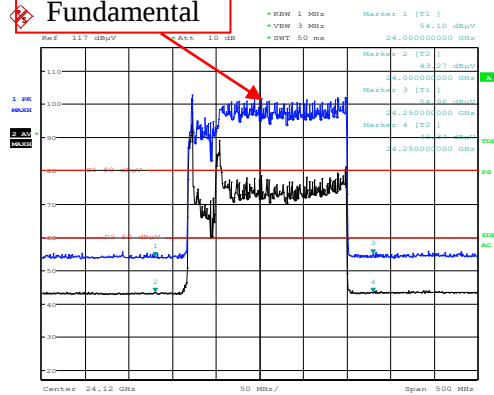


Project No : RXM251120050
Date: 11.MAY.2026 16:22:44

Tester :Hugh Wu

Vertical

Fundamental

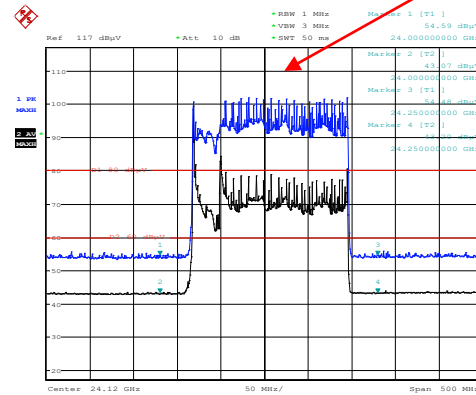

Project No : RXM251120050
Date: 11.MAY.2026 17:13:31

Tester :Hugh Wu

Note: The unit of limit and test level are dBμV/m.

Fundamental:

Pol	Average Field strength of fundamental@1.5M (dBuV/m)	Peak Field strength of fundamental @1.5M (dBuV/m)	Limit@1.5M (dBuV/m)	Margin (dB)
H	/	102.96	133.96	31.00
H	100.43	/	113.96	13.54
V	/	101.19	133.96	32.77
V	98.34	/	113.96	15.62

Band Edge:

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Corr. (dB/m)
Left							
24000	54.10	---	80	25.90	150	H	9.4
24000	---	43.27	60	16.73	150	H	9.4
Right							
24250	54.96	---	80	25.04	150	H	9.4
24250	---	43.34	60	16.66	150	H	9.4

Note: Extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB

Limit = Specific limits(dBμV/m) + distance extrapolation factor (6 dB)

Maximum Field Strength of Fundamental (specific distance [3m]) = Peak Field strength of fundamental (test distance [1.5m])-distance extrapolation factor (6 dB), So Maximum Field Strength of Fundamental is 96.96 dBμV/m at 3m.

20 dB BANDWIDTH TESTING


Environmental Conditions & Test Information

Test Date:	2026-05-11
Temperature:	21.8°C
Relative Humidity:	43 %
ATM Pressure:	101.2 kPa
Test Result:	Pass
Test Engineer:	Hugh Wu

Test Result: Compliant.

Test Mode: Transmitting

Mode	20 dB BANDWIDTH (MHz)	F _L (GHz)	Limit (GHz)	F _H (GHz)	Limit (GHz)
Sweep	204.33	24.029	24	24.233	24.25

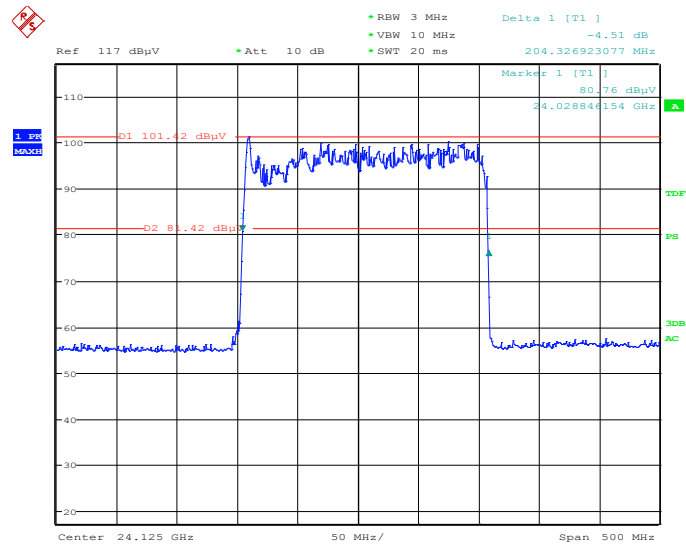

Project No :RXM251120050 Tester :Hugh Wu
Date: 11.MAY.2026 19:33:22

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS, EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

*******END OF REPORT*******