




|                          |               |                    |                |               |                |                    |        |          |            |
|--------------------------|---------------|--------------------|----------------|---------------|----------------|--------------------|--------|----------|------------|
| EUT:                     |               | Tablet             |                |               |                | Model Name.:       |        | DT1      |            |
| Temperature:             |               | 20 °C              |                |               |                | Relative Humidity: |        | 48%      |            |
| Pressure:                |               | 1010 hPa           |                |               |                | Test Voltage:      |        | DC 5V    |            |
| Test Mode:               |               | TX(5.2G)-802.11n40 |                |               |                |                    |        |          |            |
| Frequency                | Meter Reading | Cable Loss         | Antenna Factor | Preamp Factor | Emission Level | Limits             | Margin | Detector | Comment    |
| (MHz)                    | (dBμV)        | (dB)               | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m)           | (dB)   | Type     |            |
| 5.2G WIFI-802.11n40 Mode |               |                    |                |               |                |                    |        |          |            |
| 4500                     | 55.32         | 5.2                | 35.6           | 44.2          | 51.92          | 74                 | -22.08 | Pk       | Horizontal |
| 4500                     | 46.89         | 5.2                | 35.6           | 44.2          | 43.49          | 54                 | -10.51 | AV       | Horizontal |
| 4500                     | 59.01         | 5.2                | 35.6           | 44.2          | 55.61          | 74                 | -18.39 | Pk       | Vertical   |
| 4500                     | 48.06         | 5.2                | 35.6           | 44.2          | 44.66          | 54                 | -9.34  | AV       | Vertical   |
| 5150                     | 68.27         | 5.36               | 35.66          | 44.22         | 65.07          | 74                 | -8.93  | Pk       | Horizontal |
| 5150                     | 46.47         | 5.36               | 35.66          | 44.22         | 43.27          | 54                 | -10.73 | AV       | Horizontal |
| 5150                     | 56.11         | 5.36               | 35.66          | 44.22         | 52.91          | 74                 | -21.09 | Pk       | Vertical   |
| 5150                     | 40.07         | 5.36               | 35.66          | 44.22         | 36.87          | 54                 | -17.13 | AV       | Vertical   |
| 5350                     | 65.64         | 5.68               | 35.68          | 44.22         | 62.78          | 74                 | -11.22 | Pk       | Vertical   |
| 5350                     | 47.49         | 5.68               | 35.68          | 44.22         | 44.63          | 54                 | -9.37  | AV       | Vertical   |
| 5350                     | 62.73         | 5.68               | 35.68          | 44.22         | 59.87          | 74                 | -14.13 | Pk       | Horizontal |
| 5350                     | 44.18         | 5.68               | 35.68          | 44.22         | 41.32          | 54                 | -12.68 | AV       | Horizontal |


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:(1)Emission Level=Antenna Factor+Cable Loss+Read Level-Preamplifier Factor  
(2)When PK value is lower than the Average value limit,average don't record.


### B4-11n40 -Low: Horizontal

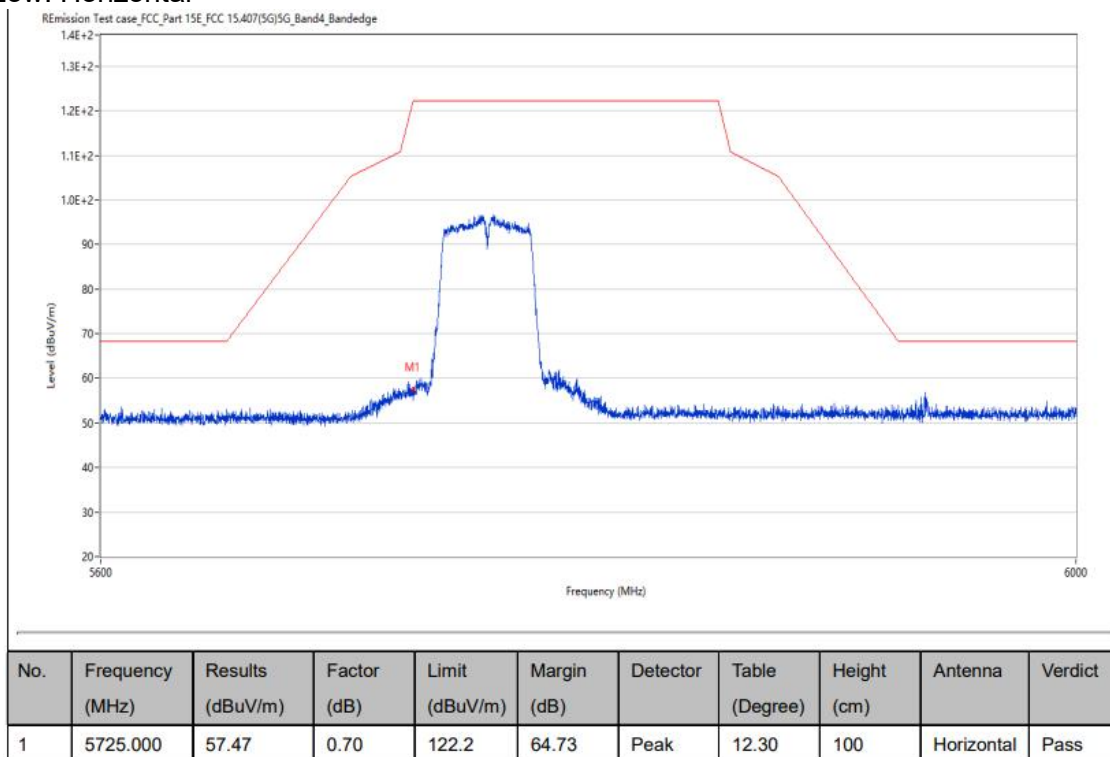


### B4-11n40 -Low: Vertical

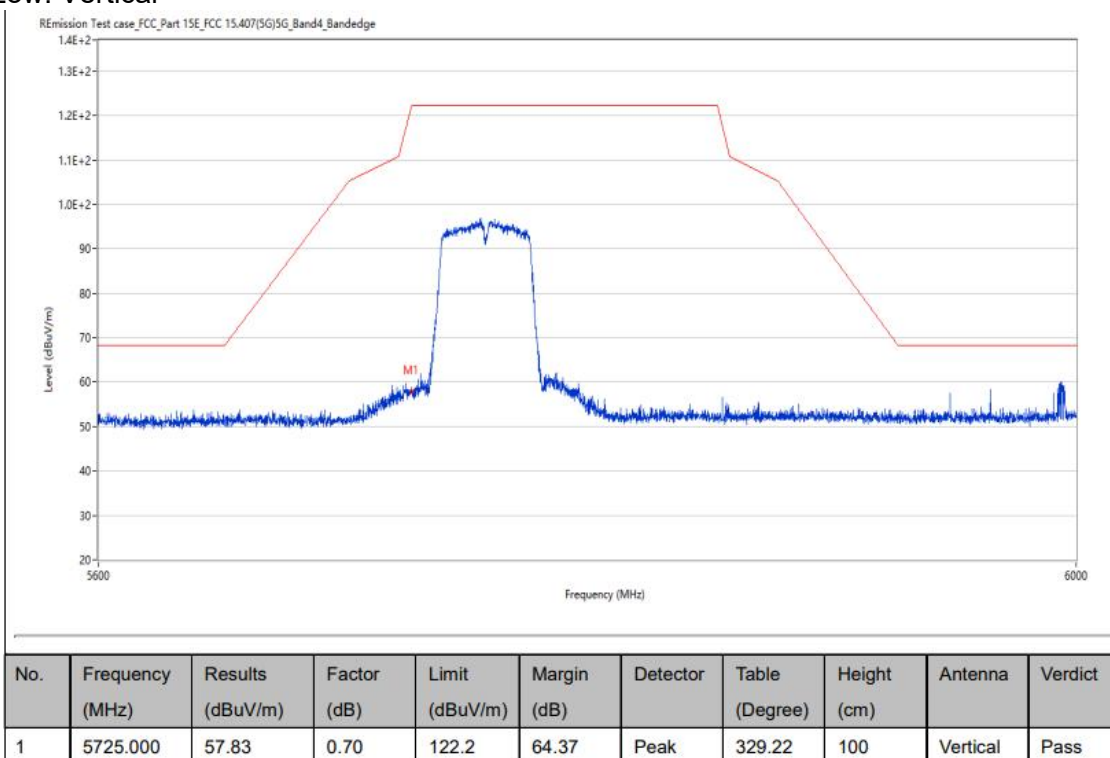

### B4-11n40 -High : Horizontal

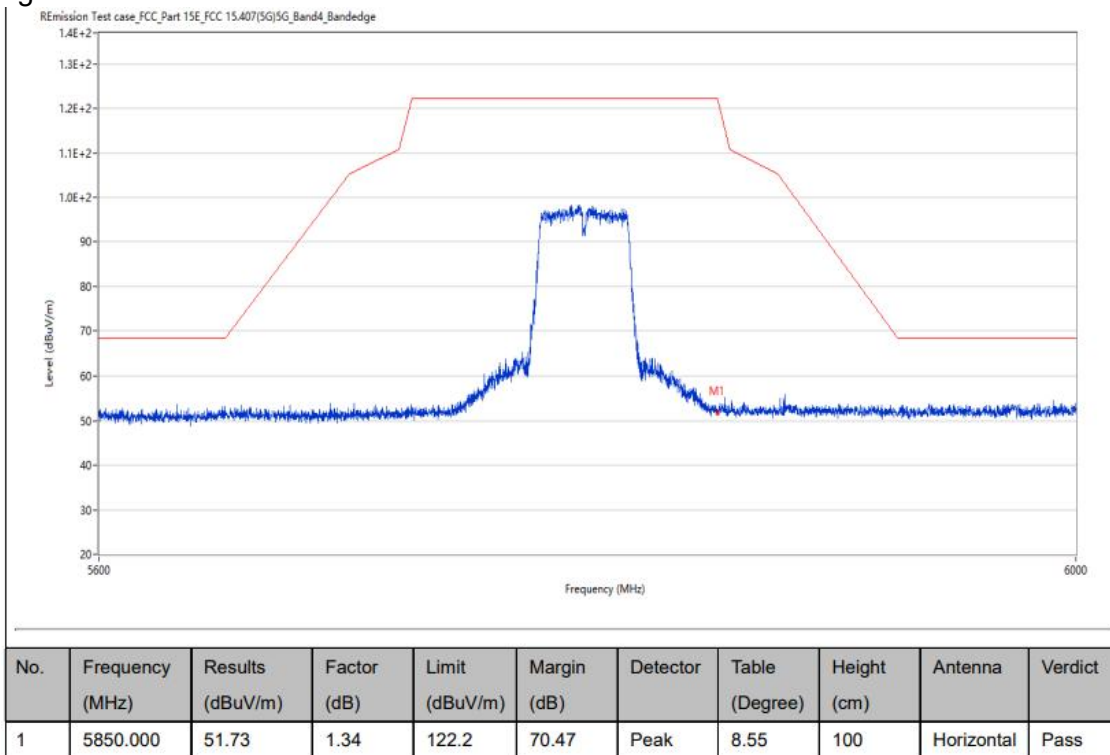

### B4-11n40 -High: Vertical

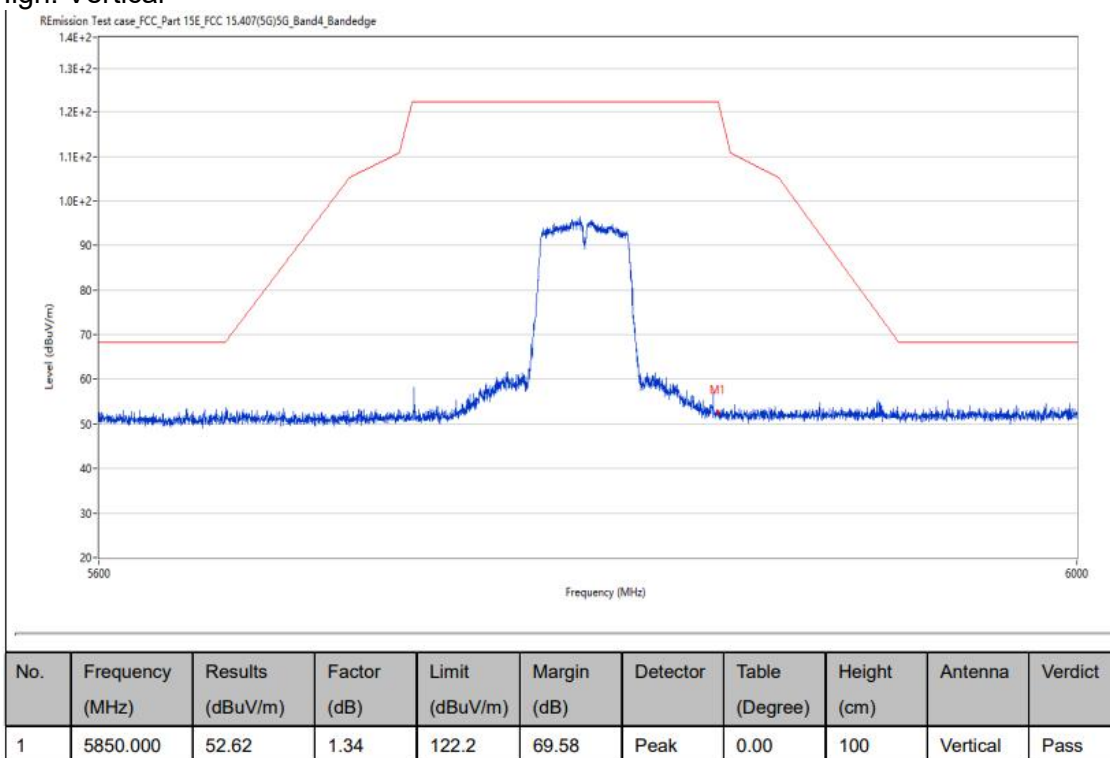




|                           |               |                     |                |               |                |                    |        |          |            |
|---------------------------|---------------|---------------------|----------------|---------------|----------------|--------------------|--------|----------|------------|
| EUT:                      |               | Tablet              |                |               |                | Model Name.:       |        | DT1      |            |
| Temperature:              |               | 20 °C               |                |               |                | Relative Humidity: |        | 48%      |            |
| Pressure:                 |               | 1010 hPa            |                |               |                | Test Voltage:      |        | DC 5V    |            |
| Test Mode:                |               | TX(5.2G)-802.11ac20 |                |               |                |                    |        |          |            |
| Frequency                 | Meter Reading | Cable Loss          | Antenna Factor | Preamp Factor | Emission Level | Limits             | Margin | Detector | Comment    |
| (MHz)                     | (dBμV)        | (dB)                | dB/m           | (dB)          | (dBμV/m)       | (dBμV/m)           | (dB)   | Type     |            |
| 5.2G WIFI-802.11ac20 Mode |               |                     |                |               |                |                    |        |          |            |
| 4500                      | 55.51         | 5.2                 | 35.6           | 44.2          | 52.11          | 74                 | -21.89 | Pk       | Horizontal |
| 4500                      | 46.34         | 5.2                 | 35.6           | 44.2          | 42.94          | 54                 | -11.06 | AV       | Horizontal |
| 4500                      | 59.73         | 5.2                 | 35.6           | 44.2          | 56.33          | 74                 | -17.67 | Pk       | Vertical   |
| 4500                      | 48.93         | 5.2                 | 35.6           | 44.2          | 45.53          | 54                 | -8.47  | AV       | Vertical   |
| 5150                      | 68.07         | 5.36                | 35.66          | 44.22         | 64.87          | 74                 | -9.13  | Pk       | Horizontal |
| 5150                      | 46.27         | 5.36                | 35.66          | 44.22         | 43.07          | 54                 | -10.93 | AV       | Horizontal |
| 5150                      | 56.84         | 5.36                | 35.66          | 44.22         | 53.64          | 74                 | -20.36 | Pk       | Vertical   |
| 5150                      | 40.11         | 5.36                | 35.66          | 44.22         | 36.91          | 54                 | -17.09 | AV       | Vertical   |
| 5350                      | 65.15         | 5.68                | 35.68          | 44.22         | 62.29          | 74                 | -11.71 | Pk       | Vertical   |
| 5350                      | 47.31         | 5.68                | 35.68          | 44.22         | 44.45          | 54                 | -9.55  | AV       | Vertical   |
| 5350                      | 62.64         | 5.68                | 35.68          | 44.22         | 59.78          | 74                 | -14.22 | Pk       | Horizontal |
| 5350                      | 44.47         | 5.68                | 35.68          | 44.22         | 41.61          | 54                 | -12.39 | AV       | Horizontal |


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:(1)Emission Level=Antenna Factor+Cable Loss+Read Level-Preamplifier Factor  
(2)When PK value is lower than the Average value limit,average don't record.


### B4-11ac20 -Low: Horizontal

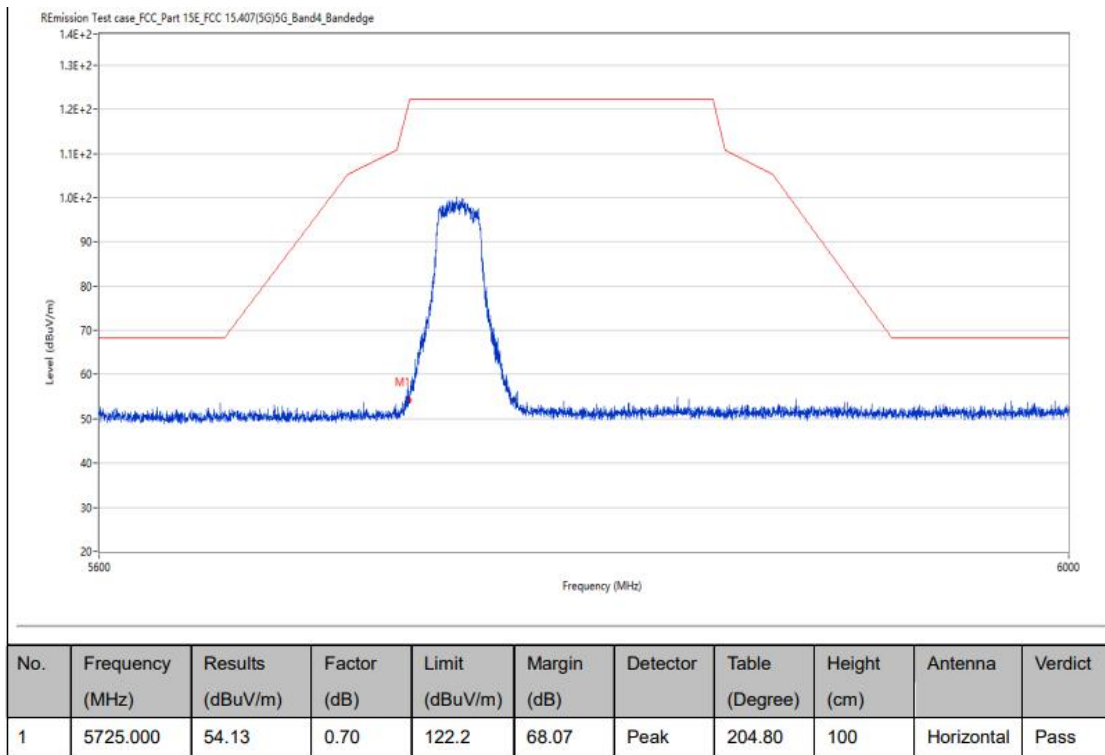


### B4-11ac20 -Low: Vertical

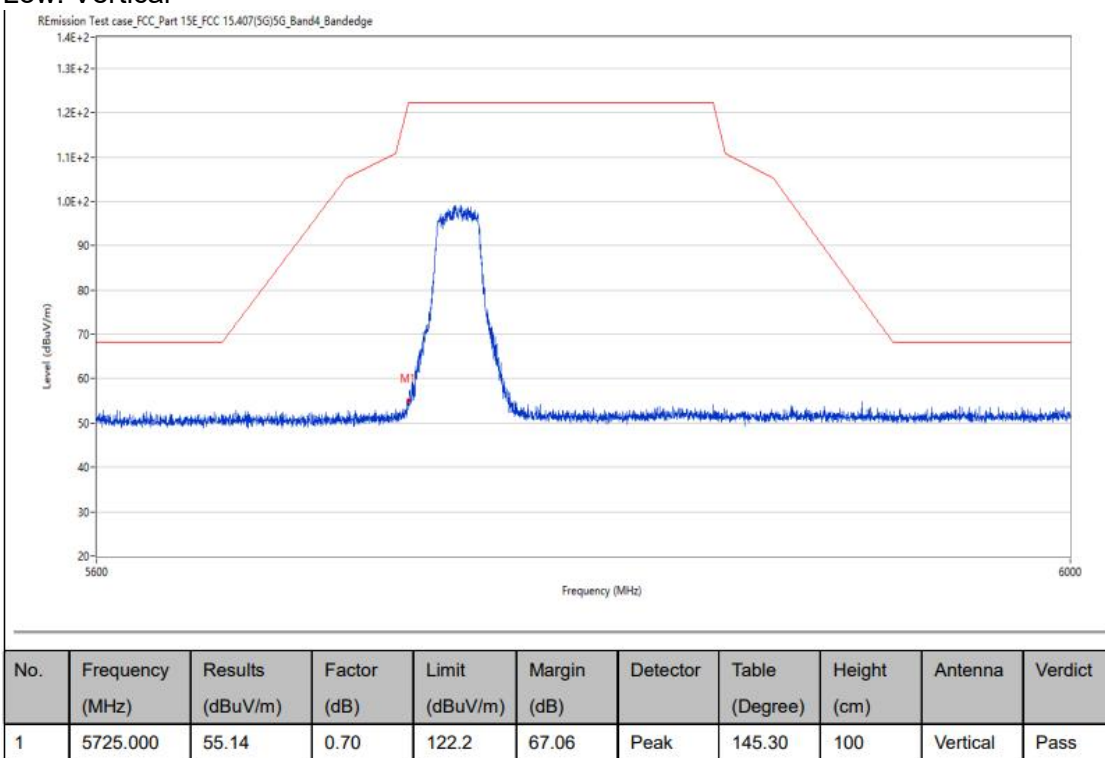

### B4-11ac20 High : Horizontal

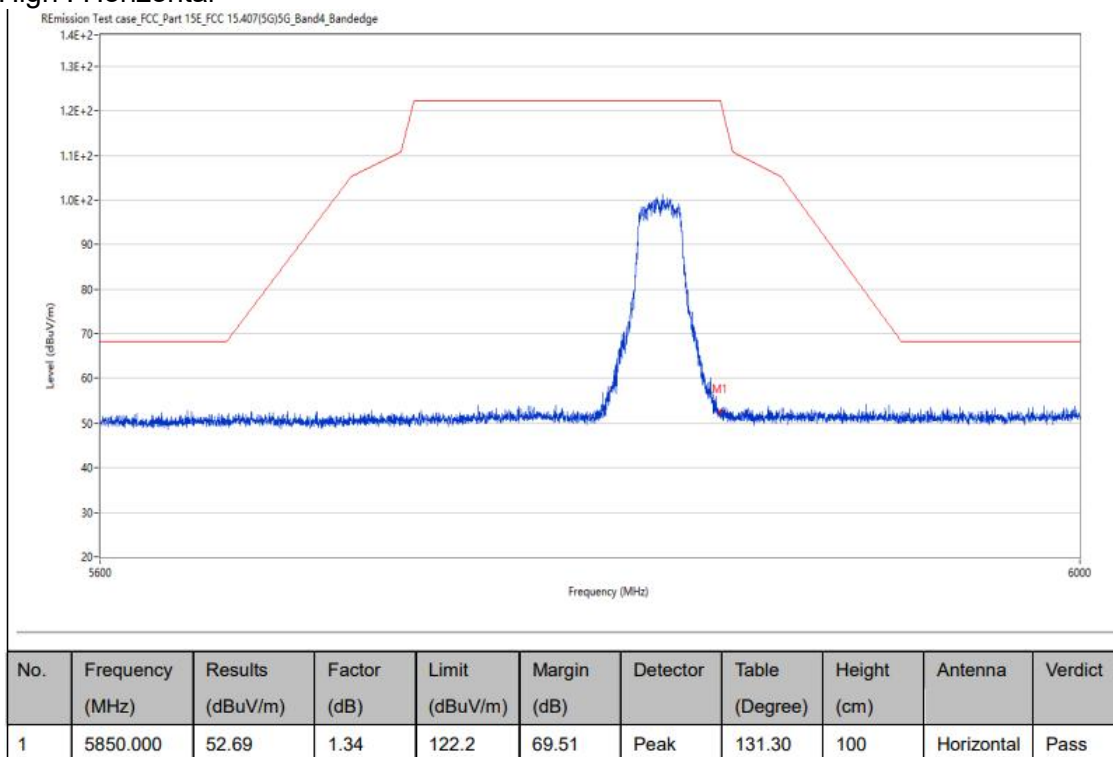

### B4-11ac20 -High : Vertical

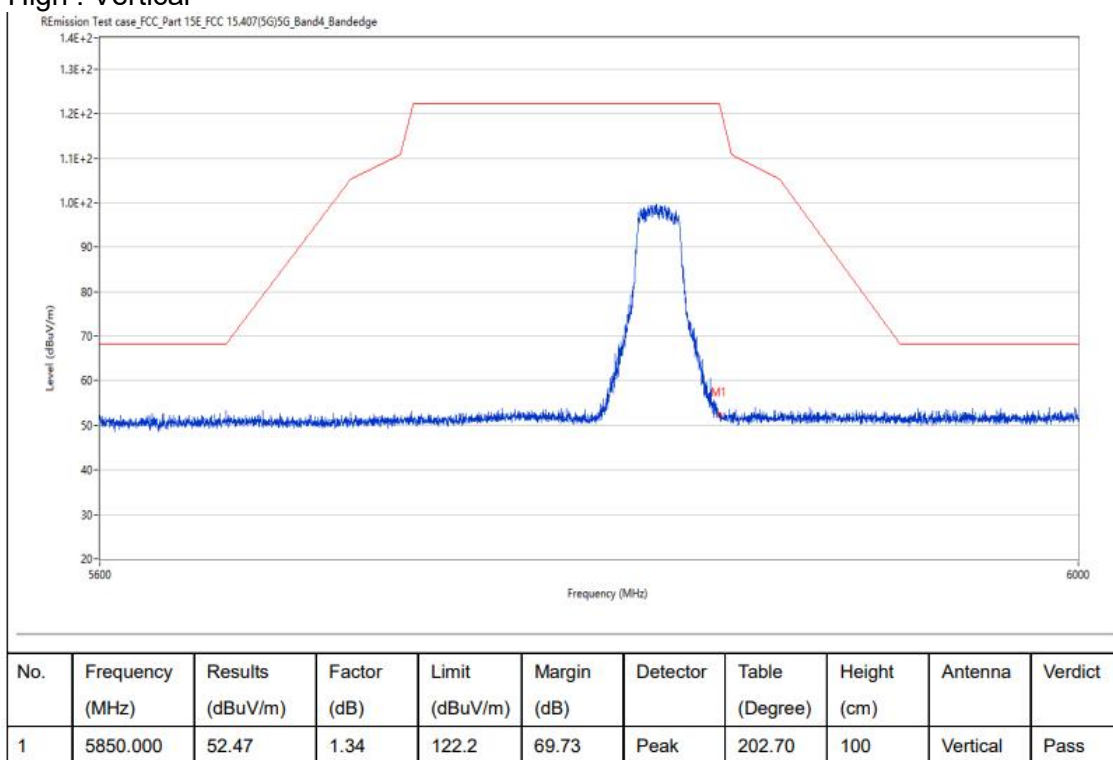




|                           |               |                     |                |                     |                |                    |        |          |            |
|---------------------------|---------------|---------------------|----------------|---------------------|----------------|--------------------|--------|----------|------------|
| EUT:                      |               | Tablet              |                |                     |                | Model Name.:       |        | DT1      |            |
| Temperature:              |               | 20 °C               |                |                     |                | Relative Humidity: |        | 48%      |            |
| Pressure:                 |               | 1010 hPa            |                |                     |                | Test Voltage:      |        | DC 5V    |            |
| Test Mode:                |               | TX(5.2G)-802.11ac40 |                |                     |                |                    |        |          |            |
| Frequency                 | Meter Reading | Cable Loss          | Antenna Factor | Preamplifier Factor | Emission Level | Limits             | Margin | Detector | Comment    |
| (MHz)                     | (dBμV)        | (dB)                | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m)           | (dB)   | Type     |            |
| 5.2G WIFI-802.11ac40 Mode |               |                     |                |                     |                |                    |        |          |            |
| 4500                      | 55.13         | 5.2                 | 35.6           | 44.2                | 51.73          | 74                 | -22.27 | Pk       | Horizontal |
| 4500                      | 46.06         | 5.2                 | 35.6           | 44.2                | 42.66          | 54                 | -11.34 | AV       | Horizontal |
| 4500                      | 59.27         | 5.2                 | 35.6           | 44.2                | 55.87          | 74                 | -18.13 | Pk       | Vertical   |
| 4500                      | 48.17         | 5.2                 | 35.6           | 44.2                | 44.77          | 54                 | -9.23  | AV       | Vertical   |
| 5150                      | 68.19         | 5.36                | 35.66          | 44.22               | 64.99          | 74                 | -9.01  | Pk       | Horizontal |
| 5150                      | 46.34         | 5.36                | 35.66          | 44.22               | 43.14          | 54                 | -10.86 | AV       | Horizontal |
| 5150                      | 56.25         | 5.36                | 35.66          | 44.22               | 53.05          | 74                 | -20.95 | Pk       | Vertical   |
| 5150                      | 40.33         | 5.36                | 35.66          | 44.22               | 37.13          | 54                 | -16.87 | AV       | Vertical   |
| 5350                      | 65.38         | 5.68                | 35.68          | 44.22               | 62.52          | 74                 | -11.48 | Pk       | Vertical   |
| 5350                      | 47.49         | 5.68                | 35.68          | 44.22               | 44.63          | 54                 | -9.37  | AV       | Vertical   |
| 5350                      | 62.52         | 5.68                | 35.68          | 44.22               | 59.66          | 74                 | -14.34 | Pk       | Horizontal |
| 5350                      | 44.46         | 5.68                | 35.68          | 44.22               | 41.60          | 54                 | -12.40 | AV       | Horizontal |


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:(1)Emission Level=Antenna Factor+Cable Loss+Read Level-Preamplifier Factor  
(2)When PK value is lower than the Average value limit,average don't record.


### B4-11ac40 Low: Horizontal

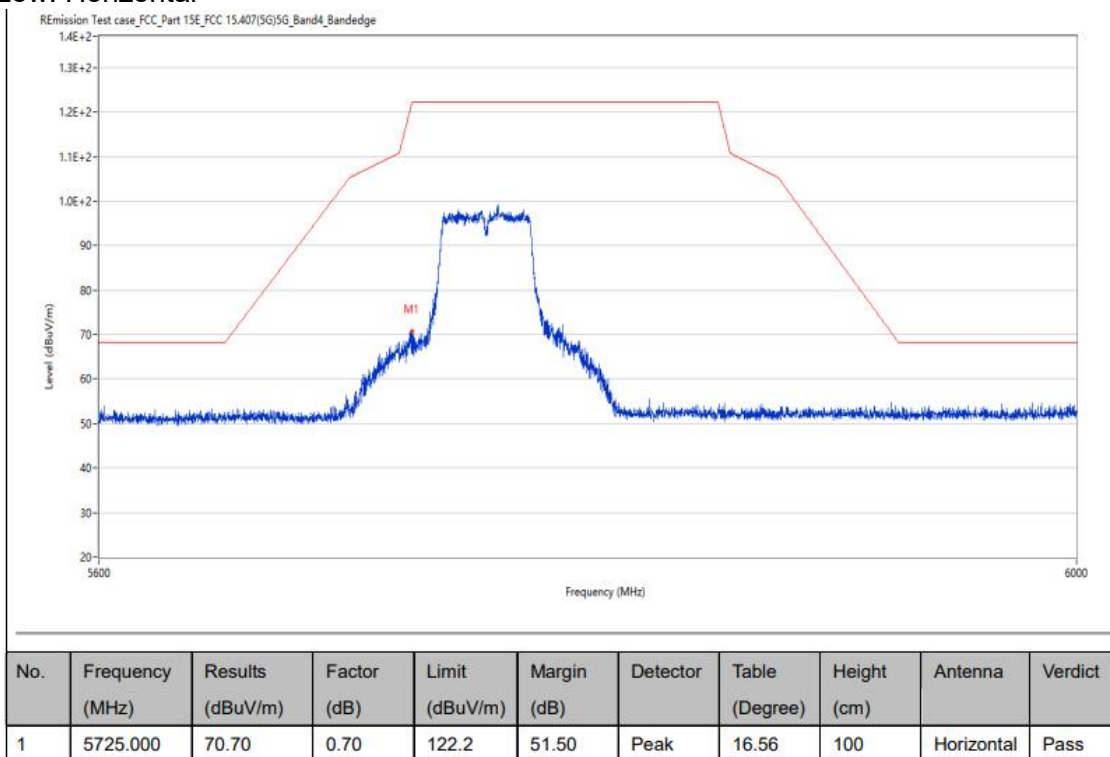

### B4-11ac40 Low: Vertical

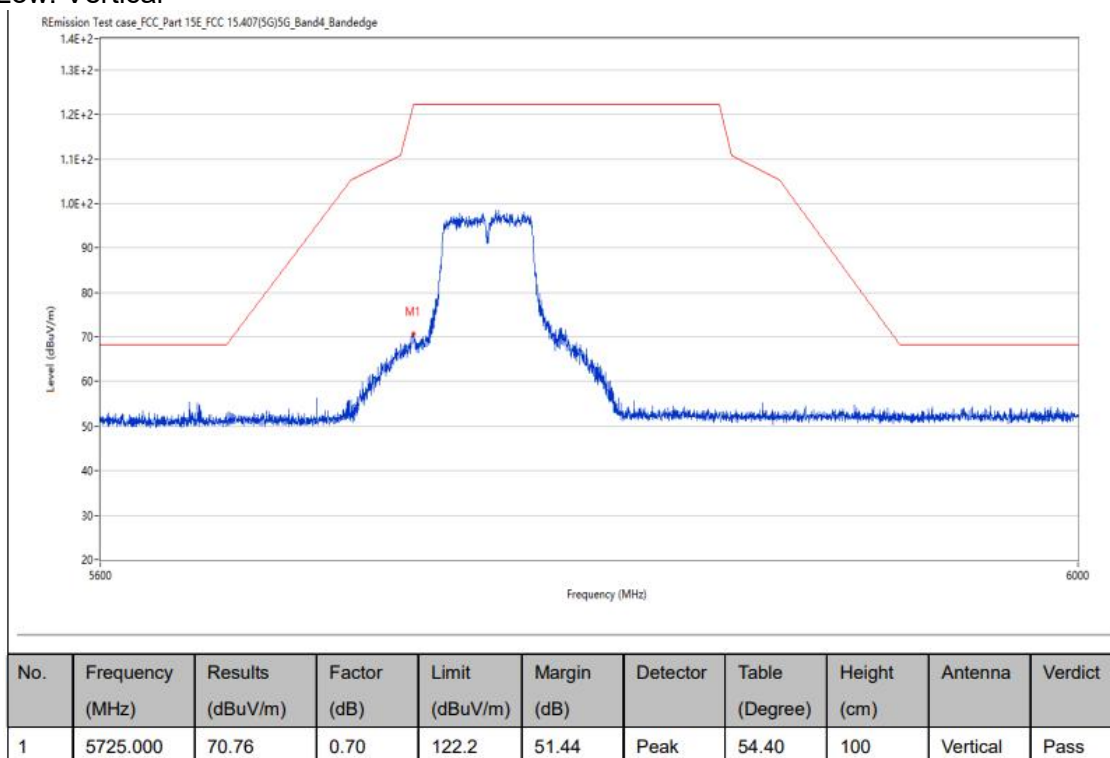


### B4-11ac40 High : Horizontal

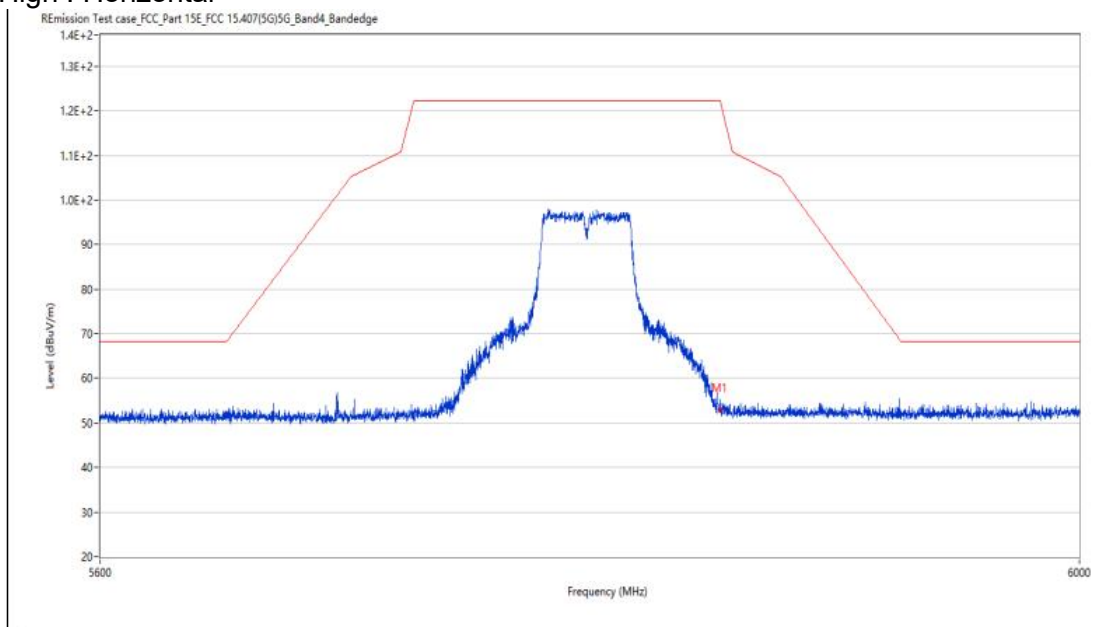

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 5850.000        | 52.90            | 1.34        | 122.2          | 69.30       | Peak     | 65.72          | 100         | Horizontal | Pass    |

### B4-11ac40 High : Vertical

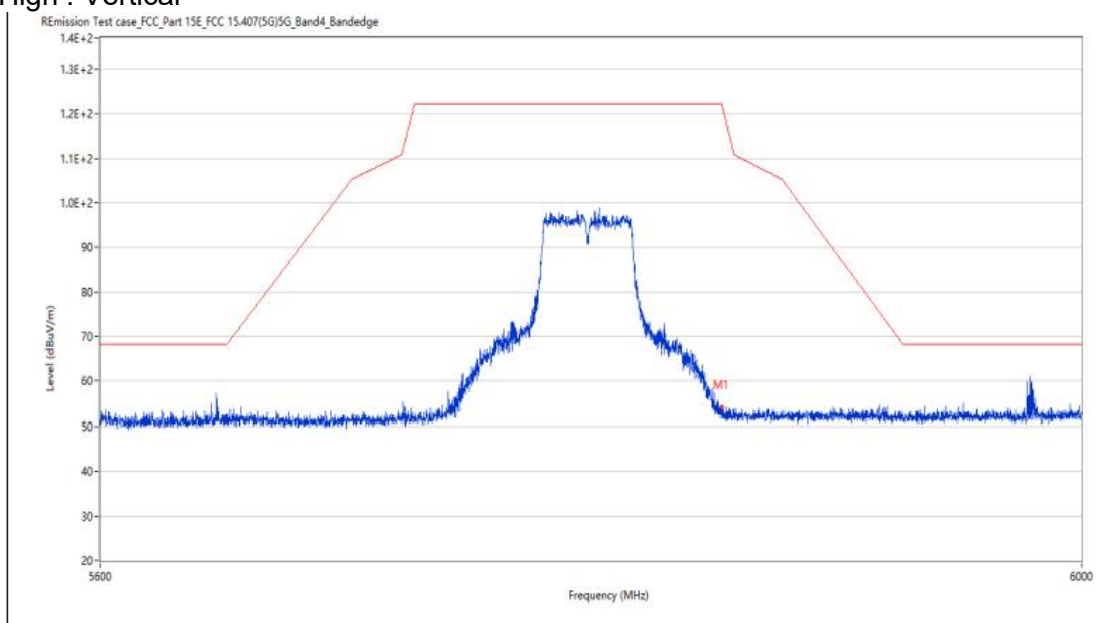

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 5850.000        | 54.12            | 1.34        | 122.2          | 68.08       | Peak     | 34.32          | 100         | Vertical | Pass    |




|                           |               |                     |                |                     |                |                    |        |          |            |
|---------------------------|---------------|---------------------|----------------|---------------------|----------------|--------------------|--------|----------|------------|
| EUT:                      |               | Tablet              |                |                     |                | Model Name.:       |        | DT1      |            |
| Temperature:              |               | 20 °C               |                |                     |                | Relative Humidity: |        | 48%      |            |
| Pressure:                 |               | 1010 hPa            |                |                     |                | Test Voltage:      |        | DC 5V    |            |
| Test Mode:                |               | TX(5.2G)-802.11ac80 |                |                     |                |                    |        |          |            |
| Frequency                 | Meter Reading | Cable Loss          | Antenna Factor | Preamplifier Factor | Emission Level | Limits             | Margin | Detector | Comment    |
| (MHz)                     | (dBμV)        | (dB)                | dB/m           | (dB)                | (dBμV/m)       | (dBμV/m)           | (dB)   | Type     |            |
| 5.2G WIFI-802.11ac80 Mode |               |                     |                |                     |                |                    |        |          |            |
| 4500                      | 55.65         | 5.2                 | 35.6           | 44.2                | 52.25          | 74                 | -21.75 | Pk       | Horizontal |
| 4500                      | 46.01         | 5.2                 | 35.6           | 44.2                | 42.61          | 54                 | -11.39 | AV       | Horizontal |
| 4500                      | 59.48         | 5.2                 | 35.6           | 44.2                | 56.08          | 74                 | -17.92 | Pk       | Vertical   |
| 4500                      | 48.04         | 5.2                 | 35.6           | 44.2                | 44.64          | 54                 | -9.36  | AV       | Vertical   |
| 5150                      | 68.57         | 5.36                | 35.66          | 44.22               | 65.37          | 74                 | -8.63  | Pk       | Horizontal |
| 5150                      | 46.05         | 5.36                | 35.66          | 44.22               | 42.85          | 54                 | -11.15 | AV       | Horizontal |
| 5150                      | 56.61         | 5.36                | 35.66          | 44.22               | 53.41          | 74                 | -20.59 | Pk       | Vertical   |
| 5150                      | 40.59         | 5.36                | 35.66          | 44.22               | 37.39          | 54                 | -16.61 | AV       | Vertical   |
| 5350                      | 65.48         | 5.68                | 35.68          | 44.22               | 62.62          | 74                 | -11.38 | Pk       | Vertical   |
| 5350                      | 47.34         | 5.68                | 35.68          | 44.22               | 44.48          | 54                 | -9.52  | AV       | Vertical   |
| 5350                      | 62.66         | 5.68                | 35.68          | 44.22               | 59.8           | 74                 | -14.2  | Pk       | Horizontal |
| 5350                      | 44.09         | 5.68                | 35.68          | 44.22               | 41.23          | 54                 | -12.77 | AV       | Horizontal |


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:(1)Emission Level=Antenna Factor+Cable Loss+Read Level-Preamplifier Factor  
(2)When PK value is lower than the Average value limit,average don't record.

# B4-11ac80 -Low : Horizontal

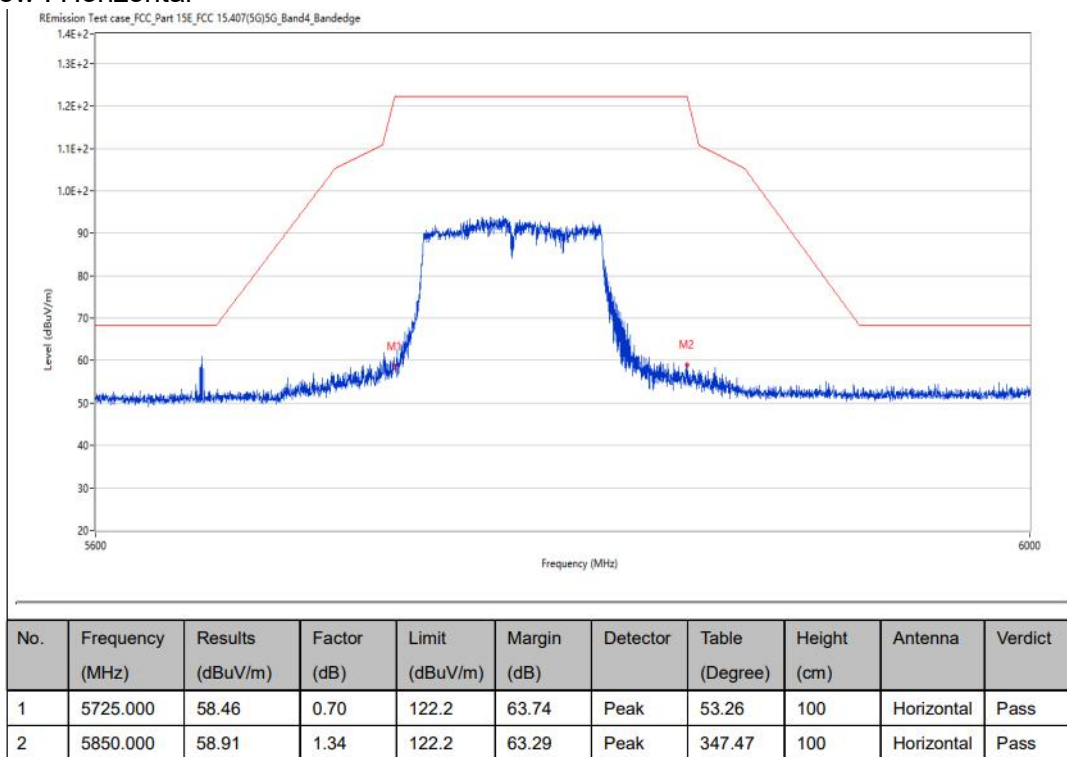

# B4-11ac80 -Low : Vertical

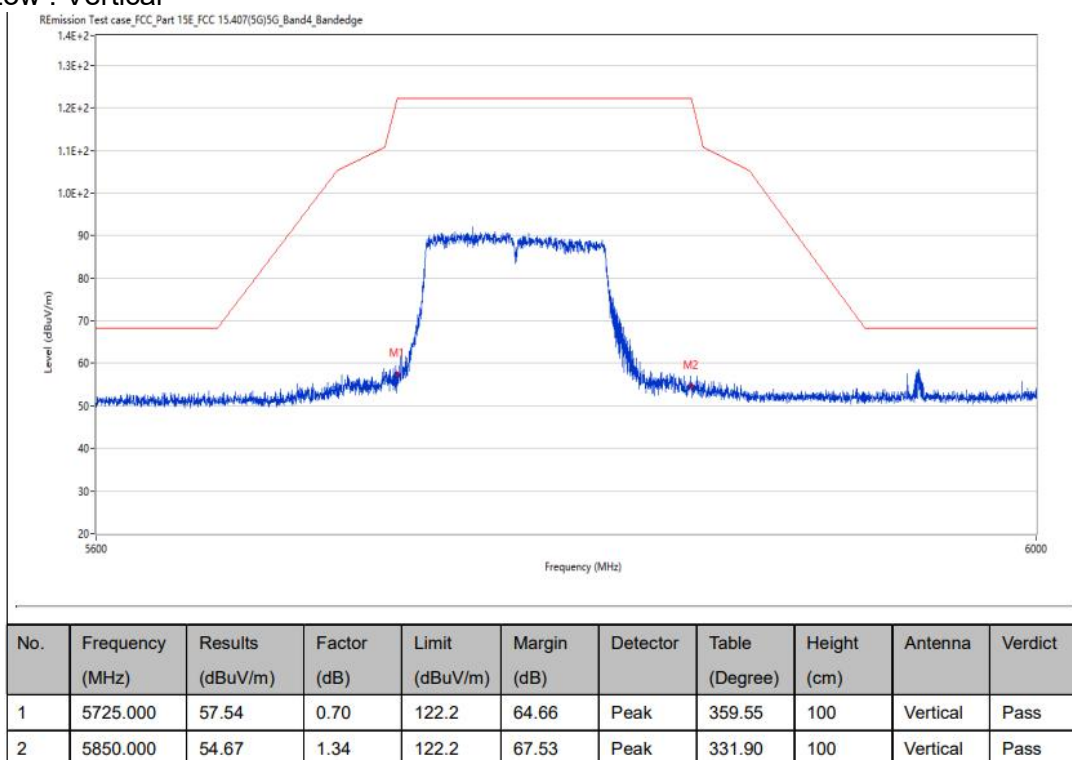

## 10 CONDUCTED EMISSION TEST

### 10.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

| FREQUENCY (MHz) | Conducted Emissionlimit (dBuV) |           |
|-----------------|--------------------------------|-----------|
|                 | Quasi-peak                     | Average   |
| 0.15 -0.5       | 66 - 56 *                      | 56 - 46 * |
| 0.50 -5.0       | 56.00                          | 46.00     |
| 5.0 -30.0       | 60.00                          | 50.00     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

## 10.2 TEST PROCEDURE

- The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 10.3 TEST SETUP

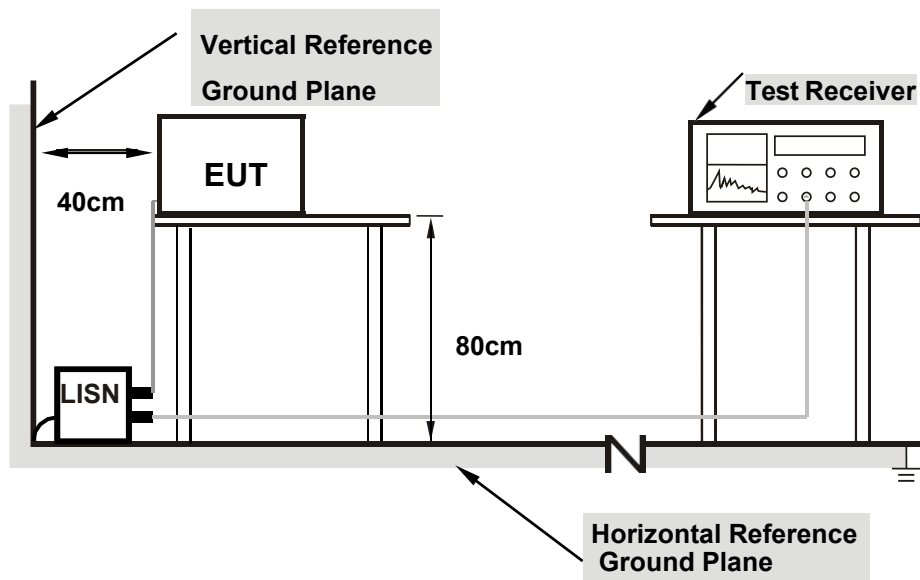


**Note: 1.Support units were connected to second LISN.**


**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

## 10.4 TEST RESULT

|               |         |                    |     |
|---------------|---------|--------------------|-----|
| Temperature:  | 22.1 °C | Relative Humidity: | 56% |
| Test Voltage: | DC 5V   | Phase:             | L/N |
| Test Mode:    | ON      |                    |     |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 0.4875             | 31.49             | 9.87                    | 41.36              | 56.21             | 14.85          | QP     |
| 2   | 0.4875             | 25.90             | 9.87                    | 35.77              | 46.21             | 10.44          | AVG    |
| 3   | 0.7080             | 31.66             | 9.89                    | 41.55              | 56.00             | 14.45          | QP     |
| 4   | 0.7080             | 22.04             | 9.89                    | 31.93              | 46.00             | 14.07          | AVG    |
| 5   | 3.7725             | 24.43             | 17.90                   | 42.33              | 56.00             | 13.67          | QP     |
| 6   | 3.7725             | 12.17             | 17.90                   | 30.07              | 46.00             | 15.93          | AVG    |
| 7   | 8.1555             | 27.25             | 20.00                   | 47.25              | 60.00             | 12.75          | QP     |
| 8   | 8.1555             | 12.33             | 20.00                   | 32.33              | 50.00             | 17.67          | AVG    |
| 9   | 11.5034            | 26.08             | 20.04                   | 46.12              | 60.00             | 13.88          | QP     |
| 10  | 11.5034            | 13.93             | 20.04                   | 33.97              | 50.00             | 16.03          | AVG    |
| 11  | 16.7685            | 23.90             | 20.13                   | 44.03              | 60.00             | 15.97          | QP     |
| 12  | 16.7685            | 12.82             | 20.13                   | 32.95              | 50.00             | 17.05          | AVG    |

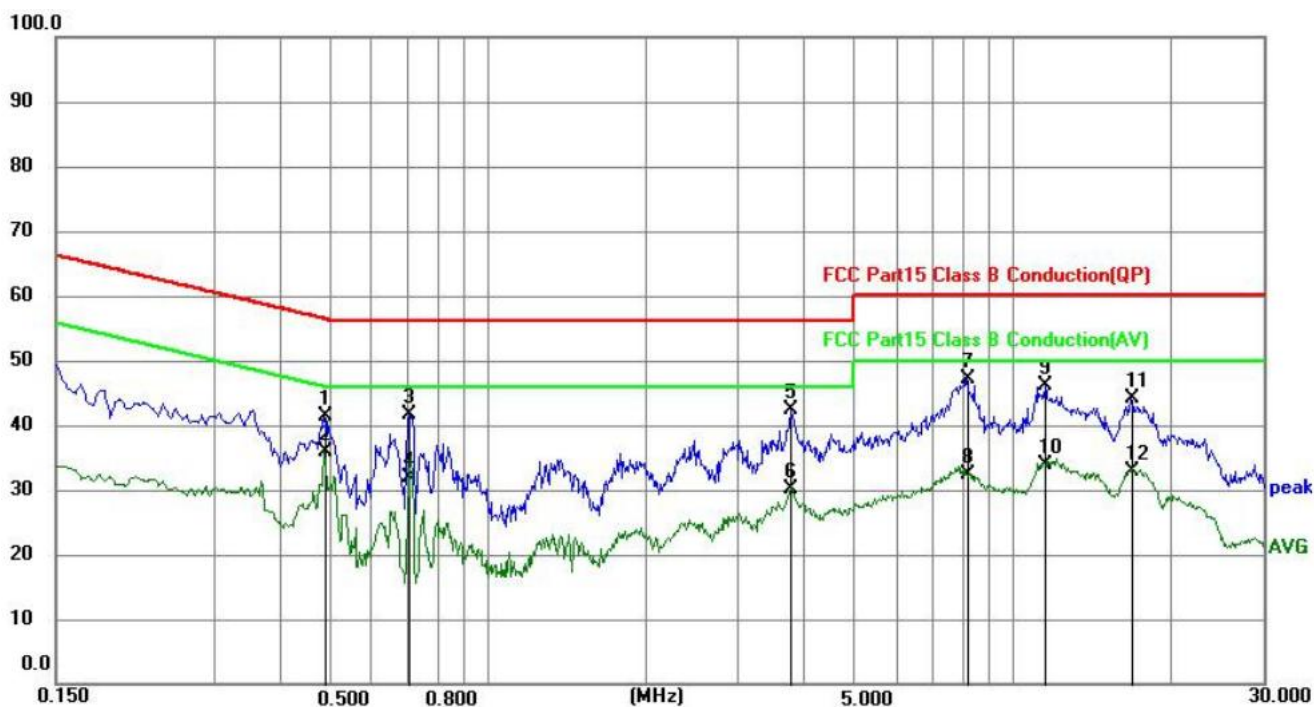

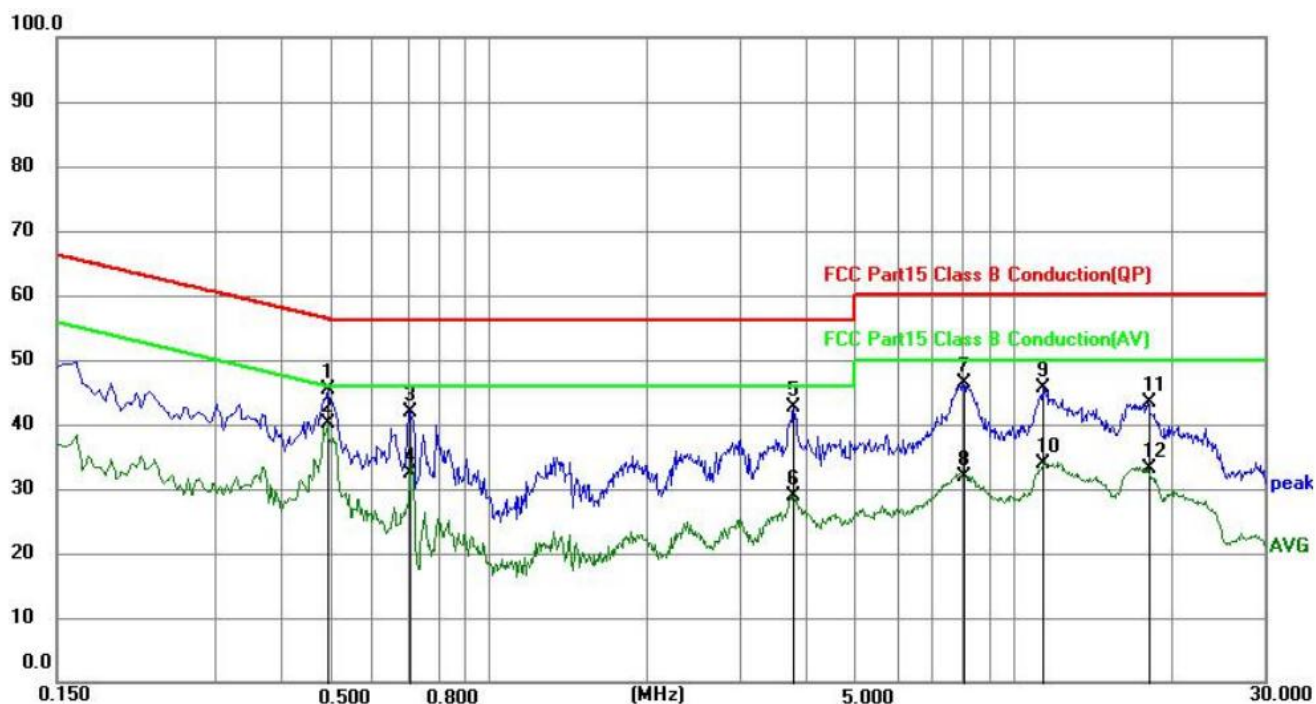

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct<br>Factor(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|-------------------------|--------------------|-------------------|----------------|--------|
| 1   | 0.4920             | 35.46             | 9.87                    | 45.33              | 56.13             | 10.80          | QP     |
| 2   | 0.4920             | 30.33             | 9.87                    | 40.20              | 46.13             | 5.93           | AVG    |
| 3   | 0.7080             | 32.01             | 9.89                    | 41.90              | 56.00             | 14.10          | QP     |
| 4   | 0.7080             | 22.38             | 9.89                    | 32.27              | 46.00             | 13.73          | AVG    |
| 5   | 3.8130             | 24.69             | 18.00                   | 42.69              | 56.00             | 13.31          | QP     |
| 6   | 3.8130             | 10.88             | 18.00                   | 28.88              | 46.00             | 17.12          | AVG    |
| 7   | 8.0070             | 26.35             | 20.14                   | 46.49              | 60.00             | 13.51          | QP     |
| 8   | 8.0070             | 11.80             | 20.14                   | 31.94              | 50.00             | 18.06          | AVG    |
| 9   | 11.3549            | 25.56             | 20.19                   | 45.75              | 60.00             | 14.25          | QP     |
| 10  | 11.3549            | 13.72             | 20.19                   | 33.91              | 50.00             | 16.09          | AVG    |
| 11  | 17.9790            | 23.14             | 20.24                   | 43.38              | 60.00             | 16.62          | QP     |
| 12  | 17.9790            | 12.79             | 20.24                   | 33.03              | 50.00             | 16.97          | AVG    |



## 11. ANTENNA REQUIREMENT

### 11.1 STANDARD REQUIREMENT

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2 RESULT

The antennas used for this product are FPC antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.53dBi for 5.2G and 3.67dBi for 5.8G.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*