Appendix B

RF Test Data for 5.2GWIFI (Conducted Measurement)

Product Name: WiFi6 AX3000 Router

Test Model: WiFi6 AX3000

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

B.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant0	21.16	>=0.5	Pass
NVNT	a	5200	Ant0	21.646	>=0.5	Pass
NVNT	a	5240	Ant0	28.872	>=0.5	Pass
NVNT	n20	5180	Ant0	21.745	>=0.5	Pass
NVNT	n20	5200	Ant0	22.136	>=0.5	Pass
NVNT	n20	5240	Ant0	23.878	>=0.5	Pass
NVNT	n40	5190	Ant0	40.793	>=0.5	Pass
NVNT	n40	5230	Ant0	48.998	>=0.5	Pass
NVNT	ac20	5180	Ant0	20.555	>=0.5	Pass
NVNT	ac20	5200	Ant0	21.284	>=0.5	Pass
NVNT	ac20	5240	Ant0	24.162	>=0.5	Pass
NVNT	ac40	5190	Ant0	40.164	>=0.5	Pass
NVNT	ac40	5230	Ant0	42.774	>=0.5	Pass
NVNT	ac80	5210	Ant0	80.202	>=0.5	Pass
NVNT	ax20	5180	Ant0	22.238	>=0.5	Pass
NVNT	ax20	5200	Ant0	20.872	>=0.5	Pass
NVNT	ax20	5240	Ant0	24.304	>=0.5	Pass
NVNT	ax40	5190	Ant0	39.832	>=0.5	Pass
NVNT	ax40	5230	Ant0	45.369	>=0.5	Pass
NVNT	ax80	5210	Ant0	79.266	>=0.5	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant0

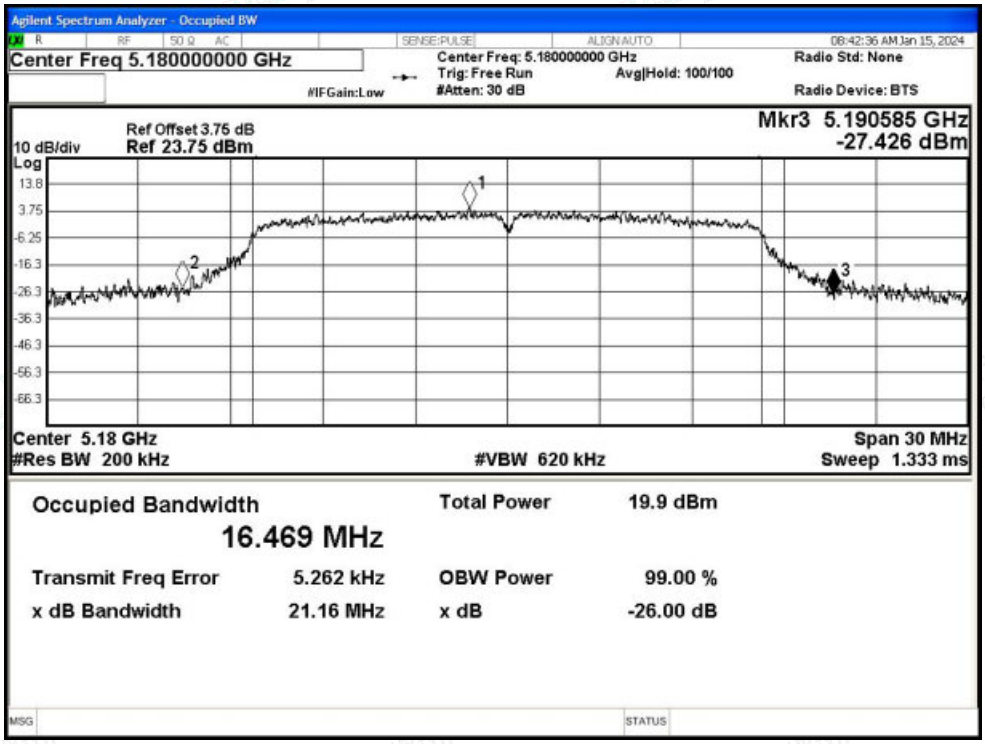

-26dB Bandwidth NVNT a 5200MHz Ant0

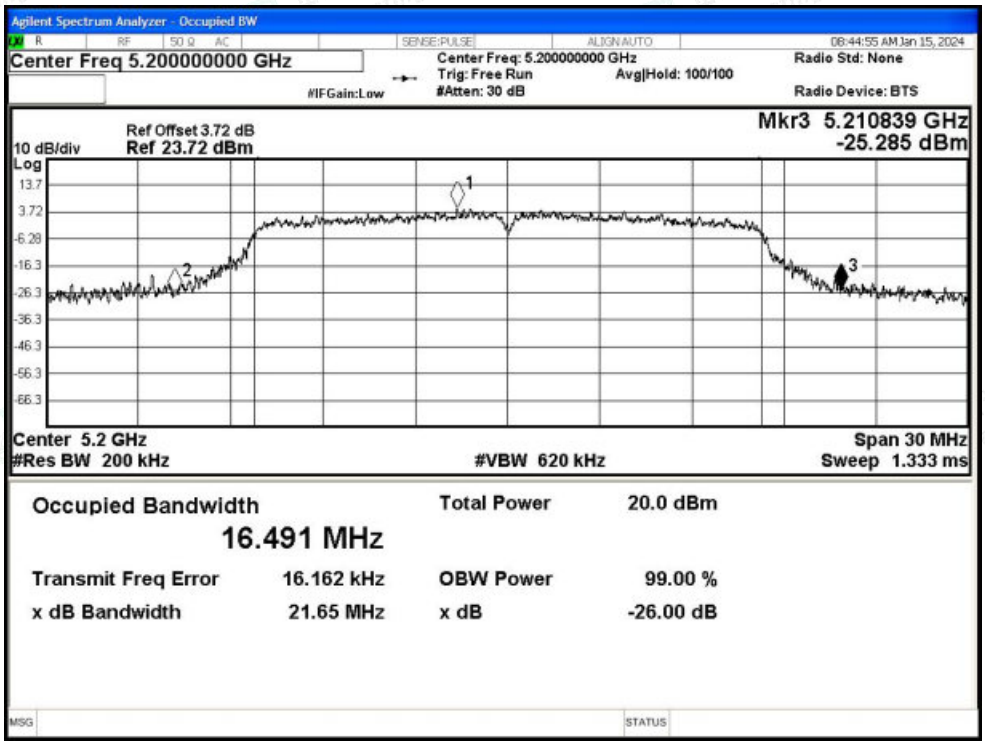

-26dB Bandwidth NVNT a 5240MHz Ant0

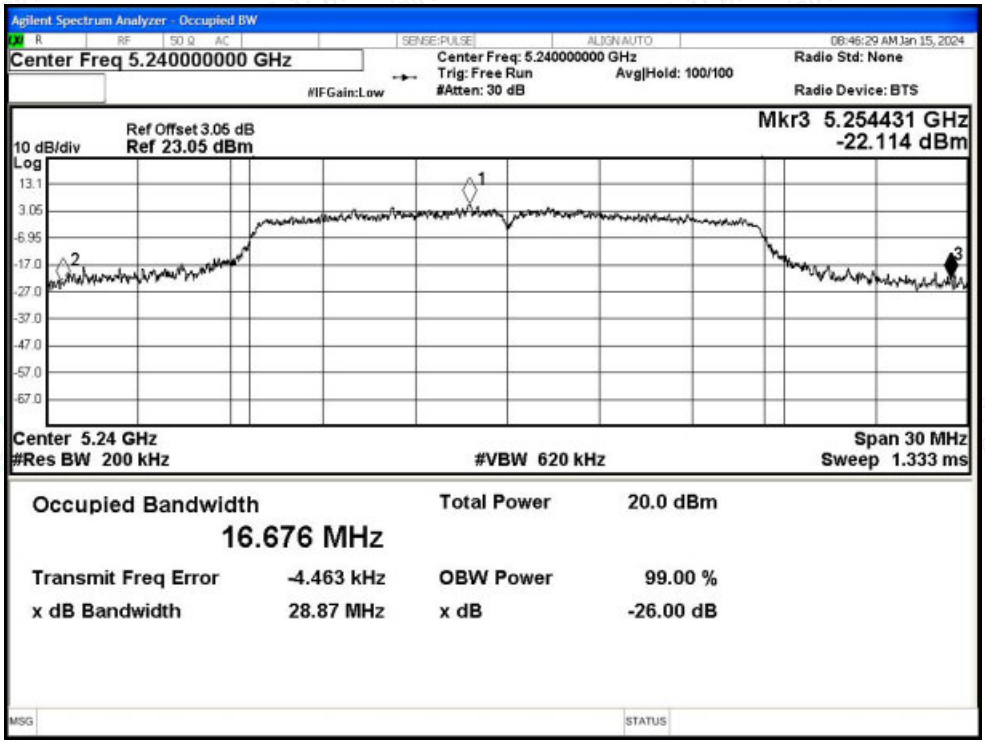

-26dB Bandwidth NVNT n20 5180MHz Ant0

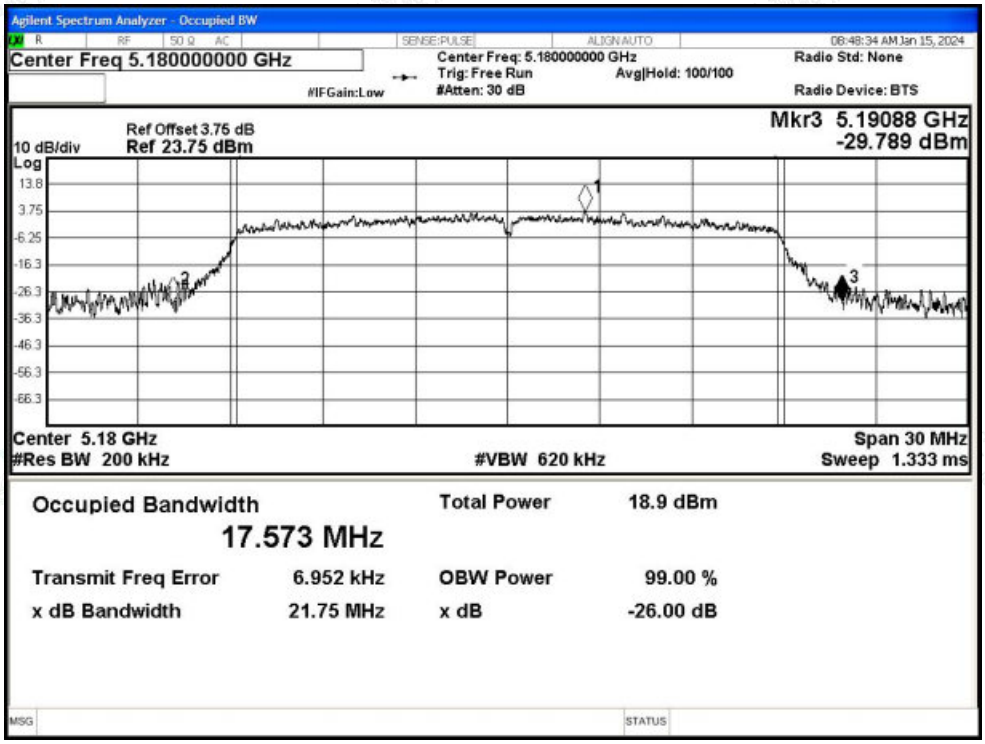

-26dB Bandwidth NVNT n20 5200MHz Ant0

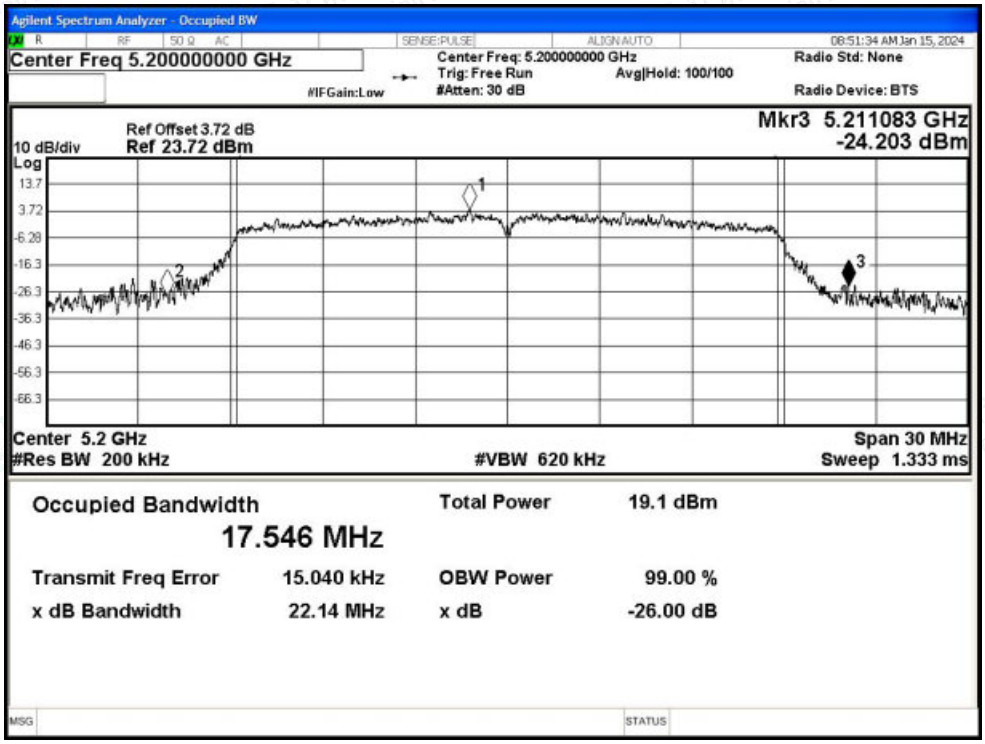

-26dB Bandwidth NVNT n20 5240MHz Ant0

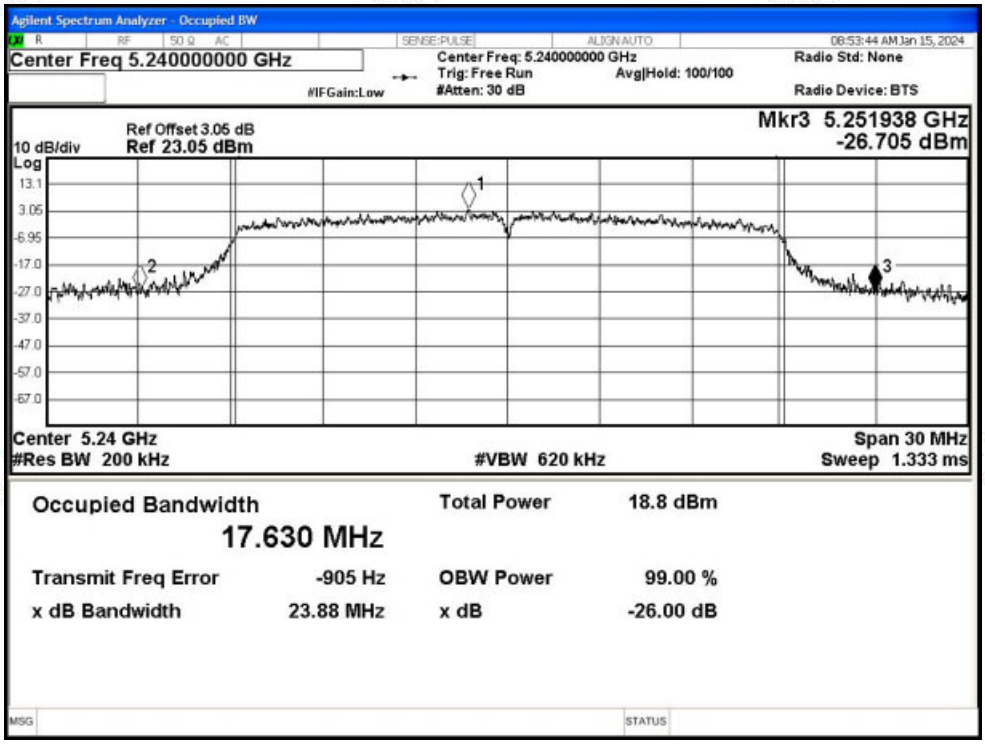

-26dB Bandwidth NVNT n40 5190MHz Ant0

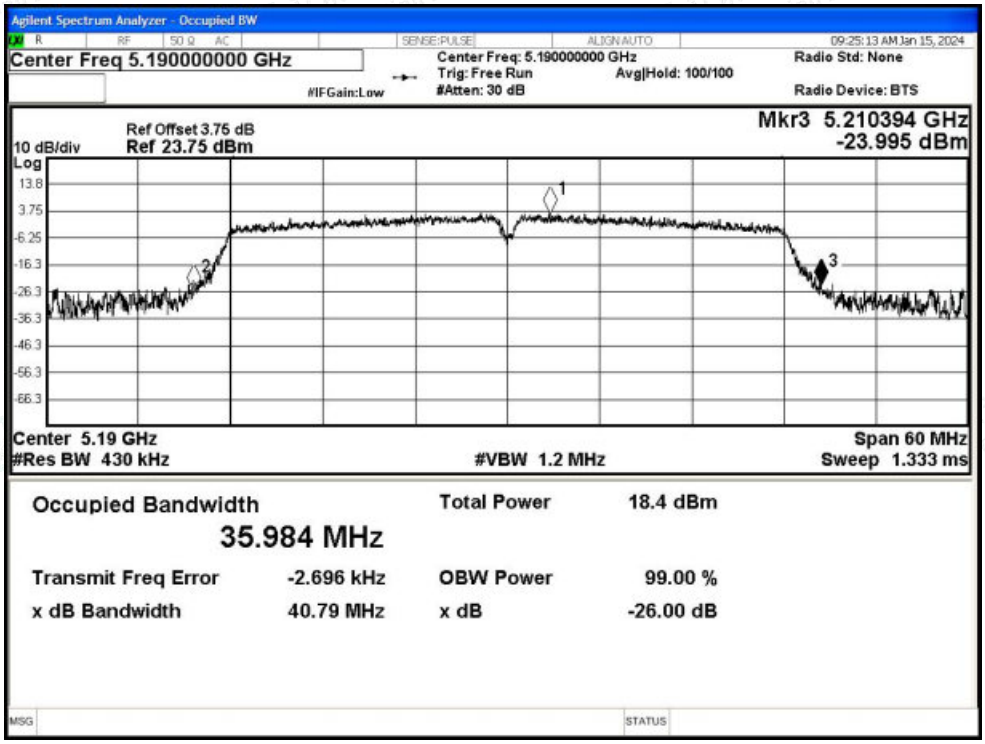

-26dB Bandwidth NVNT n40 5230MHz Ant0

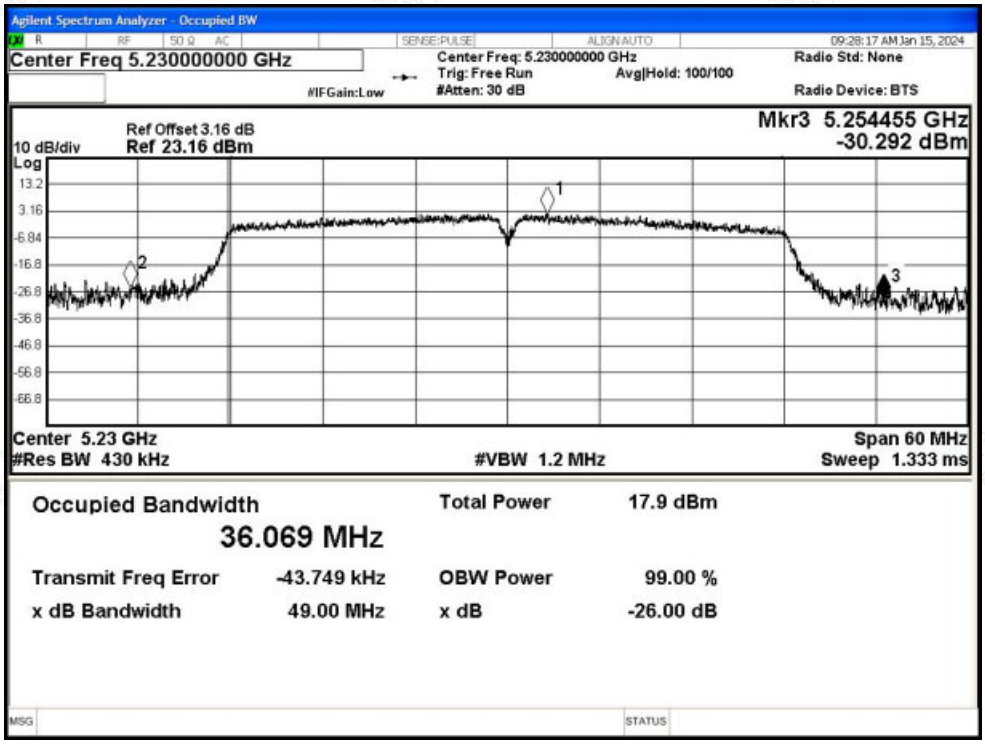

-26dB Bandwidth NVNT ac20 5180MHz Ant0

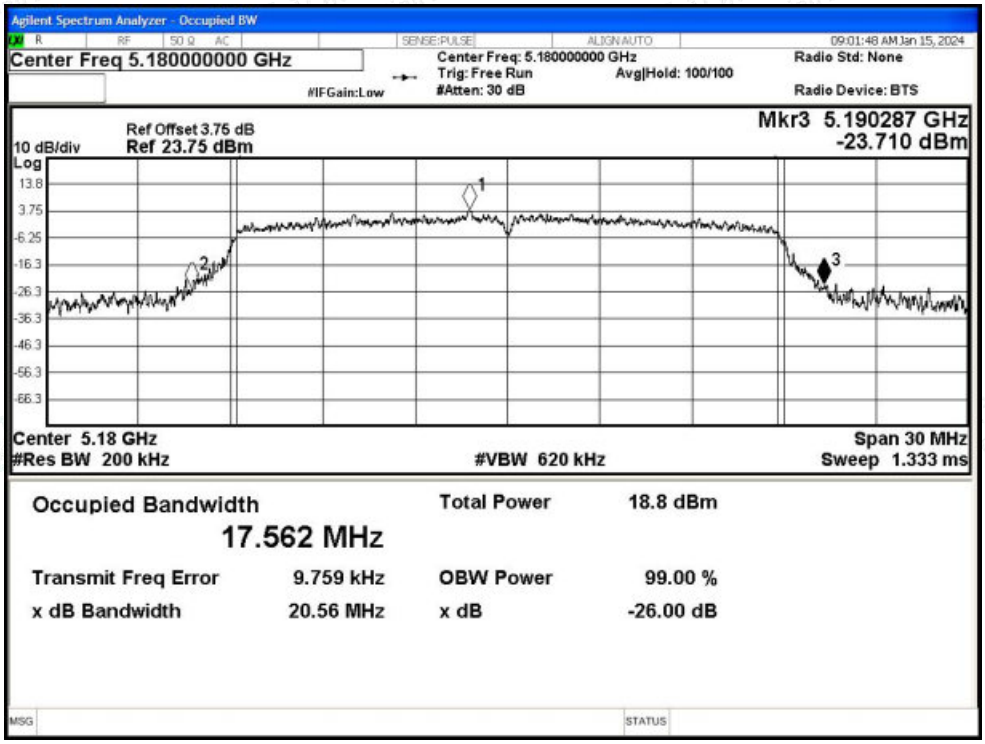

-26dB Bandwidth NVNT ac20 5200MHz Ant0

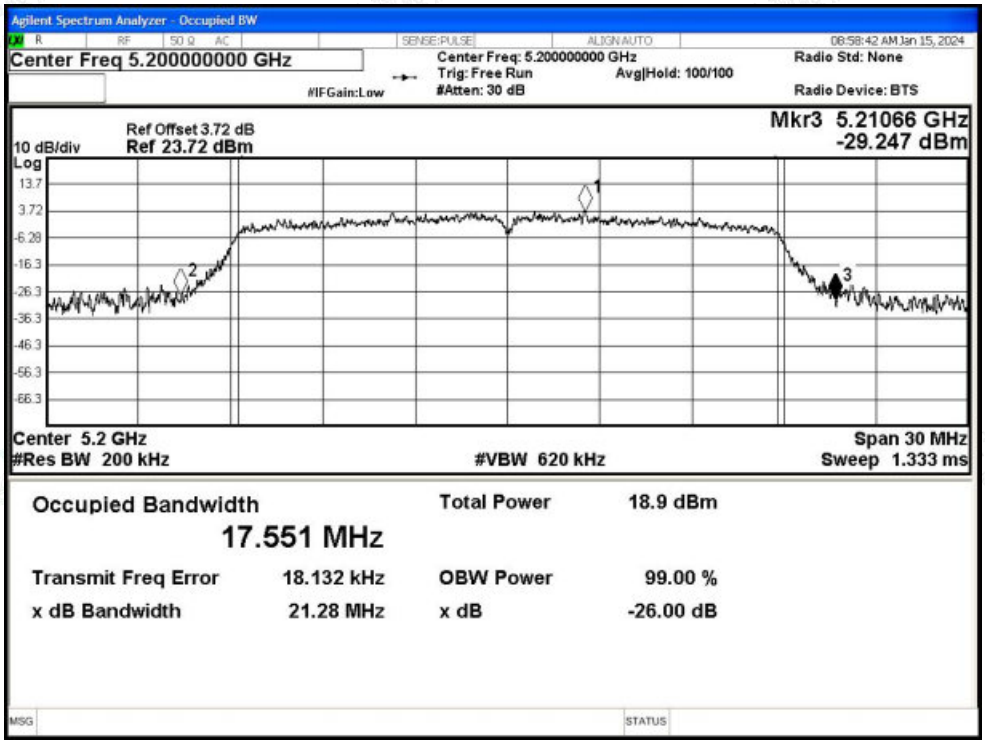

-26dB Bandwidth NVNT ac20 5240MHz Ant0

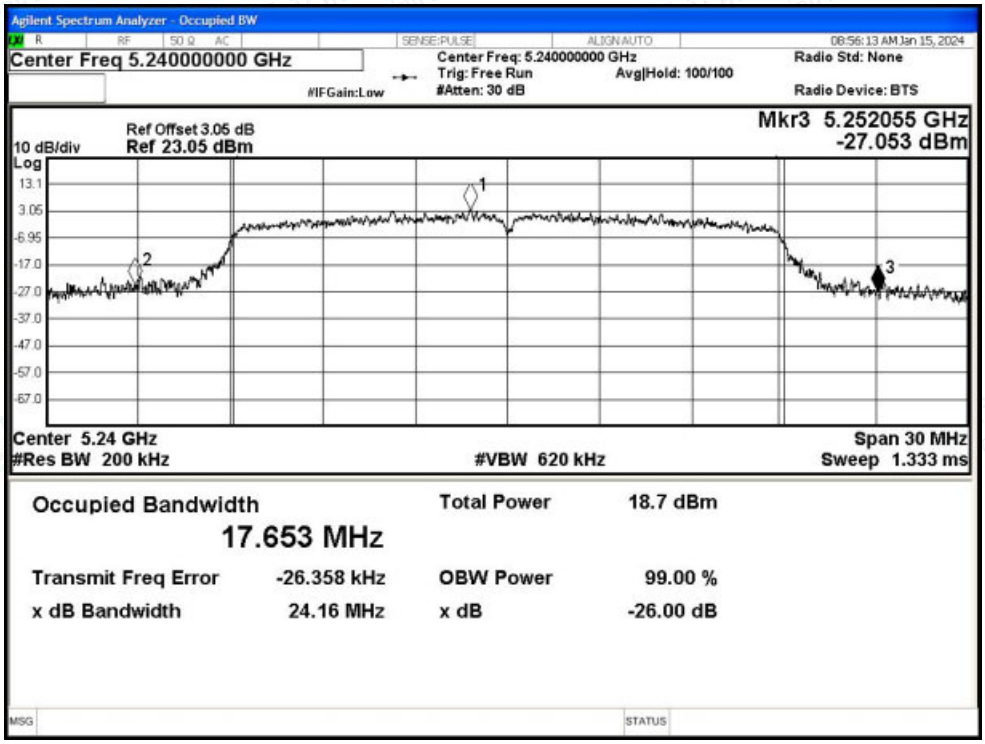

-26dB Bandwidth NVNT ac40 5190MHz Ant0

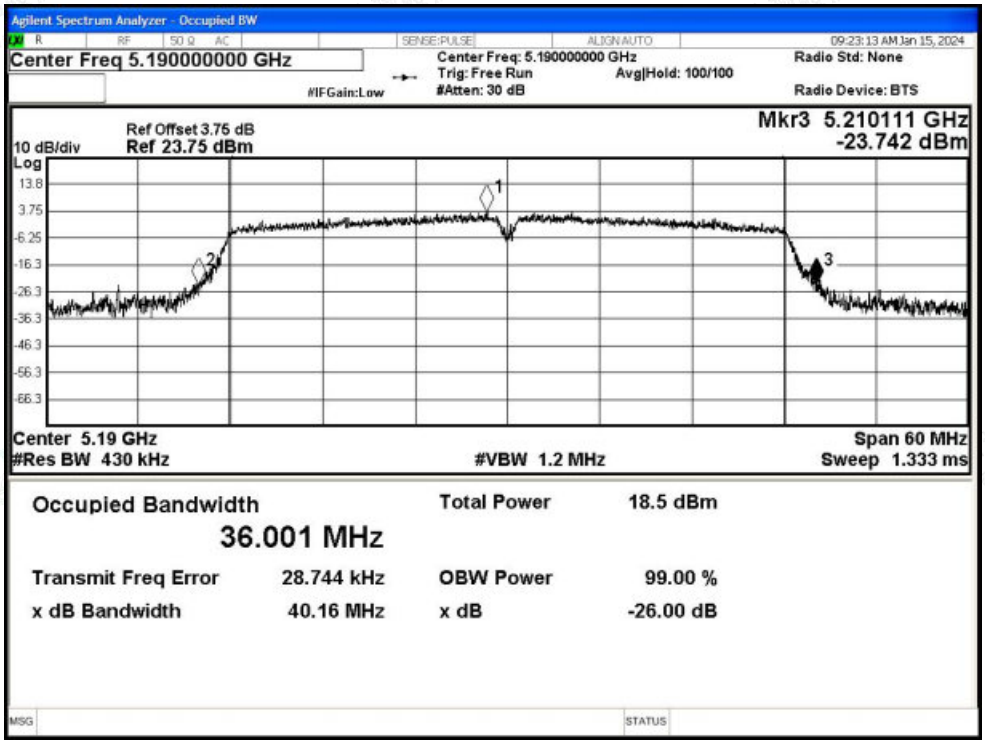

-26dB Bandwidth NVNT ac40 5230MHz Ant0

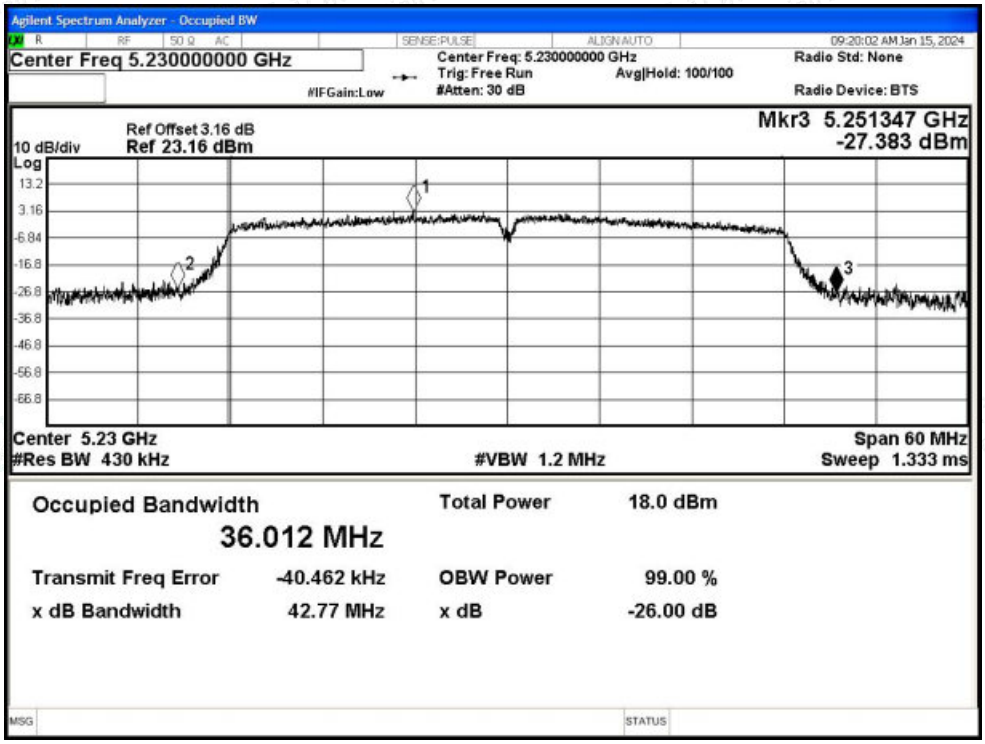

-26dB Bandwidth NVNT ac80 5210MHz Ant0

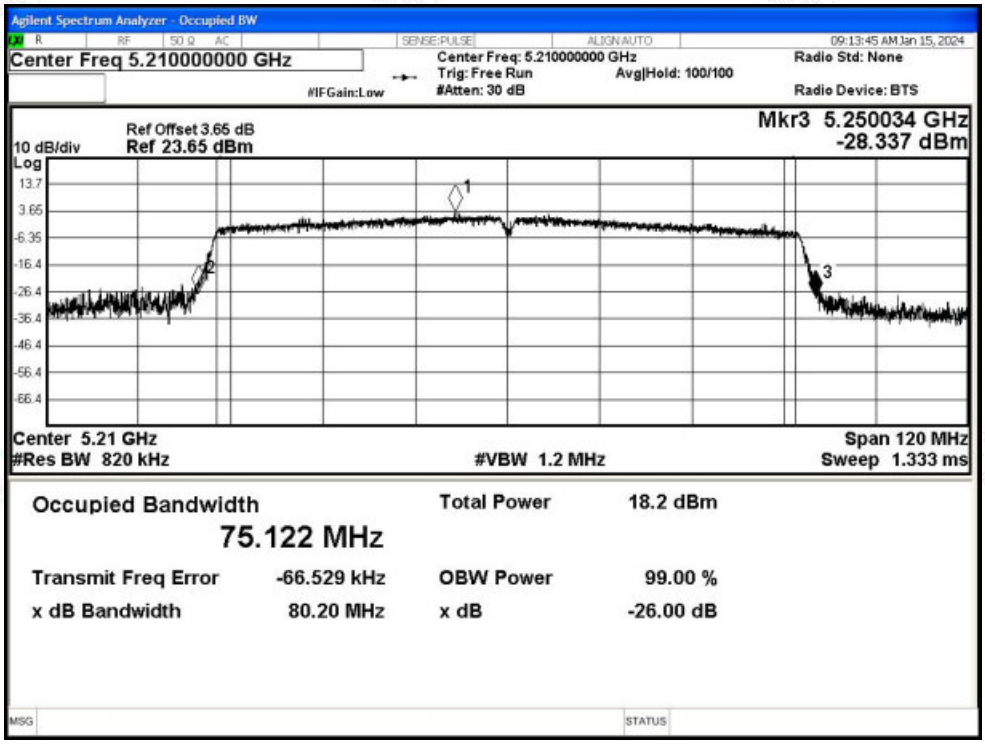

-26dB Bandwidth NVNT ax20 5180MHz Ant0

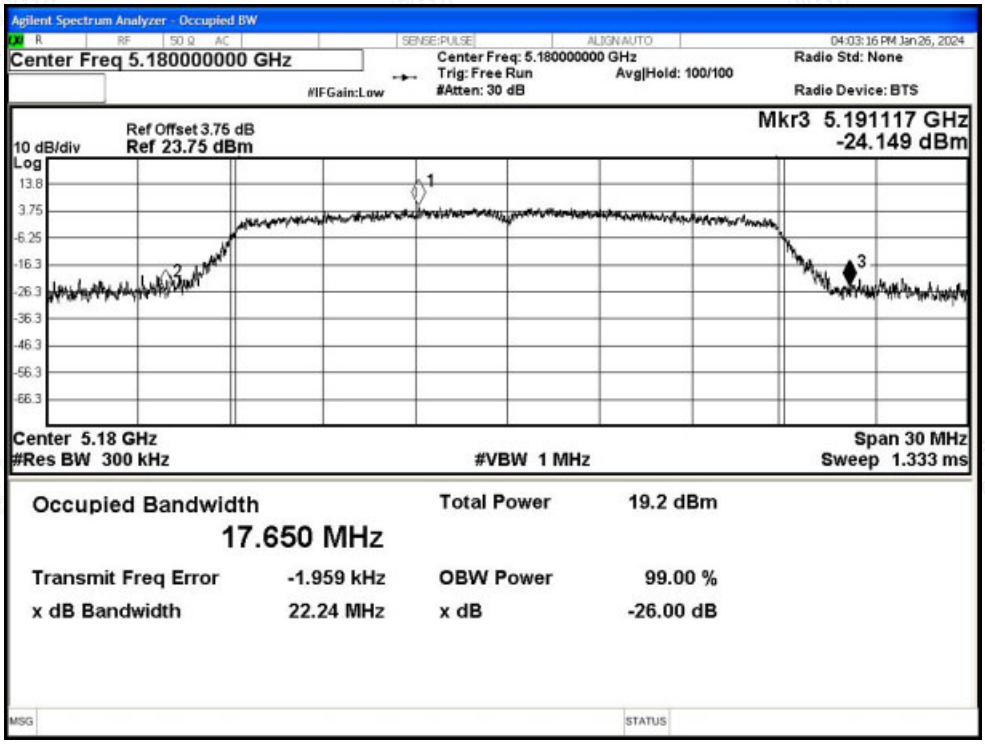

-26dB Bandwidth NVNT ax20 5200MHz Ant0

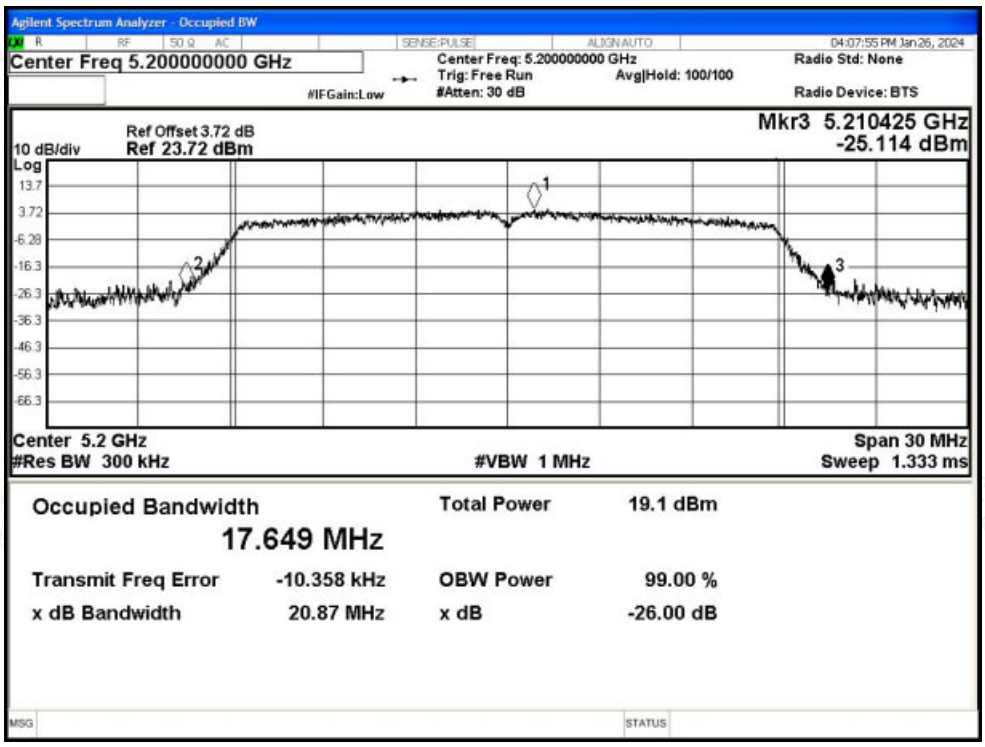

-26dB Bandwidth NVNT ax20 5240MHz Ant0

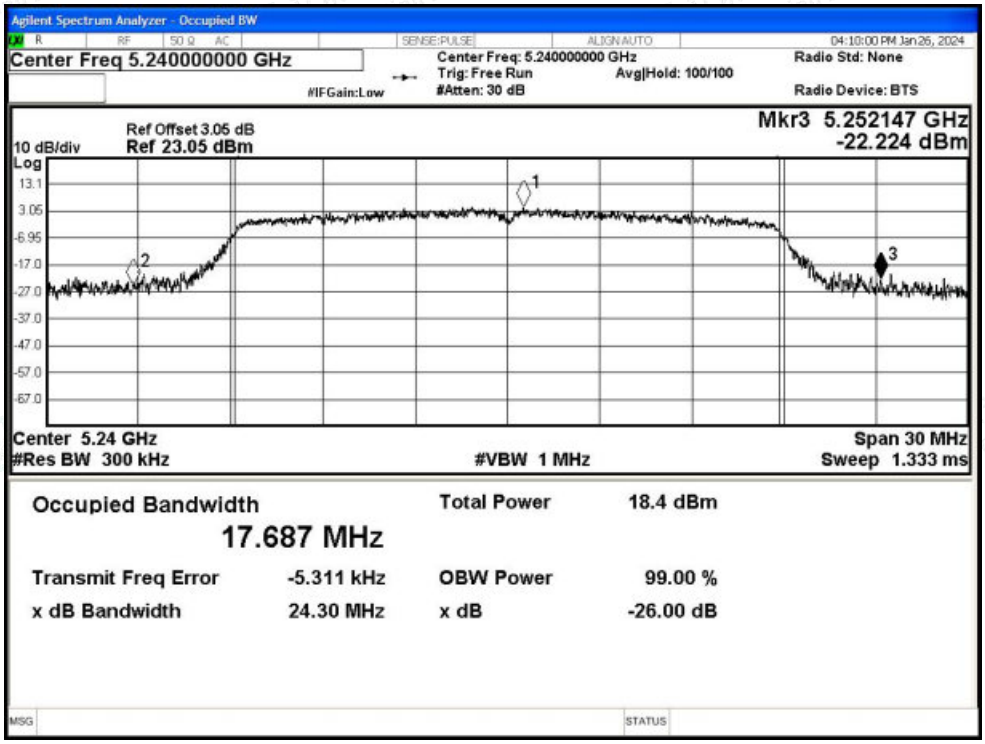

-26dB Bandwidth NVNT ax40 5190MHz Ant0

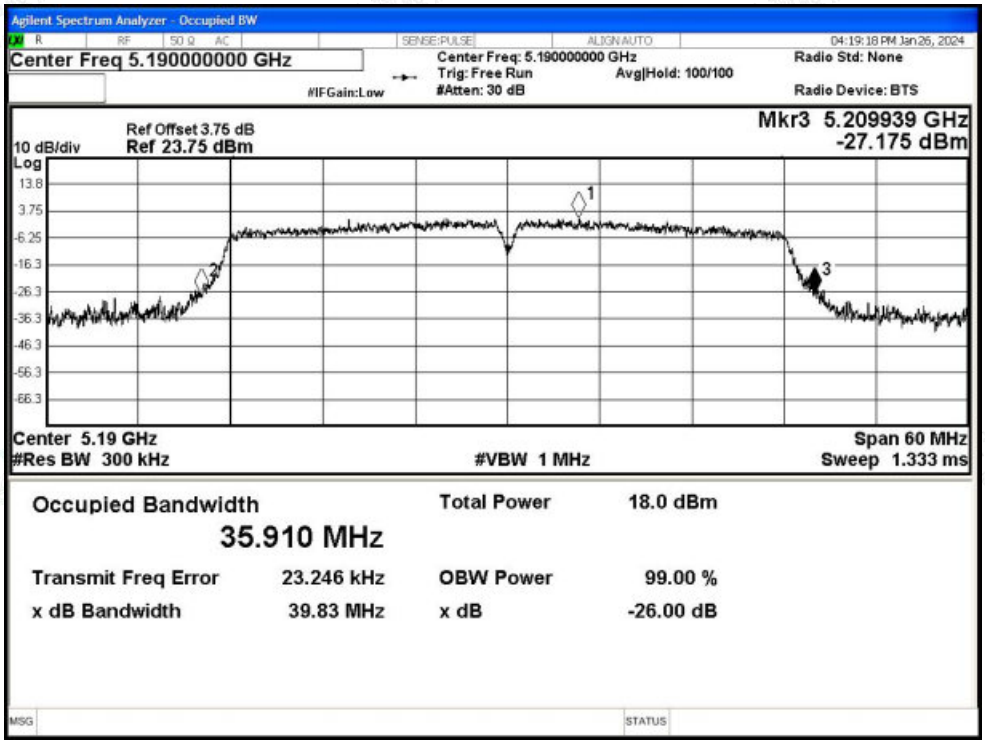

-26dB Bandwidth NVNT ax40 5230MHz Ant0

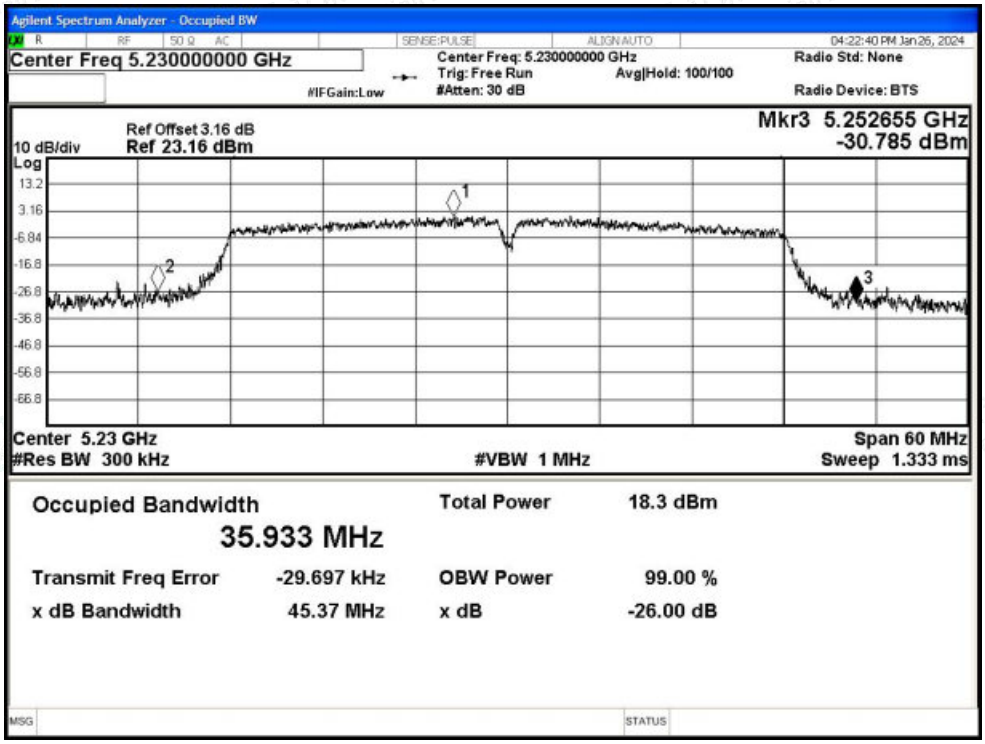

-26dB Bandwidth NVNT ax80 5210MHz Ant0

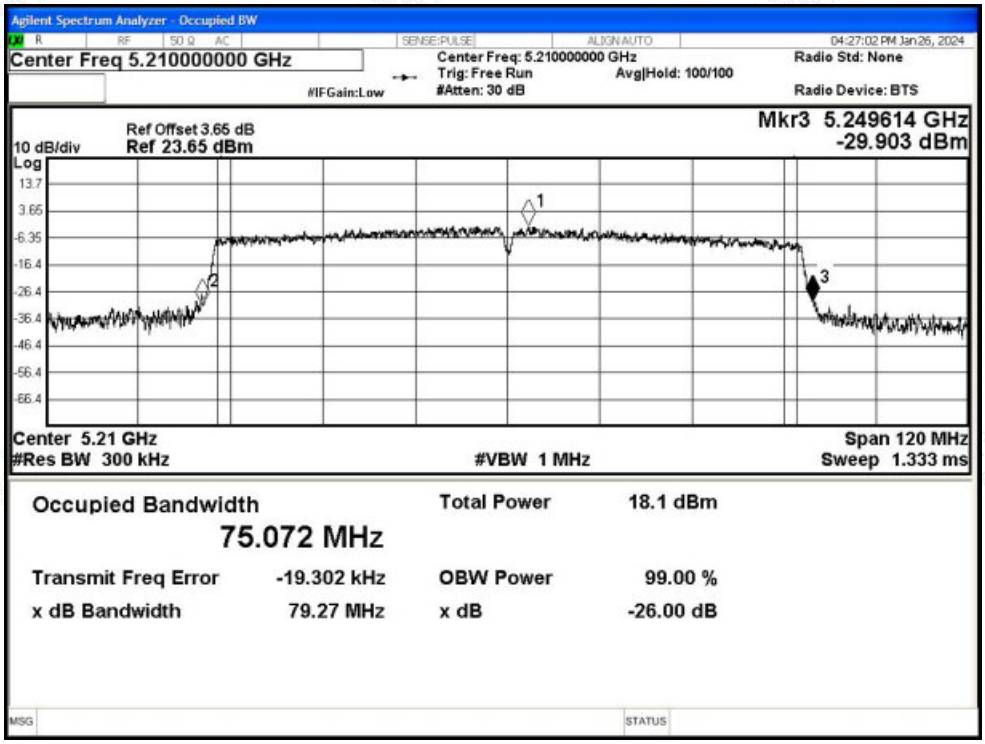

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	20.062	>=0.5	Pass
NVNT	a	5200	Ant1	21.335	>=0.5	Pass
NVNT	a	5240	Ant1	28.099	>=0.5	Pass
NVNT	n20	5180	Ant1	20.286	>=0.5	Pass
NVNT	n20	5200	Ant1	20.093	>=0.5	Pass
NVNT	n20	5240	Ant1	21.668	>=0.5	Pass
NVNT	n40	5190	Ant1	40.607	>=0.5	Pass
NVNT	n40	5230	Ant1	51.987	>=0.5	Pass
NVNT	ac20	5180	Ant1	20.167	>=0.5	Pass
NVNT	ac20	5200	Ant1	20.395	>=0.5	Pass
NVNT	ac20	5240	Ant1	22.04	>=0.5	Pass
NVNT	ac40	5190	Ant1	40.353	>=0.5	Pass
NVNT	ac40	5230	Ant1	48.39	>=0.5	Pass
NVNT	ac80	5210	Ant1	80.114	>=0.5	Pass
NVNT	ax20	5180	Ant1	25.353	>=0.5	Pass
NVNT	ax20	5200	Ant1	20.608	>=0.5	Pass
NVNT	ax20	5240	Ant1	28.921	>=0.5	Pass
NVNT	ax40	5190	Ant1	39.976	>=0.5	Pass
NVNT	ax40	5230	Ant1	42.905	>=0.5	Pass
NVNT	ax80	5210	Ant1	78.897	>=0.5	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

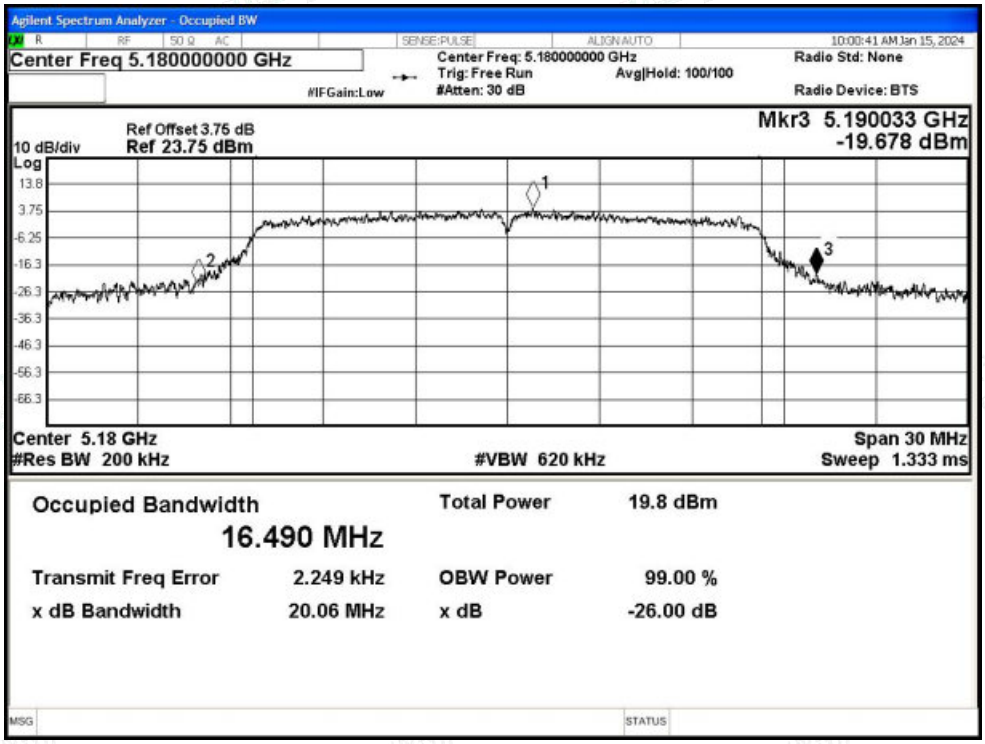

-26dB Bandwidth NVNT a 5200MHz Ant1

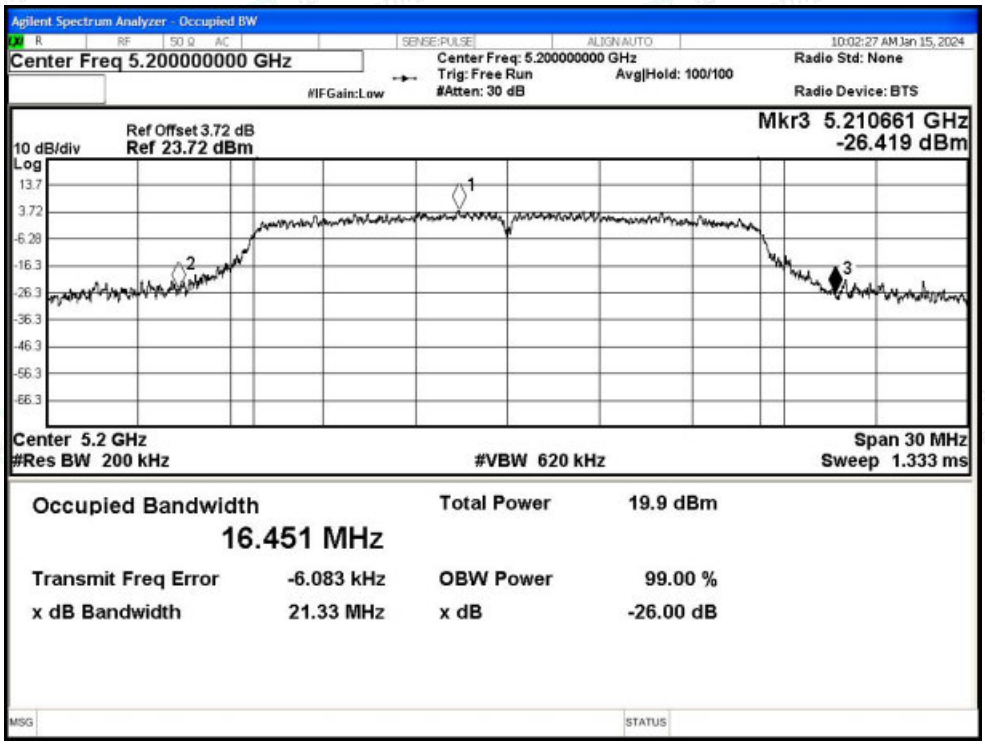

-26dB Bandwidth NVNT a 5240MHz Ant1

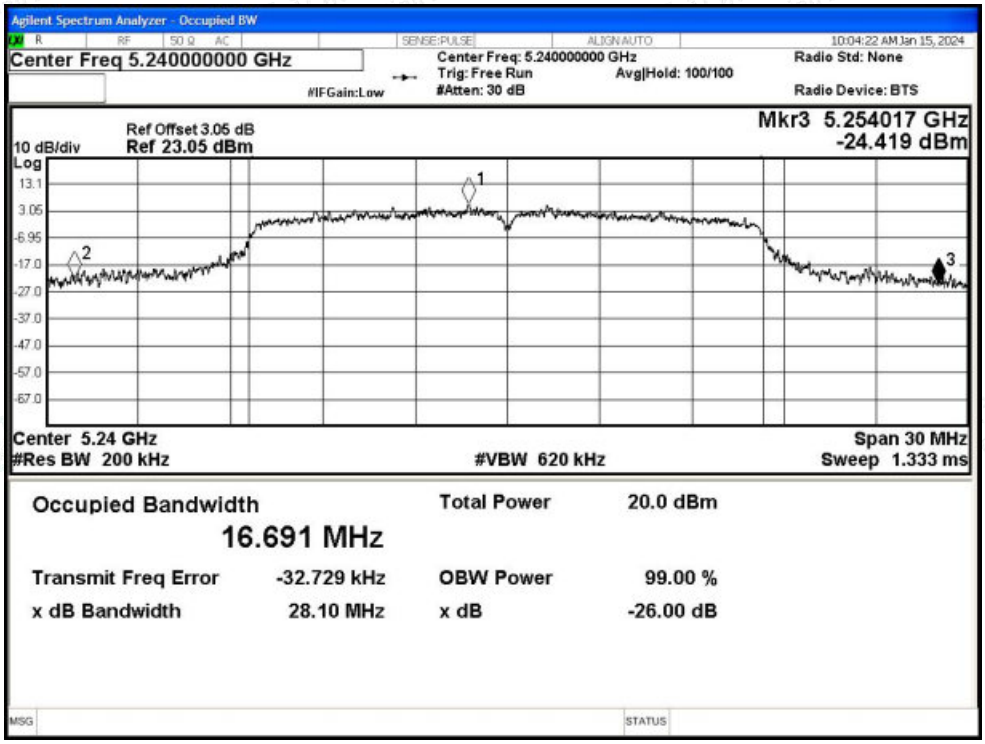

-26dB Bandwidth NVNT n20 5180MHz Ant1

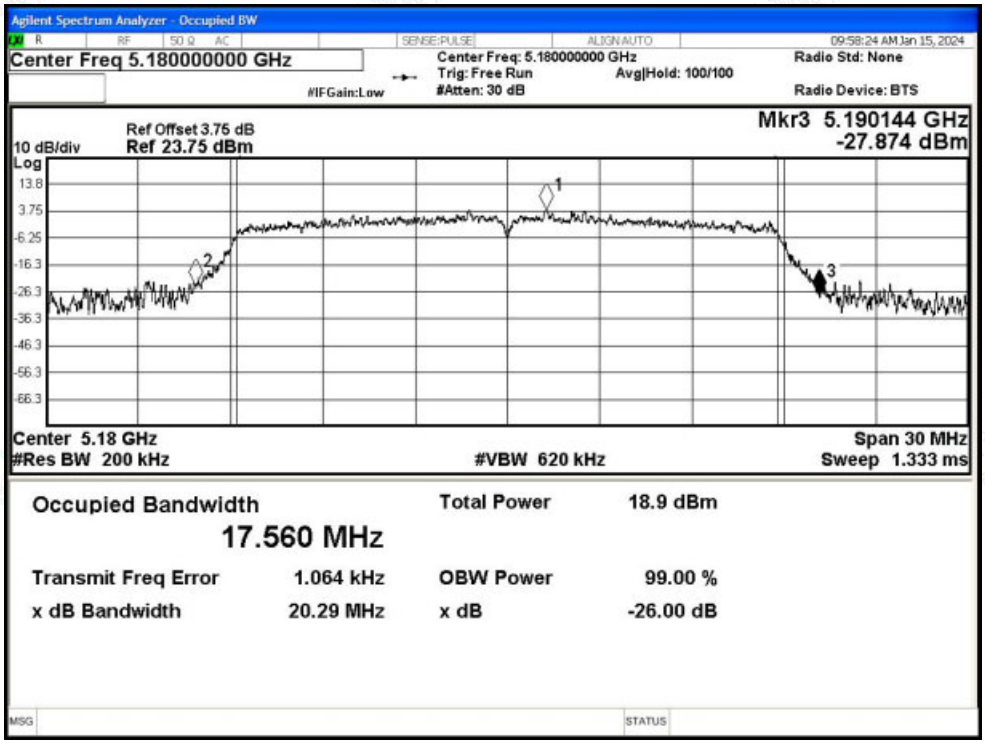

-26dB Bandwidth NVNT n20 5200MHz Ant1

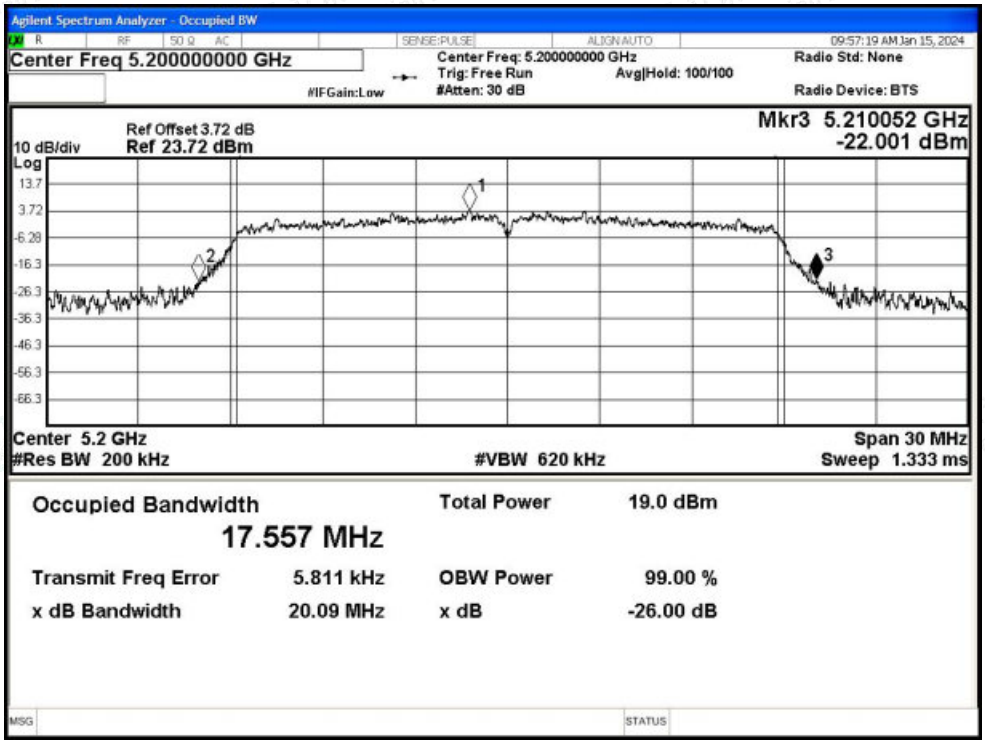

-26dB Bandwidth NVNT n20 5240MHz Ant1

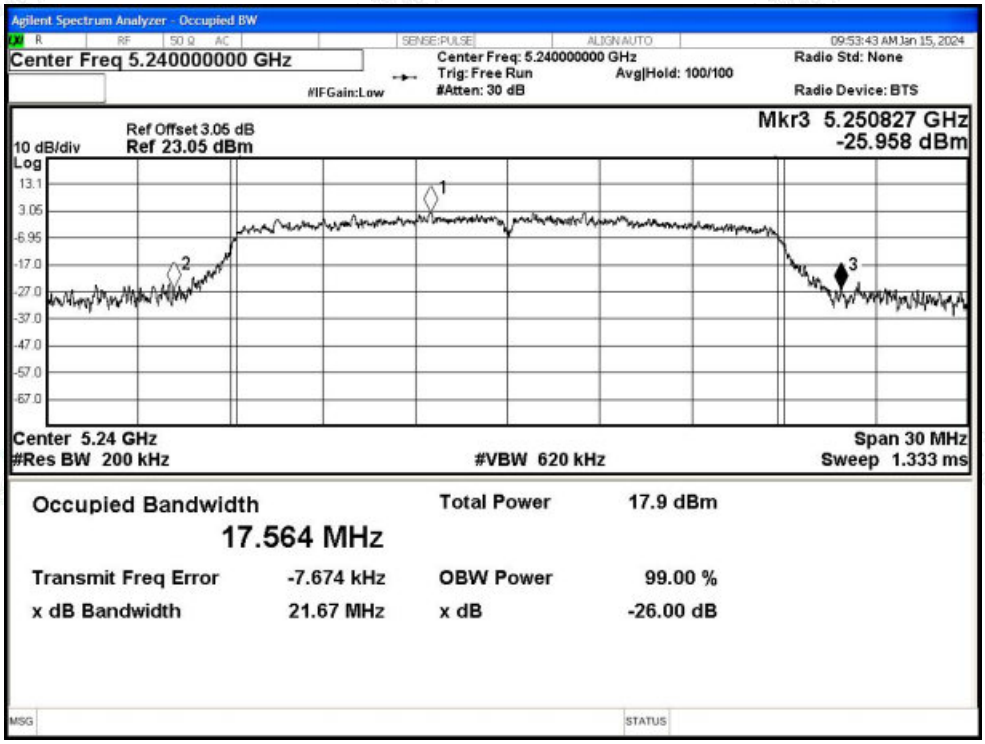

-26dB Bandwidth NVNT n40 5190MHz Ant1

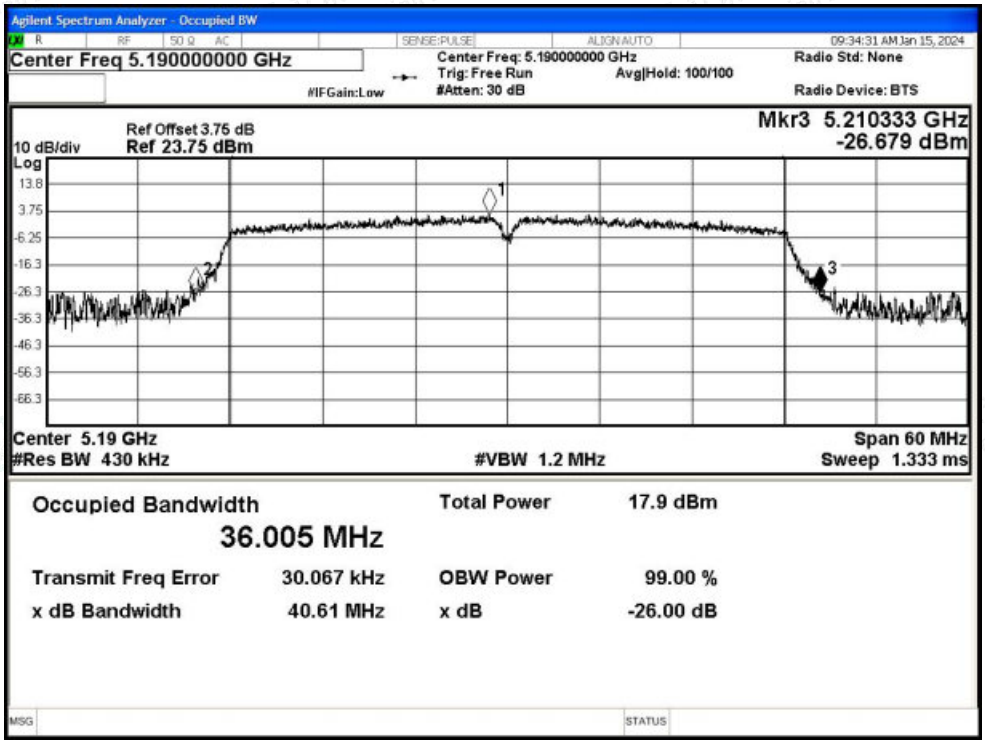

-26dB Bandwidth NVNT n40 5230MHz Ant1

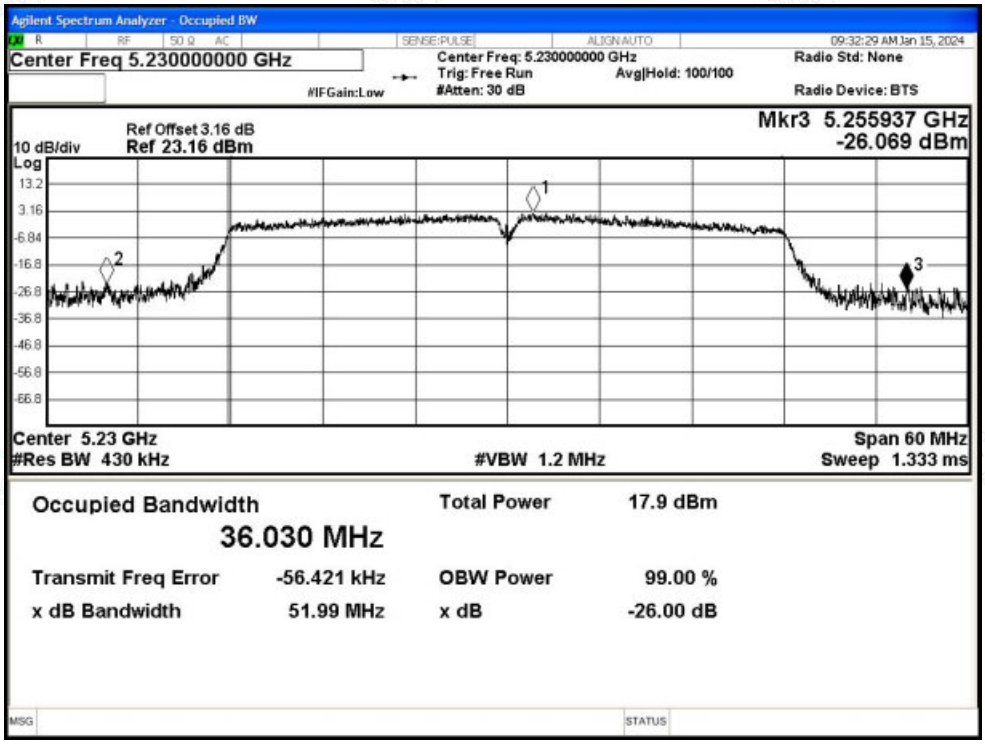

-26dB Bandwidth NVNT ac20 5180MHz Ant1

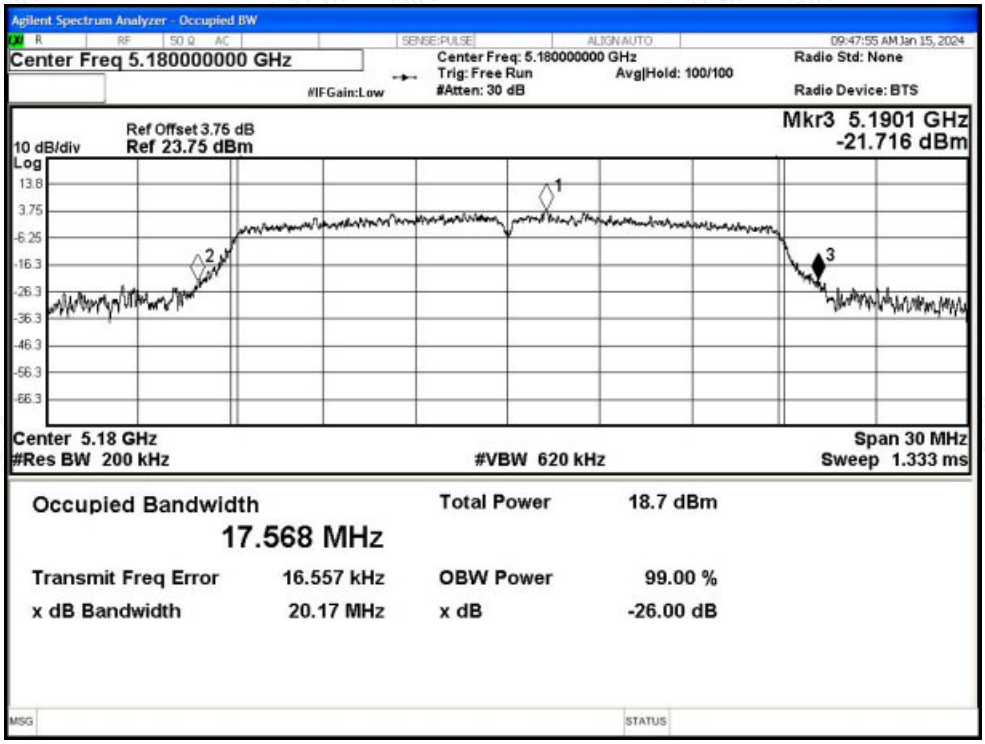

-26dB Bandwidth NVNT ac20 5200MHz Ant1

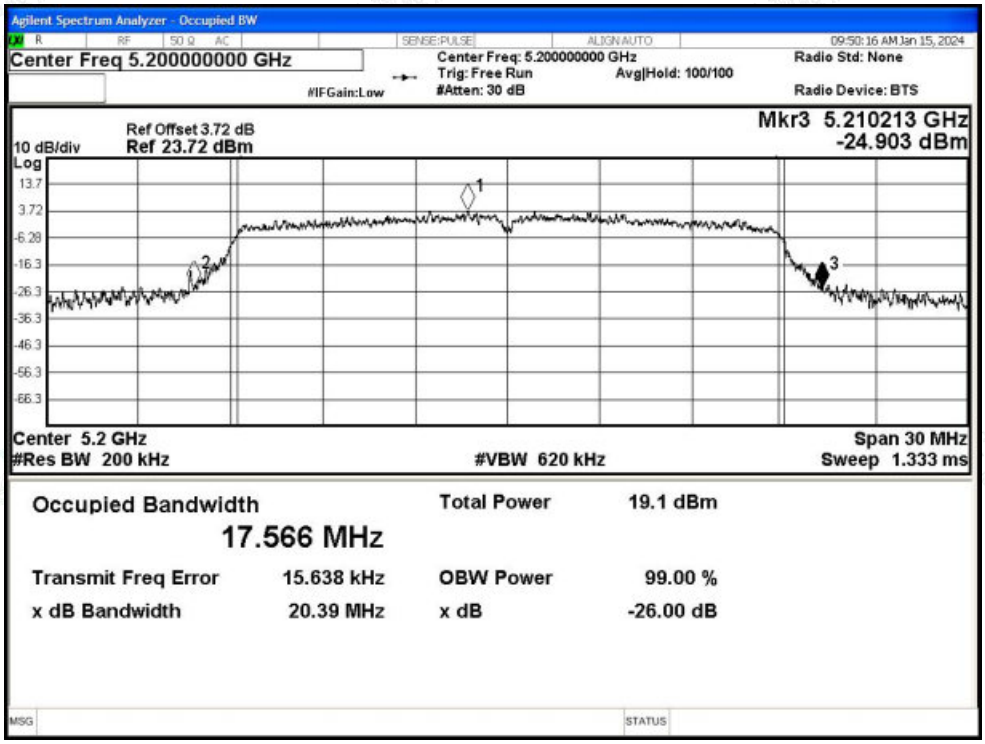

-26dB Bandwidth NVNT ac20 5240MHz Ant1

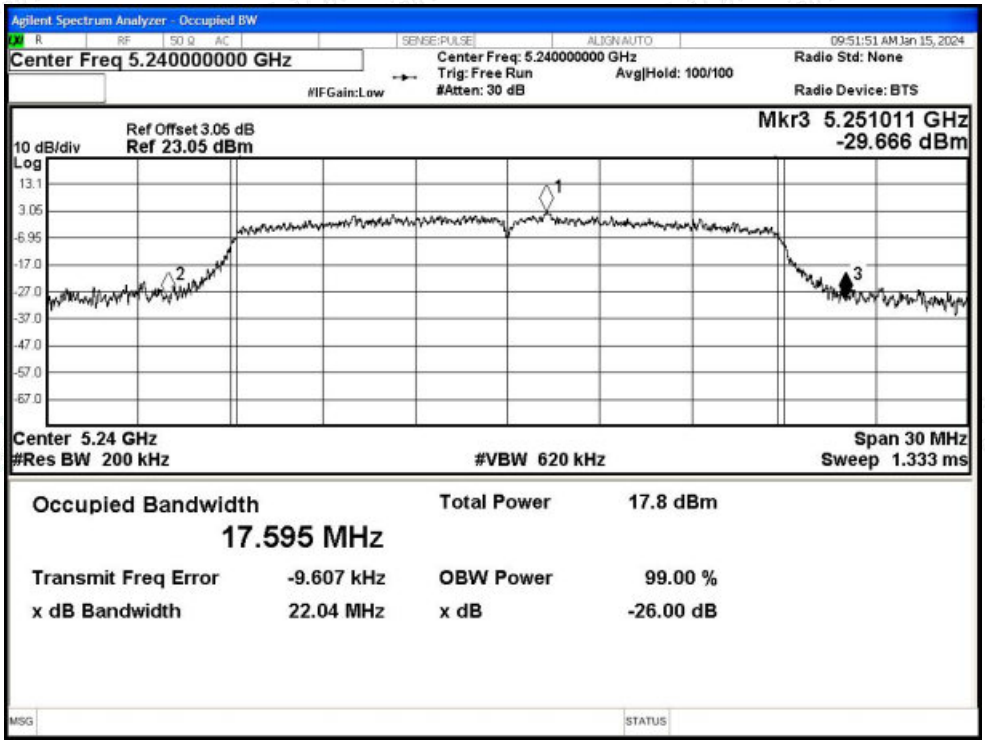

-26dB Bandwidth NVNT ac40 5190MHz Ant1

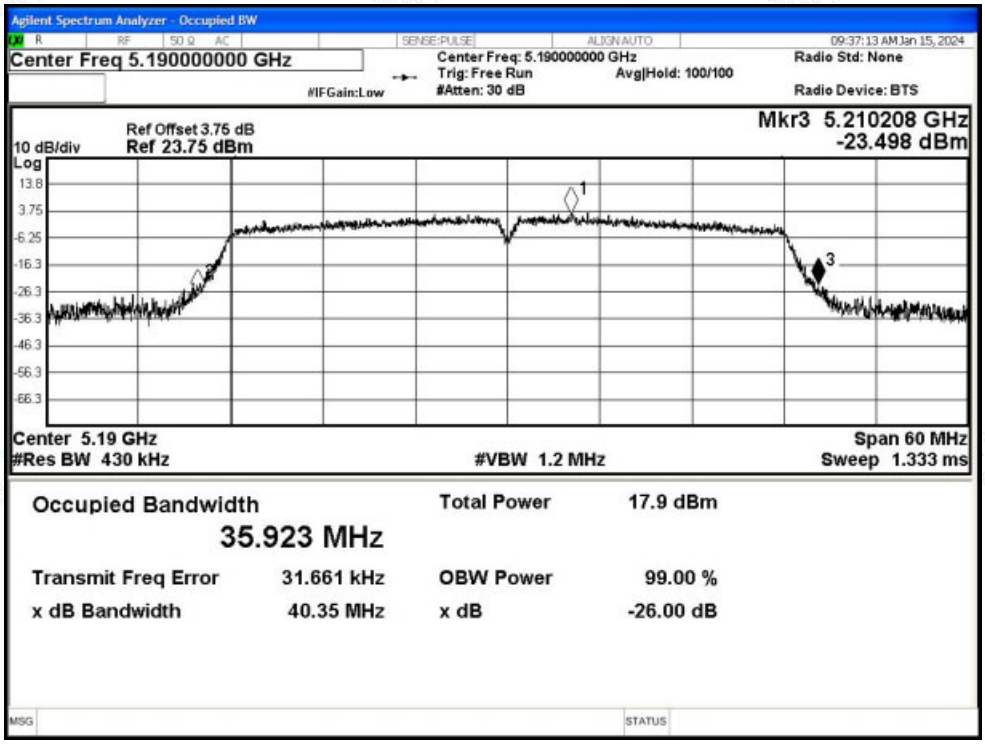

-26dB Bandwidth NVNT ac40 5230MHz Ant1

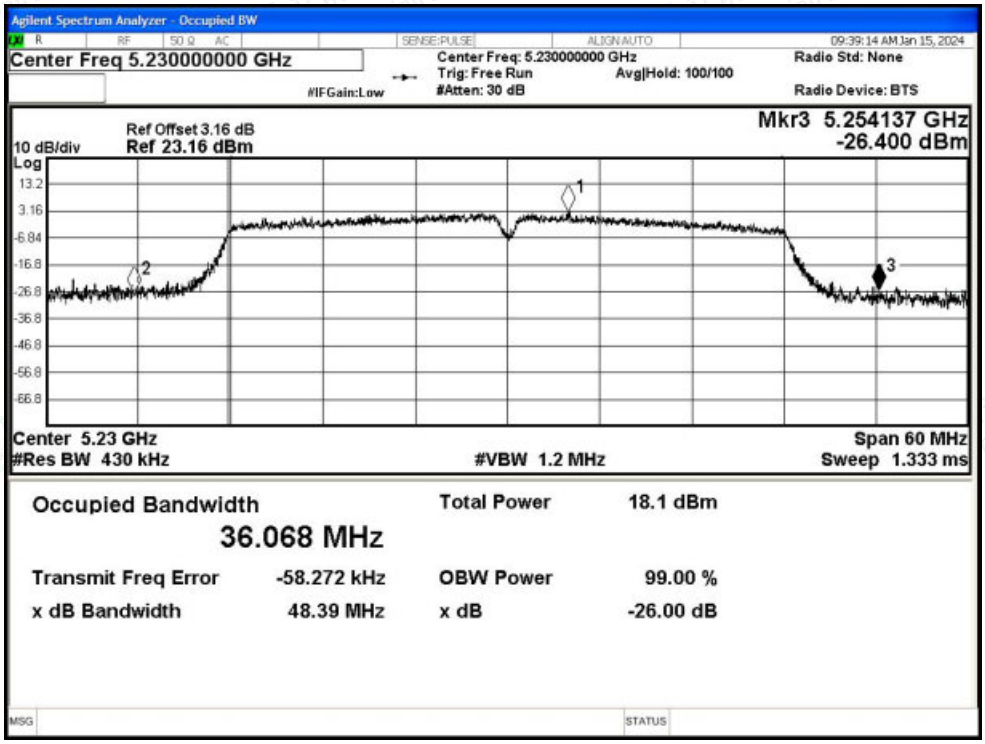

-26dB Bandwidth NVNT ac80 5210MHz Ant1

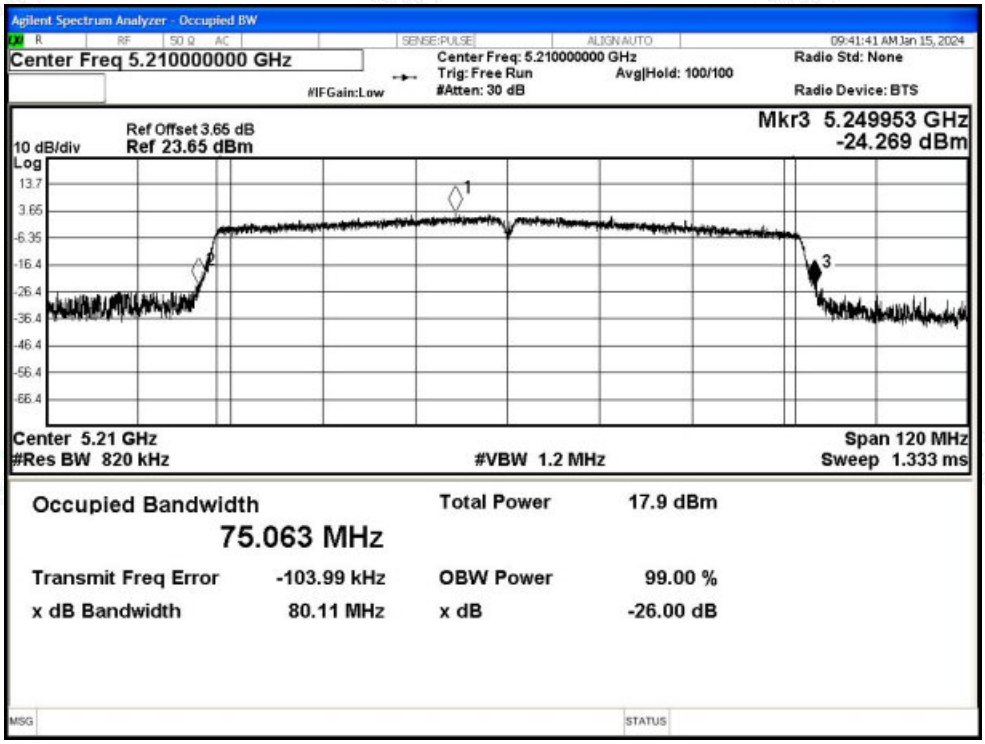

-26dB Bandwidth NVNT ax20 5180MHz Ant1

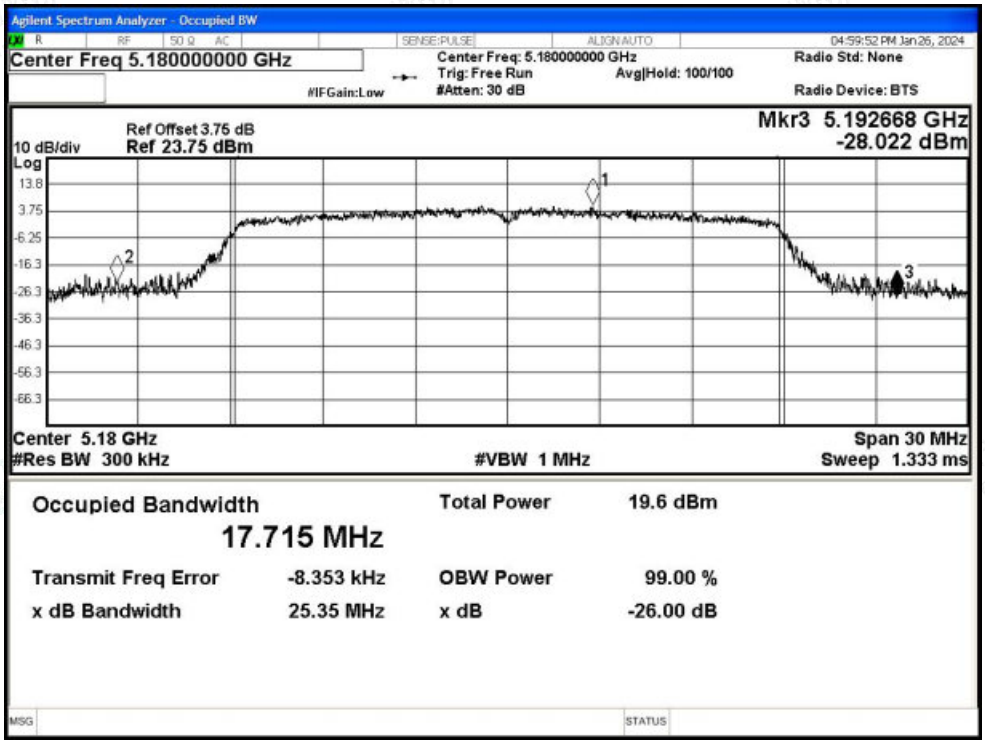

-26dB Bandwidth NVNT ax20 5200MHz Ant1

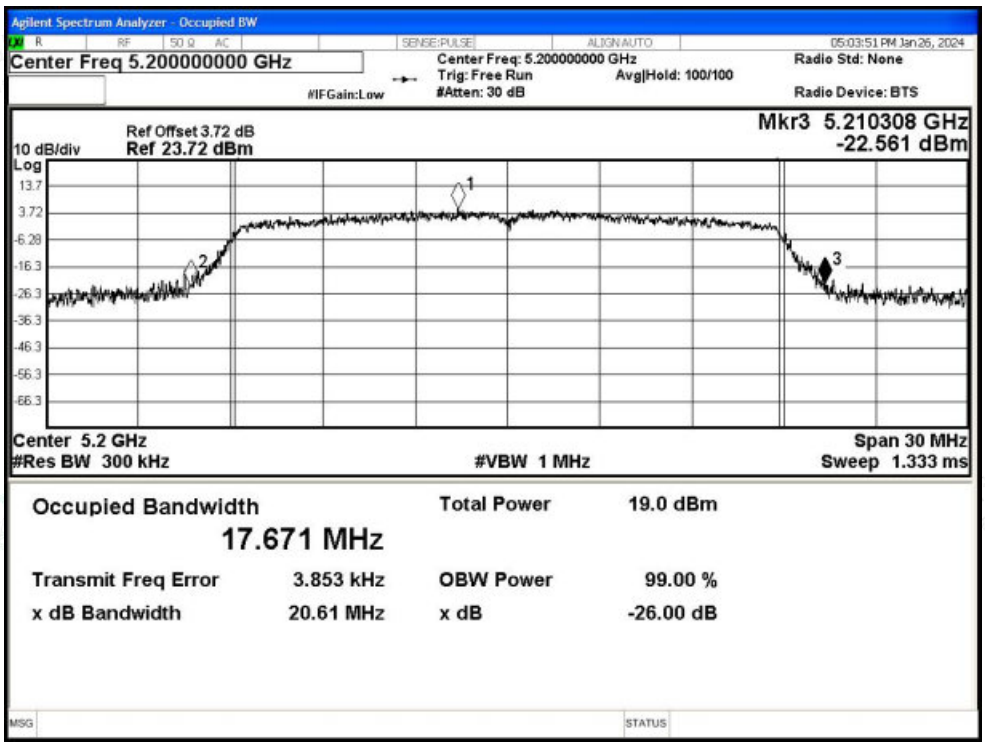

-26dB Bandwidth NVNT ax20 5240MHz Ant1

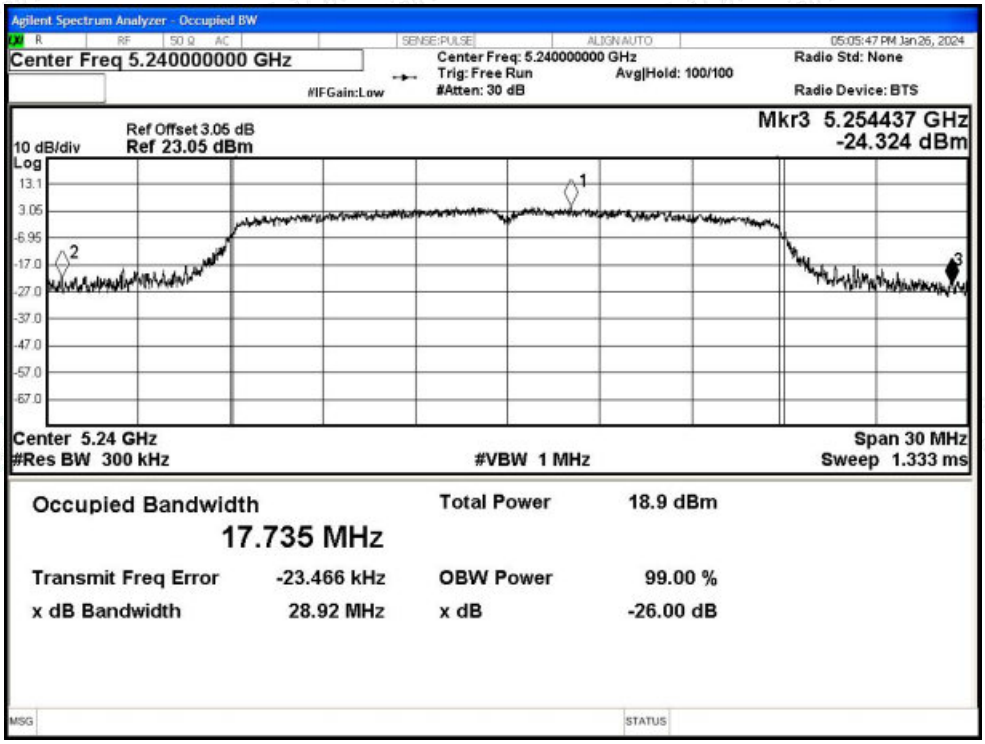

-26dB Bandwidth NVNT ax40 5190MHz Ant1

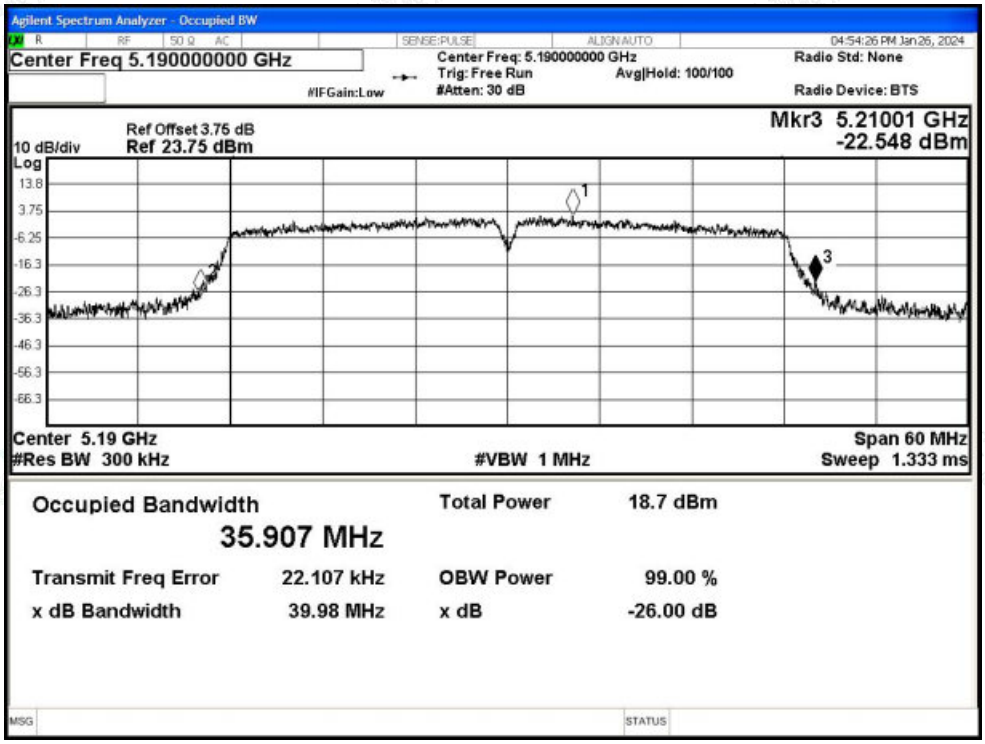

-26dB Bandwidth NVNT ax40 5230MHz Ant1

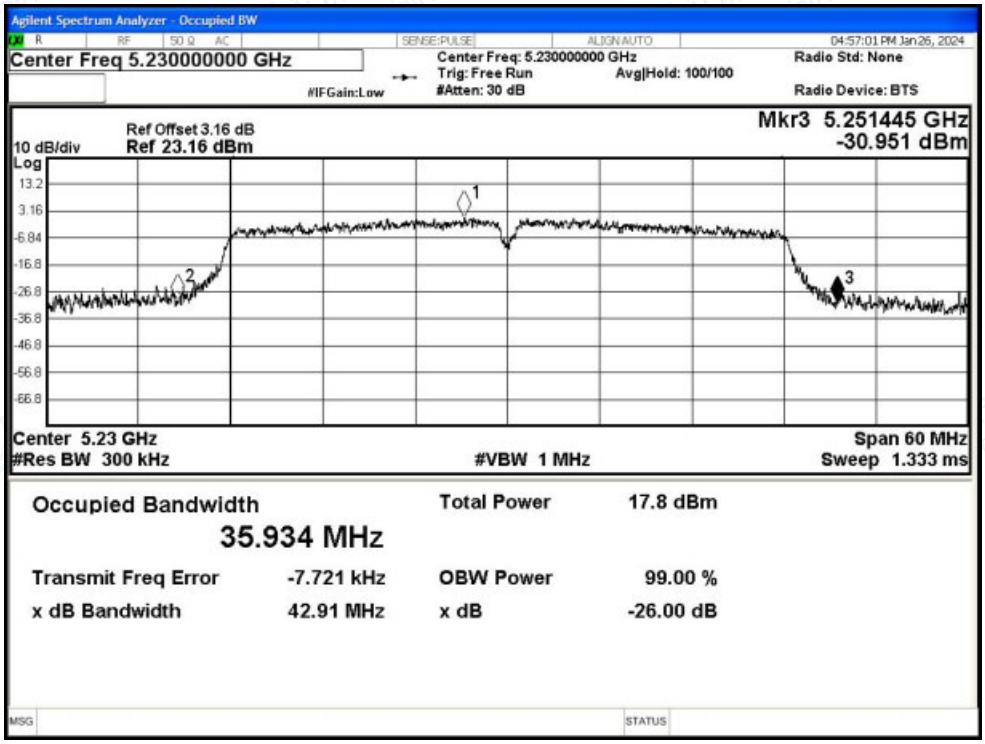

-26dB Bandwidth NVNT ax80 5210MHz Ant1

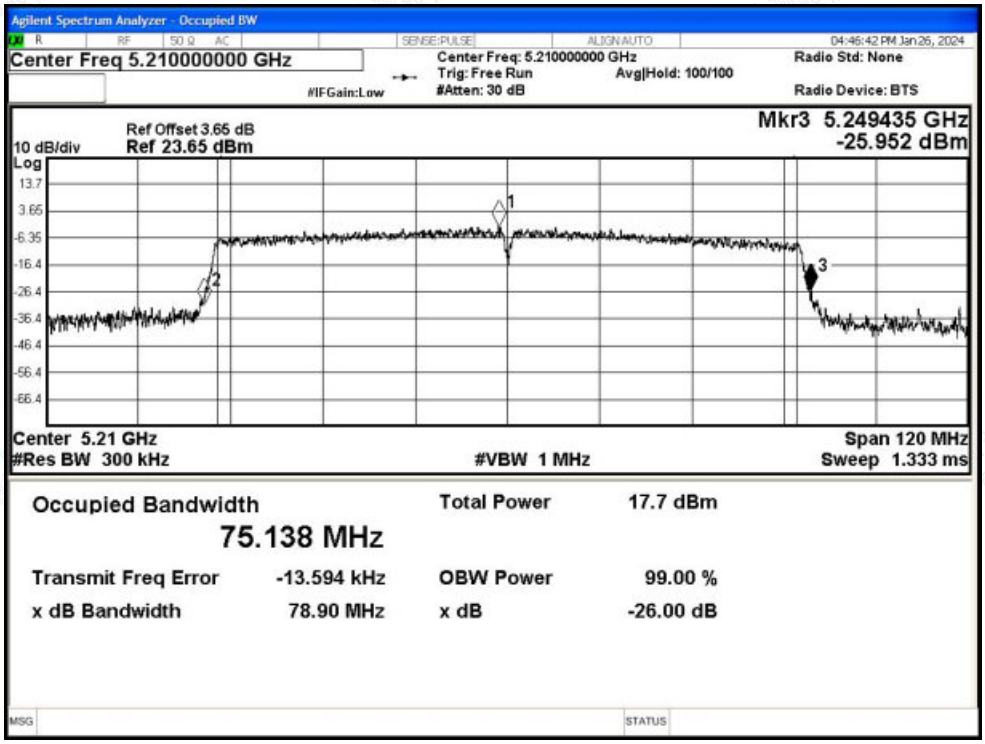

B.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant0	14.1	0.13	14.23	24	Pass
NVNT	a	5200	Ant0	14.39	0.13	14.52	24	Pass
NVNT	a	5240	Ant0	14.27	0.13	14.4	24	Pass
NVNT	n20	5180	Ant0	13.01	0.15	13.16	24	Pass
NVNT	n20	5200	Ant0	13.38	0.15	13.53	24	Pass
NVNT	n20	5240	Ant0	13.12	0.15	13.27	24	Pass
NVNT	n40	5190	Ant0	12.59	0.28	12.87	24	Pass
NVNT	n40	5230	Ant0	11.86	0.29	12.15	24	Pass
NVNT	ac20	5180	Ant0	13.26	0.14	13.4	24	Pass
NVNT	ac20	5200	Ant0	13.29	0.14	13.43	24	Pass
NVNT	ac20	5240	Ant0	13.03	0.14	13.17	24	Pass
NVNT	ac40	5190	Ant0	12.62	0.28	12.9	24	Pass
NVNT	ac40	5230	Ant0	12.18	0.28	12.46	24	Pass
NVNT	ac80	5210	Ant0	11.26	0.55	11.81	24	Pass
NVNT	ax20	5180	Ant0	13.12	0.14	13.26	24	Pass
NVNT	ax20	5200	Ant0	13.39	0.14	13.53	24	Pass
NVNT	ax20	5240	Ant0	12.85	0.14	12.99	24	Pass
NVNT	ax40	5190	Ant0	12.16	0.28	12.44	24	Pass
NVNT	ax40	5230	Ant0	12.27	0.28	12.55	24	Pass
NVNT	ax80	5210	Ant0	11.09	0.55	11.64	24	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	14.29	0.13	14.42	24	Pass
NVNT	a	5200	Ant1	14.29	0.13	14.42	24	Pass
NVNT	a	5240	Ant1	14.25	0.13	14.38	24	Pass
NVNT	n20	5180	Ant1	13.03	0.15	13.18	24	Pass
NVNT	n20	5200	Ant1	13.24	0.15	13.39	24	Pass
NVNT	n20	5240	Ant1	12.16	0.15	12.31	24	Pass
NVNT	n40	5190	Ant1	11.99	0.29	12.28	24	Pass
NVNT	n40	5230	Ant1	11.96	0.29	12.25	24	Pass
NVNT	ac20	5180	Ant1	13.05	0.14	13.19	24	Pass
NVNT	ac20	5200	Ant1	13.44	0.14	13.58	24	Pass
NVNT	ac20	5240	Ant1	12.1	0.15	12.25	24	Pass
NVNT	ac40	5190	Ant1	12.07	0.28	12.35	24	Pass
NVNT	ac40	5230	Ant1	12.15	0.28	12.43	24	Pass
NVNT	ac80	5210	Ant1	11.01	0.55	11.56	24	Pass

NVNT	ax20	5180	Ant1	13.63	0.14	13.77	24	Pass
NVNT	ax20	5200	Ant1	13.29	0.14	13.43	24	Pass
NVNT	ax20	5240	Ant1	13.18	0.14	13.32	24	Pass
NVNT	ax40	5190	Ant1	12.7	0.28	12.98	24	Pass
NVNT	ax40	5230	Ant1	11.76	0.28	12.04	24	Pass
NVNT	ax80	5210	Ant1	11.09	0.55	11.64	24	Pass

MIMO

Condition	Mode	Frequency (MHz)	Antenna		Total Power (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	13.16	13.18	16.18	22.99	Pass
NVNT	n20	5200	13.53	13.39	16.47	22.99	Pass
NVNT	n20	5240	13.27	12.31	15.83	22.99	Pass
NVNT	n40	5190	12.87	12.28	15.60	22.99	Pass
NVNT	n40	5230	12.15	12.25	15.21	22.99	Pass
NVNT	ac20	5180	13.4	13.19	16.31	22.99	Pass
NVNT	ac20	5200	13.43	13.58	16.52	22.99	Pass
NVNT	ac20	5240	13.17	12.25	15.74	22.99	Pass
NVNT	ac40	5190	12.9	12.35	15.64	22.99	Pass
NVNT	ac40	5230	12.46	12.43	15.46	22.99	Pass
NVNT	ac80	5210	11.81	11.56	14.70	22.99	Pass
NVNT	ax20	5180	13.26	13.77	16.53	22.99	Pass
NVNT	ax20	5200	13.53	13.43	16.49	22.99	Pass
NVNT	ax20	5240	12.99	13.32	16.17	22.99	Pass
NVNT	ax40	5190	12.44	12.98	15.73	22.99	Pass
NVNT	ax40	5230	12.55	12.04	15.31	22.99	Pass
NVNT	ax80	5210	11.64	11.64	14.65	22.99	Pass

B.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant0	4.75	0.13	4.88	11	Pass
NVNT	a	5200	Ant0	4.94	0.13	5.07	11	Pass
NVNT	a	5240	Ant0	4.52	0.13	4.65	11	Pass
NVNT	n20	5180	Ant0	3.17	0.15	3.32	11	Pass
NVNT	n20	5200	Ant0	3.62	0.15	3.77	11	Pass
NVNT	n20	5240	Ant0	3.18	0.15	3.33	11	Pass
NVNT	n40	5190	Ant0	-0.21	0.28	0.07	11	Pass
NVNT	n40	5230	Ant0	-0.81	0.29	-0.52	11	Pass
NVNT	ac20	5180	Ant0	3.46	0.14	3.6	11	Pass
NVNT	ac20	5200	Ant0	3.41	0.14	3.55	11	Pass
NVNT	ac20	5240	Ant0	3.19	0.14	3.33	11	Pass
NVNT	ac40	5190	Ant0	-0.07	0.28	0.21	11	Pass
NVNT	ac40	5230	Ant0	-0.71	0.28	-0.43	11	Pass
NVNT	ac80	5210	Ant0	-4.22	0.55	-3.67	11	Pass
NVNT	ax20	5180	Ant0	3.53	0.14	3.67	11	Pass
NVNT	ax20	5200	Ant0	3.63	0.14	3.77	11	Pass
NVNT	ax20	5240	Ant0	3.06	0.14	3.2	11	Pass
NVNT	ax40	5190	Ant0	-0.57	0.28	-0.29	11	Pass
NVNT	ax40	5230	Ant0	-0.47	0.28	-0.19	11	Pass
NVNT	ax80	5210	Ant0	-4.05	0.55	-3.5	11	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	4.62	0.13	4.75	11	Pass
NVNT	a	5200	Ant1	4.69	0.13	4.82	11	Pass
NVNT	a	5240	Ant1	4.73	0.13	4.86	11	Pass
NVNT	n20	5180	Ant1	3.59	0.15	3.74	11	Pass
NVNT	n20	5200	Ant1	3.78	0.15	3.93	11	Pass
NVNT	n20	5240	Ant1	2.22	0.15	2.37	11	Pass
NVNT	n40	5190	Ant1	-0.45	0.29	-0.16	11	Pass
NVNT	n40	5230	Ant1	-0.74	0.29	-0.45	11	Pass
NVNT	ac20	5180	Ant1	3.16	0.14	3.3	11	Pass
NVNT	ac20	5200	Ant1	3.69	0.14	3.83	11	Pass
NVNT	ac20	5240	Ant1	2.06	0.15	2.21	11	Pass
NVNT	ac40	5190	Ant1	-0.39	0.28	-0.11	11	Pass
NVNT	ac40	5230	Ant1	-0.76	0.28	-0.48	11	Pass
NVNT	ac80	5210	Ant1	-4.23	0.55	-3.68	11	Pass

NVNT	ax20	5180	Ant1	4.04	0.14	4.18	11	Pass
NVNT	ax20	5200	Ant1	3.5	0.14	3.64	11	Pass
NVNT	ax20	5240	Ant1	3.33	0.14	3.47	11	Pass
NVNT	ax40	5190	Ant1	-0.16	0.28	0.12	11	Pass
NVNT	ax40	5230	Ant1	-1.33	0.28	-1.05	11	Pass
NVNT	ax80	5210	Ant1	-4.46	0.55	-3.91	11	Pass

MIMO

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm) Duty Factor (dB)		Total PSD (dBm)	Limit (dBm)	Verdict
			Ant0	Ant1			
NVNT	n20	5180	3.32	3.74	6.55	9.99	Pass
NVNT	n20	5200	3.77	3.93	6.86	9.99	Pass
NVNT	n20	5240	3.33	2.37	5.89	9.99	Pass
NVNT	n40	5190	0.07	-0.16	2.97	9.99	Pass
NVNT	n40	5230	-0.52	-0.45	2.53	9.99	Pass
NVNT	ac20	5180	3.6	3.3	6.46	9.99	Pass
NVNT	ac20	5200	3.55	3.83	6.70	9.99	Pass
NVNT	ac20	5240	3.33	2.21	5.82	9.99	Pass
NVNT	ac40	5190	0.21	-0.11	3.06	9.99	Pass
NVNT	ac40	5230	-0.43	-0.48	2.56	9.99	Pass
NVNT	ac80	5210	-3.67	-3.68	-0.66	9.99	Pass
NVNT	ax20	5180	3.67	4.18	6.94	9.99	Pass
NVNT	ax20	5200	3.77	3.64	6.72	9.99	Pass
NVNT	ax20	5240	3.2	3.47	6.35	9.99	Pass
NVNT	ax40	5190	-0.29	0.12	2.93	9.99	Pass
NVNT	ax40	5230	-0.19	-1.05	2.41	9.99	Pass
NVNT	ax80	5210	-3.5	-3.91	-0.69	9.99	Pass

Test Graphs

PSD NVNT a 5180MHz Ant0

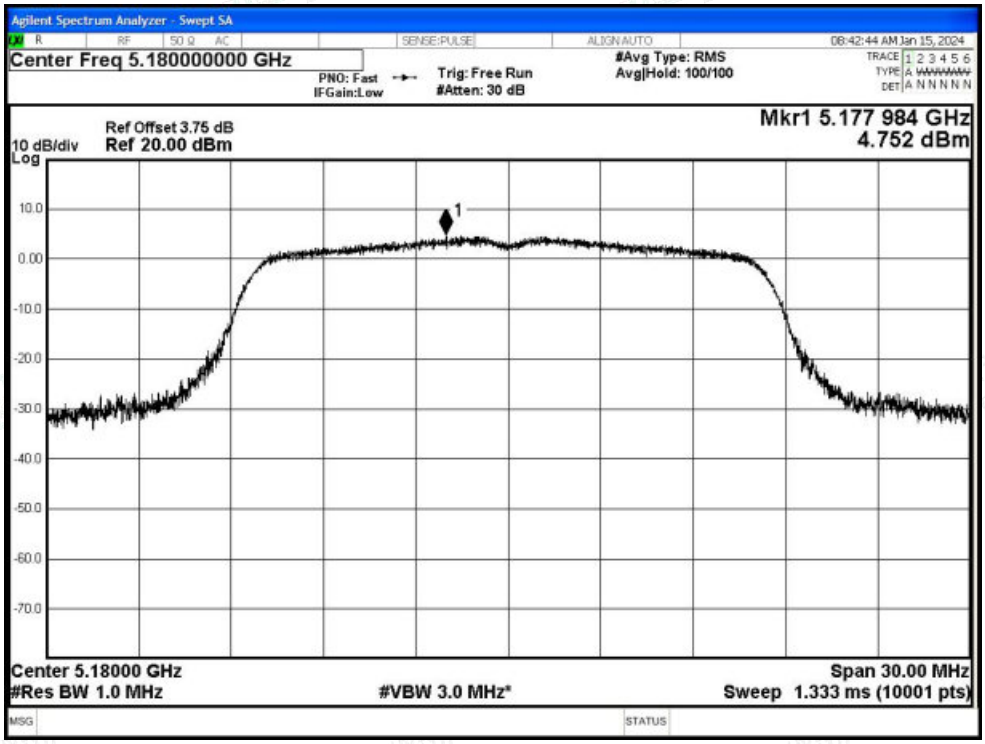

PSD NVNT a 5200MHz Ant0

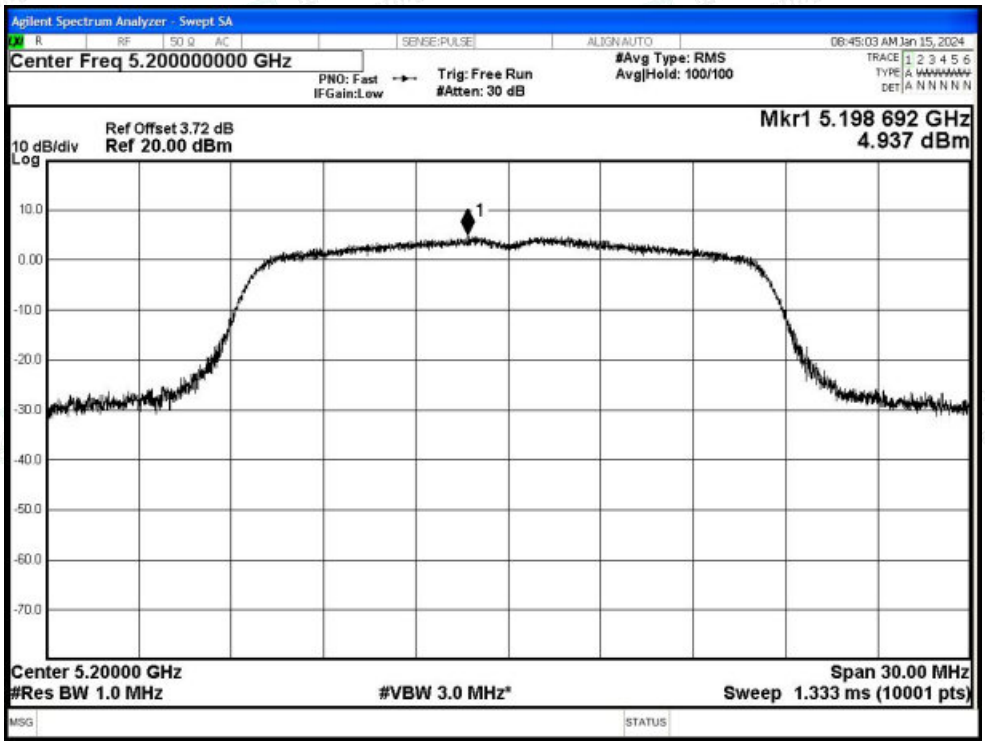

PSD NVNT a 5240MHz Ant0

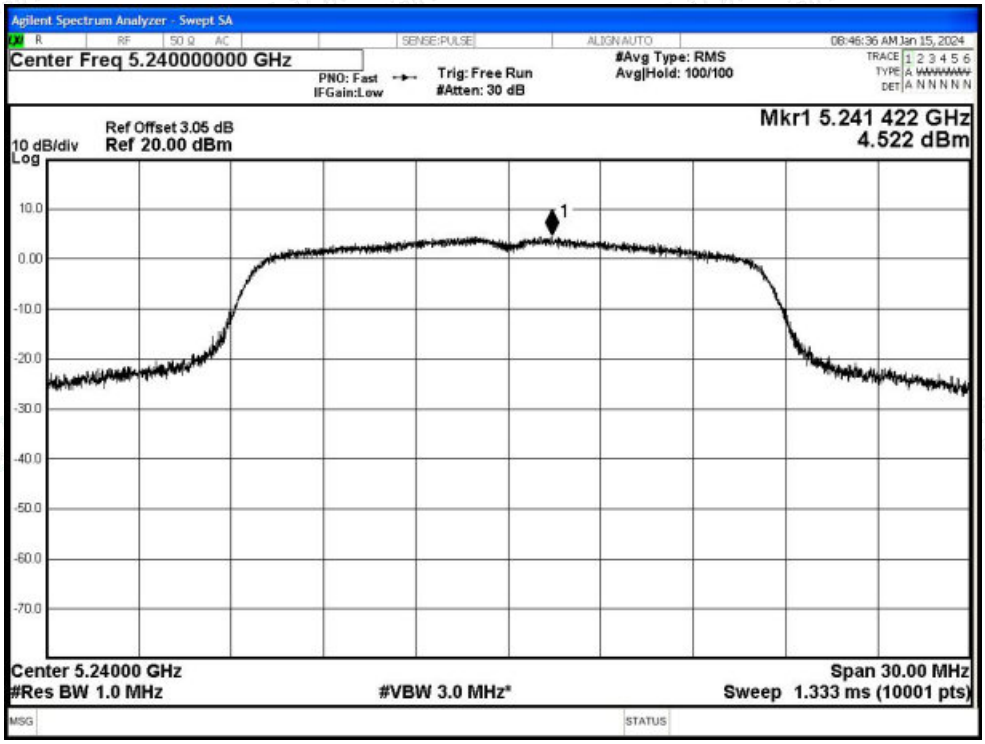

PSD NVNT n20 5180MHz Ant0

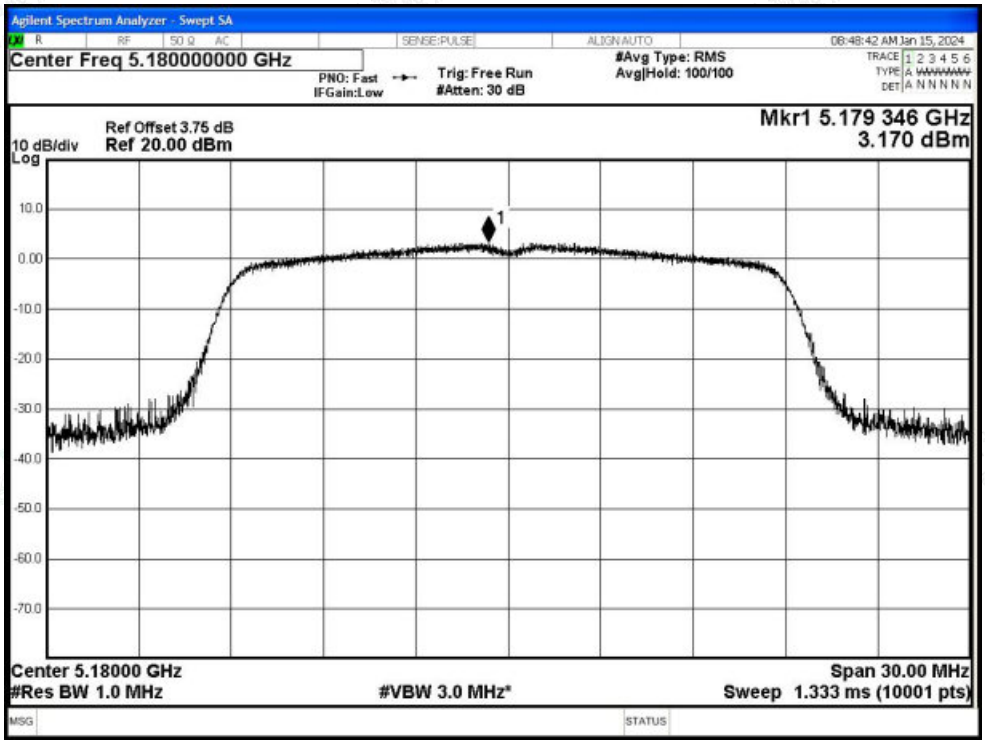

PSD NVNT n20 5200MHz Ant0

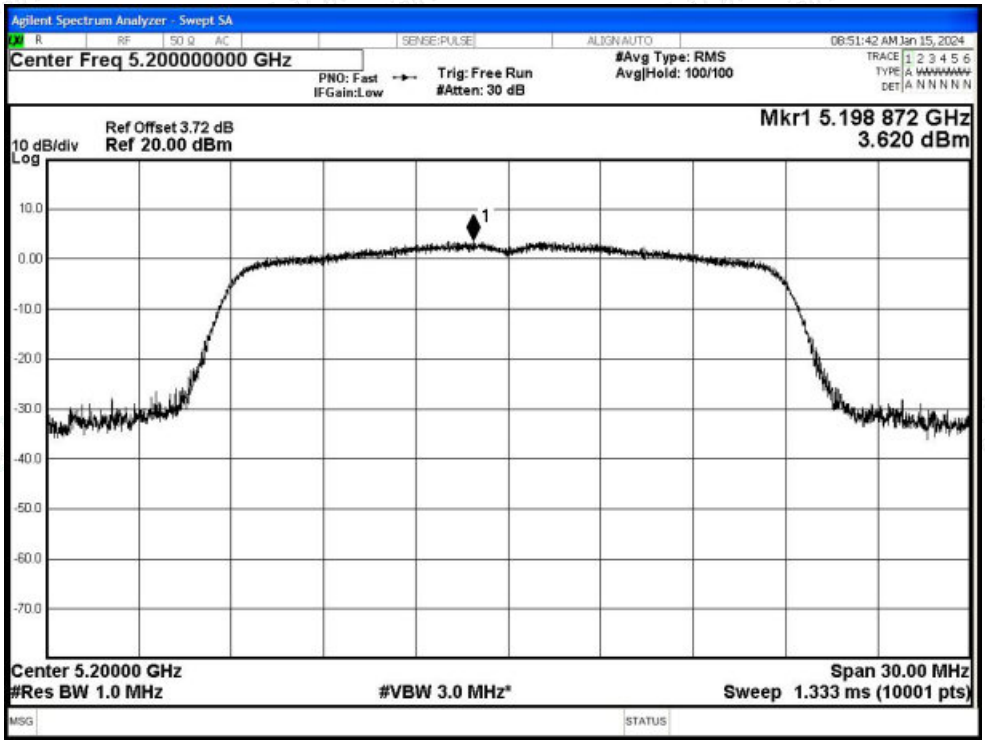

PSD NVNT n20 5240MHz Ant0

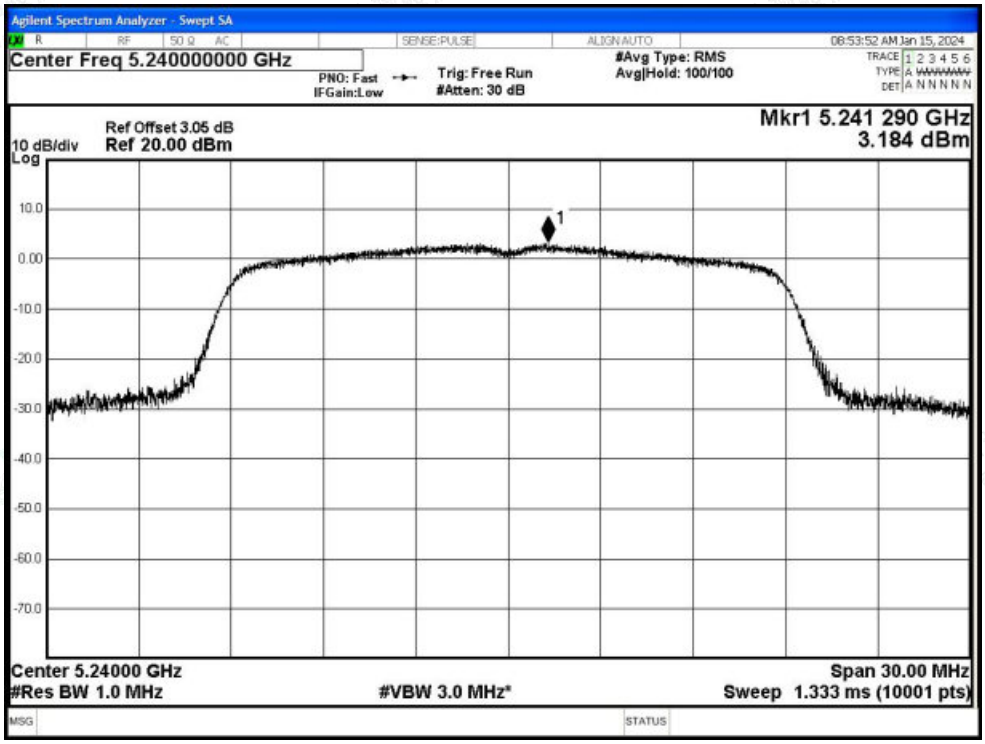

PSD NVNT n40 5190MHz Ant0

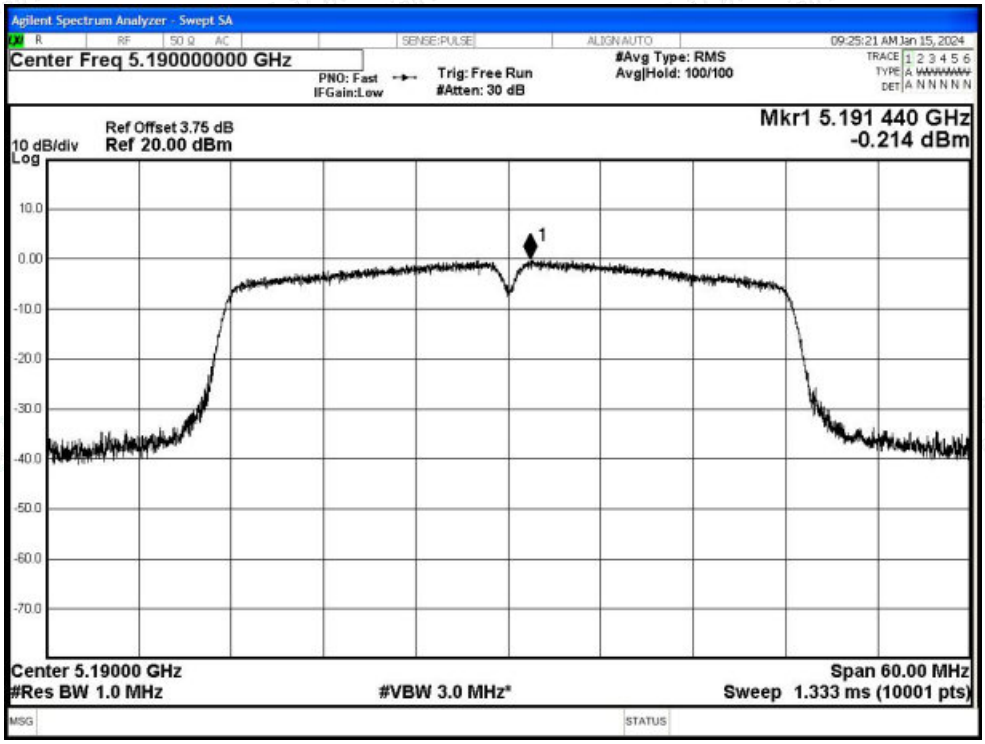

PSD NVNT n40 5230MHz Ant0

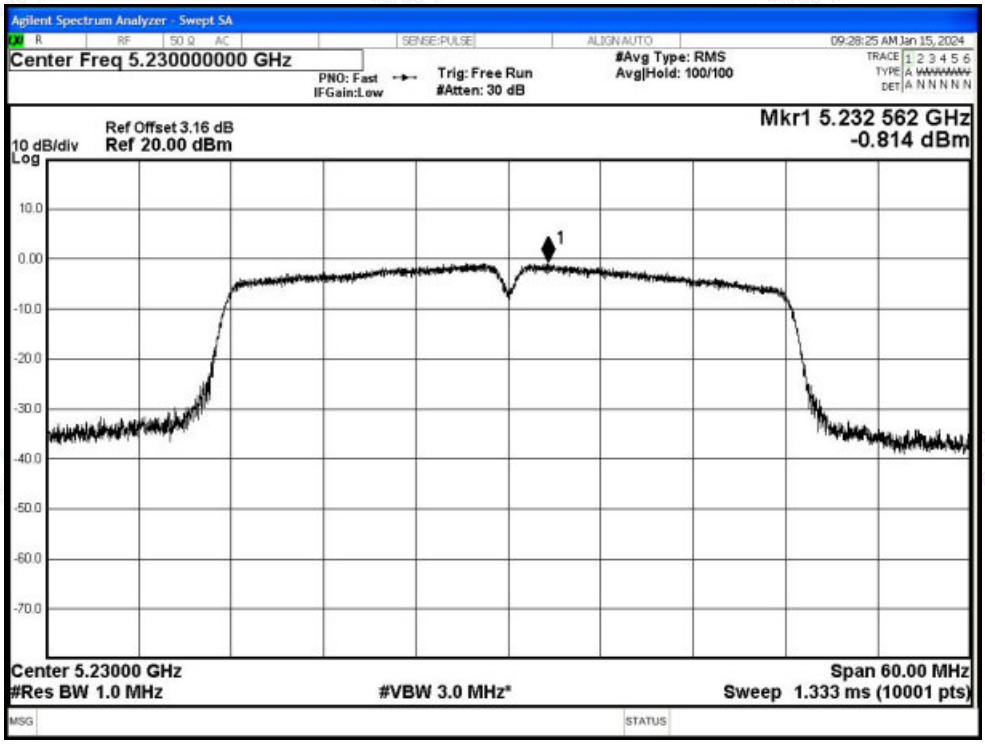

PSD NVNT ac20 5180MHz Ant0

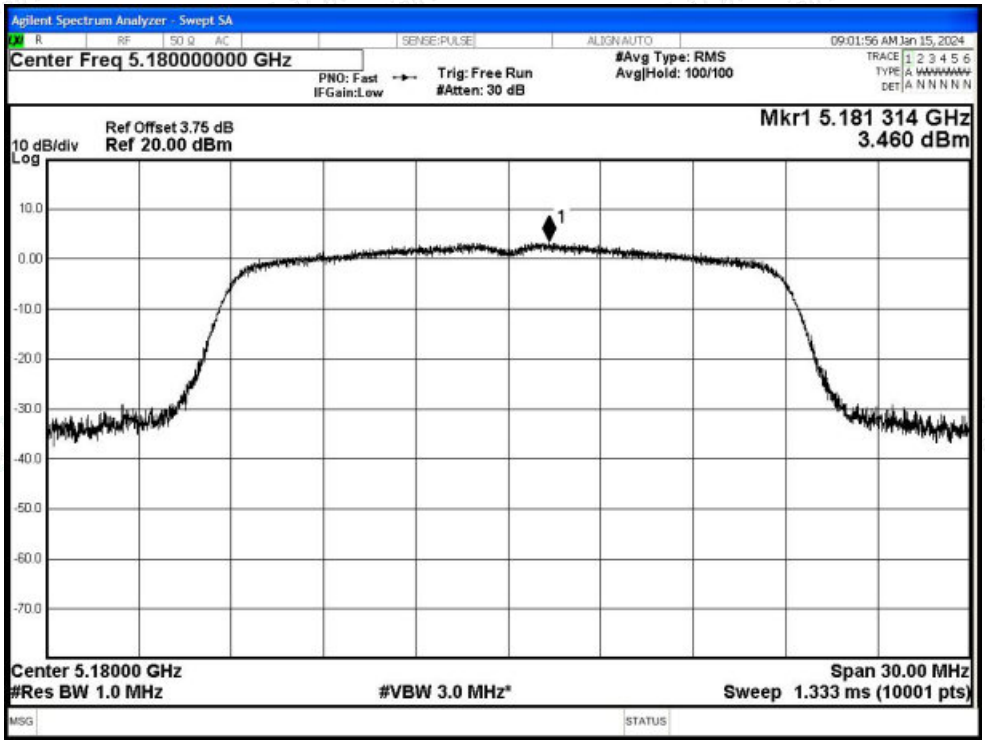

PSD NVNT ac20 5200MHz Ant0

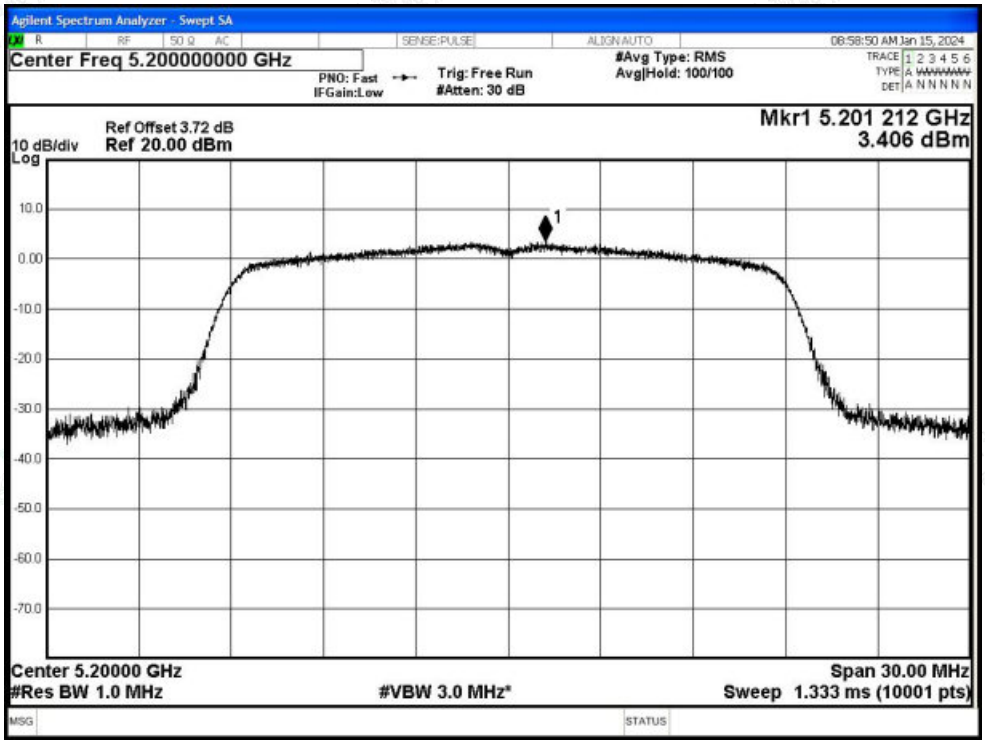

PSD NVNT ac20 5240MHz Ant0

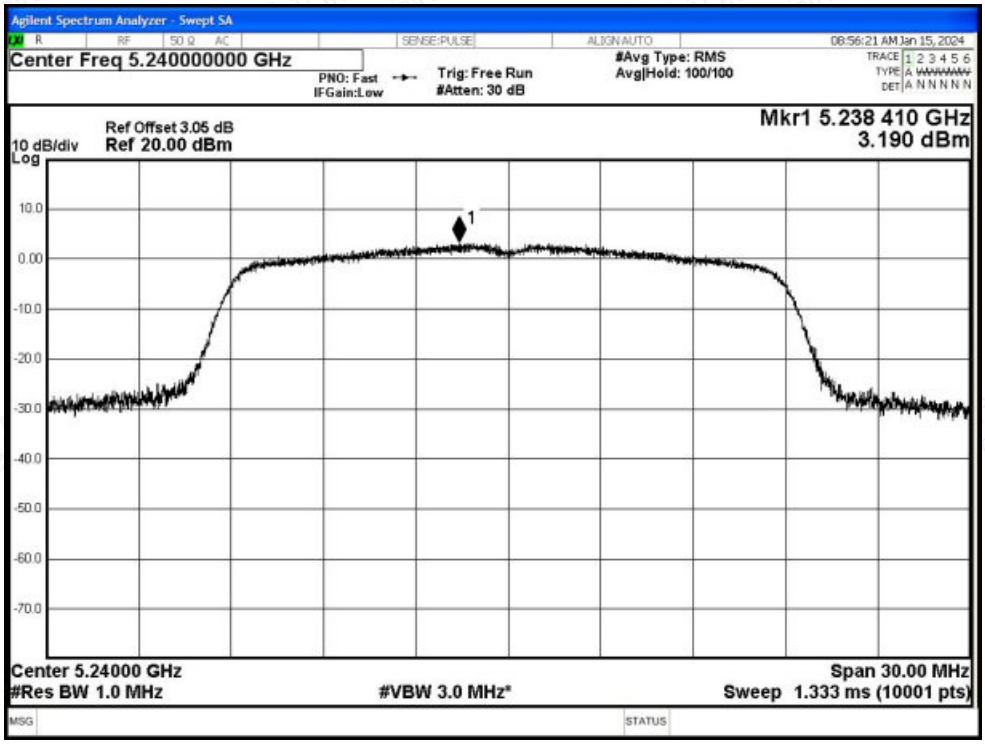

PSD NVNT ac40 5190MHz Ant0

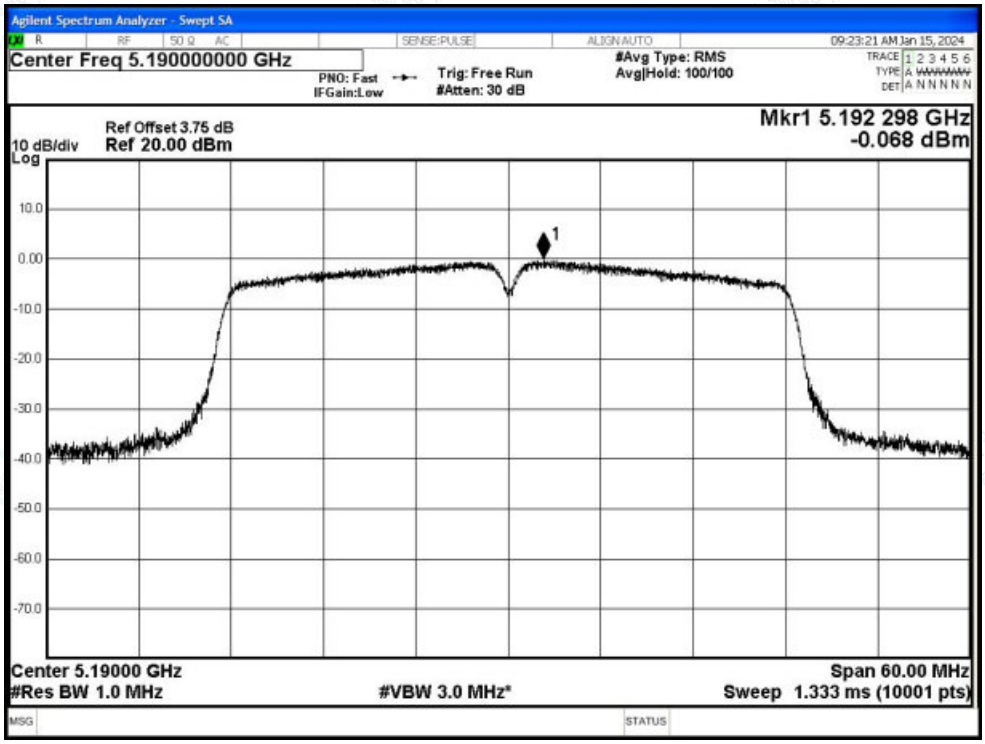

PSD NVNT ac40 5230MHz Ant0

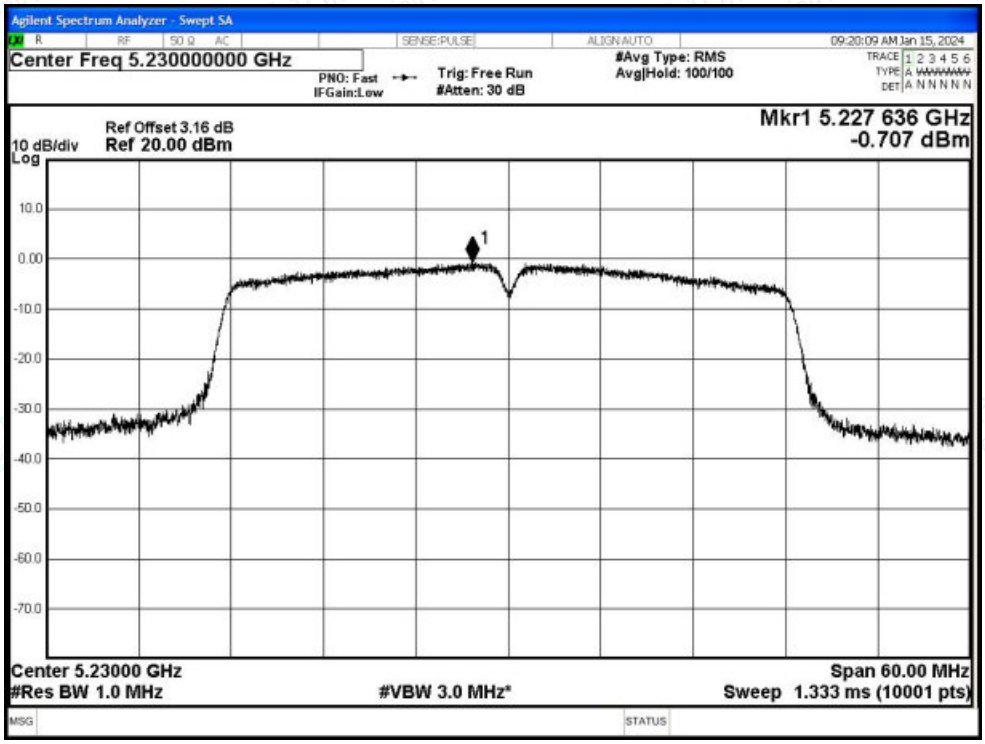

PSD NVNT ac80 5210MHz Ant0

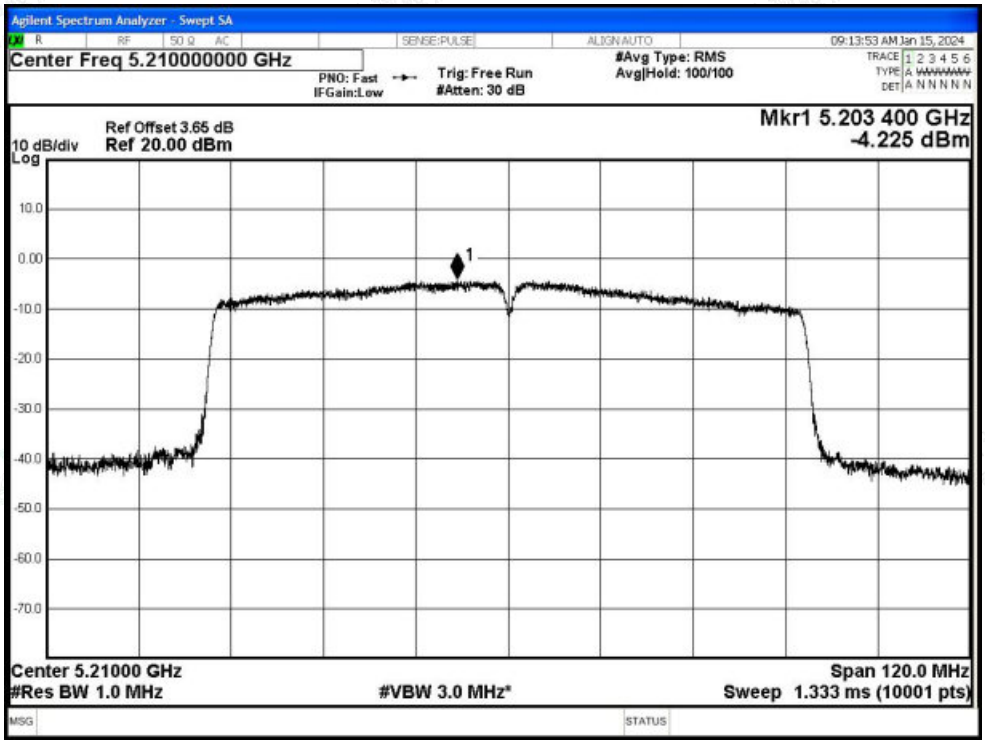

PSD NVNT ax20 5180MHz Ant0

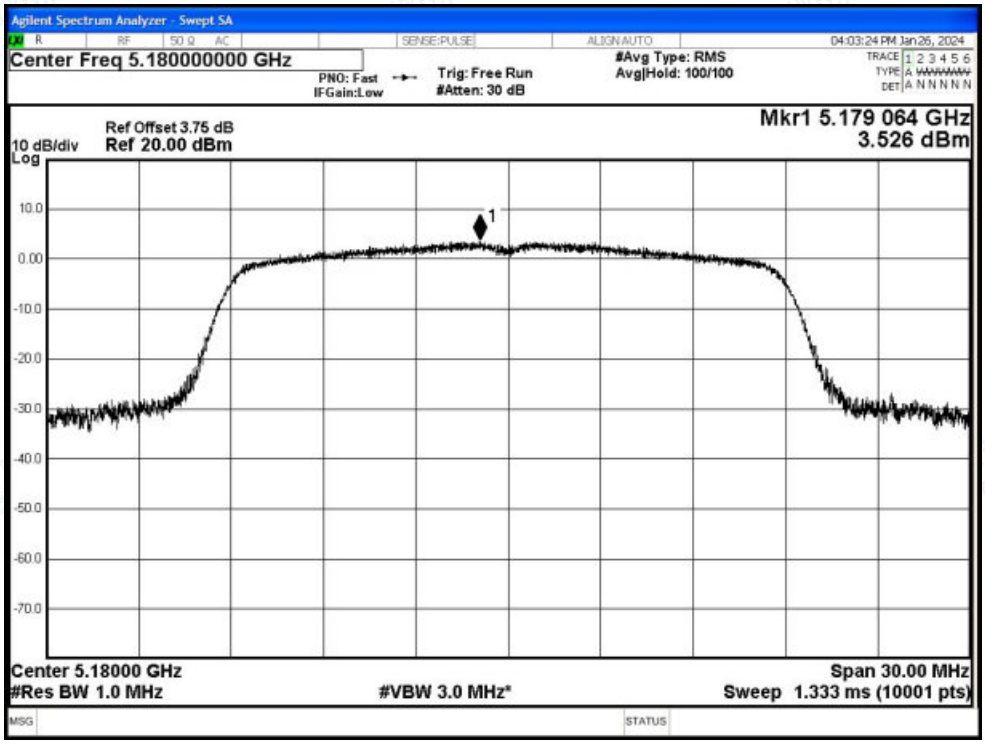

PSD NVNT ax20 5200MHz Ant0

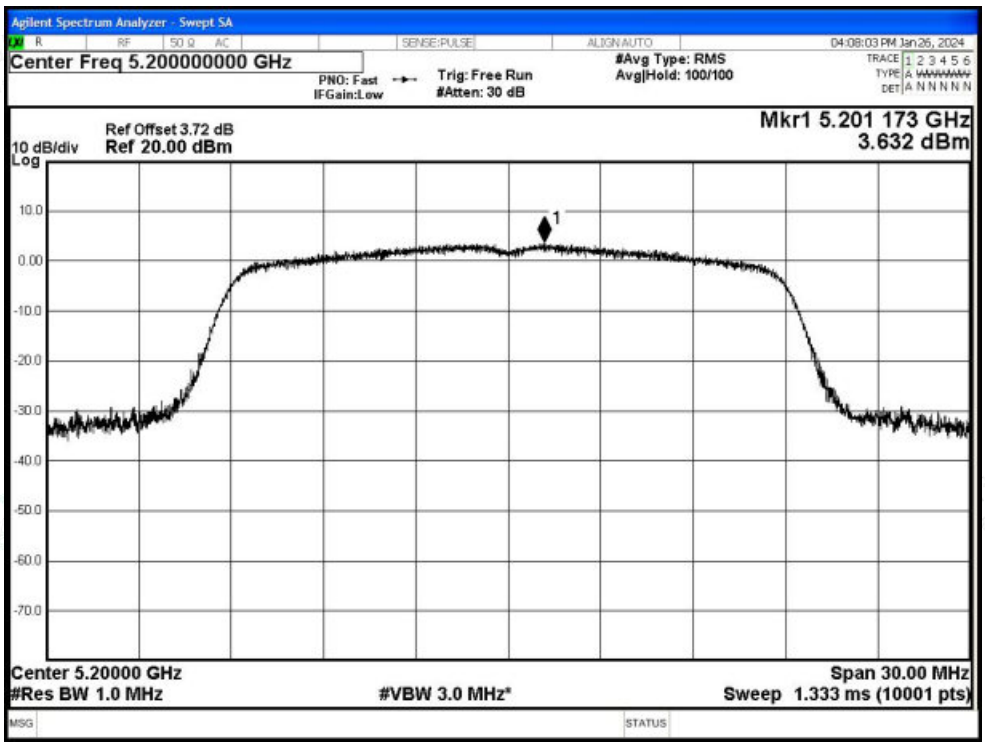

PSD NVNT ax20 5240MHz Ant0

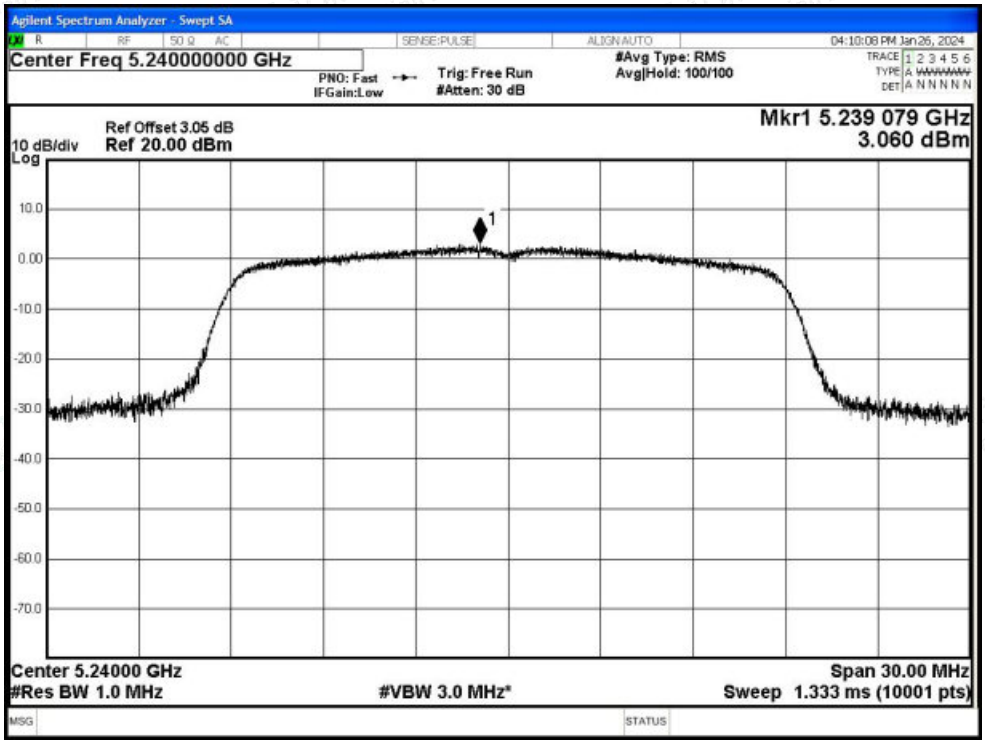

PSD NVNT ax40 5190MHz Ant0

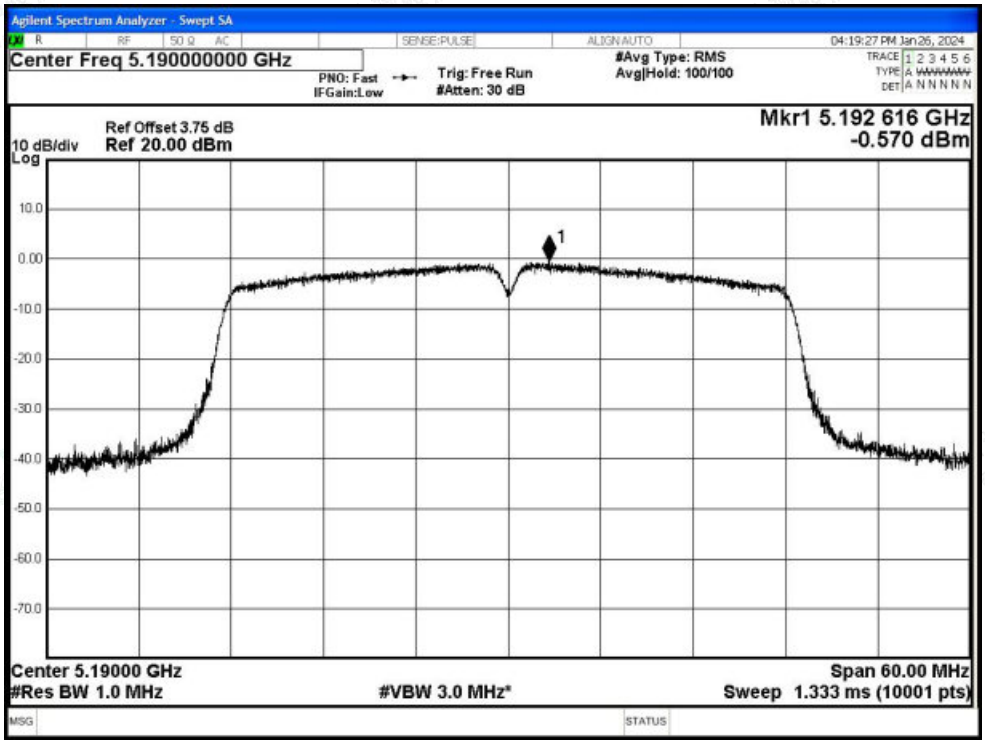

PSD NVNT ax40 5230MHz Ant0

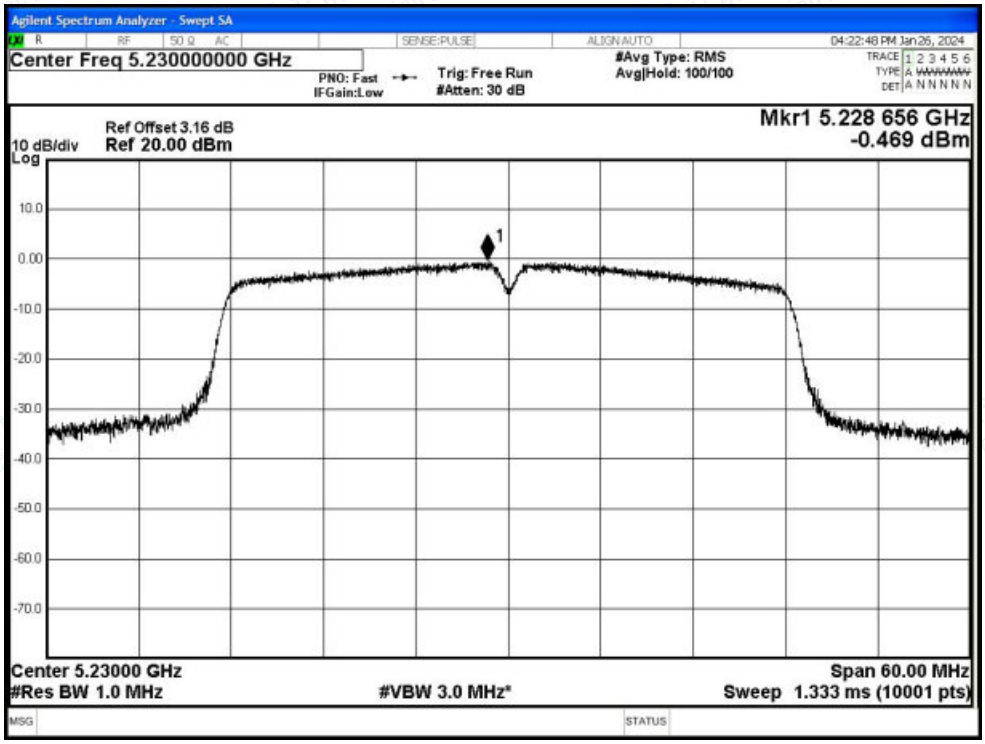

PSD NVNT ax80 5210MHz Ant0

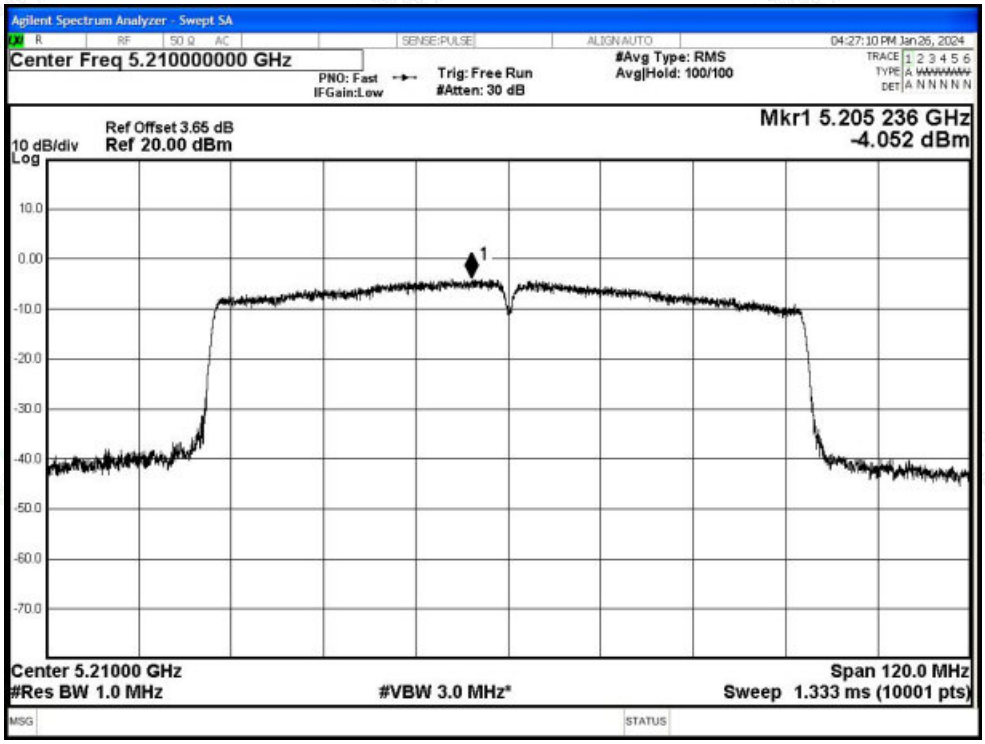

Test Graphs

PSD NVNT a 5180MHz Ant1

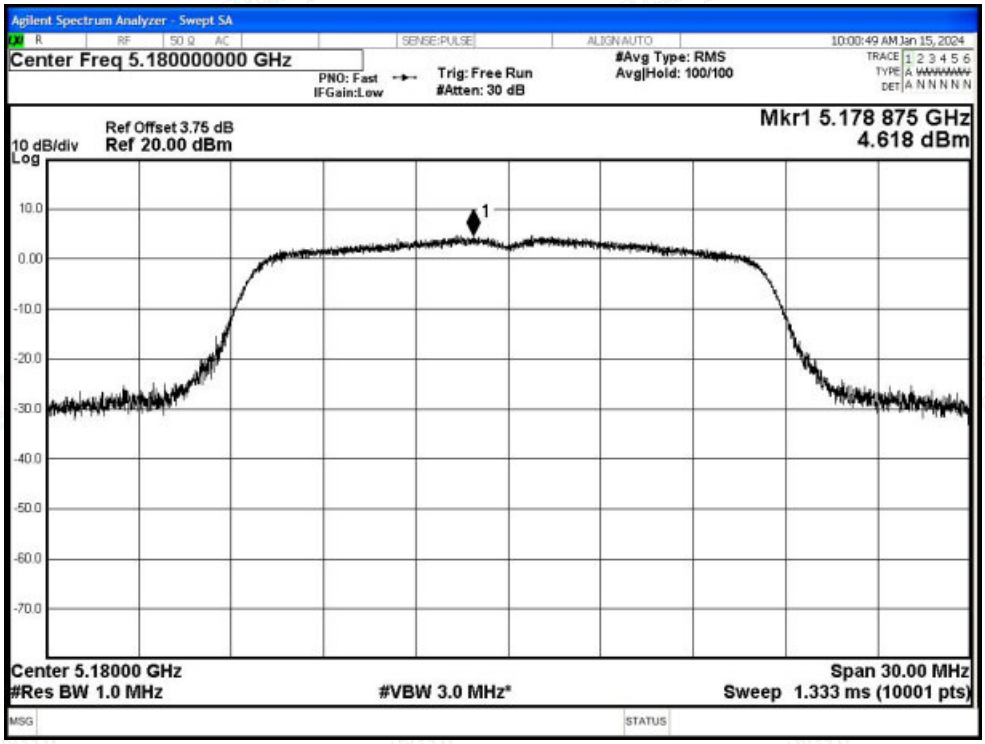

PSD NVNT a 5200MHz Ant1

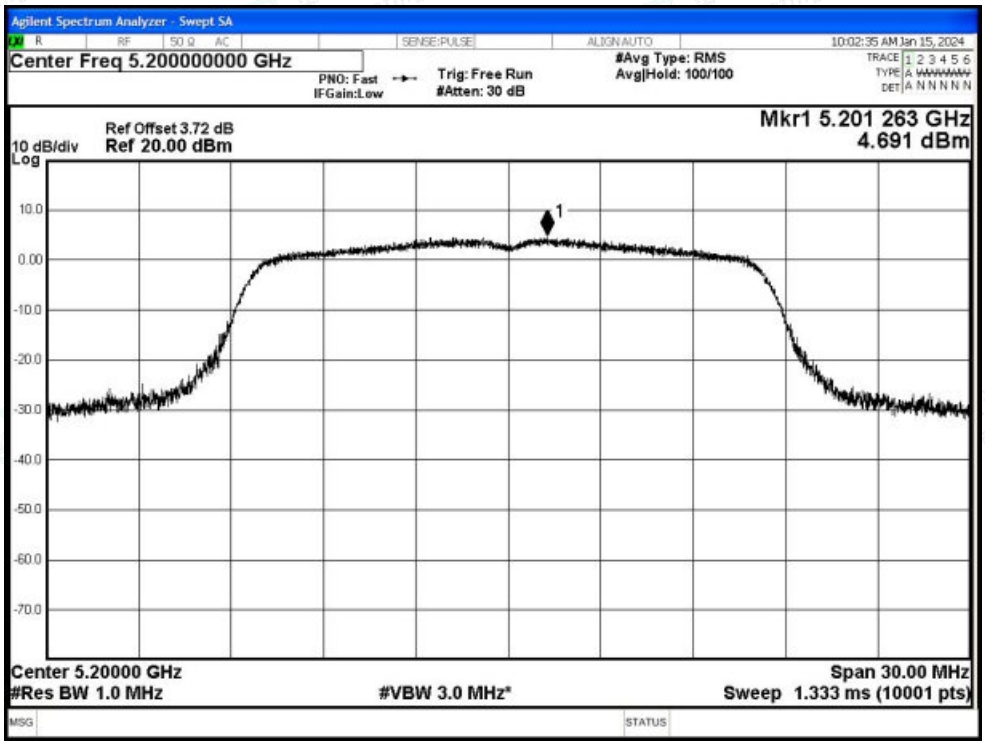

PSD NVNT a 5240MHz Ant1

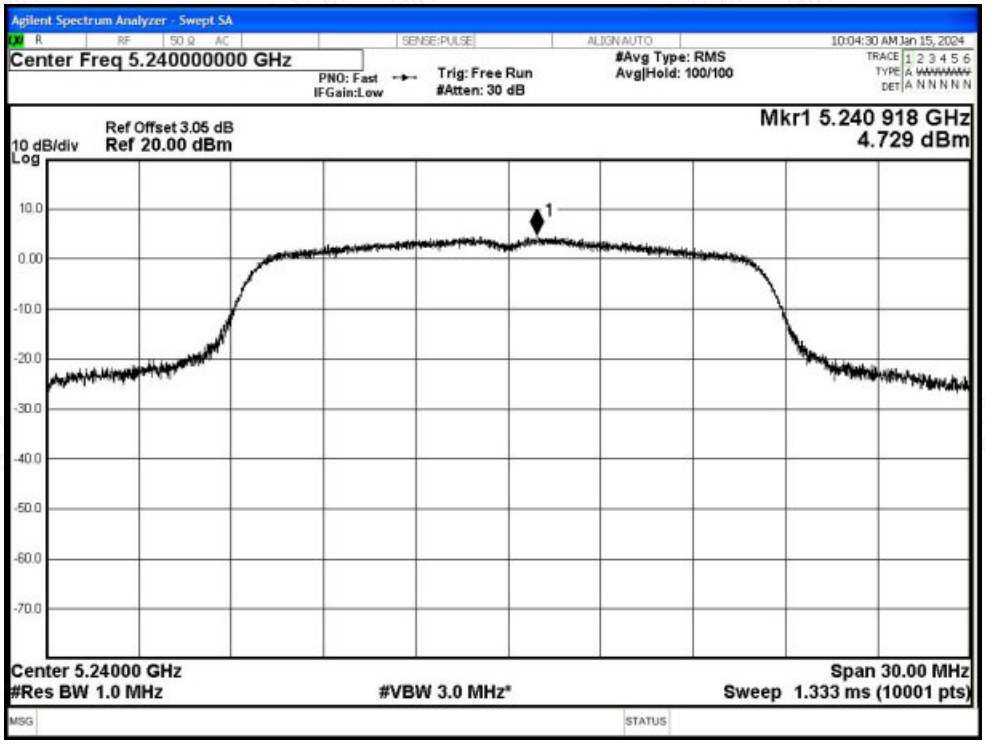

PSD NVNT n20 5180MHz Ant1

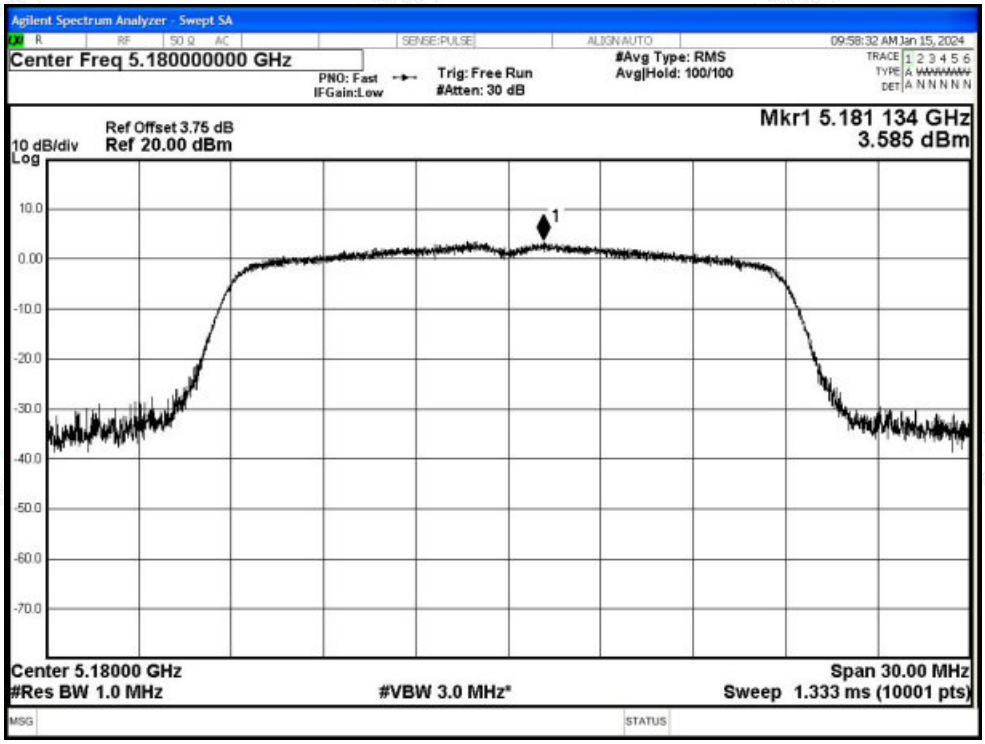

PSD NVNT n20 5200MHz Ant1

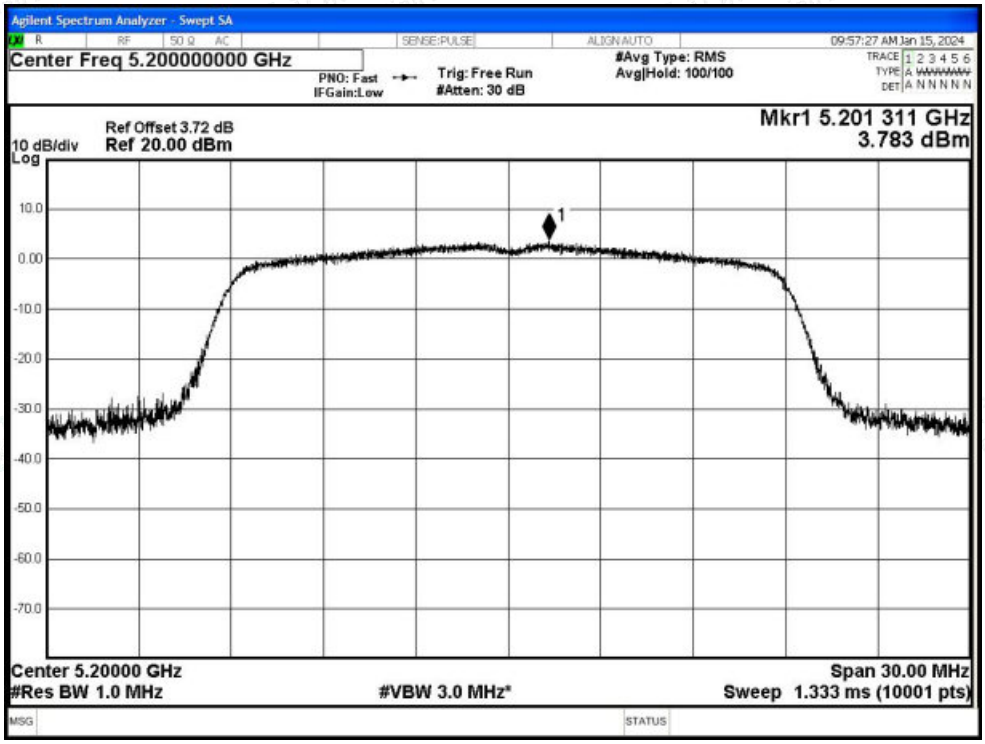

PSD NVNT n20 5240MHz Ant1

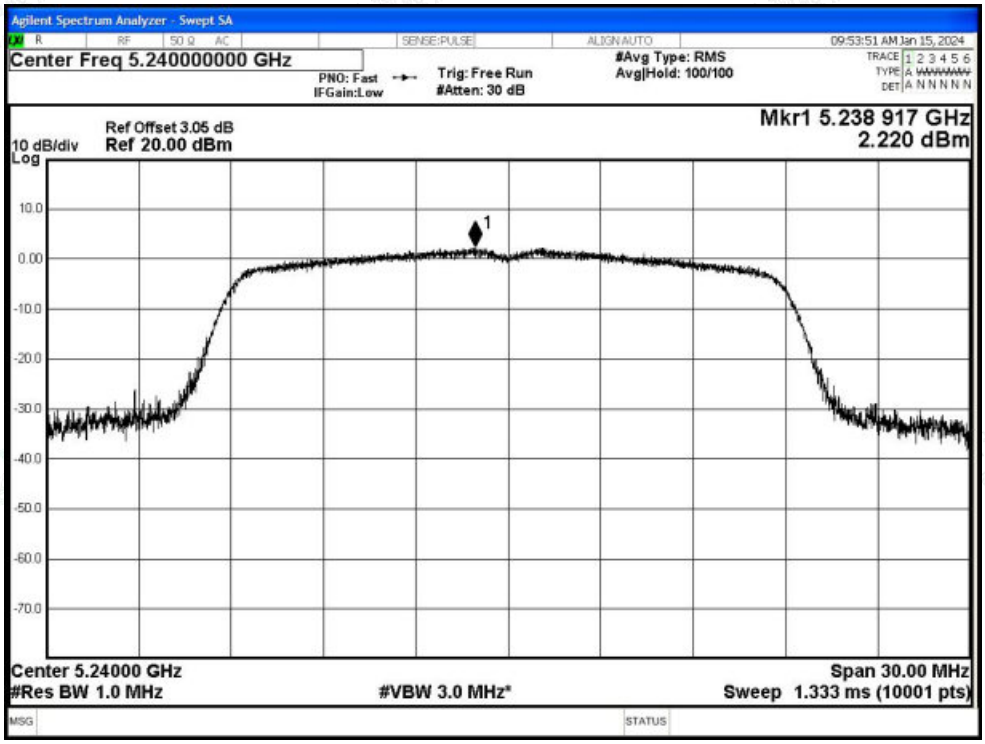

PSD NVNT n40 5190MHz Ant1

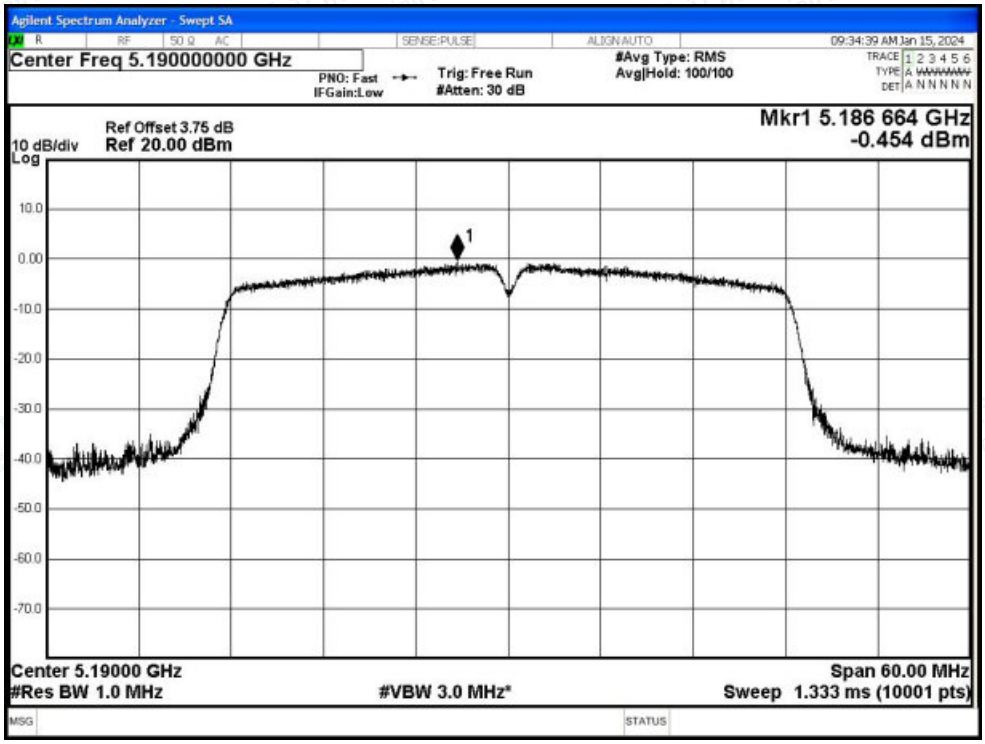

PSD NVNT n40 5230MHz Ant1

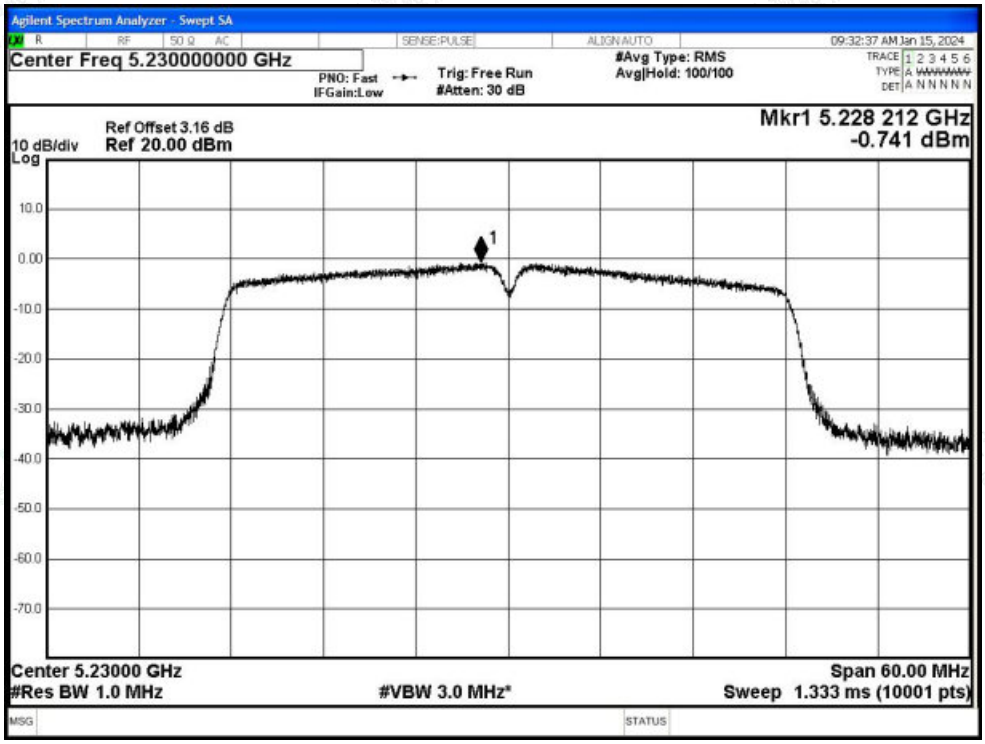

PSD NVNT ac20 5180MHz Ant1

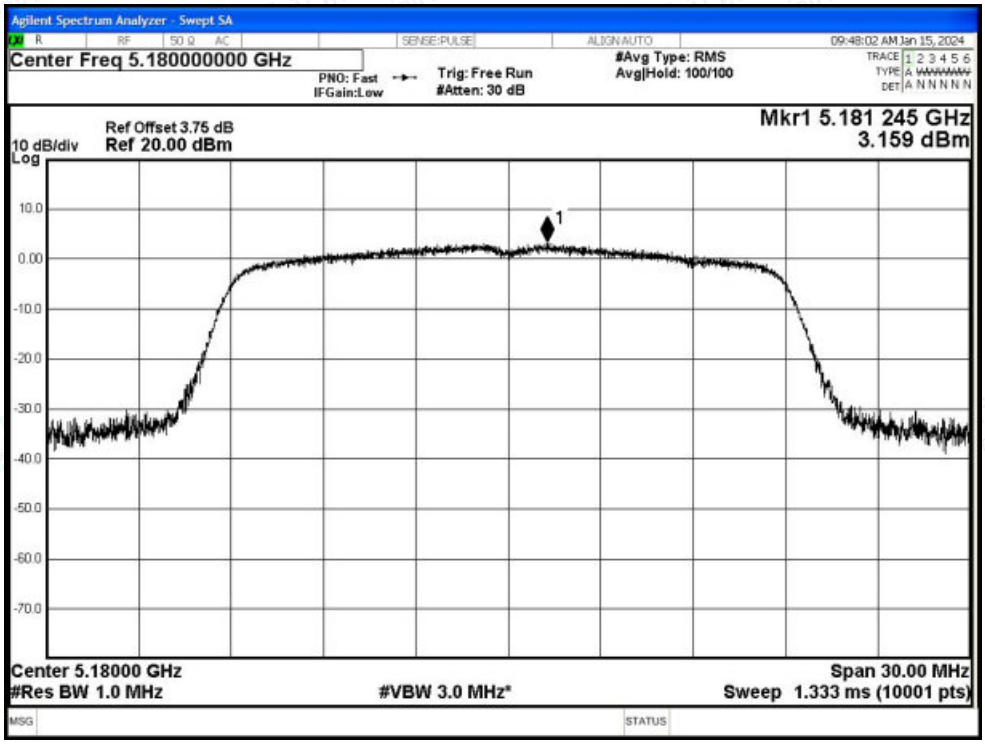

PSD NVNT ac20 5200MHz Ant1

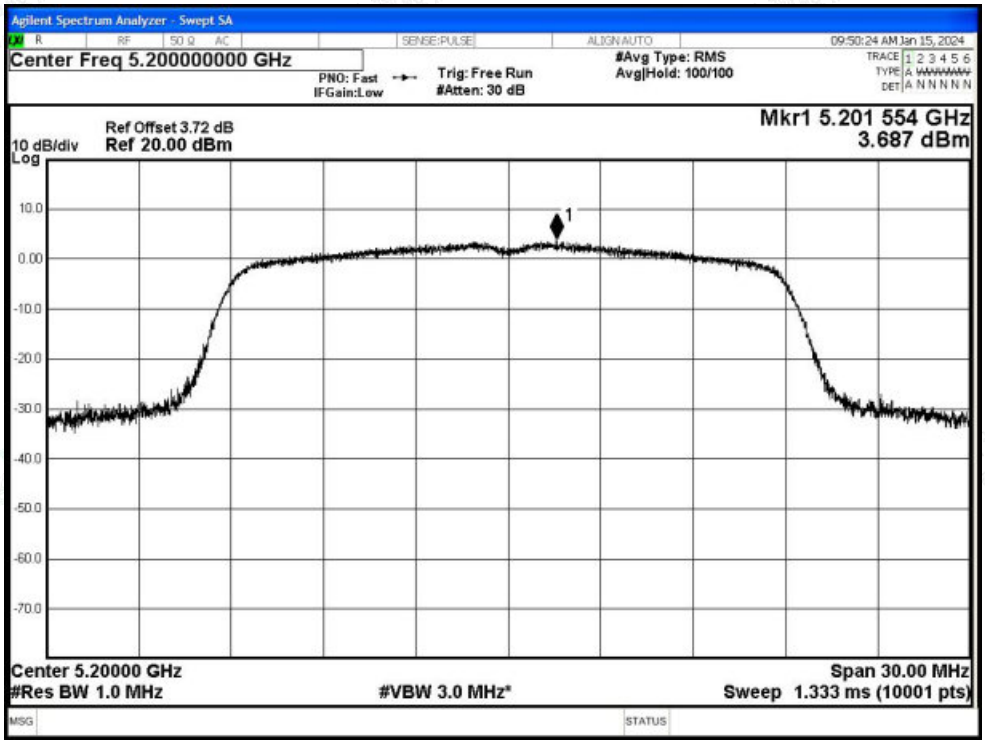

PSD NVNT ac20 5240MHz Ant1

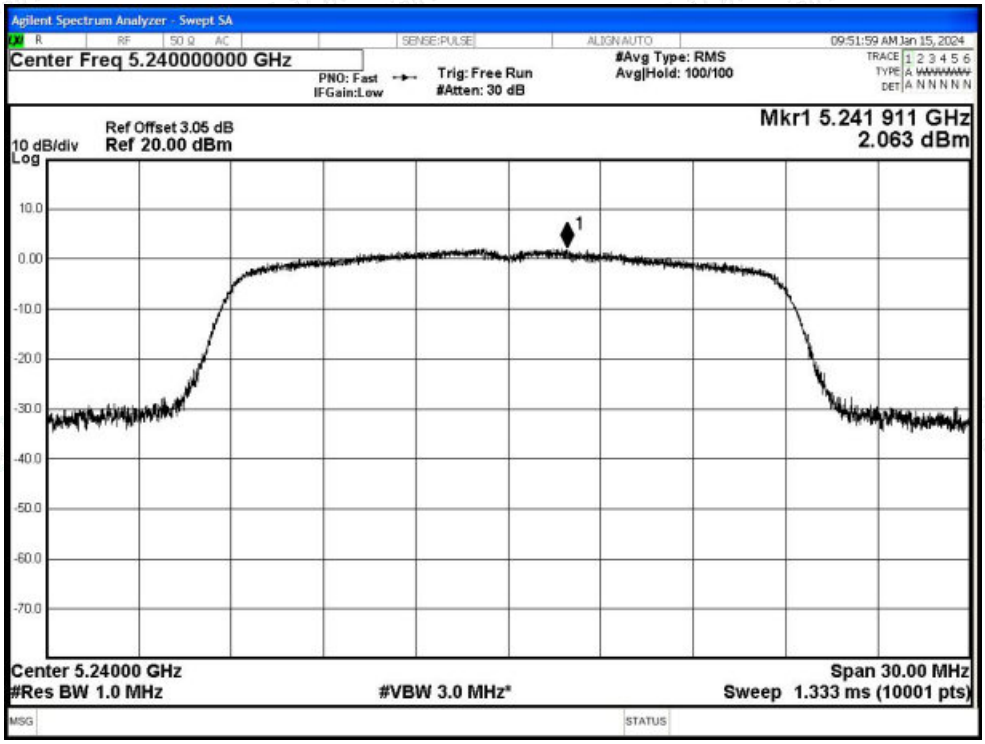

PSD NVNT ac40 5190MHz Ant1

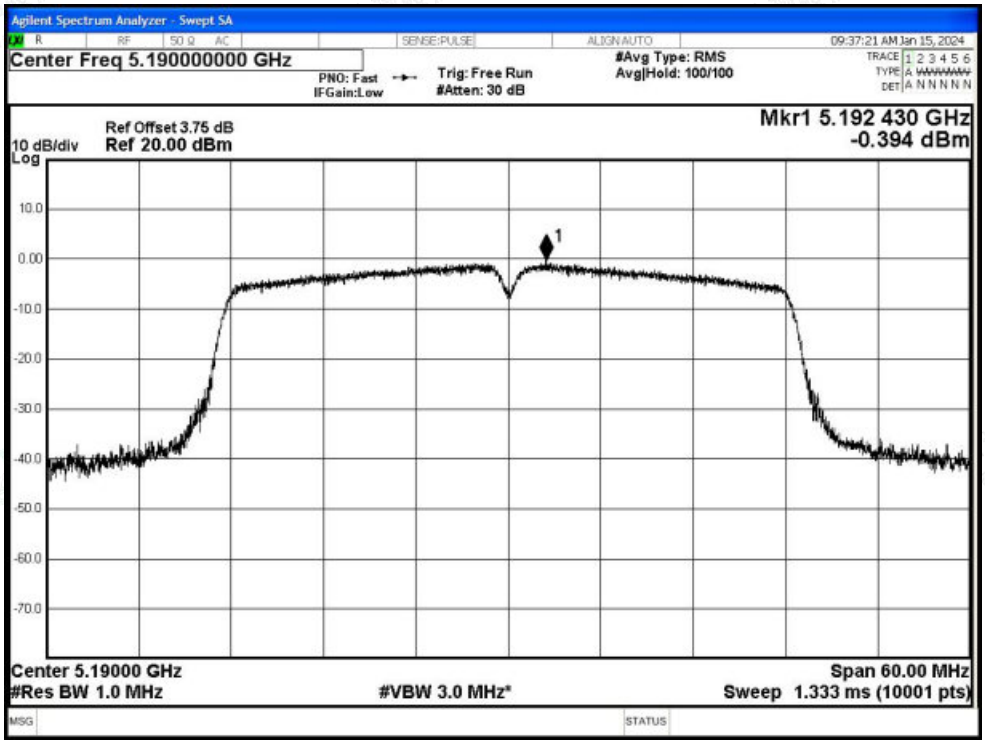

PSD NVNT ac40 5230MHz Ant1

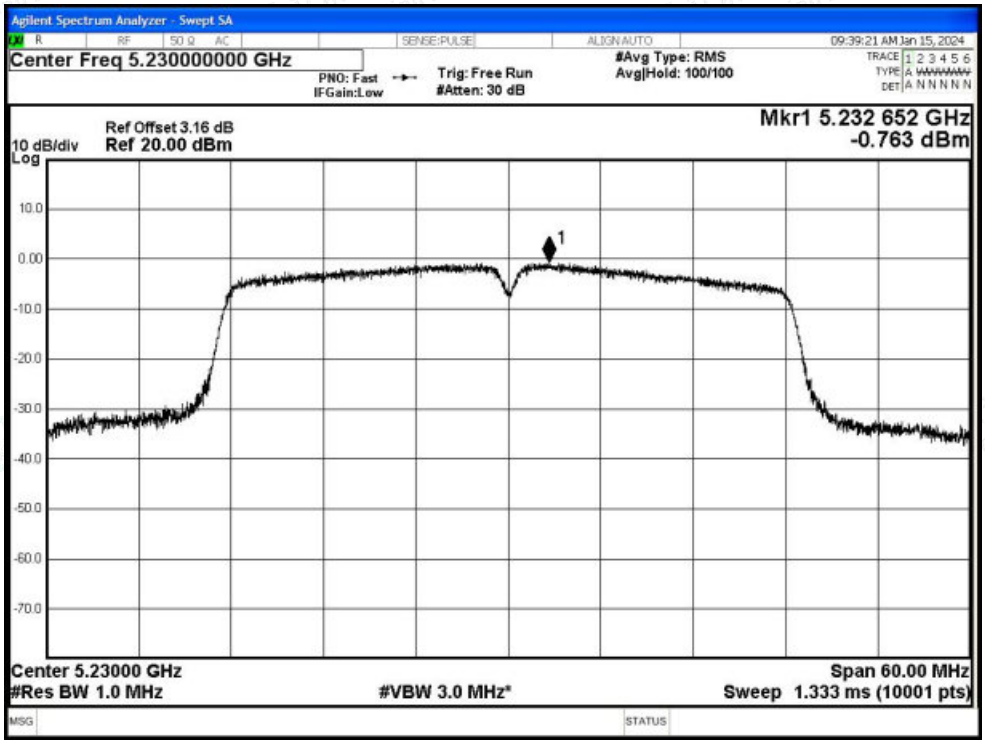

PSD NVNT ac80 5210MHz Ant1

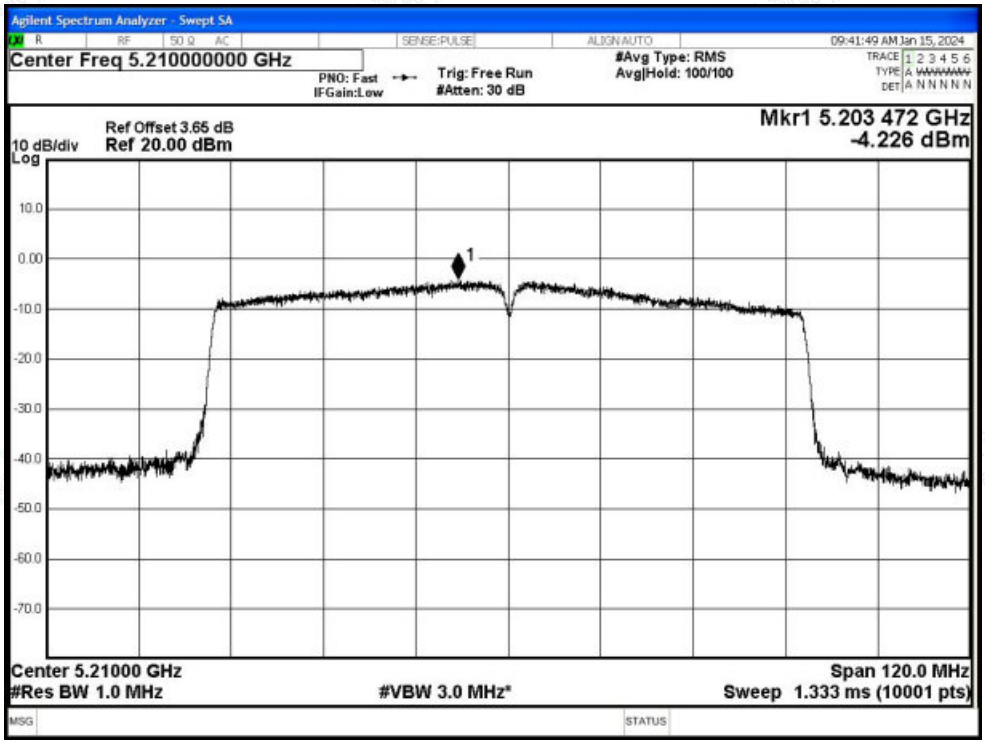

PSD NVNT ax20 5180MHz Ant1

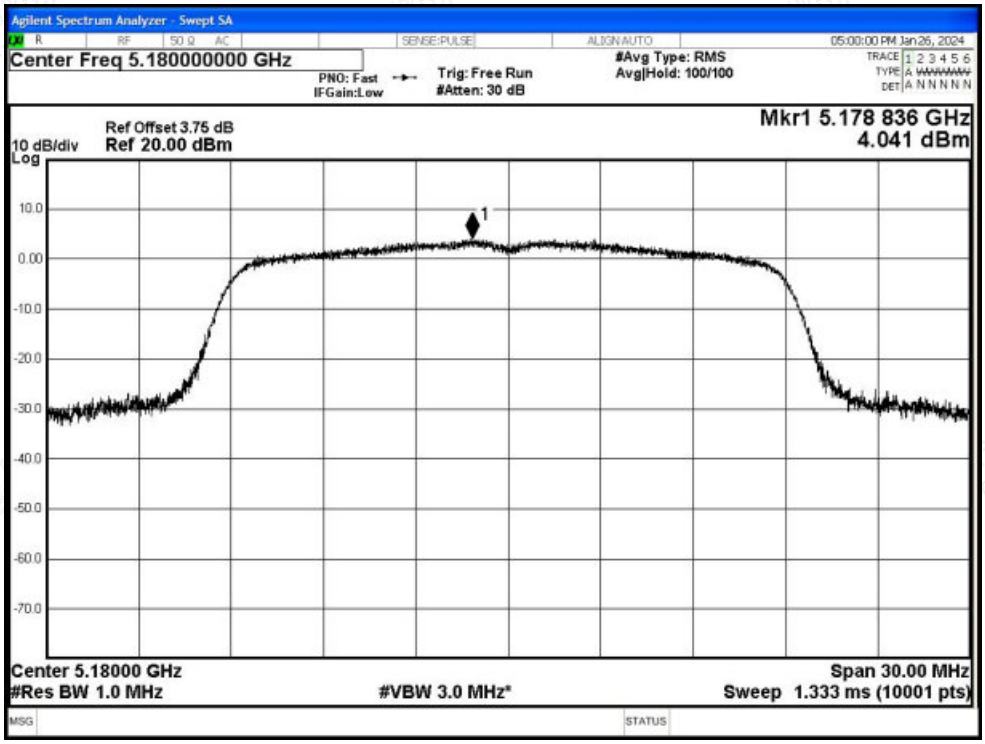

PSD NVNT ax20 5200MHz Ant1

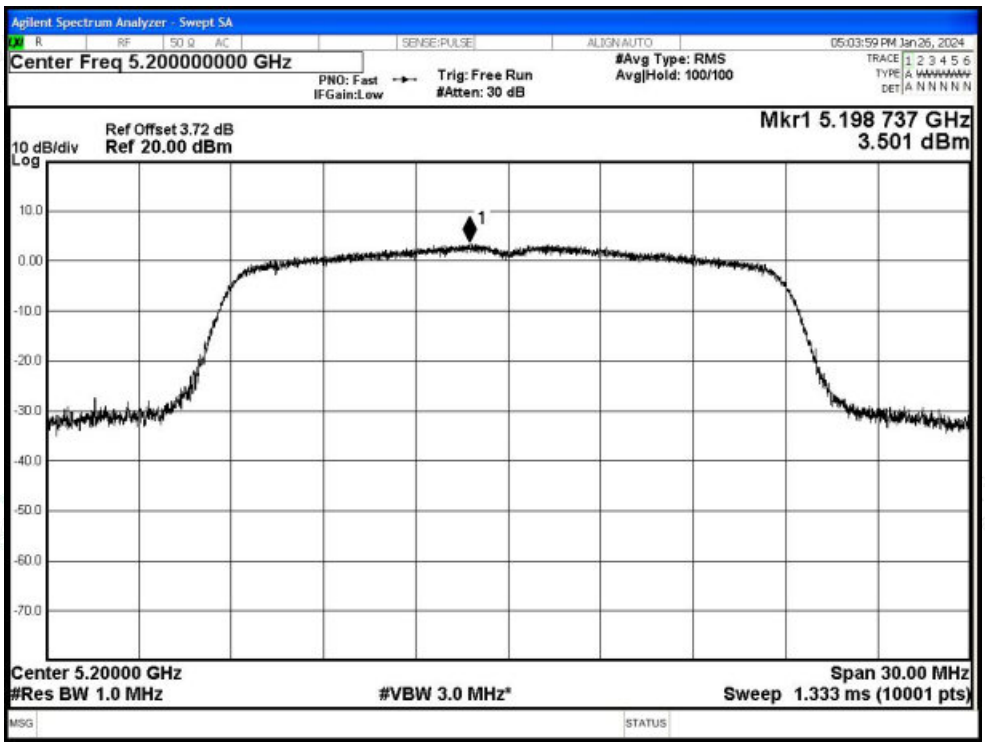

PSD NVNT ax20 5240MHz Ant1

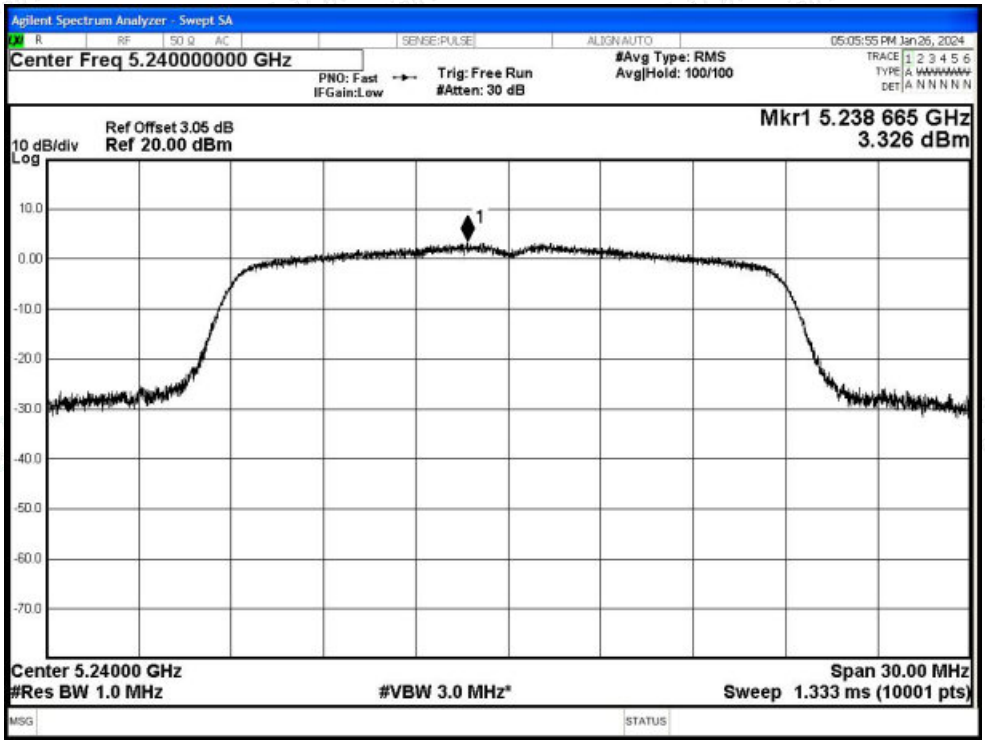

PSD NVNT ax40 5190MHz Ant1

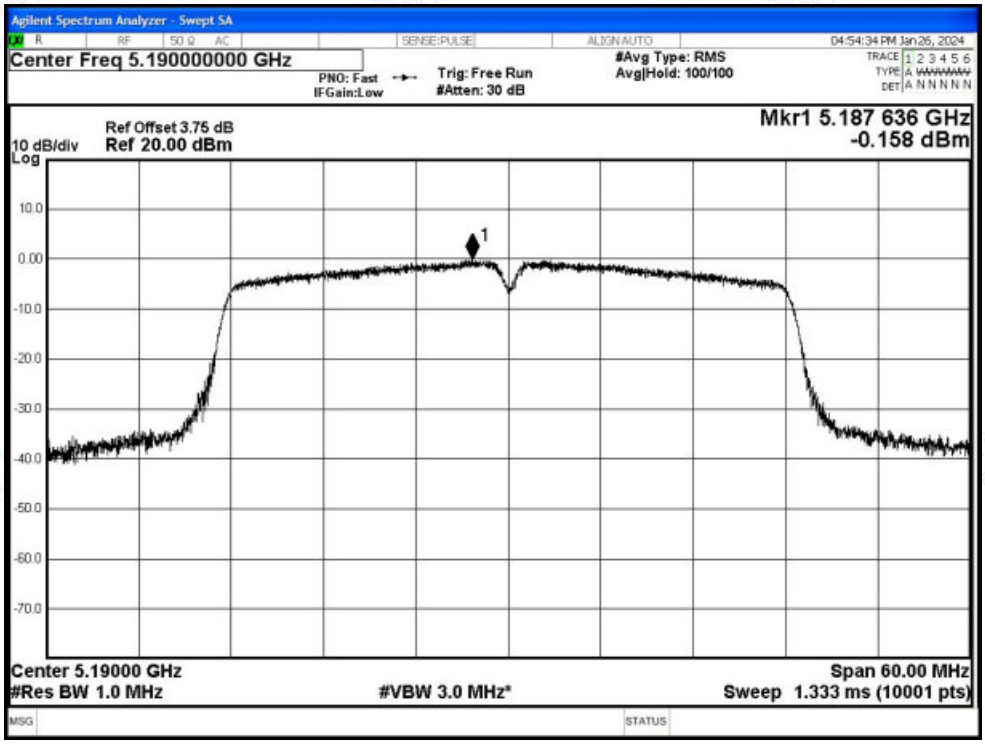

PSD NVNT ax40 5230MHz Ant1

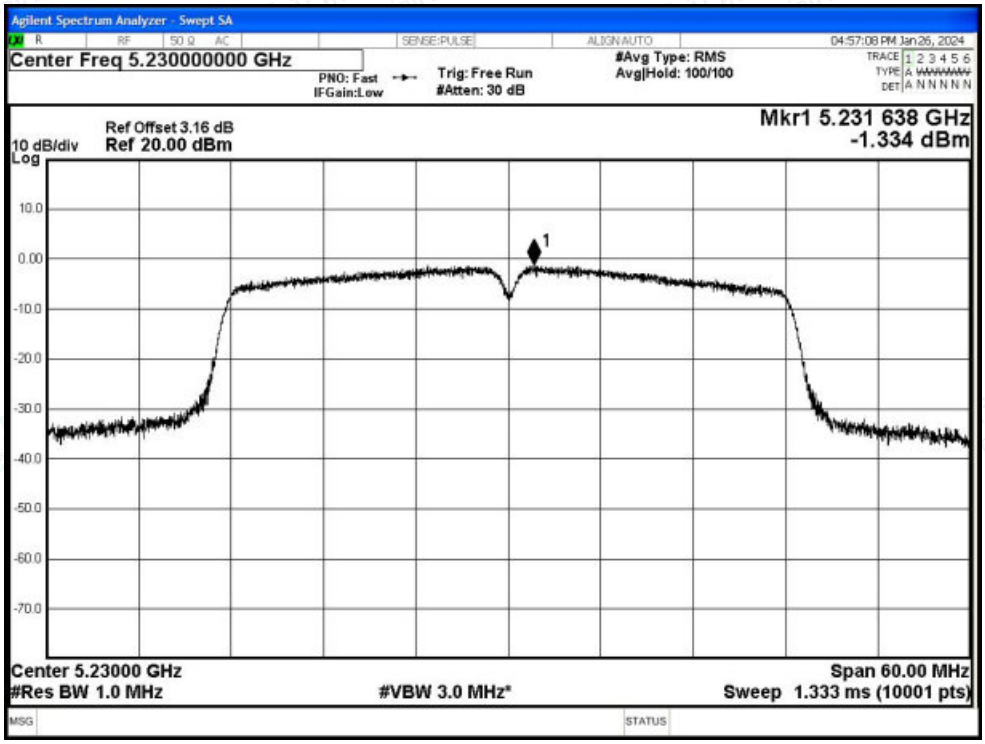

PSD NVNT ax80 5210MHz Ant1

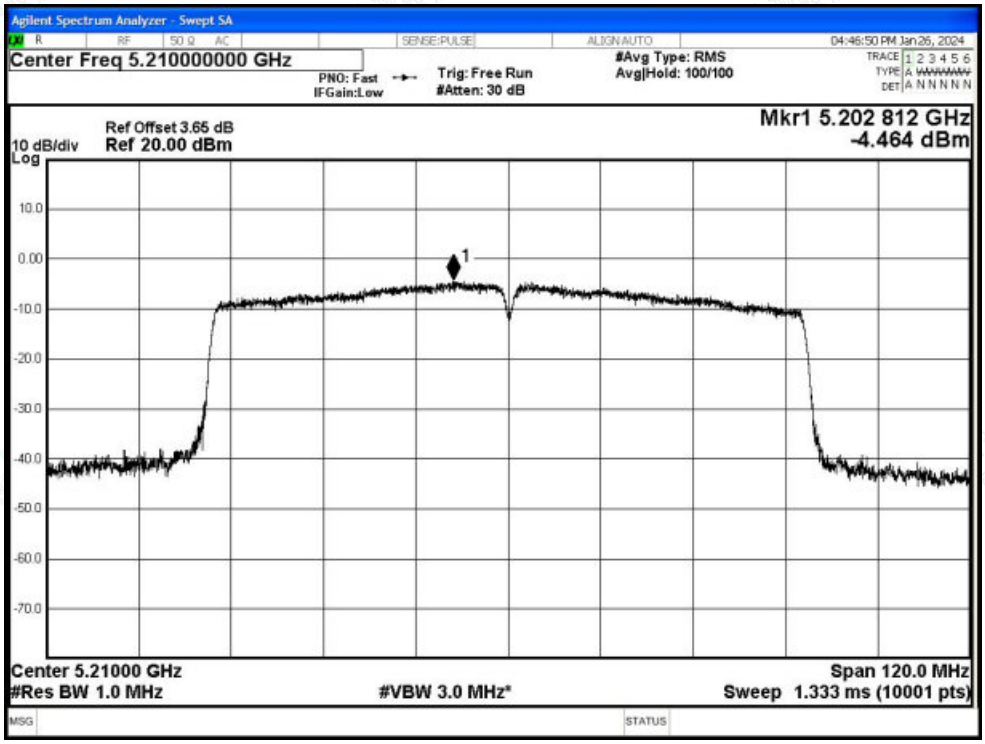

B.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant0	4500	-50.03	3.96	-	49.19	Peak	74	Pass
NVNT	a	5180	Ant0	4500	-58.23	3.96	0.13	40.99	Average	54	Pass
NVNT	a	5180	Ant0	5119.5	-45.03	3.96	-	54.19	Peak	74	Pass
NVNT	a	5180	Ant0	5141.2	-54.11	3.96	0.13	45.11	Average	54	Pass
NVNT	a	5180	Ant0	5150	-46.01	3.96	-	53.21	Peak	74	Pass
NVNT	a	5180	Ant0	5150	-53.85	3.96	0.13	45.37	Average	54	Pass
NVNT	a	5240	Ant0	5350	-49.69	3.96	-	49.53	Peak	74	Pass
NVNT	a	5240	Ant0	5350	-56.66	3.96	0.13	42.56	Average	54	Pass
NVNT	a	5240	Ant0	5384.4	-46.24	3.96	-	52.98	Peak	74	Pass
NVNT	a	5240	Ant0	5352.24	-56.47	3.96	0.13	42.75	Average	54	Pass
NVNT	a	5240	Ant0	5460	-50.61	3.96	-	48.61	Peak	74	Pass
NVNT	a	5240	Ant0	5460	-58.35	3.96	0.13	40.87	Average	54	Pass
NVNT	n20	5180	Ant0	4500	-49.82	3.96	-	49.4	Peak	74	Pass
NVNT	n20	5180	Ant0	4500	-58.02	3.96	0.15	41.2	Average	54	Pass
NVNT	n20	5180	Ant0	5143.3	-44.56	3.96	-	54.66	Peak	74	Pass
NVNT	n20	5180	Ant0	5148.9	-54.1	3.96	0.15	45.12	Average	54	Pass
NVNT	n20	5180	Ant0	5150	-46.99	3.96	-	52.23	Peak	74	Pass
NVNT	n20	5180	Ant0	5150	-54.33	3.96	0.15	44.89	Average	54	Pass
NVNT	n20	5240	Ant0	5350	-47.72	3.96	-	51.5	Peak	74	Pass
NVNT	n20	5240	Ant0	5350	-57.16	3.96	0.15	42.06	Average	54	Pass
NVNT	n20	5240	Ant0	5353.2	-46.96	3.96	-	52.26	Peak	74	Pass
NVNT	n20	5240	Ant0	5350.56	-56.69	3.96	0.15	42.53	Average	54	Pass
NVNT	n20	5240	Ant0	5460	-48.47	3.96	-	50.75	Peak	74	Pass
NVNT	n20	5240	Ant0	5460	-58.26	3.96	0.15	40.96	Average	54	Pass
NVNT	n40	5190	Ant0	4500	-49.98	3.96	-	49.24	Peak	74	Pass
NVNT	n40	5190	Ant0	4500	-58.01	3.96	0.28	41.21	Average	54	Pass
NVNT	n40	5190	Ant0	5147.51	-41.17	3.96	-	58.05	Peak	74	Pass
NVNT	n40	5190	Ant0	5148.97	-53.69	3.96	0.28	45.53	Average	54	Pass
NVNT	n40	5190	Ant0	5150	-45.31	3.96	-	53.91	Peak	74	Pass
NVNT	n40	5190	Ant0	5150	-54.24	3.96	0.28	44.98	Average	54	Pass
NVNT	n40	5230	Ant0	5350	-49.13	3.96	-	50.09	Peak	74	Pass
NVNT	n40	5230	Ant0	5350	-57.06	3.96	0.29	42.16	Average	54	Pass
NVNT	n40	5230	Ant0	5400.6	-46.8	3.96	-	52.42	Peak	74	Pass
NVNT	n40	5230	Ant0	5357.4	-56.61	3.96	0.29	42.61	Average	54	Pass
NVNT	n40	5230	Ant0	5460	-50.63	3.96	-	48.59	Peak	74	Pass
NVNT	n40	5230	Ant0	5460	-57.45	3.96	0.29	41.77	Average	54	Pass

NVNT	ac20	5180	Ant0	4500	-49.8	3.96	-	49.42	Peak	74	Pass
NVNT	ac20	5180	Ant0	4500	-58.22	3.96	0.14	41	Average	54	Pass
NVNT	ac20	5180	Ant0	5148.9	-44.37	3.96	-	54.85	Peak	74	Pass
NVNT	ac20	5180	Ant0	5146.1	-54.24	3.96	0.14	44.98	Average	54	Pass
NVNT	ac20	5180	Ant0	5150	-45.32	3.96	-	53.9	Peak	74	Pass
NVNT	ac20	5180	Ant0	5150	-54.45	3.96	0.14	44.77	Average	54	Pass
NVNT	ac20	5240	Ant0	5350	-50.04	3.96	-	49.18	Peak	74	Pass
NVNT	ac20	5240	Ant0	5350	-57.21	3.96	0.14	42.01	Average	54	Pass
NVNT	ac20	5240	Ant0	5359.44	-47.17	3.96	-	52.05	Peak	74	Pass
NVNT	ac20	5240	Ant0	5351.76	-56.75	3.96	0.14	42.47	Average	54	Pass
NVNT	ac20	5240	Ant0	5460	-50.74	3.96	-	48.48	Peak	74	Pass
NVNT	ac20	5240	Ant0	5460	-57.76	3.96	0.14	41.46	Average	54	Pass
NVNT	ac40	5190	Ant0	4500	-49.63	3.96	-	49.59	Peak	74	Pass
NVNT	ac40	5190	Ant0	4500	-59.03	3.96	0.28	40.19	Average	54	Pass
NVNT	ac40	5190	Ant0	5148.97	-44.19	3.96	-	55.03	Peak	74	Pass
NVNT	ac40	5190	Ant0	5148.97	-53.84	3.96	0.28	45.38	Average	54	Pass
NVNT	ac40	5190	Ant0	5150	-45.36	3.96	-	53.86	Peak	74	Pass
NVNT	ac40	5190	Ant0	5150	-54.03	3.96	0.28	45.19	Average	54	Pass
NVNT	ac40	5230	Ant0	5350	-49.6	3.96	-	49.62	Peak	74	Pass
NVNT	ac40	5230	Ant0	5350	-57.31	3.96	0.28	41.91	Average	54	Pass
NVNT	ac40	5230	Ant0	5451.36	-46.99	3.96	-	52.23	Peak	74	Pass
NVNT	ac40	5230	Ant0	5356.86	-56.56	3.96	0.28	42.66	Average	54	Pass
NVNT	ac40	5230	Ant0	5460	-50.11	3.96	-	49.11	Peak	74	Pass
NVNT	ac40	5230	Ant0	5460	-57.61	3.96	0.28	41.61	Average	54	Pass
NVNT	ac80	5210	Ant0	5350	-49.29	3.96	-	49.93	Peak	74	Pass
NVNT	ac80	5210	Ant0	5350	-56.6	3.96	0.55	42.62	Average	54	Pass
NVNT	ac80	5210	Ant0	5369.25	-46.04	3.96	-	53.18	Peak	74	Pass
NVNT	ac80	5210	Ant0	5377.83	-56.37	3.96	0.55	42.85	Average	54	Pass
NVNT	ac80	5210	Ant0	5460	-49.98	3.96	-	49.24	Peak	74	Pass
NVNT	ac80	5210	Ant0	5460	-57.28	3.96	0.55	41.94	Average	54	Pass
NVNT	ac80	5210	Ant0	4500	-51.14	3.96	-	48.08	Peak	74	Pass
NVNT	ac80	5210	Ant0	4500	-58.2	3.96	0.55	41.02	Average	54	Pass
NVNT	ac80	5210	Ant0	5146.22	-42.31	3.96	-	56.91	Peak	74	Pass
NVNT	ac80	5210	Ant0	5149.38	-52.59	3.96	0.55	46.63	Average	54	Pass
NVNT	ac80	5210	Ant0	5150	-44.71	3.96	-	54.51	Peak	74	Pass
NVNT	ac80	5210	Ant0	5150	-52.52	3.96	0.55	46.7	Average	54	Pass
NVNT	ax20	5180	Ant0	4500	-50.25	3.96	-	48.97	Peak	74	Pass
NVNT	ax20	5180	Ant0	4500	-58.59	3.96	0.14	40.63	Average	54	Pass
NVNT	ax20	5180	Ant0	5141.2	-44.53	3.96	-	54.69	Peak	74	Pass
NVNT	ax20	5180	Ant0	5145.4	-54.38	3.96	0.14	44.84	Average	54	Pass
NVNT	ax20	5180	Ant0	5150	-44.55	3.96	-	54.67	Peak	74	Pass

NVNT	ax20	5180	Ant0	5150	-54.9	3.96	0.14	44.32	Average	54	Pass
NVNT	ax20	5240	Ant0	5350	-50.1	3.96	-	49.12	Peak	74	Pass
NVNT	ax20	5240	Ant0	5350	-57.46	3.96	0.14	41.76	Average	54	Pass
NVNT	ax20	5240	Ant0	5394.96	-45.82	3.96	-	53.4	Peak	74	Pass
NVNT	ax20	5240	Ant0	5350.56	-56.6	3.96	0.14	42.62	Average	54	Pass
NVNT	ax20	5240	Ant0	5460	-49.15	3.96	-	50.07	Peak	74	Pass
NVNT	ax20	5240	Ant0	5460	-58.21	3.96	0.14	41.01	Average	54	Pass
NVNT	ax40	5190	Ant0	4500	-50.05	3.96	-	49.17	Peak	74	Pass
NVNT	ax40	5190	Ant0	4500	-58.35	3.96	0.28	40.87	Average	54	Pass
NVNT	ax40	5190	Ant0	5149.7	-44.95	3.96	-	54.27	Peak	74	Pass
NVNT	ax40	5190	Ant0	5149.7	-54.11	3.96	0.28	45.11	Average	54	Pass
NVNT	ax40	5190	Ant0	5150	-44.95	3.96	-	54.27	Peak	74	Pass
NVNT	ax40	5190	Ant0	5150	-54.11	3.96	0.28	45.11	Average	54	Pass
NVNT	ax40	5230	Ant0	5350	-50.25	3.96	-	48.97	Peak	74	Pass
NVNT	ax40	5230	Ant0	5350	-57.22	3.96	0.28	42	Average	54	Pass
NVNT	ax40	5230	Ant0	5353.89	-46.72	3.96	-	52.5	Peak	74	Pass
NVNT	ax40	5230	Ant0	5371.71	-56.67	3.96	0.28	42.55	Average	54	Pass
NVNT	ax40	5230	Ant0	5460	-50.18	3.96	-	49.04	Peak	74	Pass
NVNT	ax40	5230	Ant0	5460	-58.86	3.96	0.28	40.36	Average	54	Pass
NVNT	ax80	5210	Ant0	5350	-48.54	3.96	-	50.68	Peak	74	Pass
NVNT	ax80	5210	Ant0	5350	-57.42	3.96	0.55	41.8	Average	54	Pass
NVNT	ax80	5210	Ant0	5369.91	-46.73	3.96	-	52.49	Peak	74	Pass
NVNT	ax80	5210	Ant0	5371.56	-56.77	3.96	0.55	42.45	Average	54	Pass
NVNT	ax80	5210	Ant0	5460	-49.9	3.96	-	49.32	Peak	74	Pass
NVNT	ax80	5210	Ant0	5460	-57.52	3.96	0.55	41.7	Average	54	Pass
NVNT	ax80	5210	Ant0	4500	-50.93	3.96	-	48.29	Peak	74	Pass
NVNT	ax80	5210	Ant0	4500	-58.25	3.96	0.55	40.97	Average	54	Pass
NVNT	ax80	5210	Ant0	5141.48	-42.01	3.96	-	57.21	Peak	74	Pass
NVNT	ax80	5210	Ant0	5148.59	-52.37	3.96	0.55	46.85	Average	54	Pass
NVNT	ax80	5210	Ant0	5150	-42.93	3.96	-	56.29	Peak	74	Pass
NVNT	ax80	5210	Ant0	5150	-52.37	3.96	0.55	46.85	Average	54	Pass