




未注公差表			
尺寸公差		厚度公差	
≤200	±0.1	≤0.8	±0.05
200-400	±0.2	0.8-1.2	±0.10
400-800	±0.3	≥1.5	±0.15
≥800	±0.5		

Product Name: EV DC Charger	
Model: HBE-DC60KW02ST-U-A1NW4G	
Input Voltage: 480Vac ±10%	Rated Input Current: 80A
Input Frequency: 60Hz	Rated Output Current: 200A*2
Power Phase: 3P+N+PE	Rated Output Voltage: 200-1000VDC
Protection Level: Type 3R	Dimension: 900*450*1805mm
Order Number: xxxxxxxx	Production Date: 04-2025
Operating Temperature: -30°C to +50°C	
Operating Environment: Outdoor & Indoor	
Manufacturer: SHENZHEN HB ELECTRONIC CO., LTD	

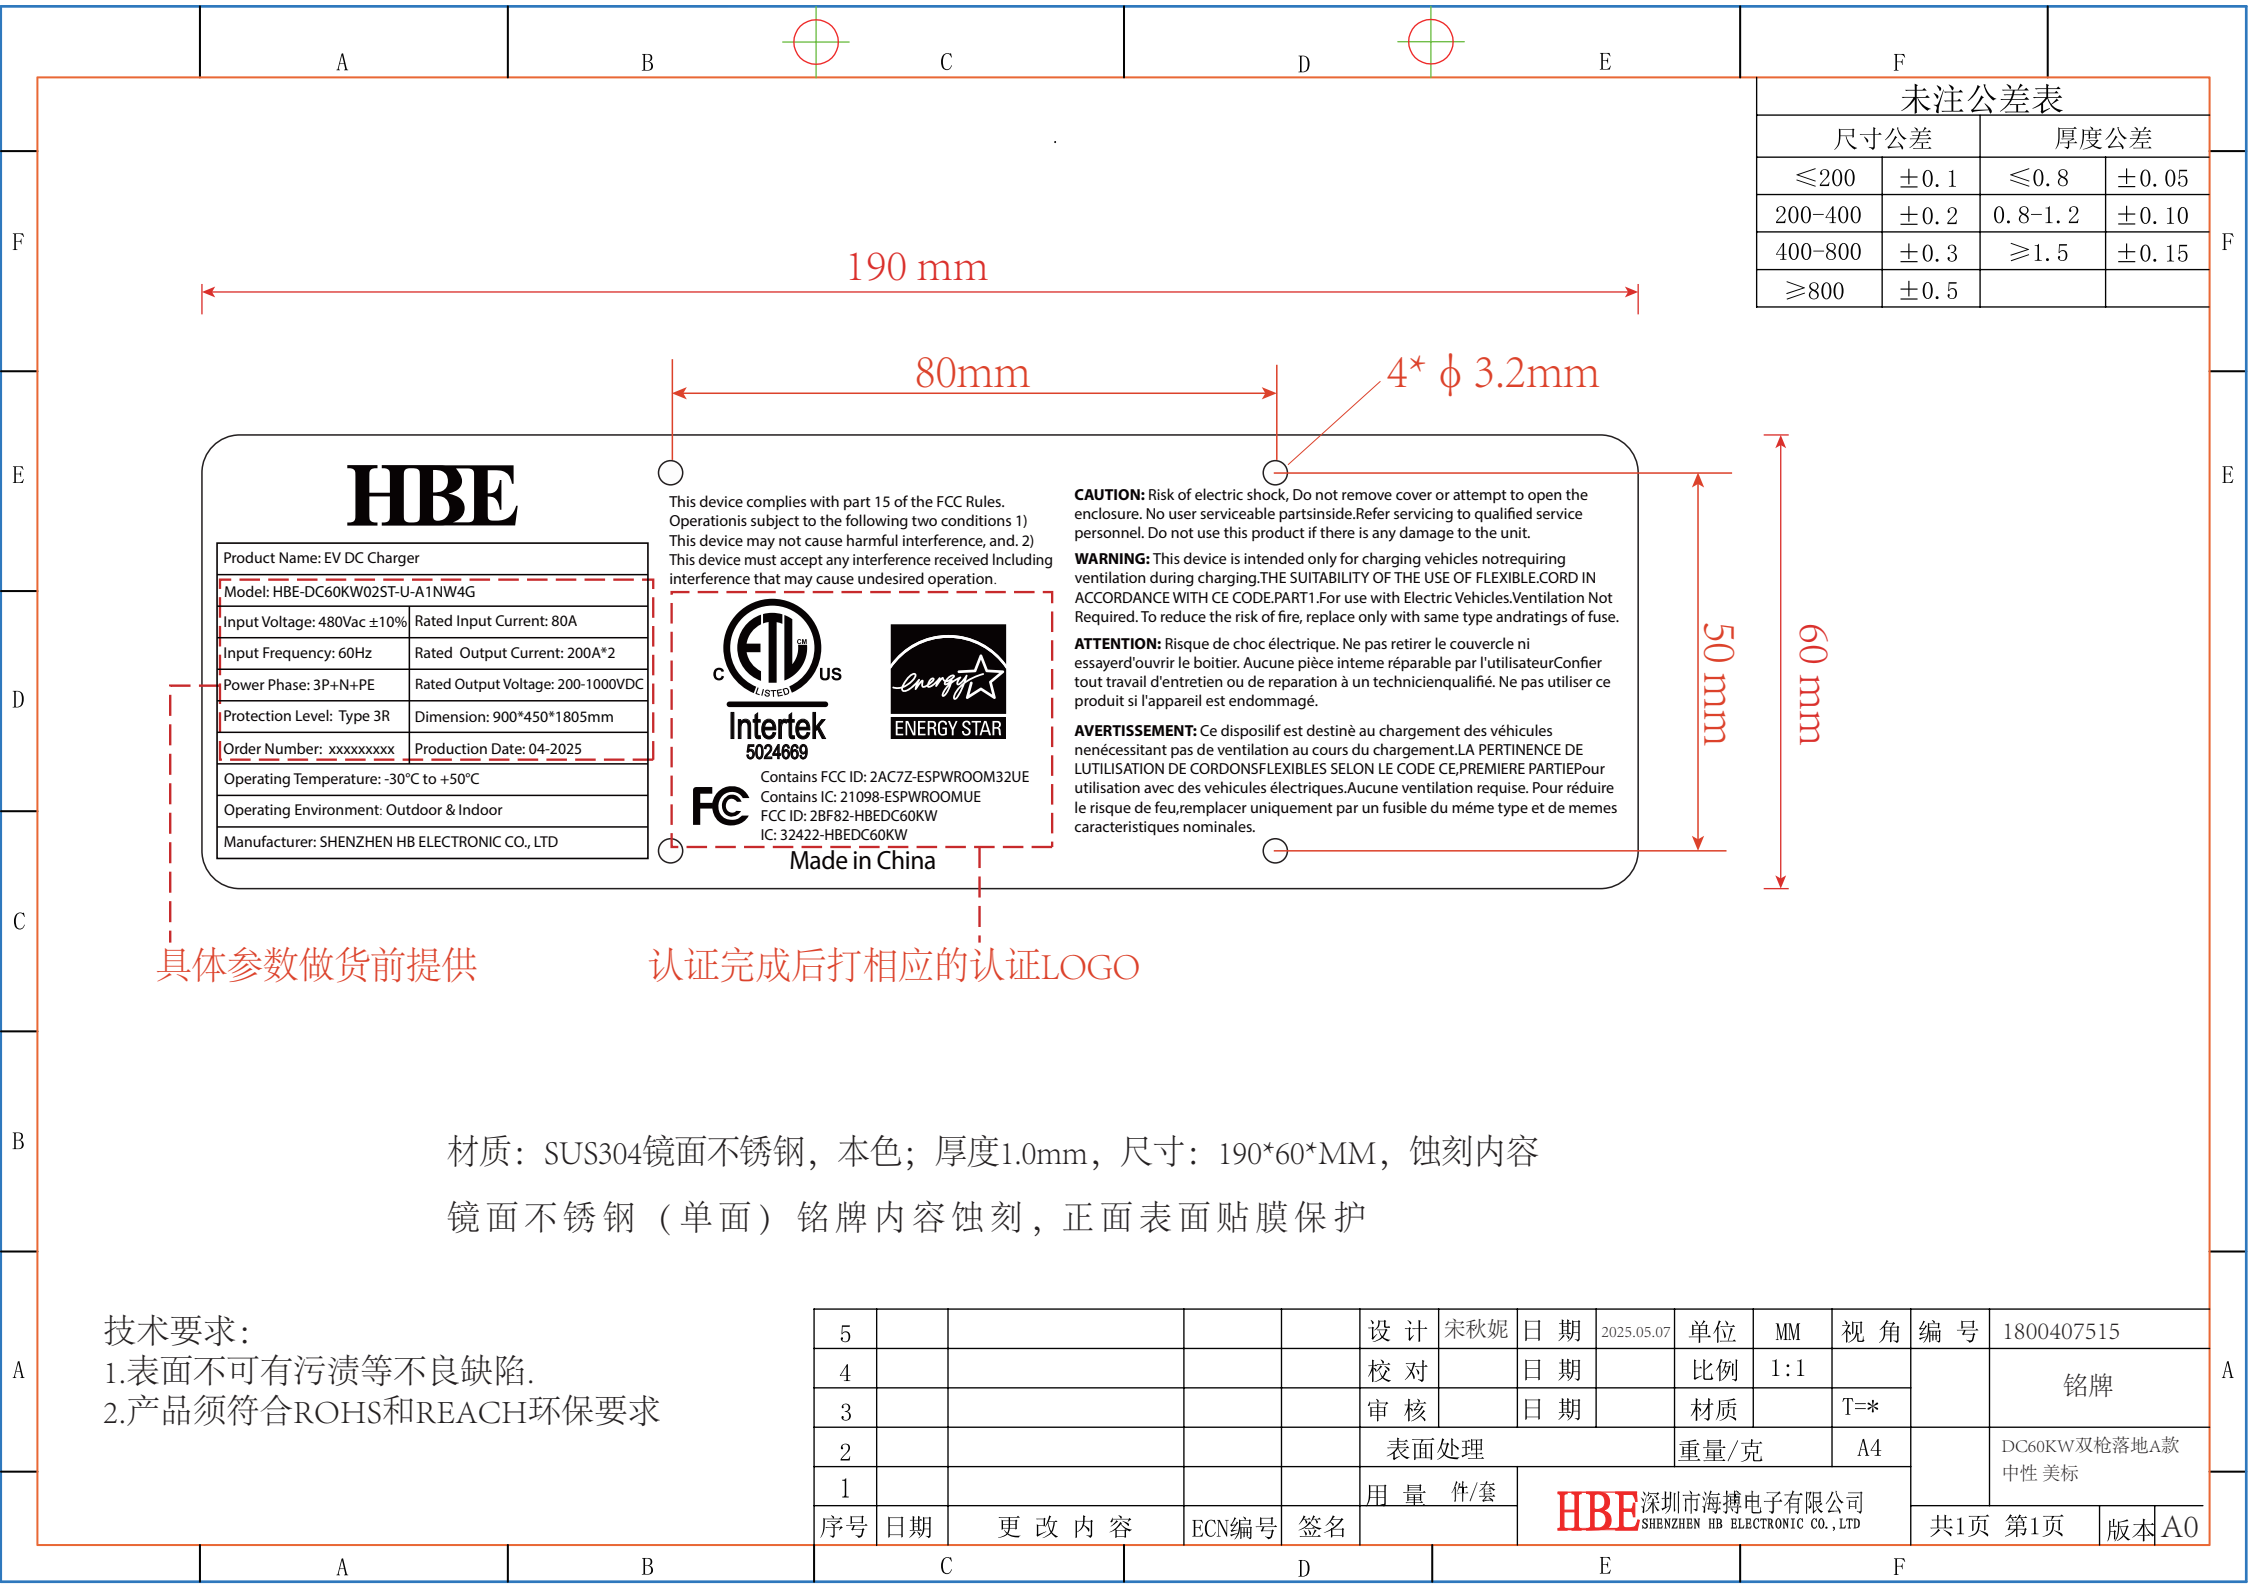

ETL
LISTED
US



ENERGY STAR



Intertek
5024869



FCC

Contains FCC ID: 2AC7Z-ESPWROOM32UE
Contains IC: 21098-ESPWROOMUE
FCC ID: 2BF82-HBEDC60KW
IC: 32422-HBEDC60KW

Made in China

材质：SUS304镜面不锈钢，本色；厚度1.0mm，尺寸：190*60*MM，蚀刻内容
镜面不锈钢（单面）铭牌内容蚀刻，正面表面贴膜保护

技术要求：

- 1.表面不可有污渍等不良缺陷.
- 2.产品须符合ROHS和REACH环保要求

5					设 计	宋秋妮	日 期	2025.05.07	单 位	MM	视 角	编 号	1800407515	
4					校 对		日 期		比 例	1:1			铭 牌	
3					审 核		日 期		材 质		T=*			
2					表 面 处 理				重 量 / 克		A4		DC60KW双枪落地A款 中性 美标	
1					用 量 件/套		HBE 深圳市海搏电子有限公司 SHENZHEN HB ELECTRONIC CO.,LTD							
序号	日期	更 改 内 容		ECN编号	签名							共1页 第1页		



Label Location