



SPECIFICATION(规格书)

SPEC NO.(规格书编号):1007-004		VERSION(版本):V1.0		CUTOFF WIRE(截面图)	
DESCRIPTION(产品描述): PVC INSULATED WIRE				CONDUCTOR (导体) INSULATION (绝缘) 	
SIZE(规格): PVC #22(17/0.12TS) OD:1.6 透明色					
REFERENCE(参考): UL758、UL1581					
RATING VOLTAGE(额定电压)V:		300			
RATING TEMPERATURE(额定温度)℃:		80			
CONSTRUCTION(结构):					
CONDUCTOR 导体		AWG(线规)		#22	
		CONSTRUCTION(结构)		17/0.12TS±0.007mm	
		MATERIAL(材质)		Tinned annealed stranded copper(绞合镀锡铜线)	
		DIAMETER(线径)		0.57mm	
INSULATION 绝缘		MATERIAL(材质)		PVC	
		MINIMUM AVERAGE THICKNESS (最小平均厚度)		0.4mm	
		MINIMUM THICKNESS(最薄厚度)		0.35mm	
		DIAMETER(线径)		1.60mm±0.10mm	
		COLOR(颜色)		透明色	
FILLER(填充)		COTTON THREAD(棉纱)		无	
BINDER(被覆层)		COTTON PAPER(棉纸)		无	
SHIELD(屏蔽)		BRAID(编织)		无	
		DRAIN WIRE(地线)		无	
JACKET(外被)		MATERIAL(材质)		无	
		MINIMUM AVERAGE THICKNESS (最小平均厚度)		无	
		MINIMUM THICKNESS(最薄厚度)		无	
		DIAMETER(线径)		无	
		COLOR(颜色)		无	
PHYSICAL & ELECTRICAL PROPERTIES(物理与电气性能)					
CONDUCTOR RESISTANCE(导体电阻)ohms/km:				59.4 MAX. at 20℃	
INSULATION RESISTANCE(绝缘电阻)Mohms/km:				0.75	
SPARK TEST(火花测试)kv:				3	
VOLTAGE WITHSTAND TEST(耐压测试)kv/min.:				2.0	
FLAME TEST(耐燃测试):				VW-1	
UNAGED FOR INSULATION(老化前)		ELONGATION(伸长率):%		100	
		TENSILE STRENGTH(抗张强度):N/cm ²		1034	
AGED FOR INSULATION(老化后)		ELONGATION(伸长率):%		65%UNAGED MIN.(121±1.0℃×168H)	
		TENSILE STRENGTH(抗张强度):N/cm ²		70%UNAGED MIN.(121±1.0℃×168H)	
UNAGED FOR JACKET(老化前)		ELONGATION(伸长率):%		无	
		TENSILE STRENGTH(抗张强度):N/cm ²		无	
AGED FOR JACKET (老化后)		ELONGATION(伸长率):%		无	
		TENSILE STRENGTH(抗张强度):N/cm ²		无	
MARKING(印字):					
无印字					
PREPARED(制作):XF		APPROVED(批准):LXW		ISSUE DATE(发行时间):2022.9.21	



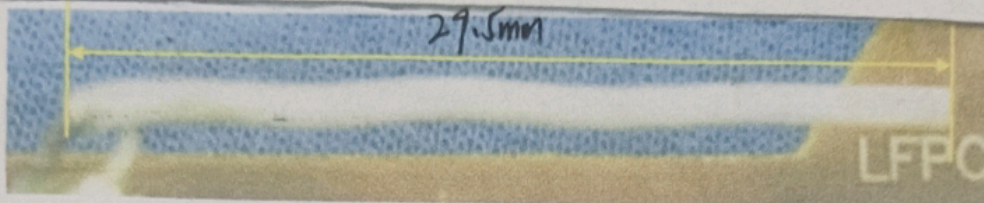

This is a quarter wave antenna. It is bent into an L-shape. The shorter side is connected to earth. The longer side is left open circuit at the end. The feed point is located somewhere between the earth end and the open end. The resulting structure resembles the letter F and possesses the properties of both a loop antenna due to the circulating current from the feed point to ground and a whip antenna due to the open circuited straight section.

In the PCB version the antenna is printed on the top layer and a ground plane is placed near the antenna on the top layer. There must not be a ground plane underneath the antenna. The aim is to make the quarter wave section resonate at mid band frequency. The feed point (which is the input/output connection) is connected to the L-Shape at the point corresponding to 50W. Experiment with measurement to determine correct location for the feed point and length of this antenna.

Operating Temperature:	-20°C ~ +65°C	Return Loss:	-10dB max
Storage Temperature:	-30°C ~ +75°C	Certain Direction:	0 min
Gain (max):	0dBi		

