

TEST REPORT

Reference No...... : WTX26X03068071W001
FCC ID : 2BF8S-150
Applicant : Glimpse LLC
Address : 101a Clay Street#144, San Francisco,CA 94111, United States Of America
Manufacturer : Glimpse LLC
Address : 101a Clay Street#144, San Francisco,CA 94111, United States Of America
Product Name : 15.6 inch WiFi Digital Photo Frame,15.6 inch WiFi Digital Photo Calendar
Model No...... : 150-FRM, 150-CAL
Standards : FCC Part 15.407
Date of Receipt sample : 2026-03-18
Date of Test..... : 2026-03-24 to 2026-03-31; 2026-04-02 to 2026-04-28
Date of Issue : 2026-04-28
Test Report Form No. : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Mike Shi/Project Engineer

Approved by:



Jason Su/Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY	5
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	5
1.5 EUT OPERATING DURING TEST	6
1.6 TEST FACILITY	6
1.7 EUT SETUP AND TEST MODE	7
1.8 MEASUREMENT UNCERTAINTY	8
1.9 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS.....	13
3. ANTENNA REQUIREMENT	14
3.1 STANDARD APPLICABLE	14
3.2 EVALUATION INFORMATION	14
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	15
4.1 STANDARD APPLICABLE	15
4.2 SUMMARY OF TEST RESULTS.....	15
5. RADIATED SPURIOUS EMISSIONS	16
5.1 STANDARD APPLICABLE	16
5.2 TEST PROCEDURE	16
5.3 TEST RECEIVER SETUP	18
5.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	18
5.5 SUMMARY OF TEST RESULTS/PLOTS.....	18
6 CONDUCTED EMISSIONS	33
6.1 TEST PROCEDURE	33
6.2 BASIC TEST SETUP BLOCK DIAGRAM	33
6.3 TEST RECEIVER SETUP	33
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	33
APPENDIX PHOTOGRAPHS.....	36

Report version

Version No.	Date of issue	Description
Rev.00	2026-04-28	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	15.6 inch WiFi Digital Photo Frame, 15.6 inch WiFi Digital Photo Calendar
Trade Name:	Skylight
Model No.:	150-FRM
Adding Model(s):	150-CAL
Rated Voltage:	DC12V
Battery Capacity:	/
Power Adapter 1#:	MODEL: AP049U-12200 INPUT: AC100-240V ~ 50/60Hz 0.6A MAX OUTPUT: DC12V, 2.0A 24.0W
Power Adapter 2#:	MODEL: KA24D-1202000DE INPUT: AC100~240 50/60Hz 0.65A MAX OUTPUT: DC12V, 2.0A 24.0W
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model 150-FRM, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n-HT20, 802.11n-HT40, 802.11ac-VHT20, 802.11ac-VHT40, 802.11ac-VHT80
Frequency Range:	5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz
Max. RF Output Power:	11.29dBm (Conducted)
Type of Modulation:	BPSK, QPSK, 16QAM, 64QAM, 256QAM
Type of Antenna:	FPC Antenna
Antenna Gain:	4.6dBi
<i>Note The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2020: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Run adb commands and follow the instructions given by the manufacturer, you can start to test. During testing, Channel and Power Controlling commands provided by the customer was used to control the operating channel as well as the output power level. Test use the customer default power level, and to measure its highest possible emissions level, more detailed description as follows:

Mode	Test Frequency (MHz)												
	NCB: 20MHz												
	5180	5200	5240	5260	5300	5320	5500	5600	5700	5720	5745	5785	5825
802.11a 6Mbps	65	65	65	65	65	65	65	65	65	/	65	65	65
802.11n-HT20 MCS0	65	65	65	65	65	65	65	65	65	/	65	65	65
Mode	NCB: 40MHz												
	5190	5230	5270	5310	5510	5590	5670	5710	5755	5795			
802.11n-HT40 MCS0	65	65	65	65	65	65	65	65	/	65	65		
Mode	NCB: 80MHz												
	5210		5290		5530		5610		5690		5775		
802.11ac-VHT8 0	65		65		65		65		/		65		

MCS0/Nss2						
-----------	--	--	--	--	--	--

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5500MHz,5600MHz,5700MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5510MHz,5590MHz,5670MHz,5755MHz,5795MHz
TM4	802.11ac-VHT80	5210MHz,5290MHz,5530MHz,5610MHz,5775MHz
Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~56 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
DC CABLE	1.8	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.57\text{dB}$
Occupied Bandwidth	Conducted	$\pm 0.015\text{MHz}$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emission 1#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Conducted Emission 2#	Conducted	@9kHz to 150kHz: $\pm 3.74\text{dB}$
		@150kHz to 30MHz: $\pm 3.34\text{dB}$
Transmitter Spurious Emissions chamber A	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.70\text{dB}$
		@1GHz to 6GHz: $\pm 5.88\text{dB}$
		@6GHz to 18GHz: $\pm 5.96\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$
Transmitter Spurious Emissions chamber B	Radiated	@30MHz to 1GHz: $\pm 5.36\text{dB}$
Transmitter Spurious Emissions chamber C	Radiated	@9kHz to 30MHz: $\pm 3.0\text{dB}$
		@30MHz to 1GHz: $\pm 5.28\text{dB}$
		@1GHz to 6GHz: $\pm 5.56\text{dB}$
		@6GHz to 18GHz: $\pm 5.72\text{dB}$
		@18GHz to 40GHz: $\pm 6.12\text{dB}$

1.9 Test Equipment List and Details

Internal No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1002	Communication Tester	Rohde & Schwarz	CMW500	1201.0002 k50-14865 0-FB	2026-02-06	2027-02-05
					2026-03-25	2027-03-24
WTXE1005A 1005	MXA Signal Analyzer	Agilent	N9020A	US471401 02	2026-02-06	2027-02-05
					2026-03-25	2027-03-24
WTXE1084A 1001	MXA Signal Analyzer	KEYSIGHT	N9020A	MY543205 48	2026-02-06	2027-02-05
WTXE1005A 1006	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2026-02-06	2027-02-05
WTXW1105A 1136	RF ATTENUATOR	FEIYANG	N-JK	/	2026-02-06	2027-02-05
WTXE1003A 1-005	Coaxial Cable	/	0M4RFC	/	2026-02-23	2027-02-22
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1007A 1002	Amplifier	HP	8447F	2805A034 75	2026-02-05	2027-02-04
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2026-03-11	2029-03-10
WTXE1104A 1032-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1032-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2026-02-05	2027-02-04
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2026-02-05	2027-02-04
WTXE1065A 1001	Amplifier	C&D	PAP-1.0G18	14918	2026-02-05	2027-02-04
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2026-02-05	2027-02-04

WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1033-1	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-2	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
WTXE1104A 1033-3	Coaxial Cable	/	C16-07-07	/	2026-02-23	2027-02-22
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2024-03-17	2027-03-16
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A104 57	2026-02-05	2027-02-04
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2026-02-05	2027-02-04
WTXE1104A 1031-1	Coaxial Cable	/	1.5MRFC-LWB3	/	2026-02-23	2027-02-22
WTXE1104A 1031-2	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1031-3	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2026-02-05	2027-02-04
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2024-04-18	2027-04-17
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2026-02-05	2027-02-04
WTXE1007A 1003	Amplifier	HP	8447F	2944A038 69	2026-02-05	2027-02-04
WTXE1104A 1034-1	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-2	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1034-3	Coaxial Cable	/	RC_6G-N-M	/	2026-02-23	2027-02-22
☒ Chamber C: Above 1GHz						
WTXE1093A	EMI Test	Rohde &	ESIB 26	100401	2026-02-05	2027-02-04

1001	Receiver	Schwarz				
WTXE1103A 1005	Horn Antenna	POAM	RTF-118A	1820	2025-06-13	2027-06-12
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2026-02-05	2027-02-04
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2026-02-10	2027-02-09
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2026-02-05	2027-02-04
WTXE1104A 1035-1	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-2	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
WTXE1104A 1035-3	Coaxial Cable	/	RC-18G-N-M	/	2026-02-23	2027-02-22
☐ Conducted Room 1#						
WTXE1104A 1029	EMI Test Receiver	Rohde & Schwarz	ESCI	100525	2025-11-25	2026-11-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2026-02-05	2027-02-04
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-279	2026-02-05	2027-02-04
WTXE1104A 1036	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22
WTXE1104A 1038	Coaxial Cable	/	6MRFC-DP	/	2026-02-23	2027-02-22
☒ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2026-02-05	2027-02-04
WTXE1003A 1003	LISN	Rohde & Schwarz	ENV 216	100097	2026-02-05	2027-02-04
WTXE1104A 1037	Coaxial Cable	/	RG 316	/	2026-02-23	2027-02-22

Software List			
Description	Manufacturer	Model	Version
EMI Test Software/EZ-EMC (Radiated Emission A)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission B)	Farad	RA-03A1	1.1.4.2
EMI Test Software/EZ-EMC (Radiated Emission C)	Farad	RA-03A1-2	1.1.4.2
EMI Test Software/EZ-EMC (Conducted Emission Room 1#)	Farad	3A1*CE-RE	1.1.4.3
EMI Test Software/EZ-EMC (Conducted Emission Room 2#)	Farad	3A1*CE-RE	1.1.4.3

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	N/A
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	N/A
§15.407(a)(1),(2)	Maximum Conducted Output Power	N/A
§15.407(b)(1),(2),(3),(4)	Undesirable emission	N/A
§15.205; §15.209; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	N/A
§15.407(h)	Dynamic Frequency Selection (DFS)	N/A

Class II Permissive Change: The memory configuration is changed from a combination of four DDR3 chips (model: K4B4G1646E) and one eMMC chip (model: RS70B16G4S15G) to a single integrated eMCP chip (model: H9TQ17ABJTMCUR).

Note: Report is for Class II Permissive Change only. Updated test data include Antenna Requirement, Automatically Discontinue Transmission, Conducted Emission and Radiated Emission. The test data refer to Original equipment (FCC ID: 2BF8S-150), the original FCC ID issue date: 03/11/2026.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has a FPC antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Radiated Spurious Emissions

5.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:


- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

5.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.

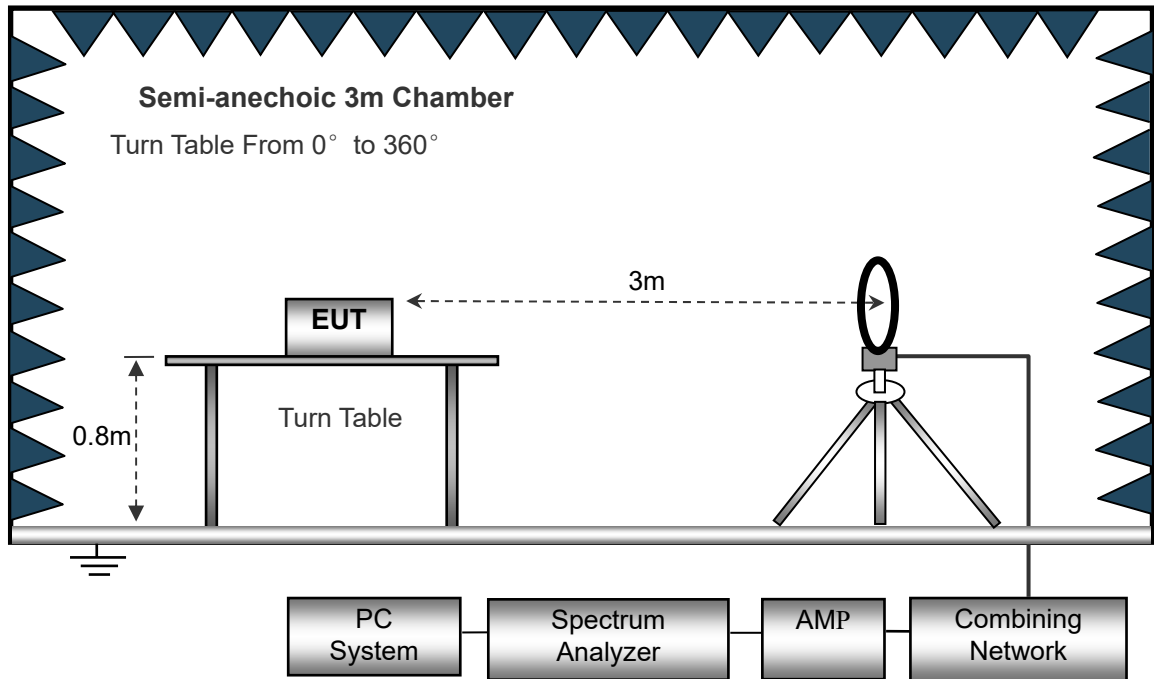

The test setup for emission measurement from 30MHz to 1GHz.

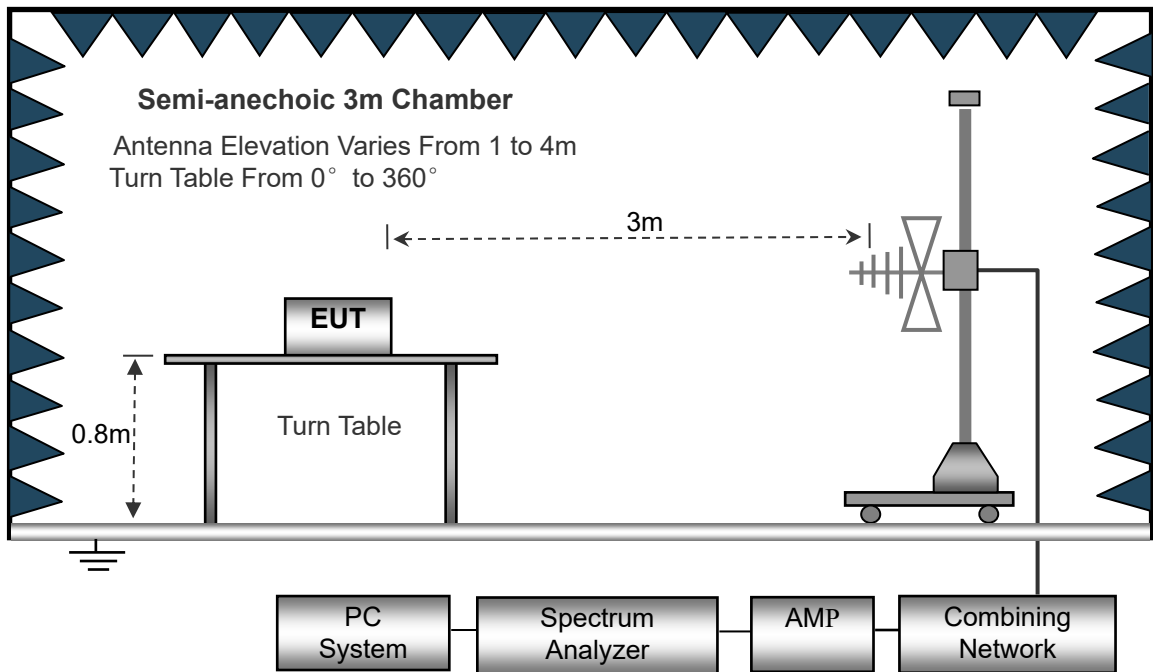

The test setup for emission measurement above 1GHz.

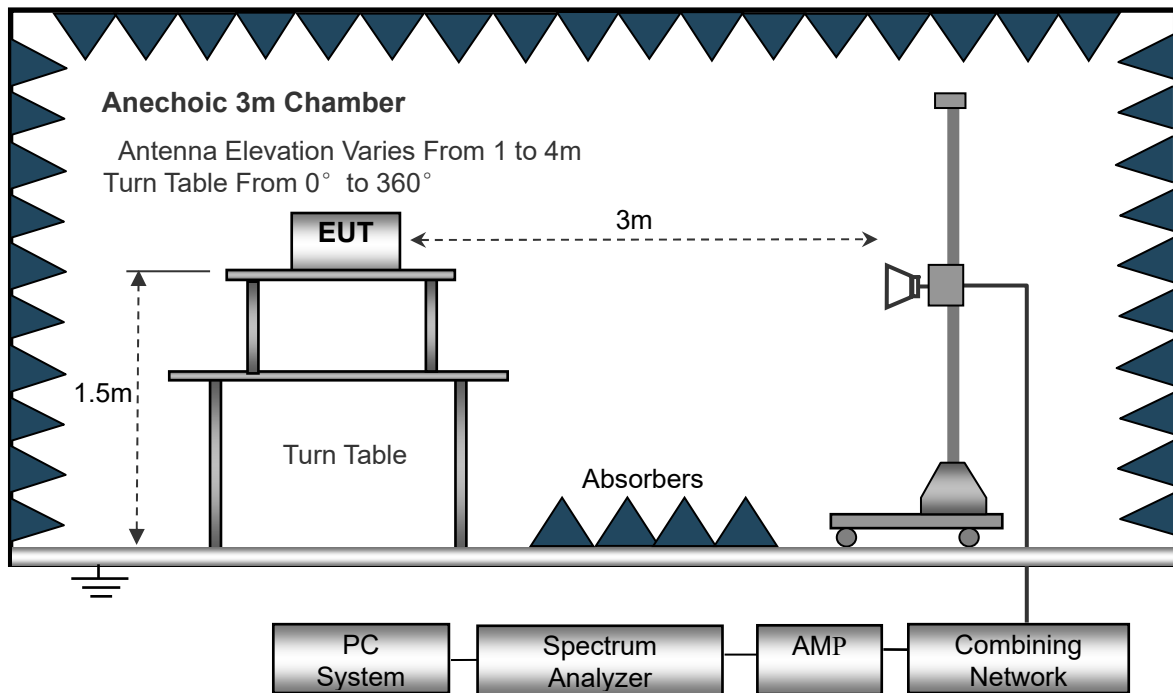

5.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

5.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz

802.11a(worst case)			
Test Channel	5180MHz(worst case)	Polarity:	Horizontal

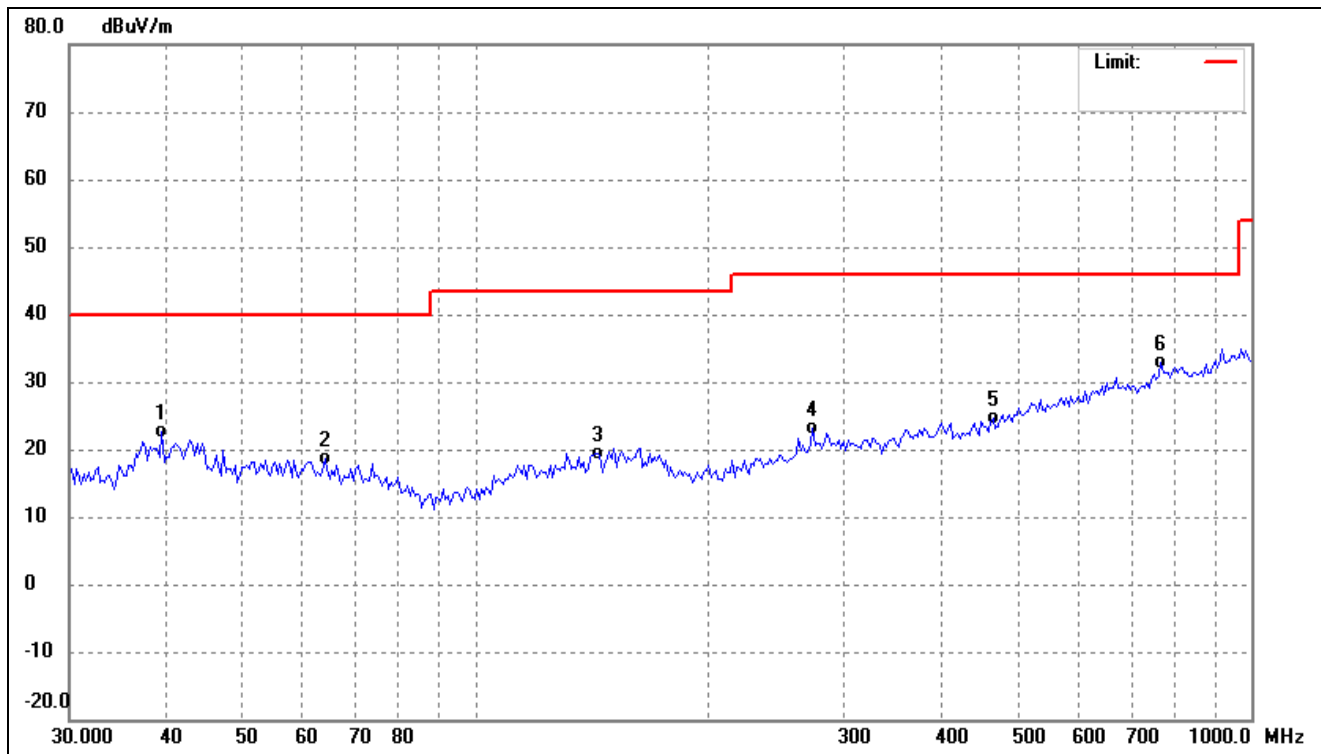

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.4588	31.53	-8.92	22.61	40.00	-17.39	-	-	QP
2	64.0800	27.95	-9.39	18.56	40.00	-21.44	-	-	QP
3	143.7760	28.15	-8.78	19.37	43.50	-24.13	-	-	QP
4	272.5246	32.25	-9.14	23.11	46.00	-22.89	-	-	QP
5	464.8867	29.10	-4.44	24.66	46.00	-21.34	-	-	QP
6	765.6482	31.65	1.31	32.96	46.00	-13.04	-	-	QP


802.11a(worst case)			
Test Channel	5180MHz(worst case)	Polarity:	Vertical

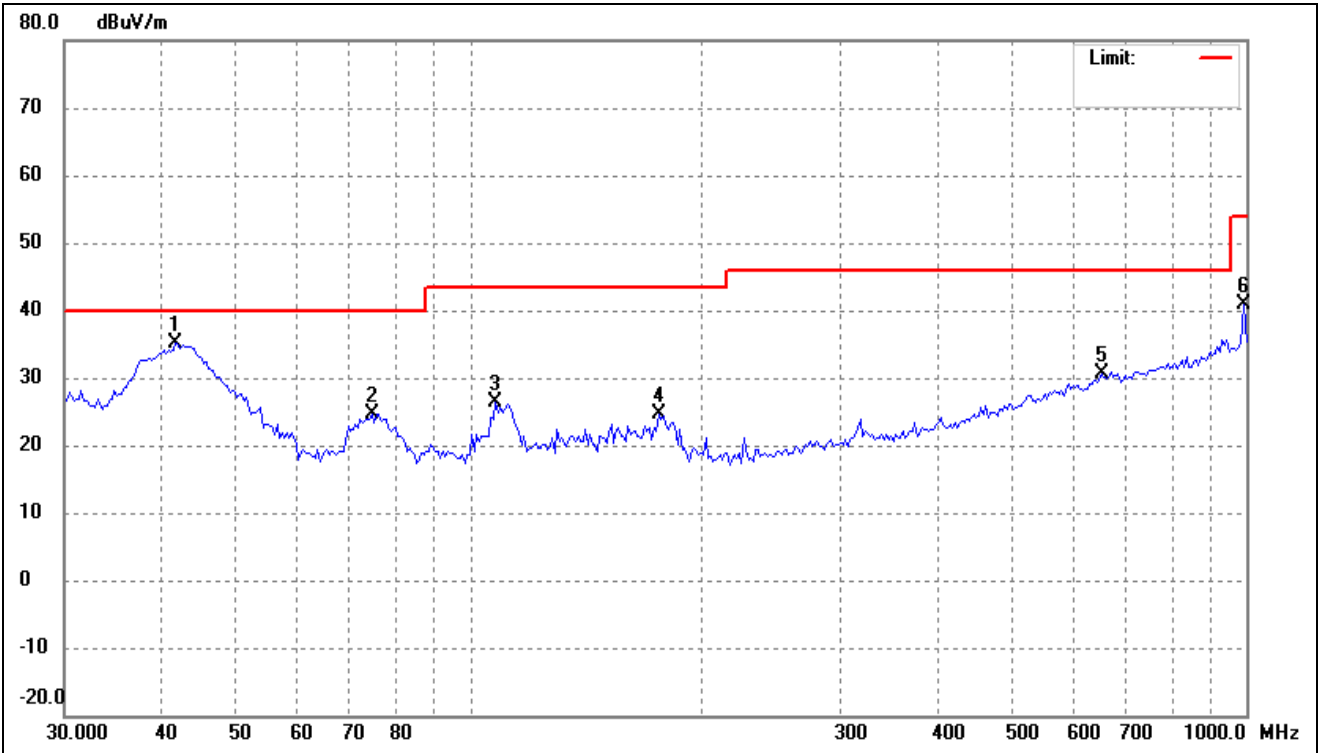

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7406	43.82	-8.71	35.11	40.00	-4.89	-	-	peak
2	74.7934	36.08	-11.35	24.73	40.00	-15.27	-	-	peak
3	107.7854	37.88	-11.61	26.27	43.50	-17.23	-	-	peak
4	175.0404	33.81	-9.17	24.64	43.50	-18.86	-	-	peak
5	651.3831	30.72	-0.15	30.57	46.00	-15.43	-	-	peak
6	992.9975	37.26	3.68	40.94	54.00	-13.06	-	-	peak

➤ 5250-5350MHz


802.11a(worst case)			
Test Channel	5260MHz	Polarity:	Horizontal

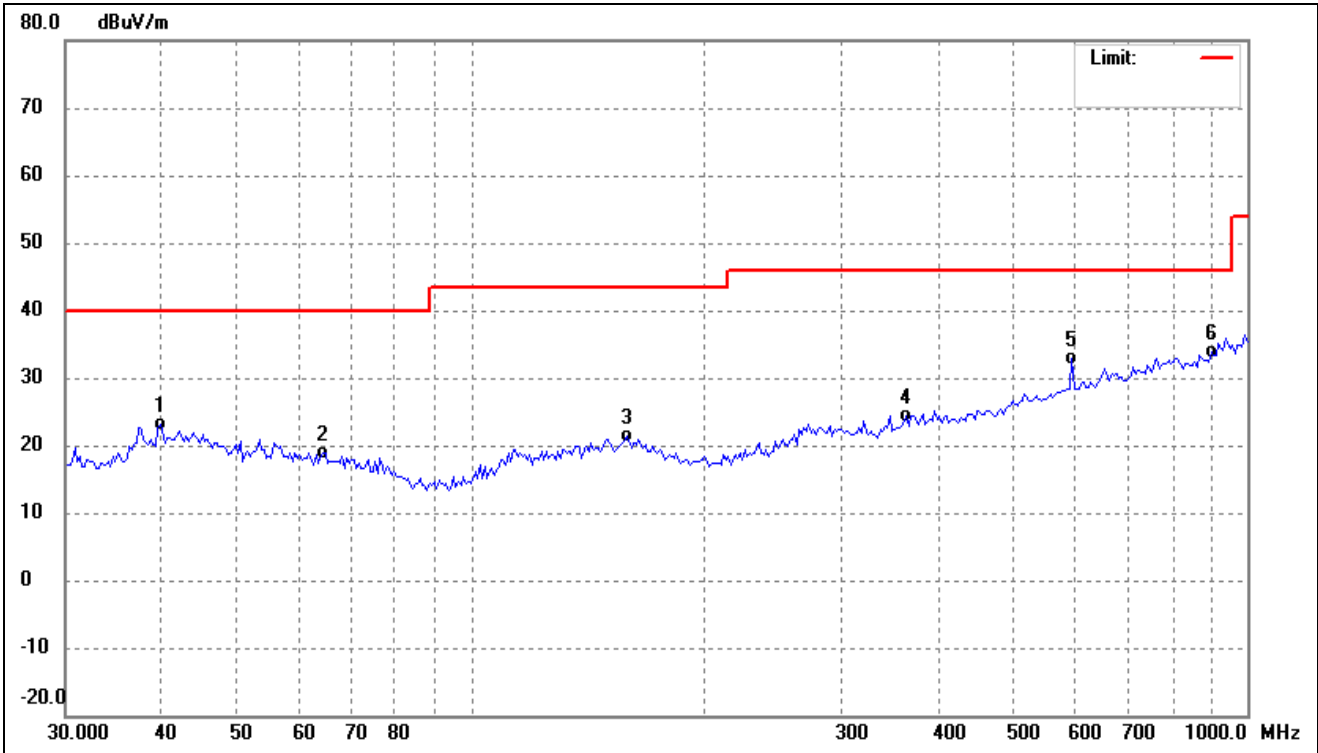

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.7371	31.94	-8.90	23.04	40.00	-16.96	-	-	QP
2	64.5319	28.45	-9.45	19.00	40.00	-21.00	-	-	QP
3	158.6399	29.75	-8.30	21.45	43.50	-22.05	-	-	QP
4	363.5231	31.51	-7.10	24.41	46.00	-21.59	-	-	QP
5	594.5143	33.84	-1.04	32.80	46.00	-13.20	-	-	QP
6	899.9577	31.38	2.62	34.00	46.00	-12.00	-	-	QP


802.11a(worst case)

Test Channel	5260MHz	Polarity:	Vertical
--------------	---------	-----------	----------

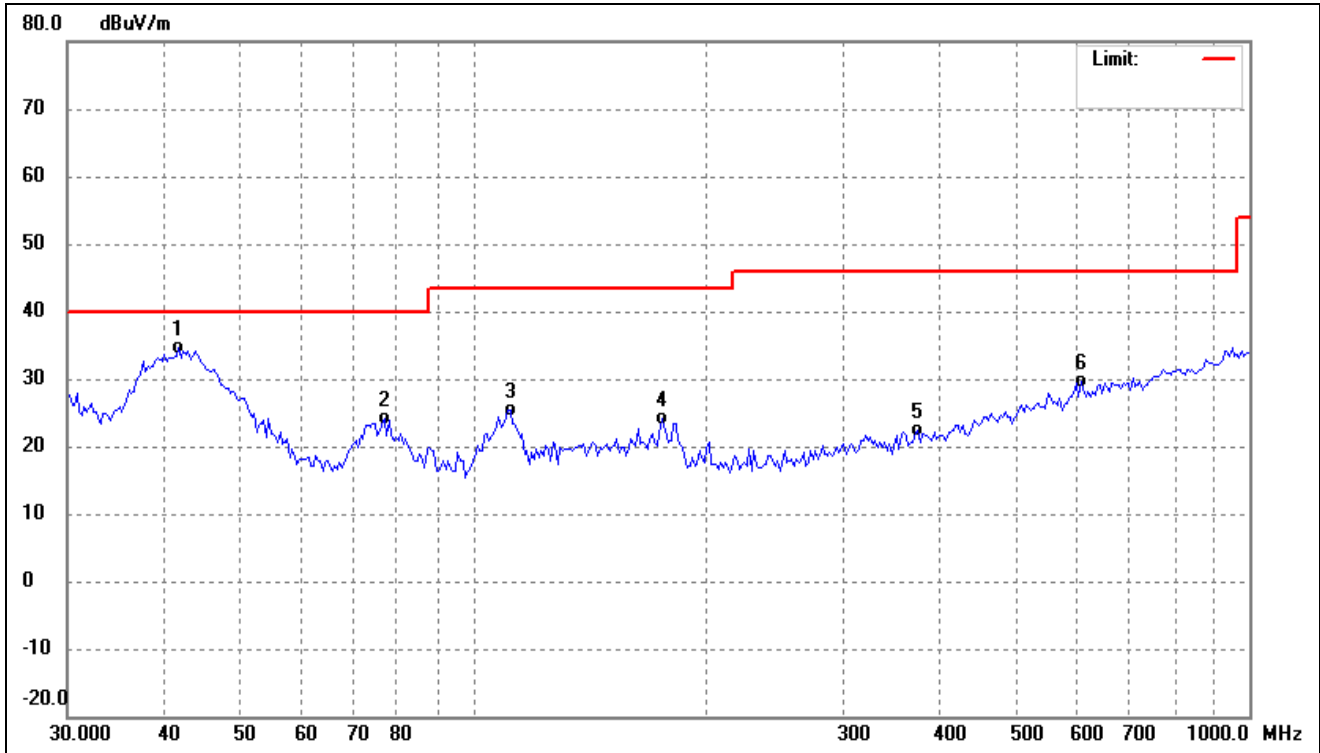


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7406	43.36	-8.71	34.65	40.00	-5.35	-	-	QP
2	76.9256	35.88	-11.78	24.10	40.00	-15.90	-	-	QP
3	111.6399	36.59	-11.13	25.46	43.50	-18.04	-	-	QP
4	175.0404	33.27	-9.17	24.10	43.50	-19.40	-	-	QP
5	373.8862	29.30	-6.88	22.42	46.00	-23.58	-	-	QP
6	607.1806	30.42	-0.87	29.55	46.00	-16.45	-	-	QP

802.11a(worst case)			
Test Channel	5320MHz	Polarity:	Horizontal

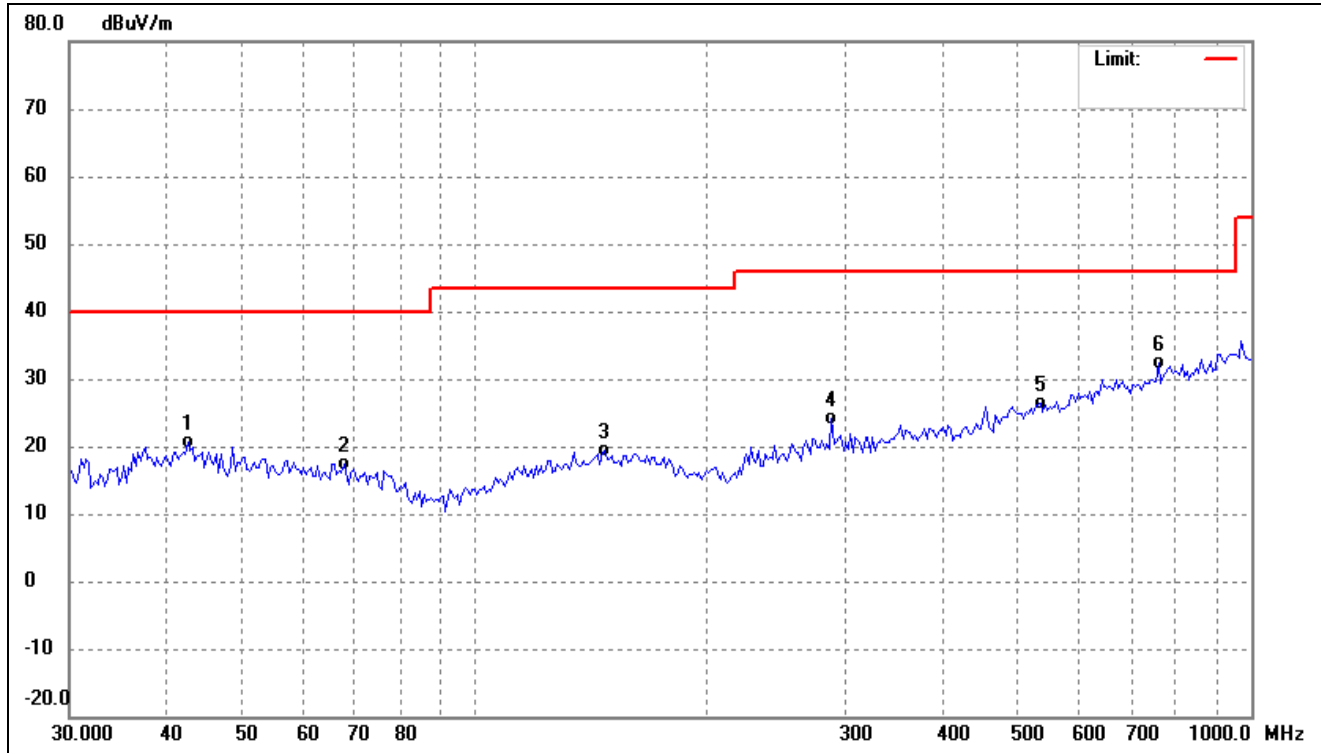

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.6299	29.12	-8.60	20.52	40.00	-19.48	-	-	QP
2	67.7856	27.41	-10.01	17.40	40.00	-22.60	-	-	QP
3	146.8392	27.96	-8.68	19.28	43.50	-24.22	-	-	QP
4	288.2840	32.70	-8.54	24.16	46.00	-21.84	-	-	QP
5	535.0377	29.17	-2.86	26.31	46.00	-19.69	-	-	QP
6	760.2867	31.11	1.25	32.36	46.00	-13.64	-	-	QP


802.11a(worst case)			
Test Channel	5320MHz	Polarity:	Vertical

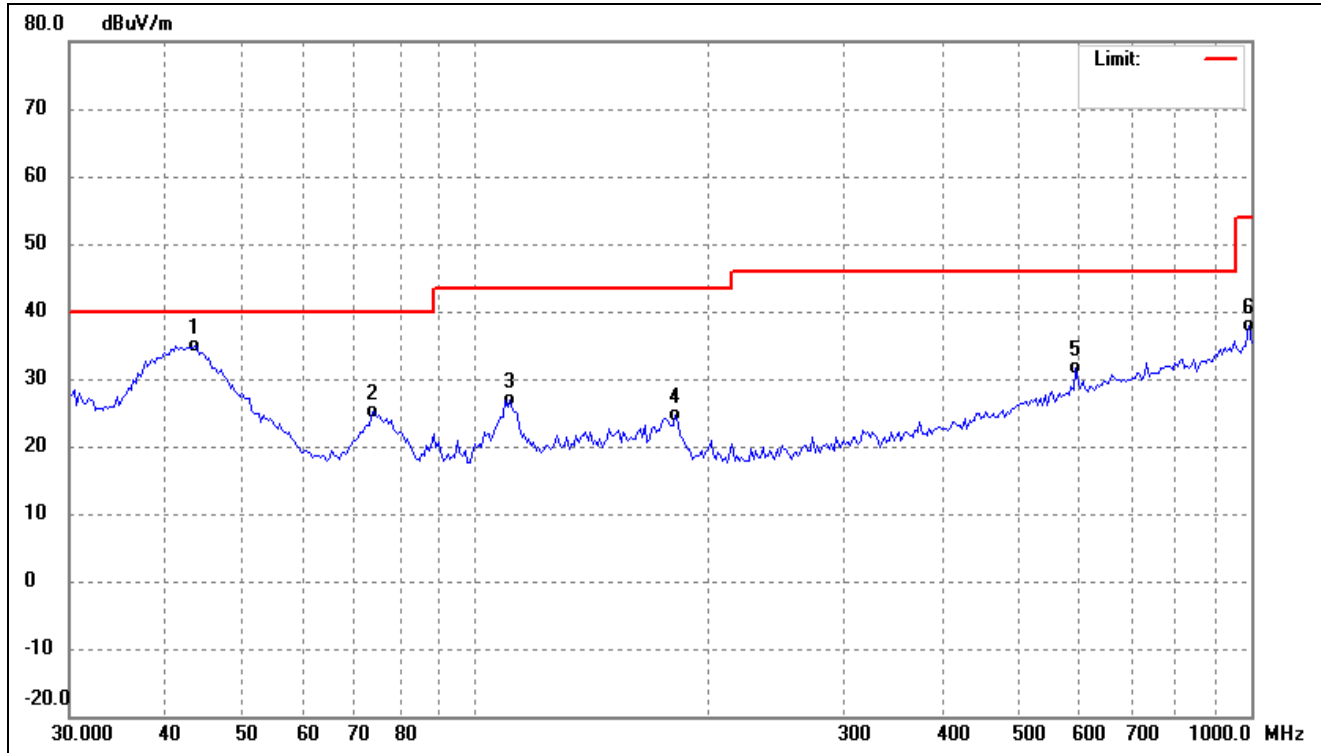

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5381	43.46	-8.49	34.97	40.00	-5.03	-	-	QP
2	73.7496	36.18	-11.13	25.05	40.00	-14.95	-	-	QP
3	110.8581	38.15	-11.21	26.94	43.50	-16.56	-	-	QP
4	181.3000	34.61	-9.97	24.64	43.50	-18.86	-	-	QP
5	594.5143	32.59	-1.04	31.55	46.00	-14.45	-	-	QP
6	992.9975	34.31	3.68	37.99	54.00	-16.01	-	-	QP


➤ 5470-5725MHz

802.11a(worst case)			
Test Channel	5500MHz	Polarity:	Horizontal

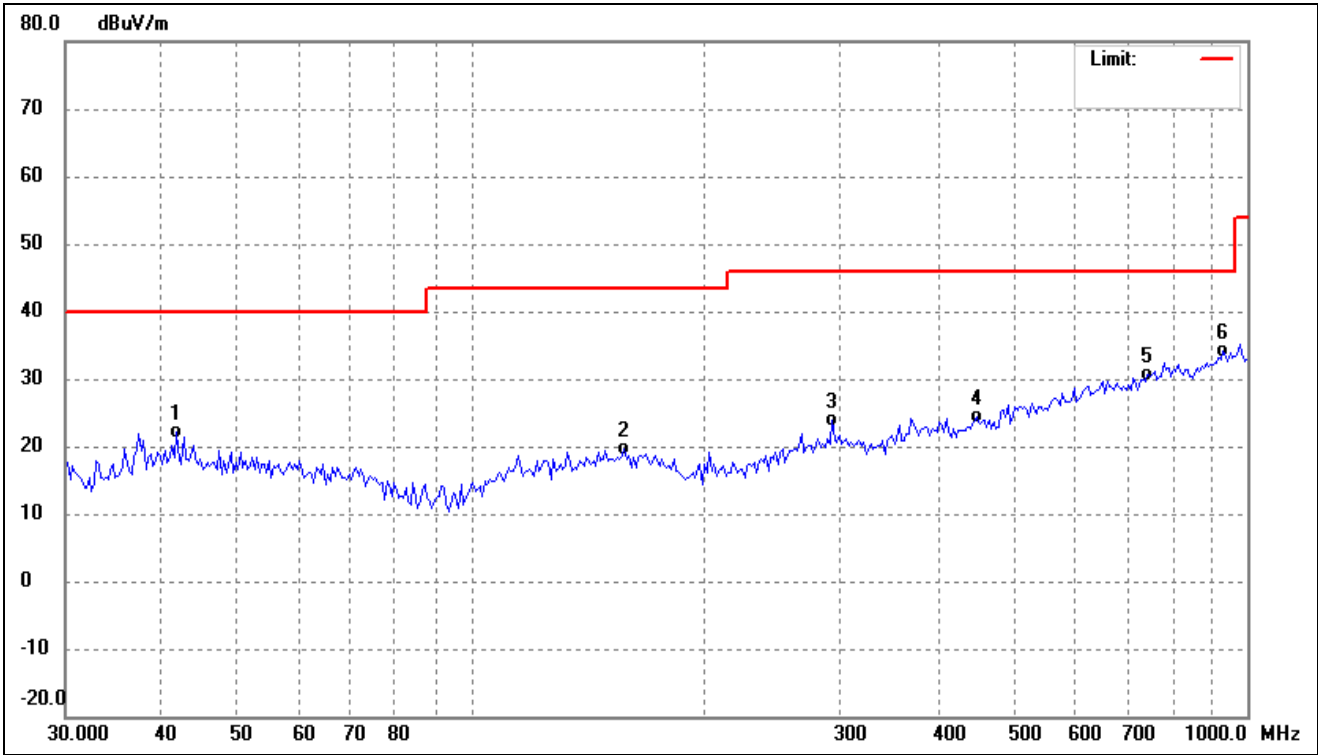


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.7406	30.72	-8.71	22.01	40.00	-17.99	-	-	QP
2	157.5290	28.05	-8.31	19.74	43.50	-23.76	-	-	QP
3	292.3643	32.26	-8.45	23.81	46.00	-22.19	-	-	QP
4	448.8361	29.15	-4.70	24.45	46.00	-21.55	-	-	QP
5	744.4265	29.59	1.02	30.61	46.00	-15.39	-	-	QP
6	932.1405	30.95	3.25	34.20	46.00	-11.80	-	-	QP

802.11a(worst case)			
Test Channel	5500MHz	Polarity:	Vertical

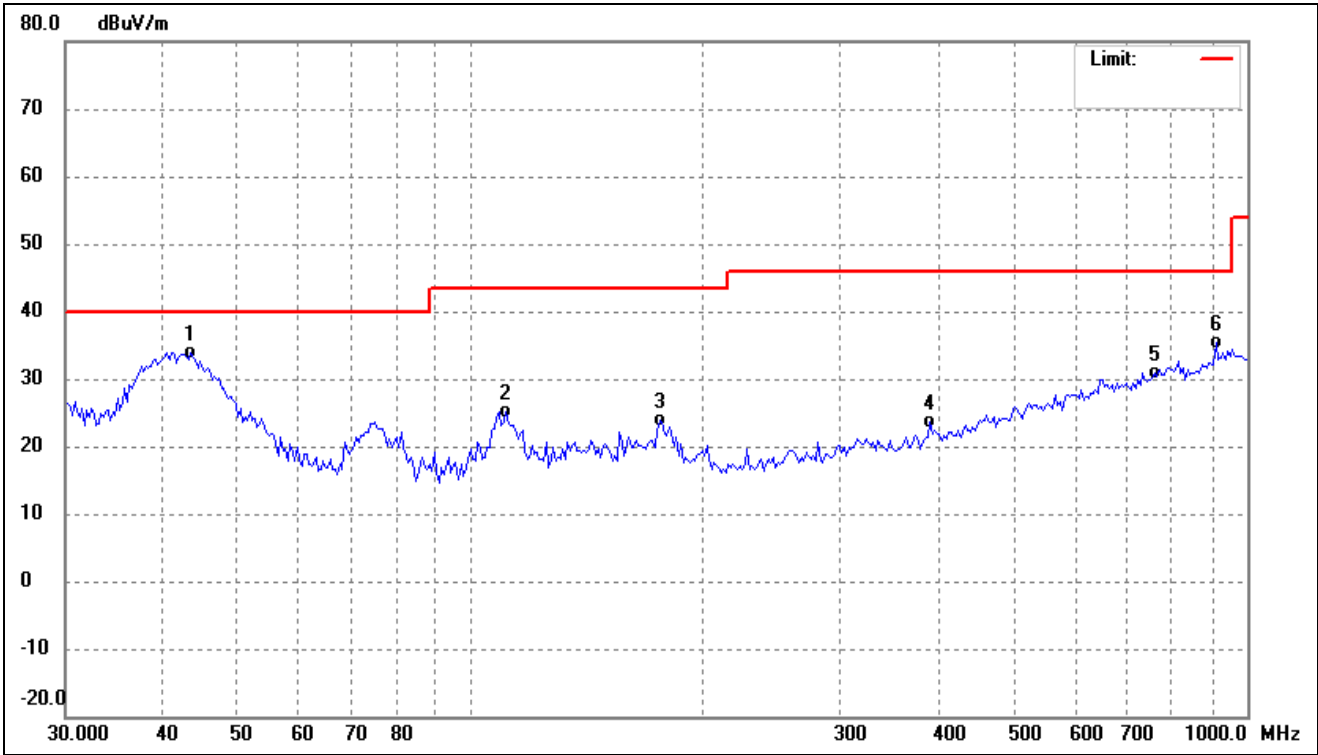

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5381	42.44	-8.49	33.95	40.00	-6.05	-	-	QP
2	110.8581	36.32	-11.21	25.11	43.50	-18.39	-	-	QP
3	175.0404	33.04	-9.17	23.87	43.50	-19.63	-	-	QP
4	389.9874	30.15	-6.50	23.65	46.00	-22.35	-	-	QP
5	760.2867	29.70	1.25	30.95	46.00	-15.05	-	-	QP
6	912.6953	32.62	2.88	35.50	46.00	-10.50	-	-	QP

802.11a(worst case)			
Test Channel	5700MHz	Polarity:	Horizontal

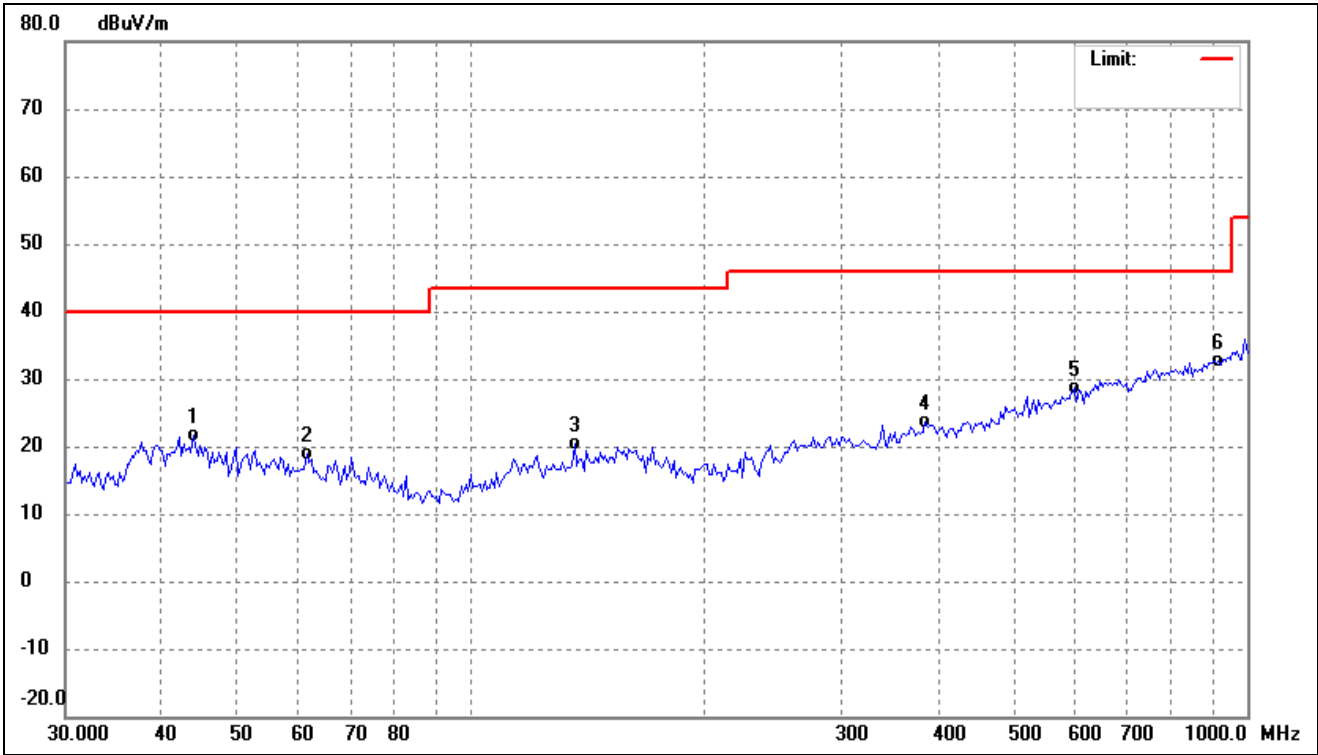

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.8452	29.97	-8.46	21.51	40.00	-18.49	-	-	QP
2	61.4343	27.89	-9.05	18.84	40.00	-21.16	-	-	QP
3	135.9163	29.52	-9.15	20.37	43.50	-23.13	-	-	QP
4	384.5447	30.20	-6.63	23.57	46.00	-22.43	-	-	QP
5	598.7067	29.63	-0.88	28.75	46.00	-17.25	-	-	QP
6	919.1315	29.60	2.99	32.59	46.00	-13.41	-	-	QP


802.11a(worst case)

Test Channel

5700MHz

Polarity:


Vertical

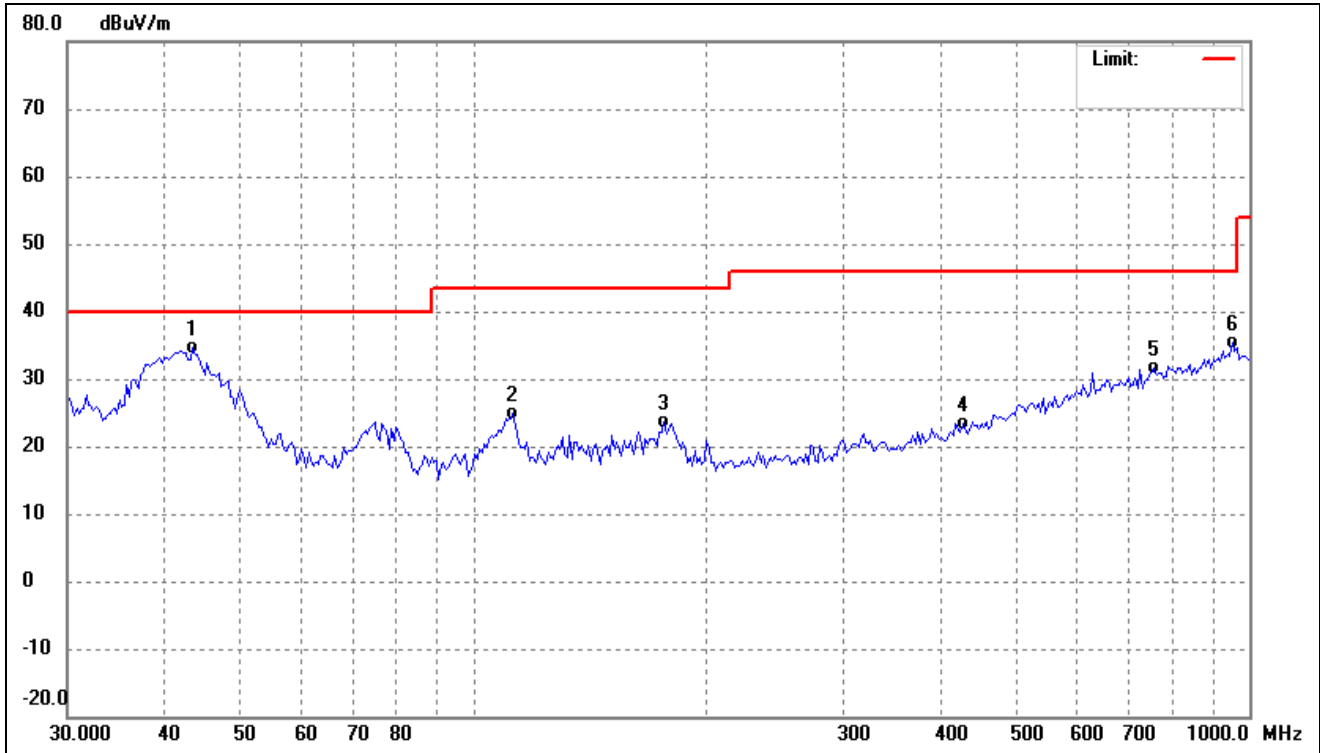

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	43.5381	43.17	-8.49	34.68	40.00	-5.32	-	-	QP
2	112.4271	35.98	-11.02	24.96	43.50	-18.54	-	-	QP
3	176.2748	32.89	-9.32	23.57	43.50	-19.93	-	-	QP
4	427.2920	29.10	-5.61	23.49	46.00	-22.51	-	-	QP
5	754.9628	30.39	1.19	31.58	46.00	-14.42	-	-	QP
6	952.0001	31.79	3.60	35.39	46.00	-10.61	-	-	QP


➤ 5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Horizontal

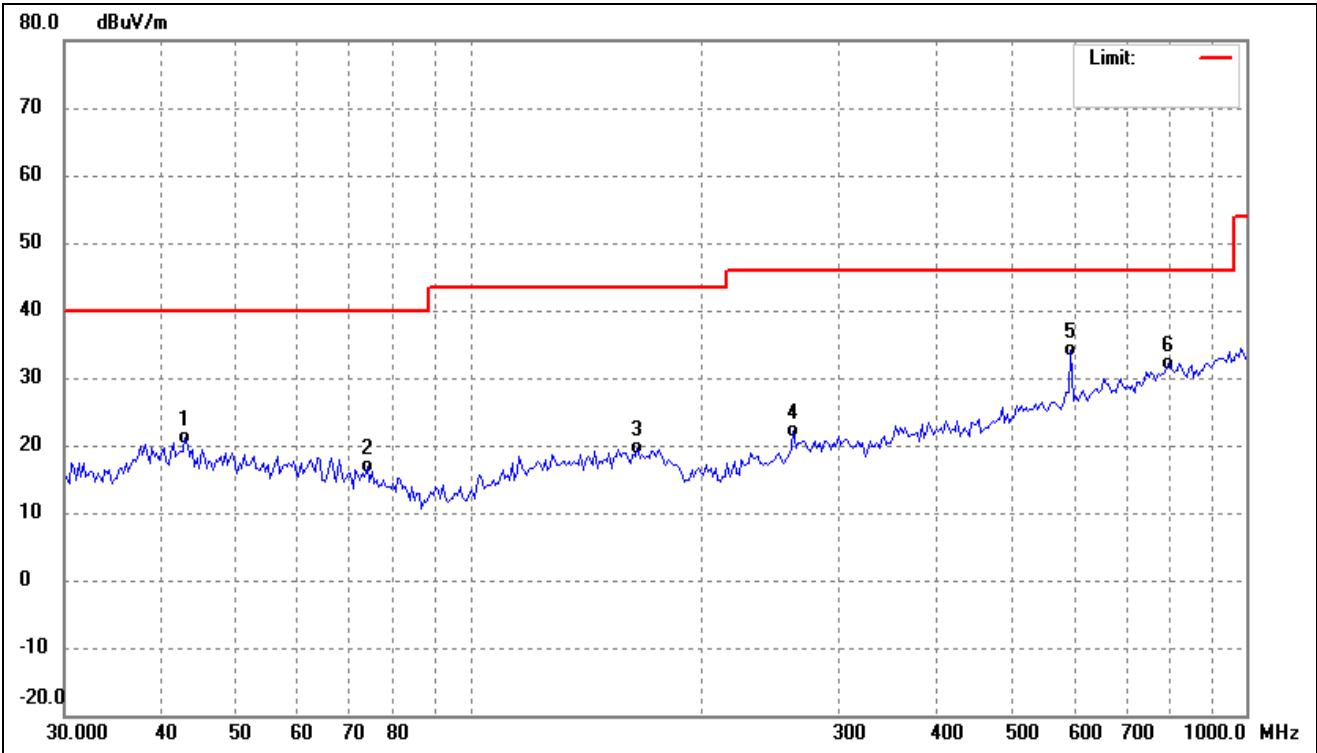


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.9305	29.77	-8.57	21.20	40.00	-18.80	-	-	QP
2	73.7496	28.09	-11.13	16.96	40.00	-23.04	-	-	QP
3	164.3129	28.13	-8.45	19.68	43.50	-23.82	-	-	QP
4	261.2730	31.92	-9.67	22.25	46.00	-23.75	-	-	QP
5	594.5143	35.11	-1.04	34.07	46.00	-11.93	-	-	QP
6	793.0281	30.59	1.63	32.22	46.00	-13.78	-	-	QP

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

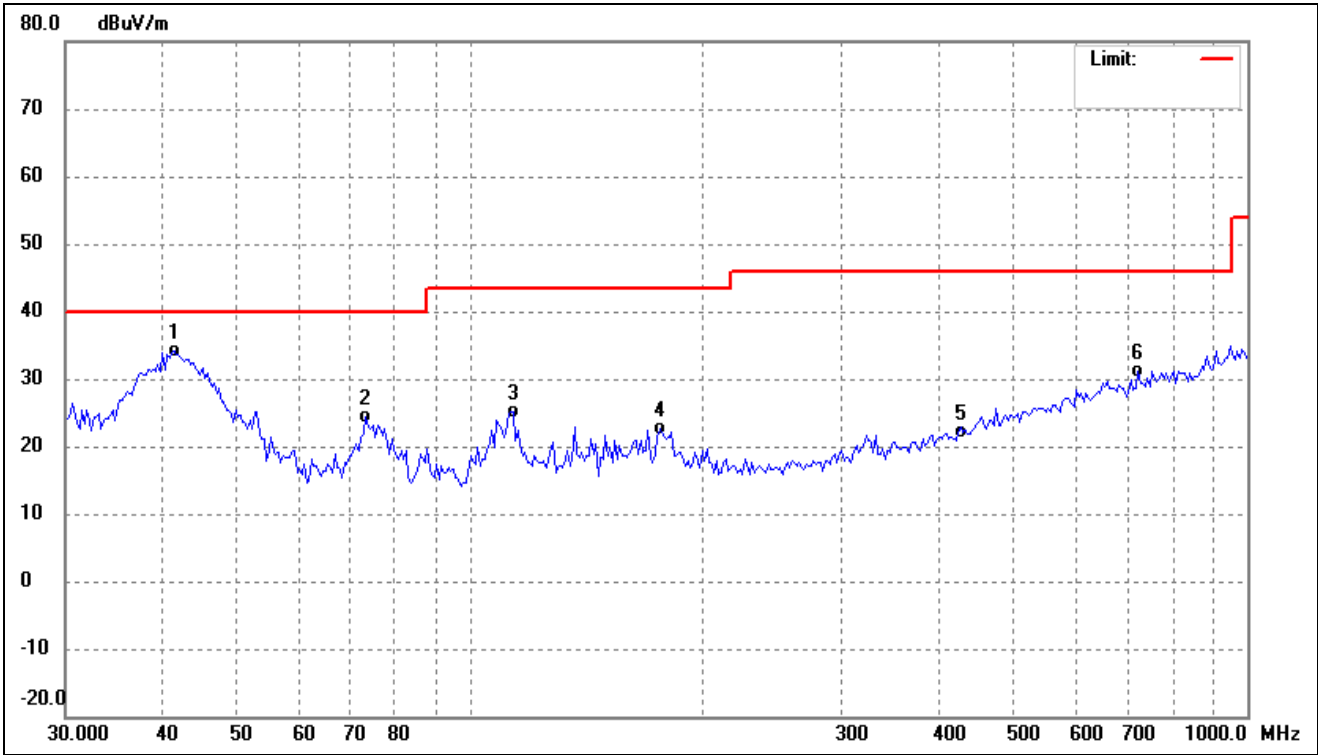


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4483	42.76	-8.74	34.02	40.00	-5.98	-	-	QP
2	73.2331	35.48	-11.02	24.46	40.00	-15.54	-	-	QP
3	113.2200	36.16	-10.92	25.24	43.50	-18.26	-	-	QP
4	175.0404	31.77	-9.17	22.60	43.50	-20.90	-	-	QP
5	424.2999	27.76	-5.71	22.05	46.00	-23.95	-	-	QP
6	723.7930	30.61	0.63	31.24	46.00	-14.76	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

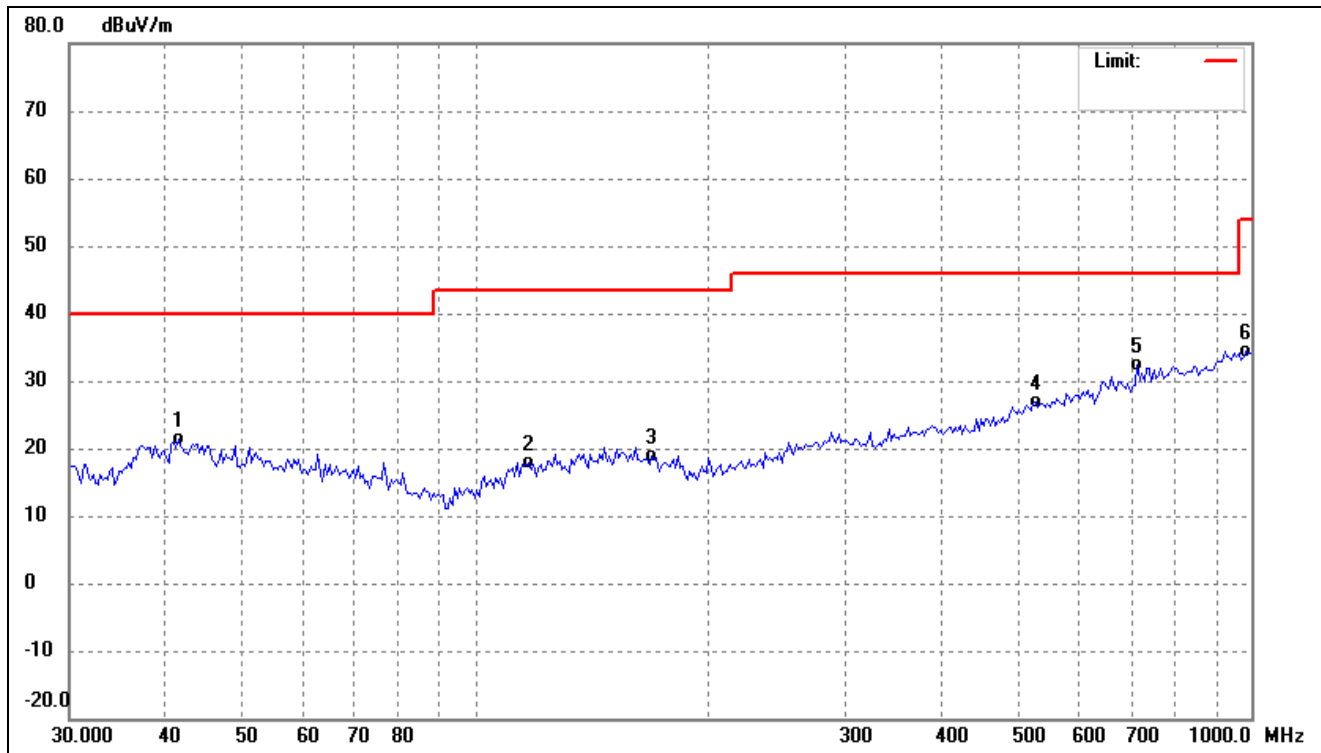

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	41.4483	30.19	-8.74	21.45	40.00	-18.55	-	-	QP
2	117.2688	28.41	-10.55	17.86	43.50	-25.64	-	-	QP
3	168.9970	27.56	-8.64	18.92	43.50	-24.58	-	-	QP
4	527.5707	29.69	-2.90	26.79	46.00	-19.21	-	-	QP
5	713.6917	31.85	0.45	32.30	46.00	-13.70	-	-	QP
6	986.0440	30.75	3.66	34.41	54.00	-19.59	-	-	QP

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

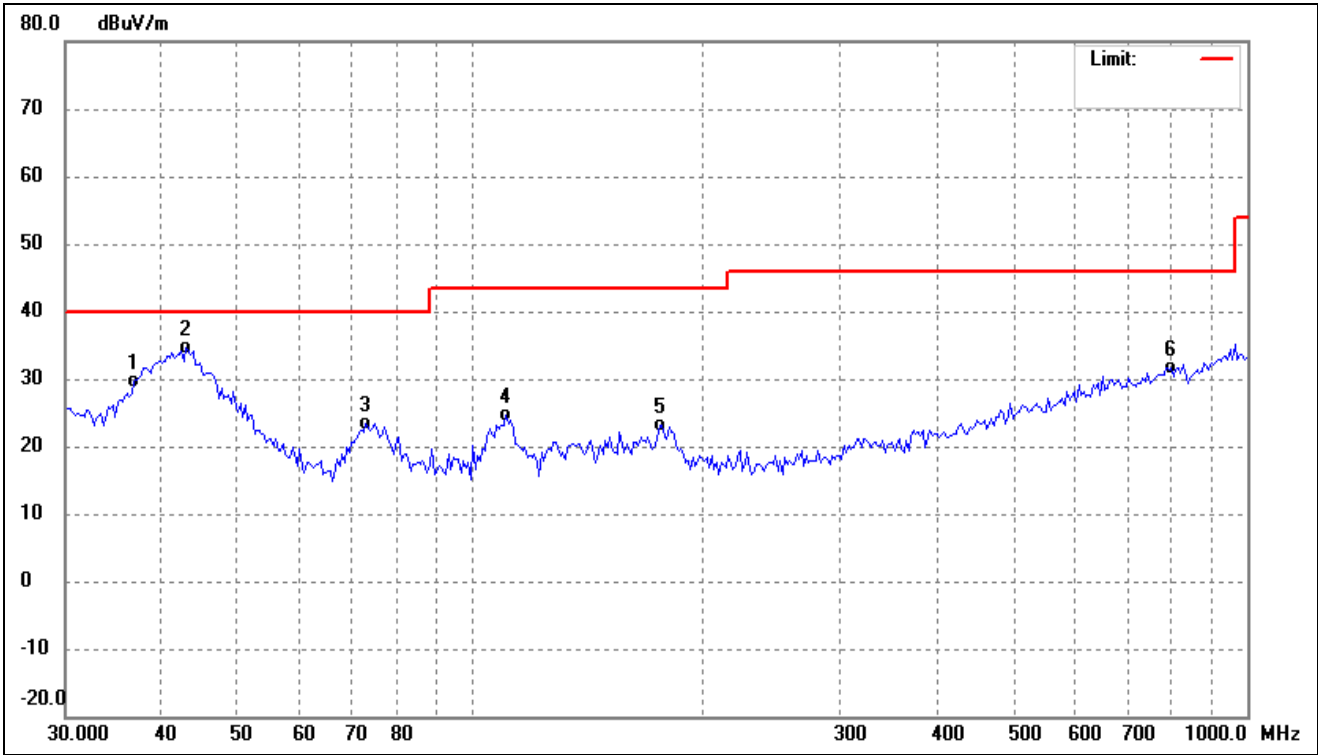

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7811	38.91	-9.26	29.65	40.00	-10.35	-	-	QP
2	42.9305	43.27	-8.57	34.70	40.00	-5.30	-	-	QP
3	73.2331	34.40	-11.02	23.38	40.00	-16.62	-	-	QP
4	110.8581	35.82	-11.21	24.61	43.50	-18.89	-	-	QP
5	175.0404	32.40	-9.17	23.23	43.50	-20.27	-	-	QP
6	798.6205	29.91	1.70	31.61	46.00	-14.39	-	-	QP

Remark: '-'Means' the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


6 Conducted Emissions

6.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.

6.2 Basic Test Setup Block Diagram

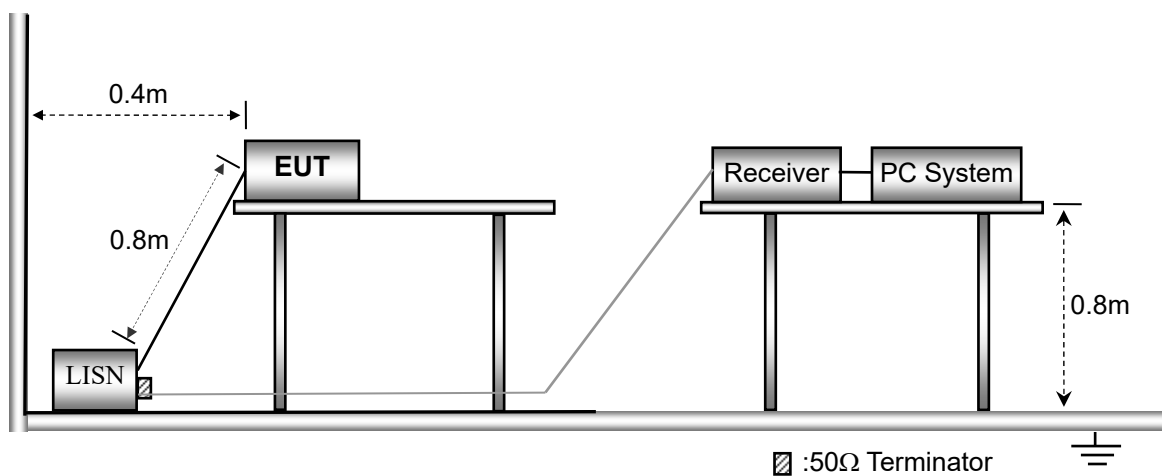


6.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150kHz
Stop Frequency	30MHz
Sweep Speed	Auto
IF Bandwidth.....	10kHz
Quasi-Peak Adapter Bandwidth	9kHz
Quasi-Peak Adapter Mode	Normal


6.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

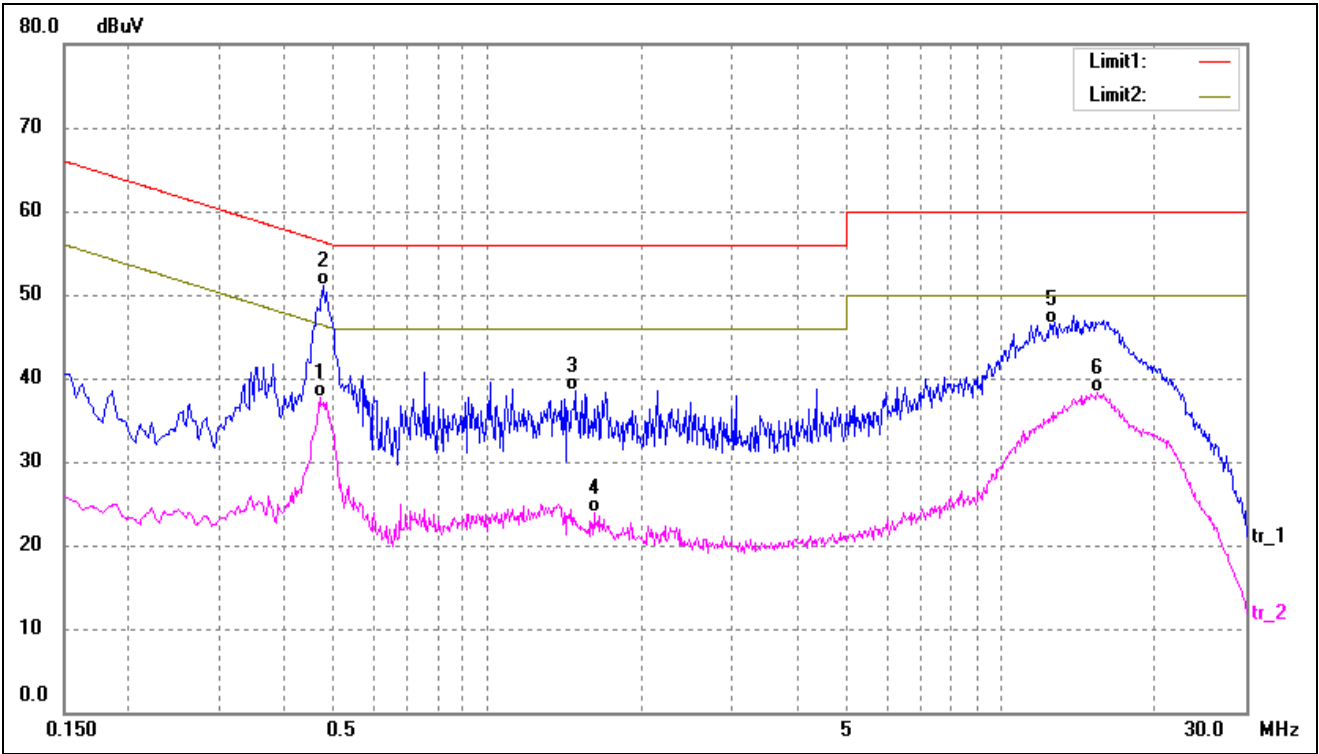

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4700	28.05	9.65	37.70	46.51	-8.81	AVG
2*	0.4780	41.40	9.65	51.05	56.37	-5.32	QP
3	1.4820	28.88	9.57	38.45	56.00	-17.55	QP
4	1.6180	14.37	9.51	23.88	46.00	-22.12	AVG
5	12.7700	36.96	9.64	46.60	60.00	-13.40	QP
6	15.4620	28.87	9.51	38.38	50.00	-11.62	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

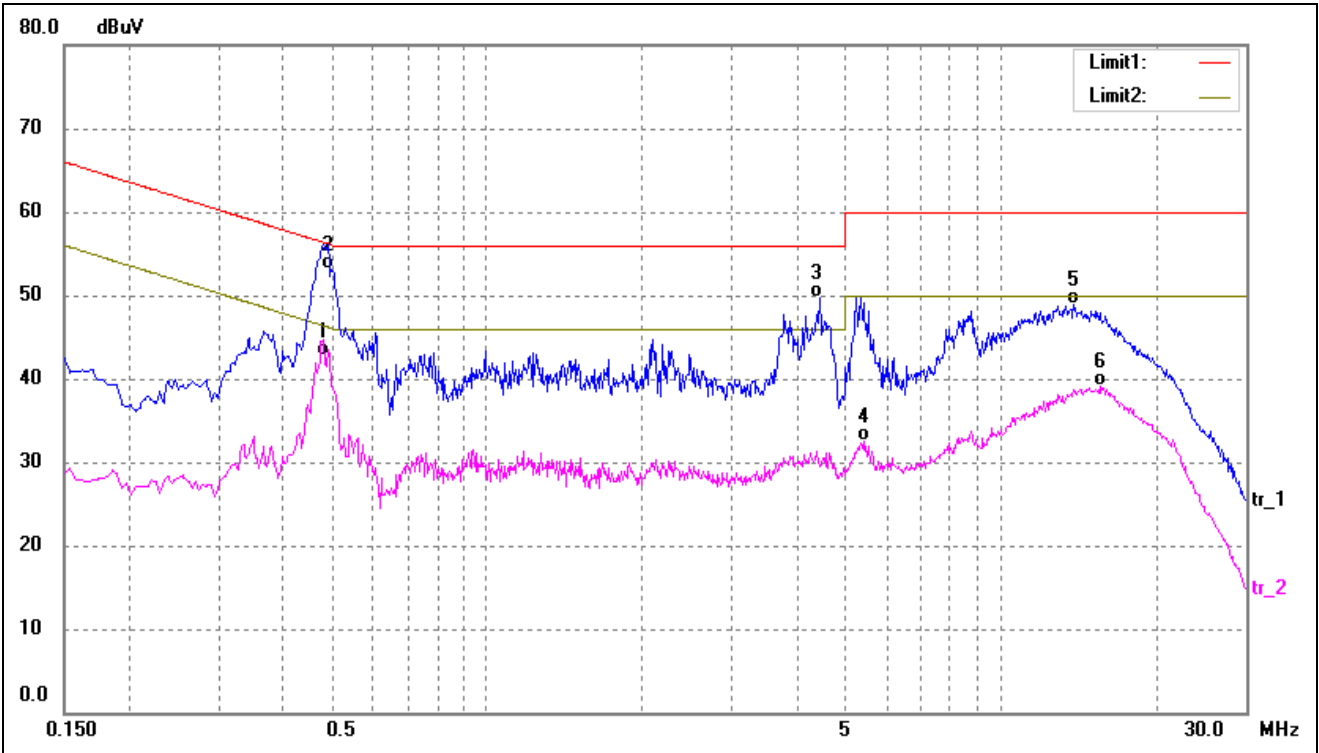

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4780	33.03	9.65	42.68	46.37	-3.69	AVG
2*	0.4900	43.47	9.65	53.12	56.17	-3.05	QP
3	4.4380	40.12	9.50	49.62	56.00	-6.38	QP
4	5.3940	22.82	9.61	32.43	50.00	-17.57	AVG
5	13.8740	39.42	9.58	49.00	60.00	-11.00	QP
6	15.5700	29.50	9.51	39.01	50.00	-10.99	AVG

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****