


尺寸130*160mm

130mm

160mm

V2.0 Quantum Light (Hexagon)

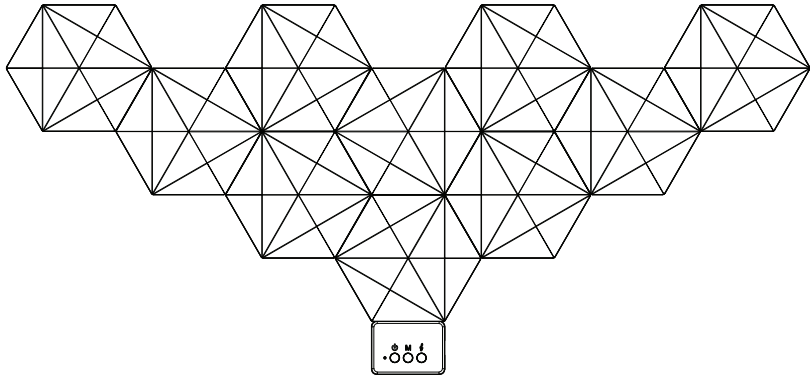

USER MANUAL



Parameters

Product Name	V2.0 Quantum Light (Hexagon)
Input	5V / 2A
Wattage of per panel	1W
Maximum pieces panels	1-15 pcs
Max Colors	RGB, 16.7 million
Working Temperature	-20°C to 40°C / -4°F to 104°F
Dimmability	App, Remote Controller, Button Controller

What's in the box


Light panel x 10, Linker x 12, Button Controller x 1, Remote controller x 1, Manual x 1, Double-sided adhesive tape x 12.

Instruction for Button Controller

- Static / dynamic mode switching: short press cycle switching red, green, blue, yellow, blue, purple, white, reverse color, forward color full water, forward colorful light, forward colorful fluttering, colorful curtains, blue running, colorful colorful curtains, forward colorful running.
- Rhythmic mode switching: Energy 1, Energy 2, Rhythm 1, Rhythm 2, Scroll 1, Scroll 2.
- Short press to turn on/off lights: short press to turn off lights, short press to turn on lights.

01


Instruction for Remote Controller



Pause	Auto mode	On/Off
Brightness+	Speed/Sensitivity+	Mode+
Brightness-	Speed/Sensitivity-	Mode-
Red	Green	Blue
Yellow	Cyan	Purple
Timed one hour light off	White	Timed two hours light off
Energy	Rhythm	Scrolling
Snowflake	Romantic	Starry Night


Installation Instruction

- Connect the controller to the first light panel with a linker.

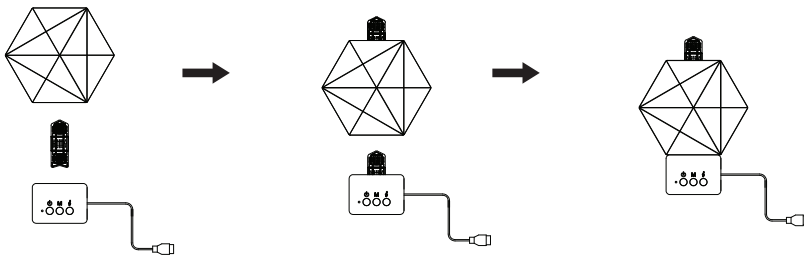


02


- Connect the light panel with the linker, and splice the shape you want.

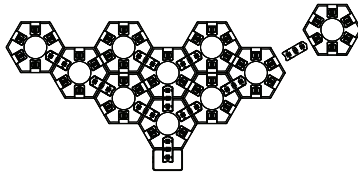


- Ensure that the installation surface is clean, flat, and free of water stains.



- Peel off the film from the double-sided tape.

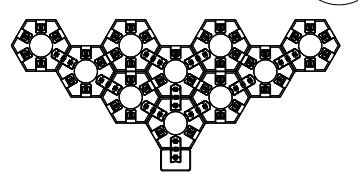

- Attach the light panel to the wall and press for 30 seconds.

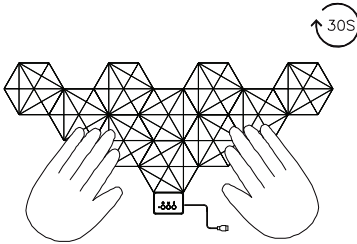

- Installation complete.

03

Packing / Weight

Item	Inner Box			
	Size (mm/in)	N.W. (kg/lbs)	G.W. (kg/lbs)	Qty (set)
KA-PL25 (Pack of 10)	250x100x136 mm 9.84x3.93x5.35 in	0.63/kg 1.38/lbs	0.73/kg 1.6/lbs	1

Item	Master Carton			
	Size (mm/in)	N.W. (kg/lbs)	G.W. (kg/lbs)	Qty (set)
KA-PL25 (Pack of 10)	518x423x433 mm 20.39x16.65x17.04 in	17.5/kg 38.58/lbs	18.5/kg 40.78/lbs	24

Steps of Connection on Mobile

- A smart phone or tablet with IOS 11.0 (or later) or Android 7.0 (or later).
- Download the " LotusLamp X " App from the APP store (IOS devices) or Google Play (Android devices).



Google play



Apple store




APP:LotusLamp X


04



- Connect to the network and turn on Bluetooth.

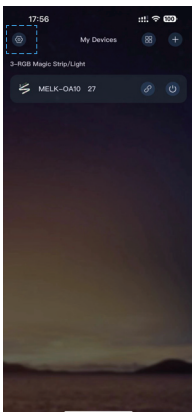


- Open Settings in the APP to turn on Auto connect.

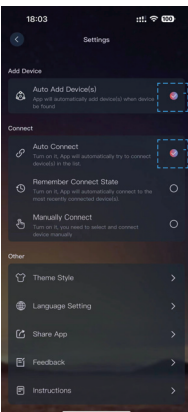

- Set Auto Add Device(s).

Auto Add Device(s)



Auto Connect

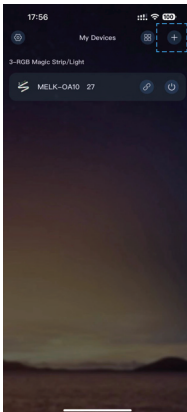

- Manually add device(s).

Add Group

Add Device(s)

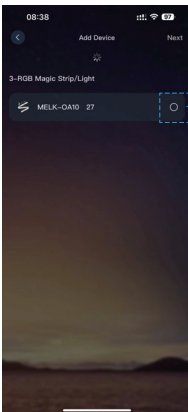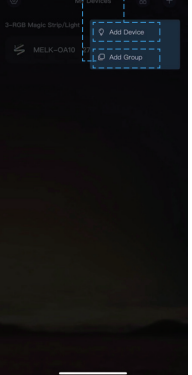


- Add devices, select the devices to be paired.


Select the devices to be paired

05


APP Interface

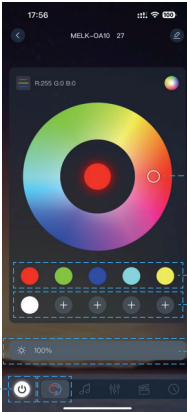

- Static mode, The lamp will display the color selected by the user.

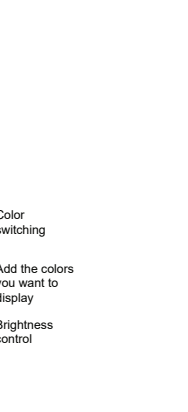

- Microphone mode, the user can choose the MIC on the mobile phone or the lamp, and control the dynamic and color change of the lamp through the change of sound.

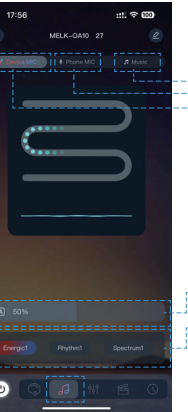

- Music mode, the user can choose the MIC on the mobile phone or the lamp, and control the dynamic and color change of the lamp through the change of sound.

Lamp switch

Color switching


Add the colors you want to display

Brightness control


Sound sensitivity

Swipe left / right to switch dynamic effects


06

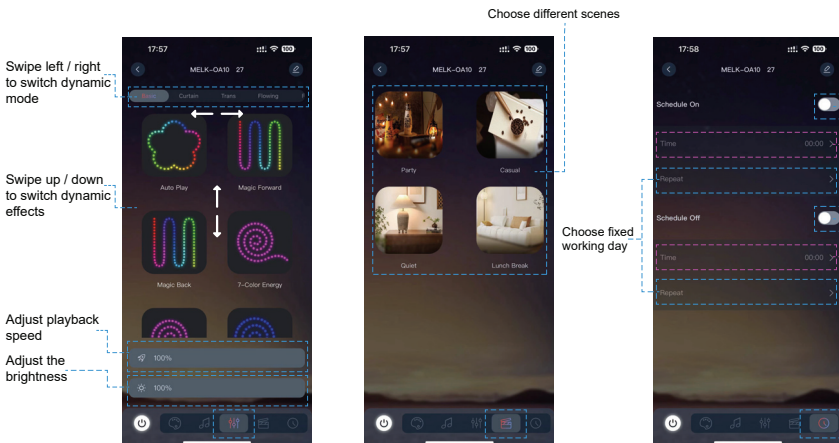

- Dynamic mode, the user can choose different dynamic effects, so that the lamp can carry out corresponding dynamic changes.

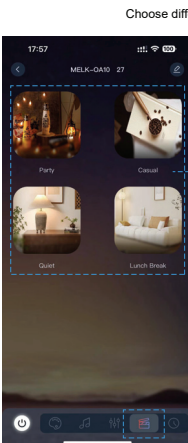

- Scene mode, Users can set different scene modes according to their preferences.

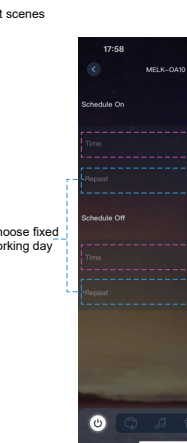

- Schedule mode, the user can set the time to turn on / on the light by setting the time.

Choose different scenes

Choose fixed working day

Turn on timed on / off light
Set the on / off time

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Caution

Read and follow the safety instructions below.

- This light panel is ideally used on smooth surfaces (e. g. glass, etc.); not suitable for uneven, bumpy or wet surfaces (e. g. brick, stucco, etc.).
- Clean and ensure the surface is totally dry before sticking the light panel on.
- When installing the light panel, press its central point against the wall for more than 30s in order to maximize the adhesion.
- Avoid installation above heat source objects, in areas where direct sunlight, airflowand temperature change significantly.
- Avoid exposing the product to the outside and directly in the rain.
- Do not use sharp and hard objects or rough pollutants to impact the light panel, as not to affect the function and appearance.
- Do not leave the power cord idle on the ground to avoid stumbling.
- Children who are not supervised by adults are not allowed to use this product alone. Some parts of this product are imported, there is a risk of choking.

For more inquires, please contact LPDISPLAY_01@163.com

07

08