


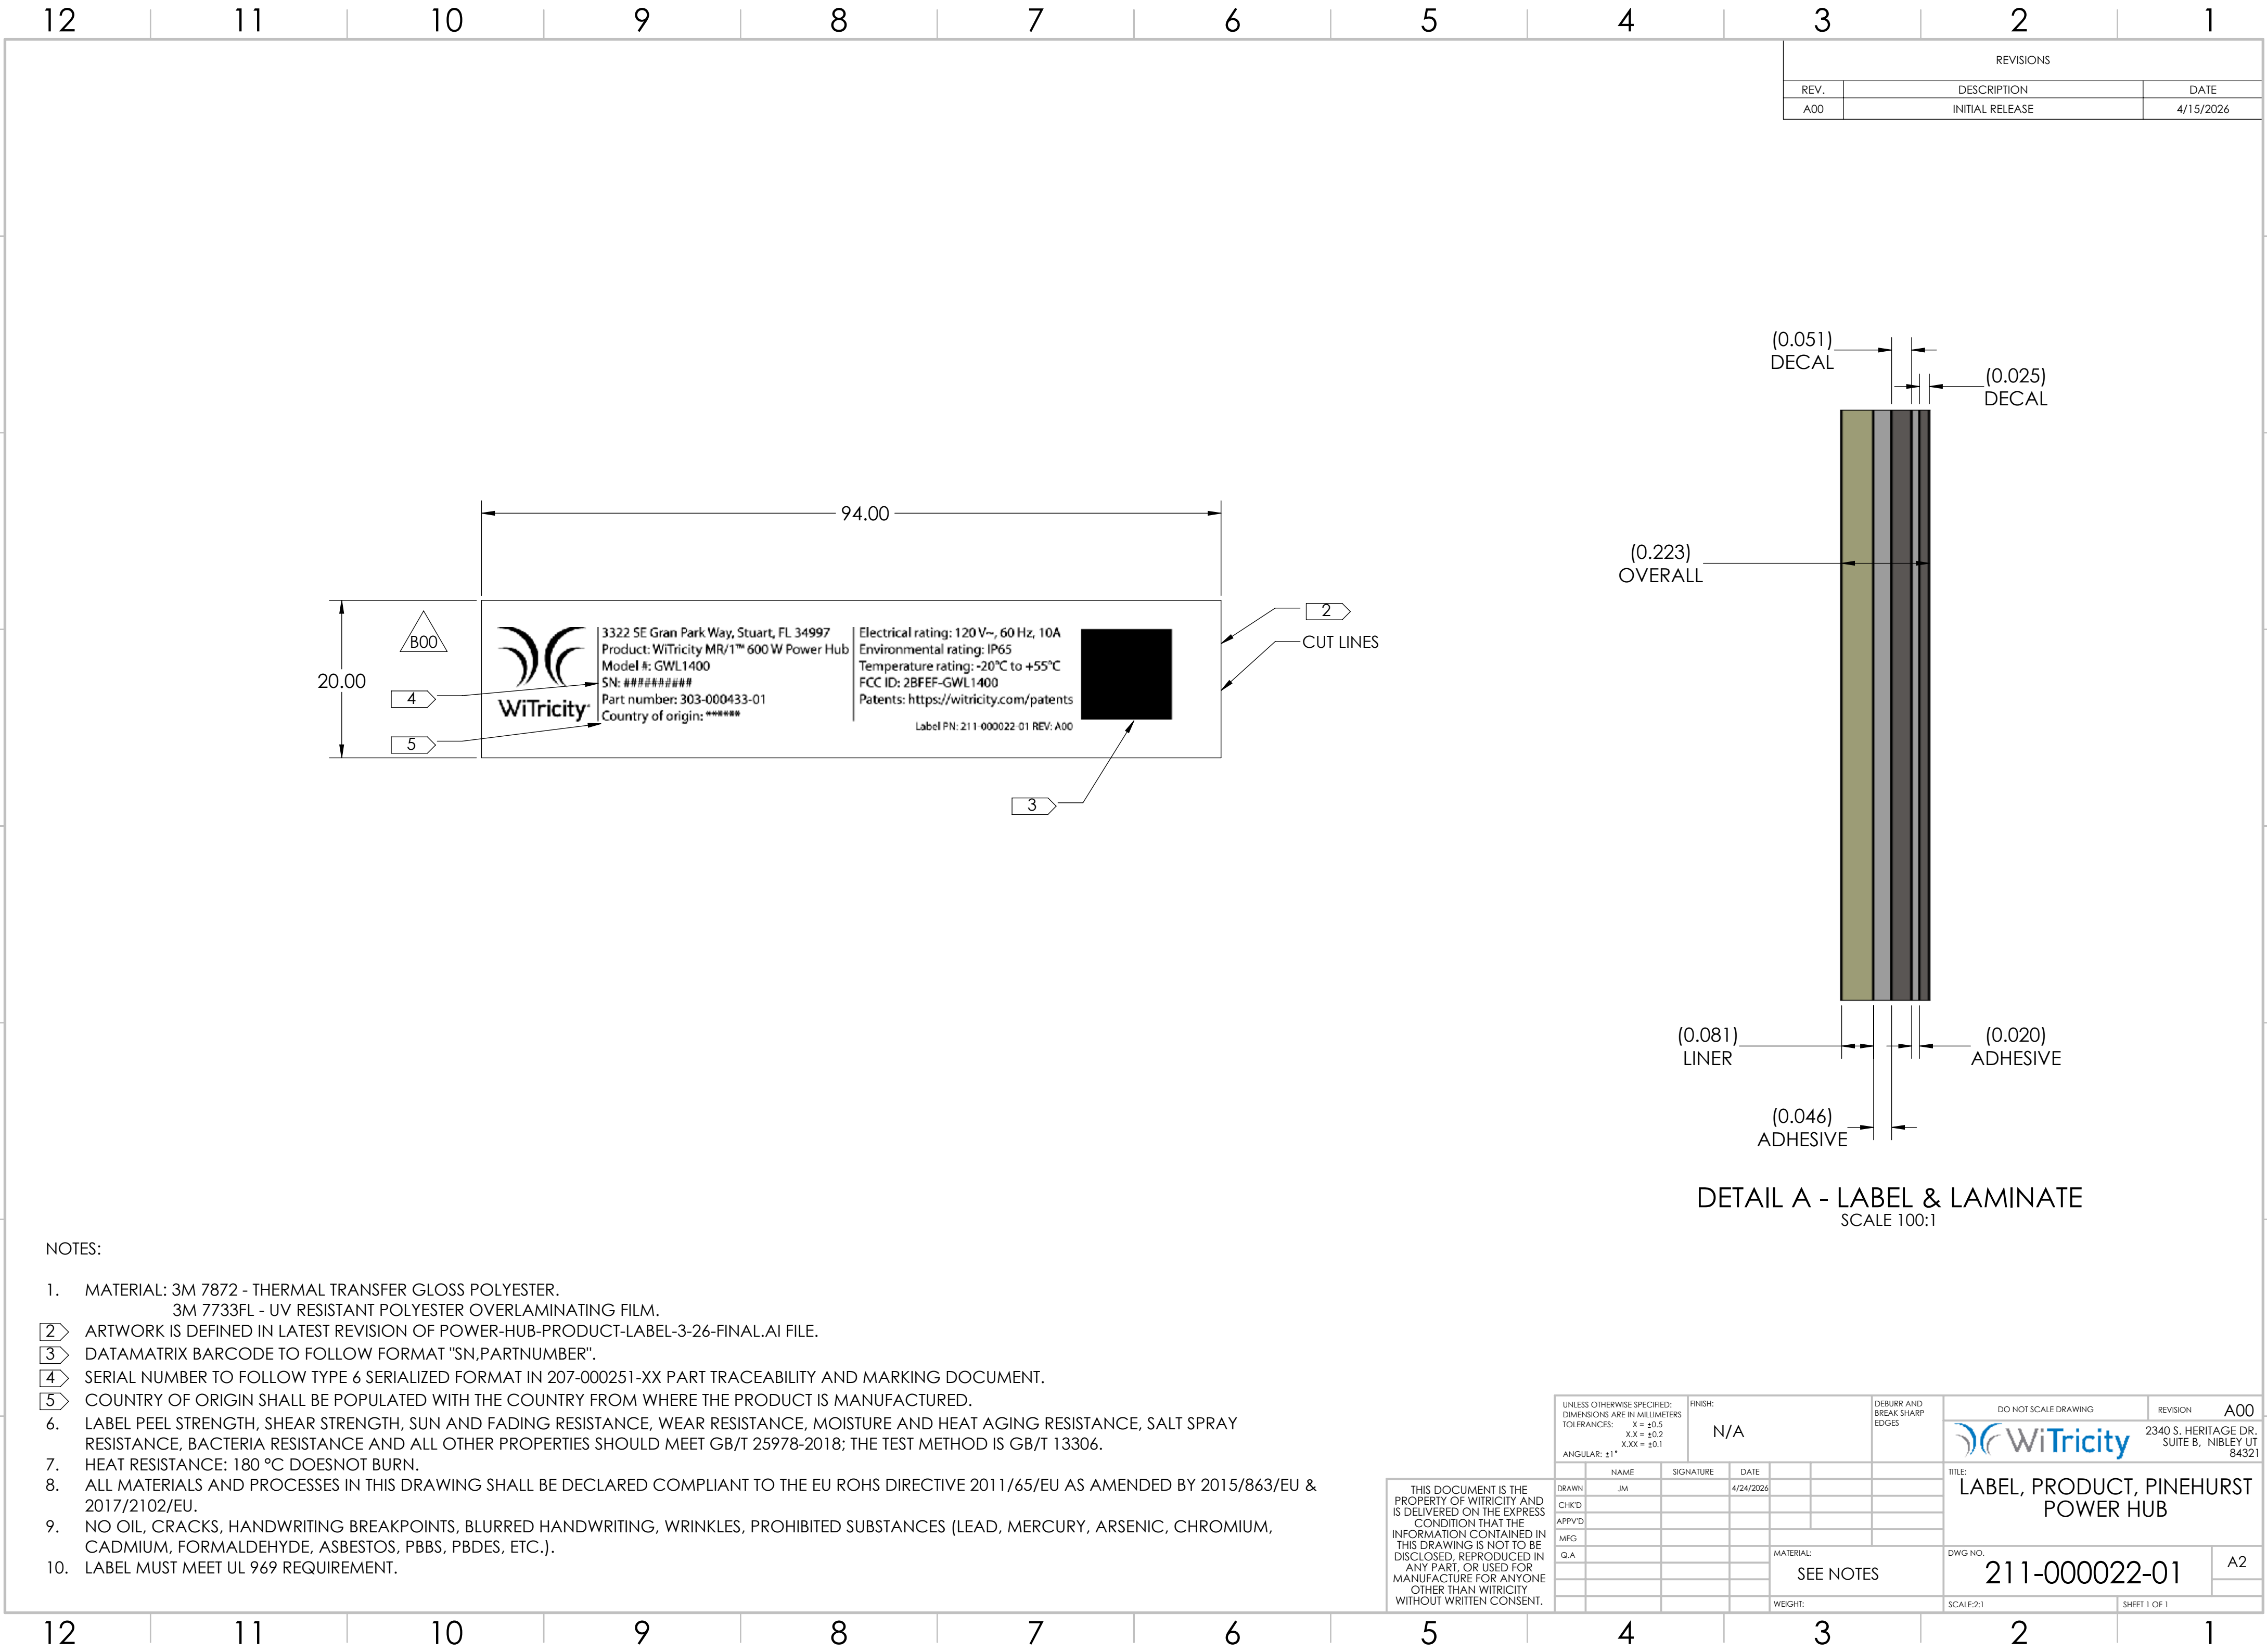

NOTES:

- MATERIAL: 3M 7872 - THERMAL TRANSFER GLOSS POLYESTER.
3M 7733FL - UV RESISTANT POLYESTER OVERLAMINATING FILM.
- ARTWORK IS DEFINED IN LATEST REVISION OF POWER-HUB-PRODUCT-LABEL-3-26-FINAL.AI FILE.
- DATAMATRIX BARCODE TO FOLLOW FORMAT "SN,PARTNUMBER".
- SERIAL NUMBER TO FOLLOW TYPE 6 SERIALIZED FORMAT IN 207-000251-XX PART TRACEABILITY AND MARKING DOCUMENT.
- COUNTRY OF ORIGIN SHALL BE POPULATED WITH THE COUNTRY FROM WHERE THE PRODUCT IS MANUFACTURED.
- LABEL PEEL STRENGTH, SHEAR STRENGTH, SUN AND FADING RESISTANCE, WEAR RESISTANCE, MOISTURE AND HEAT AGING RESISTANCE, SALT SPRAY RESISTANCE, BACTERIA RESISTANCE AND ALL OTHER PROPERTIES SHOULD MEET GB/T 25978-2018; THE TEST METHOD IS GB/T 13306.
- HEAT RESISTANCE: 180 °C DOESNOT BURN.
- ALL MATERIALS AND PROCESSES IN THIS DRAWING SHALL BE DECLARED COMPLIANT TO THE EU ROHS DIRECTIVE 2011/65/EU AS AMENDED BY 2015/863/EU & 2017/2102/EU.
- NO OIL, CRACKS, HANDWRITING BREAKPOINTS, BLURRED HANDWRITING, WRINKLES, PROHIBITED SUBSTANCES (LEAD, MERCURY, ARSENIC, CHROMIUM, CADMIUM, FORMALDEHYDE, ASBESTOS, PBBS, PBDES, ETC.).
- LABEL MUST MEET UL 969 REQUIREMENT.

THIS DOCUMENT IS THE PROPERTY OF WITRICITY AND IS DELIVERED ON THE EXPRESS CONDITION THAT THE INFORMATION CONTAINED IN THIS DRAWING IS NOT TO BE DISCLOSED, REPRODUCED IN ANY PART, OR USED FOR MANUFACTURE FOR ANYONE OTHER THAN WITRICITY WITHOUT WRITTEN CONSENT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES: X = ±0.5 XX = ±0.2 XXX = ±0.1 ANGULAR: ±1°				FINISH: N/A		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION	A00
DRAWN CHK'D APPV'D MFG Q.A.				NAME JM	SIGNATURE	DATE 4/24/2026	TITLE: LABEL, PRODUCT, PINEHURST POWER HUB			
				MATERIAL: SEE NOTES			DWG NO. 211-000022-01		A2	
				WEIGHT:			SCALE:2:1		SHEET 1 OF 1	