


Case No. : <u>GTS20250903022-1-10</u>
Ambient Condition: <u>23</u> °C, <u>49</u> %RH
According Standard: ■Part15C
Test Date: <u>2025.9.13-2025.10.21</u> Test Engineer: <u>Evan ouyang</u>


Appendix B.1: DTS Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant2	2402	0.712	2401.600	2402.312	0.5	PASS
		2440	0.684	2439.604	2440.288	0.5	PASS
		2480	0.668	2479.616	2480.284	0.5	PASS

Test Graphs

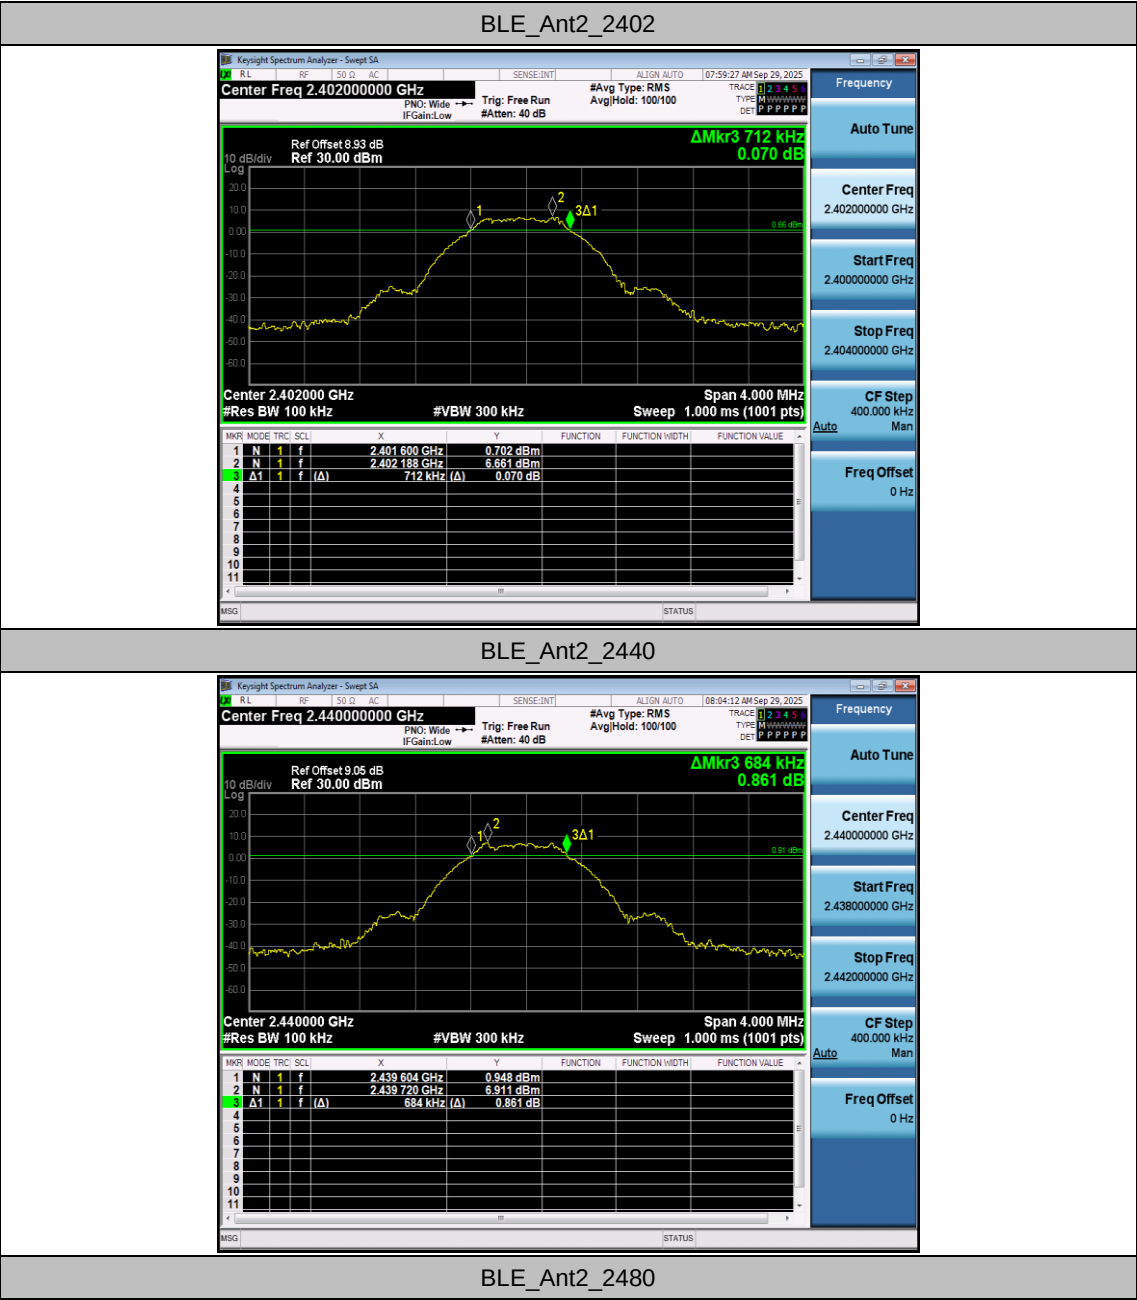

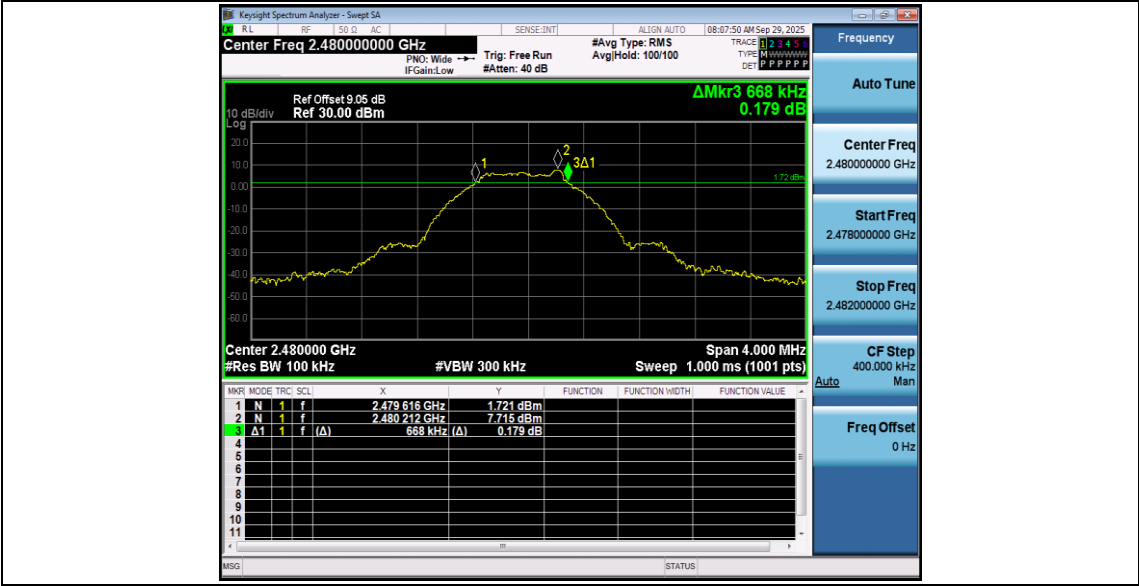


Appendix B.2: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE	Ant2	2402	1.0213	2401.4511	2402.4724	---	---
		2440	1.0279	2439.4462	2440.4741	---	---
		2480	1.0253	2479.4465	2480.4718	---	---

Test Graphs

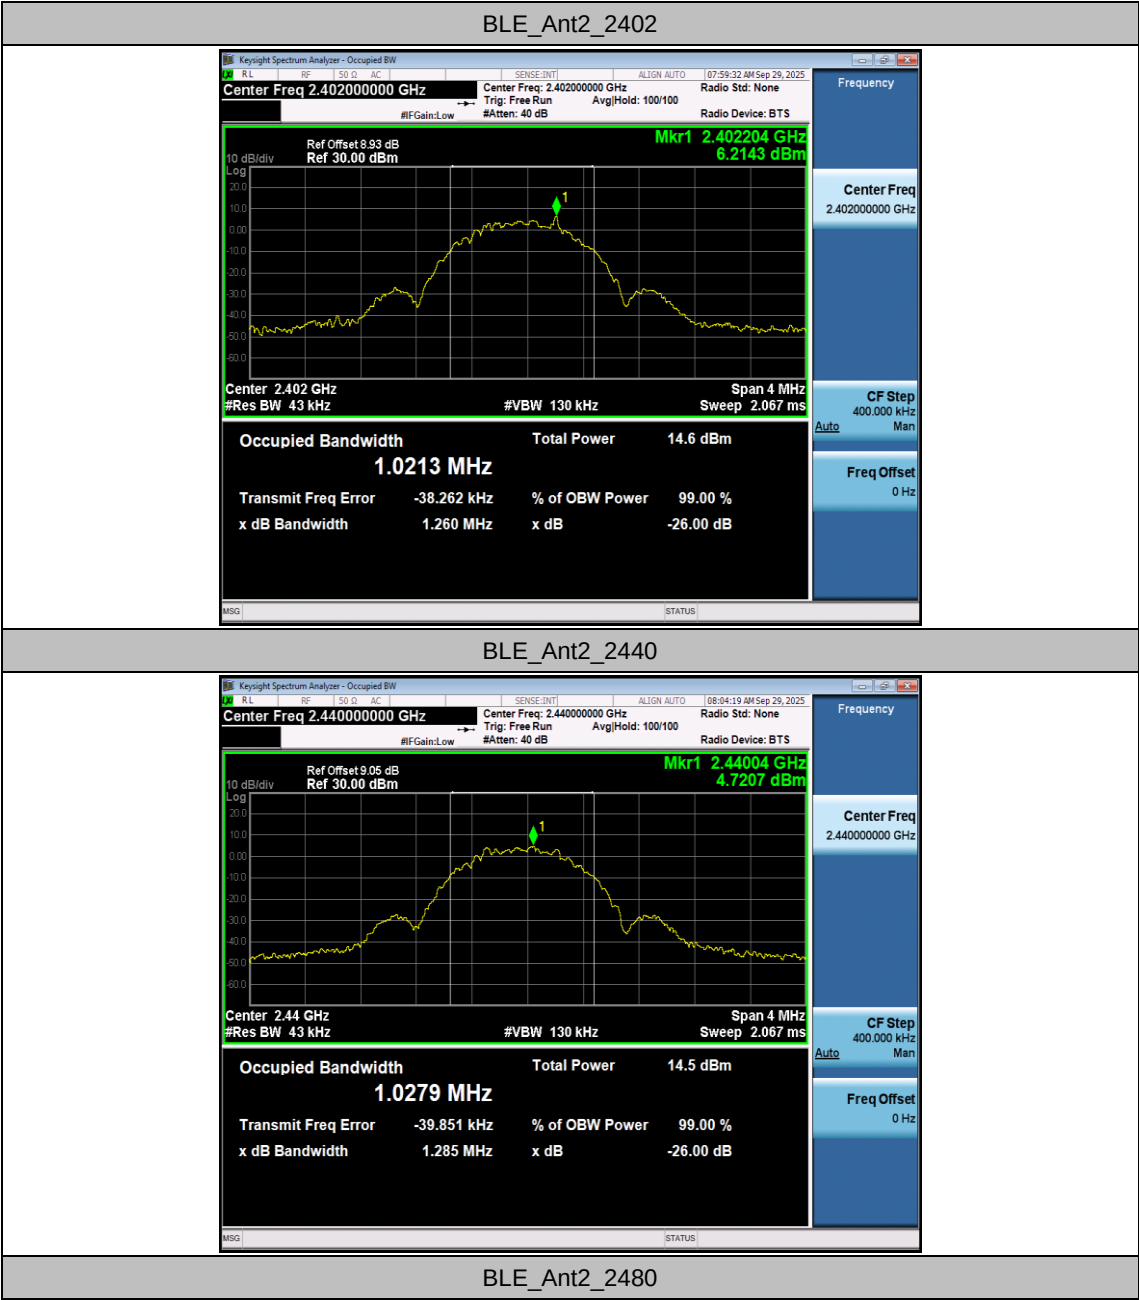

Appendix B.3: Maximum conducted output power

Test Result Peak


TestMode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
BLE	Ant2	2402	8.79	≤30	PASS
		2440	8.92	≤30	PASS
		2480	8.97	≤30	PASS

Appendix B.4: Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE	Ant2	2402	-8.35	≤8.00	PASS
		2440	-8.21	≤8.00	PASS
		2480	-8.09	≤8.00	PASS

Test Graphs

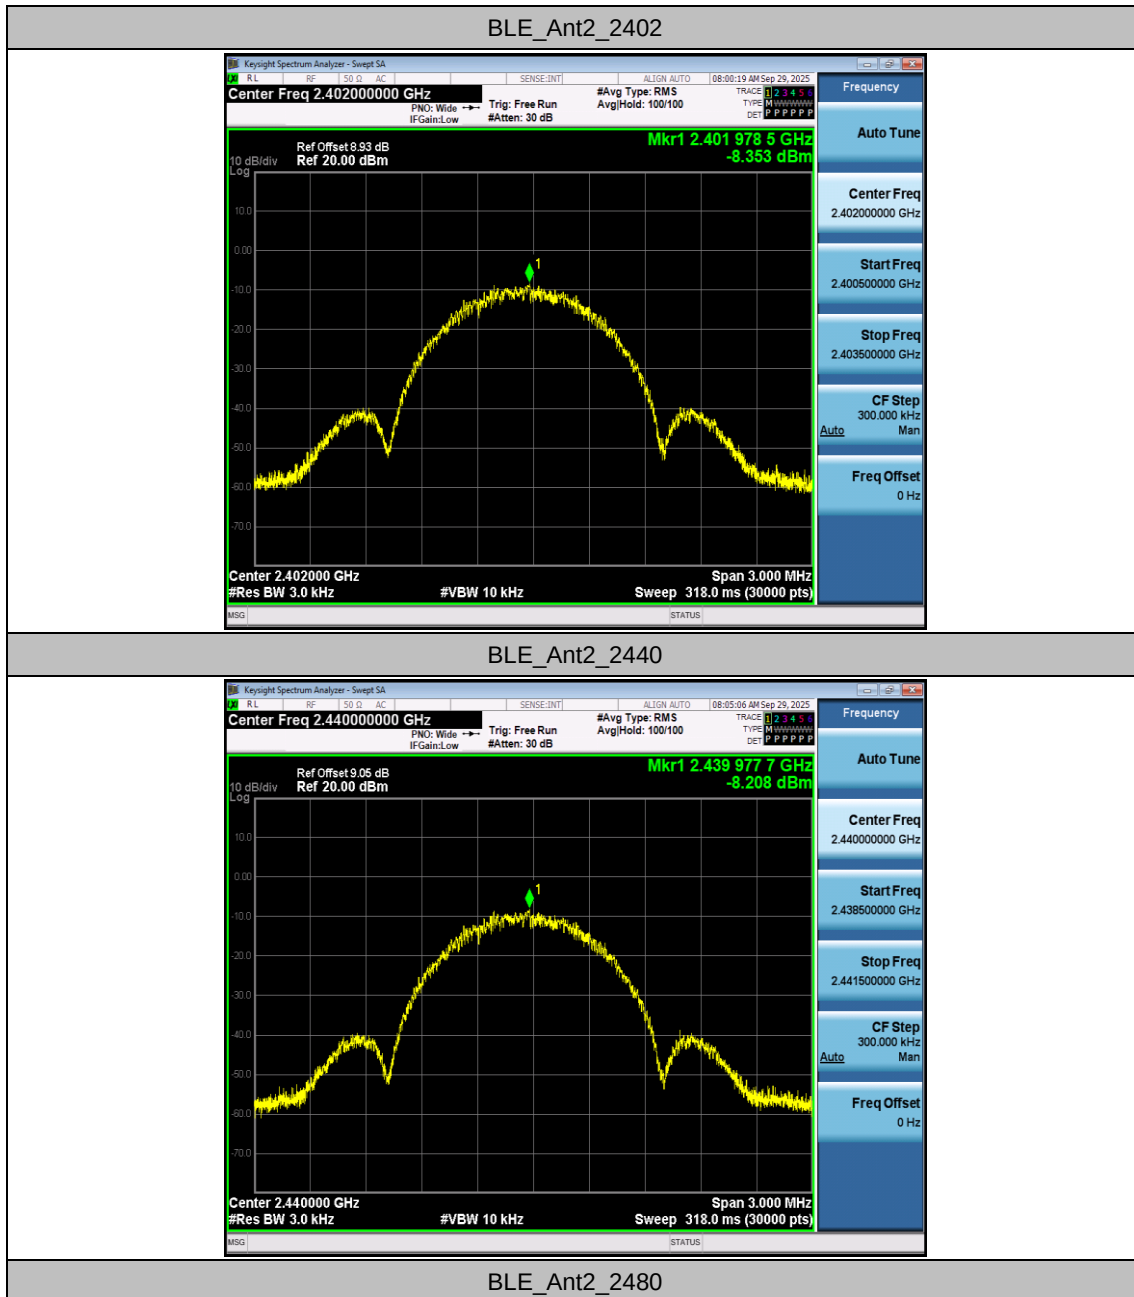


Appendix B.5:Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant2	Low	2402	7.15	-45.17	≤-12.85	PASS
		High	2480	7.67	-49.16	≤-12.33	PASS

Test Graphs

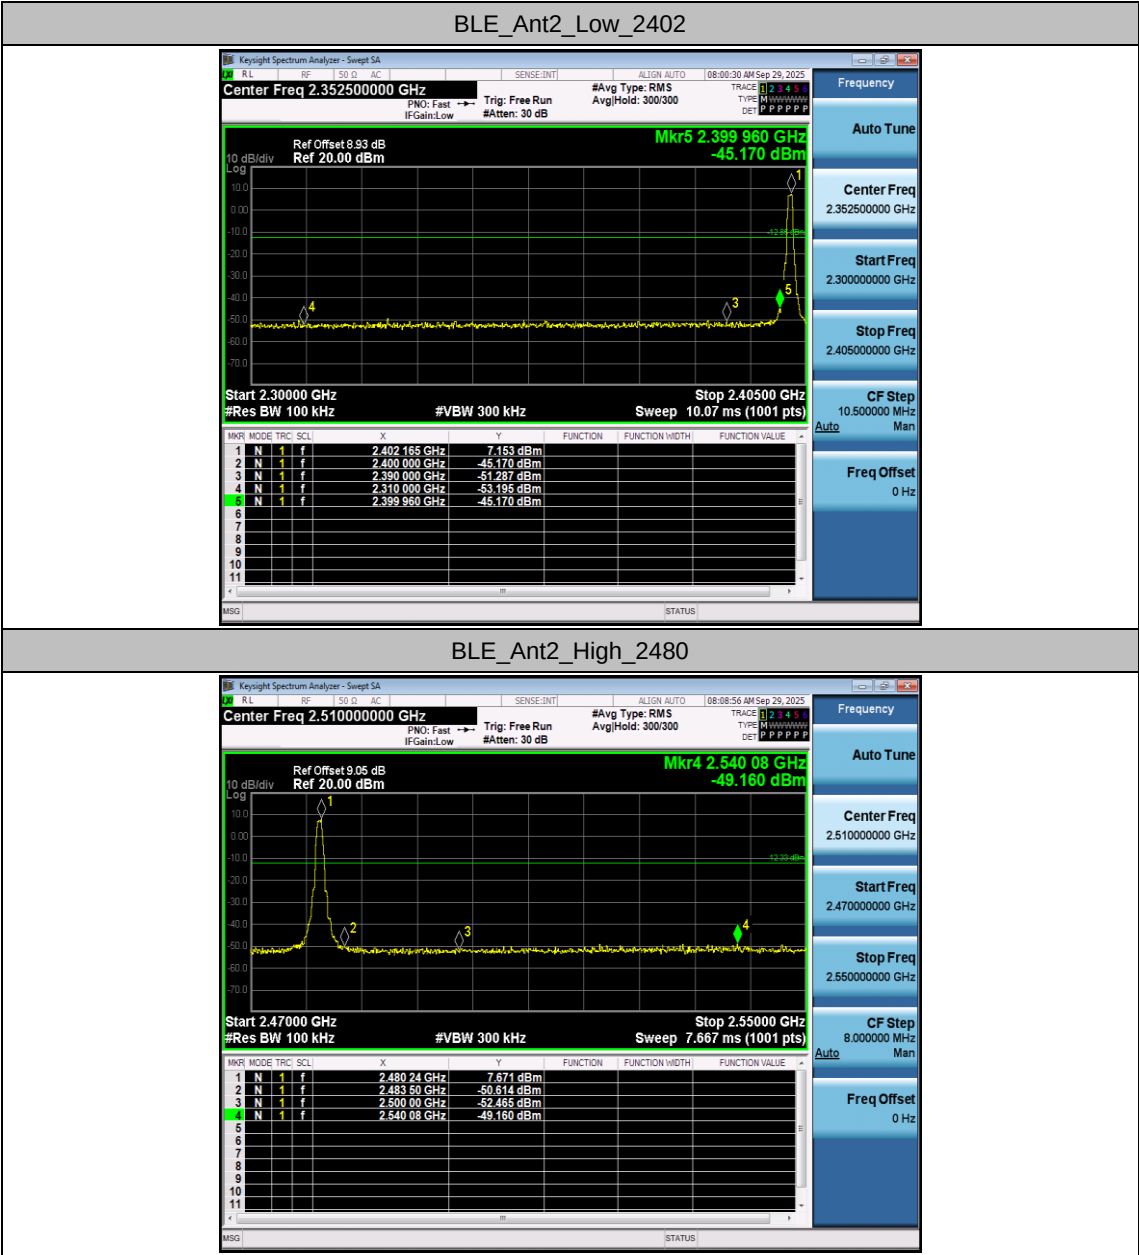



Appendix B.6:Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE	Ant2	2402	Reference	7.52	7.52	---	PASS
			30~1000	7.52	-58.15	≤-12.48	PASS
			1000~26500	7.52	-28.3	≤-12.48	PASS
		2440	Reference	7.70	7.70	---	PASS
			30~1000	7.70	-58.39	≤-12.3	PASS
			1000~26500	7.70	-27.65	≤-12.3	PASS
		2480	Reference	7.00	7.00	---	PASS
			30~1000	7.00	-57.72	≤-13	PASS
			1000~26500	7.00	-31.46	≤-13	PASS

Test Graphs

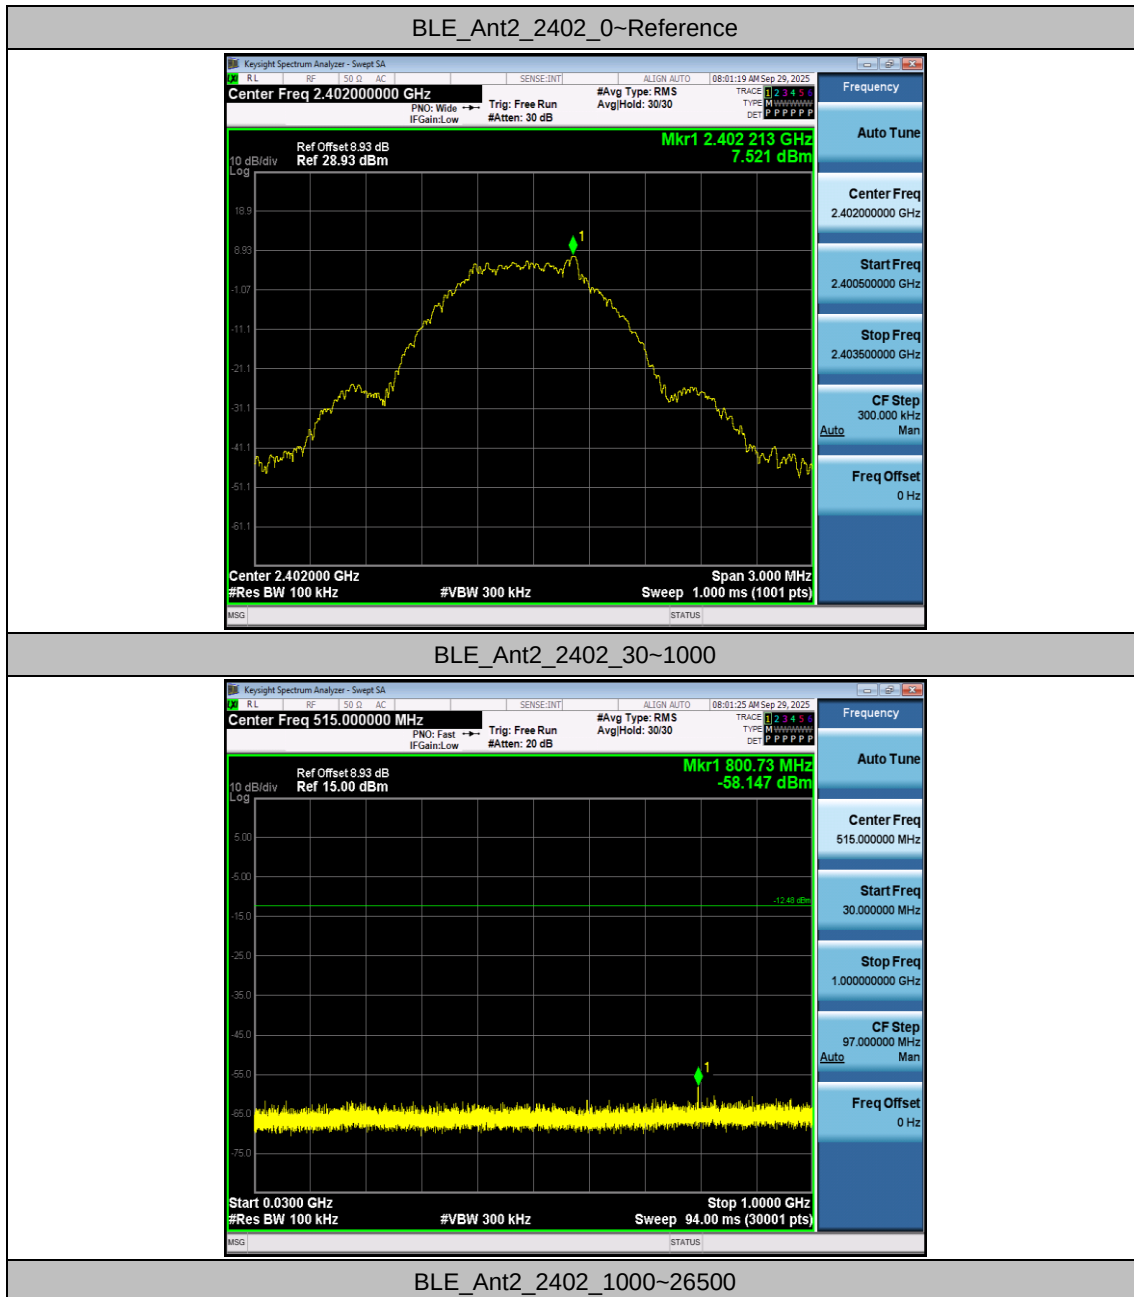


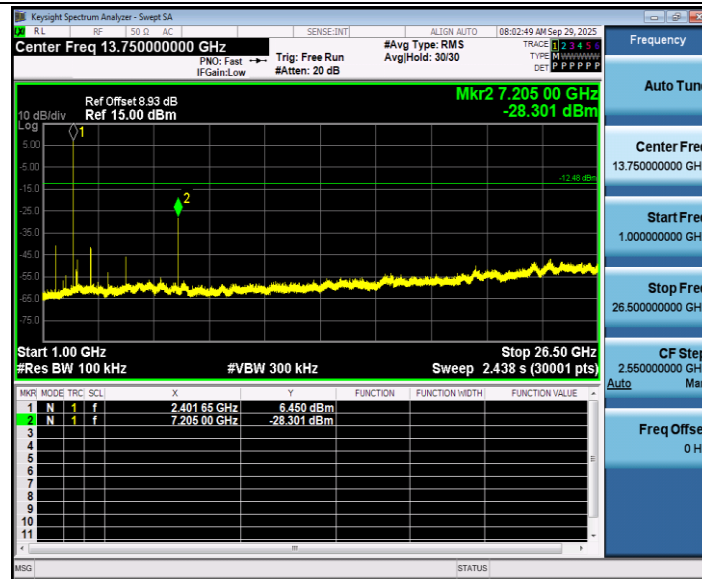



BLE_Ant2_2440_0~Reference



BLE_Ant2_2440_30~1000

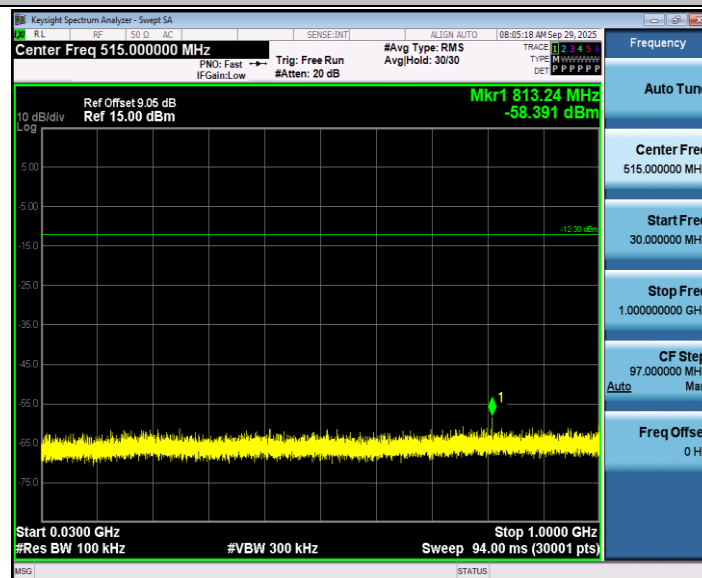

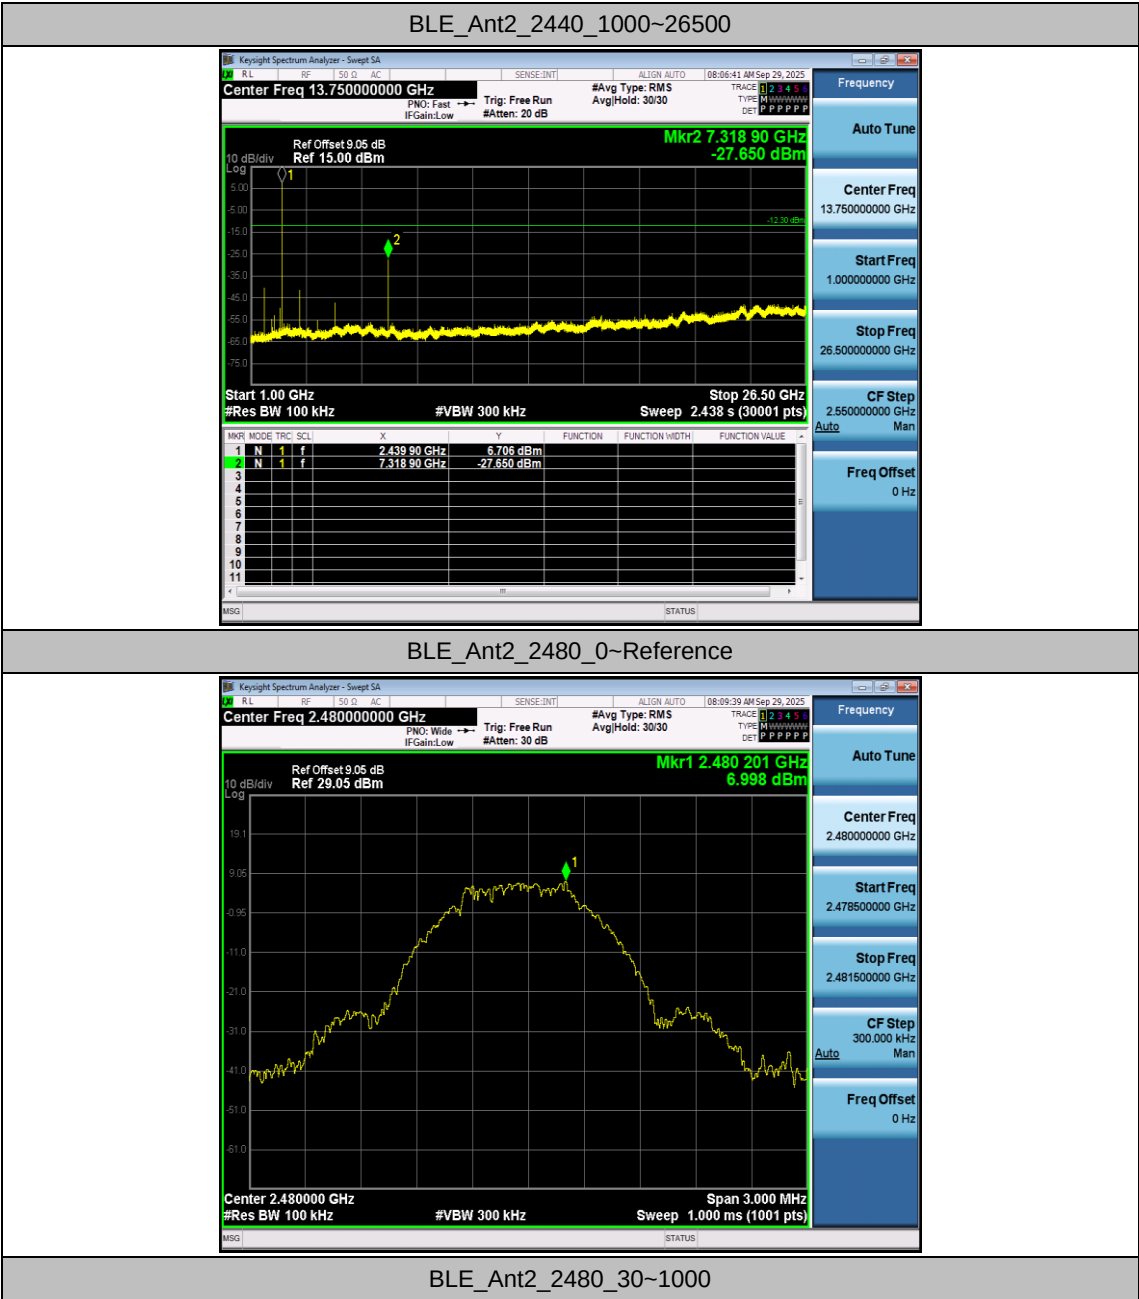

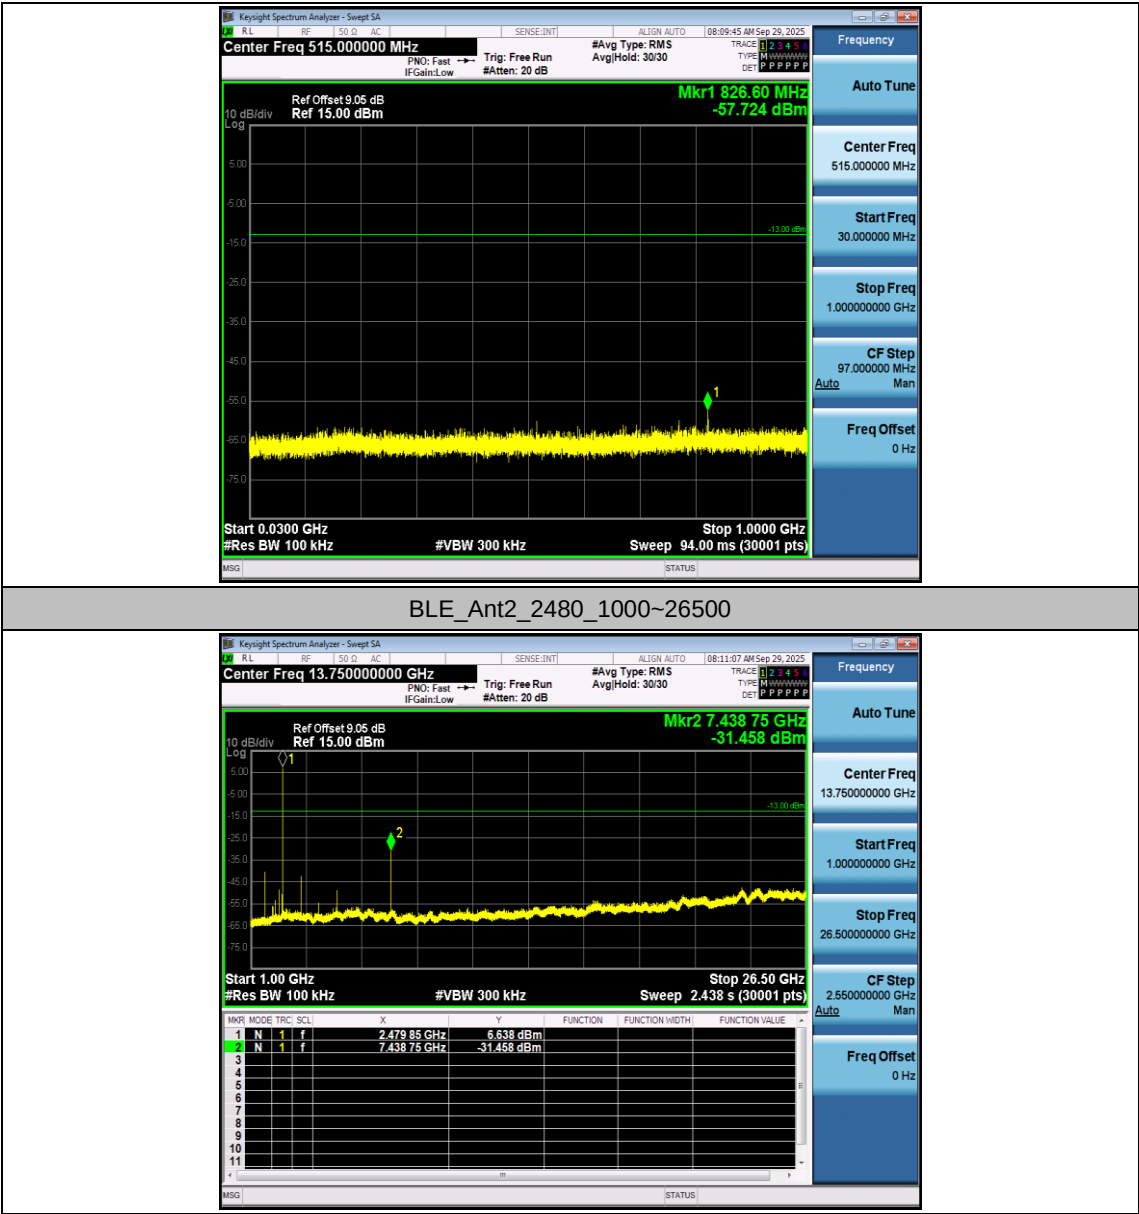



Appendix B.7: Duty Cycle

Test Result

TestMode	Antenna	Freq(MHz)	ON Time [ms]	Period [ms]	X	DC [%]	Duty Cycle Factor[dB]	1/T Factor[KHz]
BLE	Ant2	2402	2.13	2.51	0.8486	84.86	0.71	0.47
		2440	2.12	2.50	0.8480	84.80	0.72	0.47
		2480	2.12	2.50	0.8480	84.80	0.72	0.47

Test Graphs

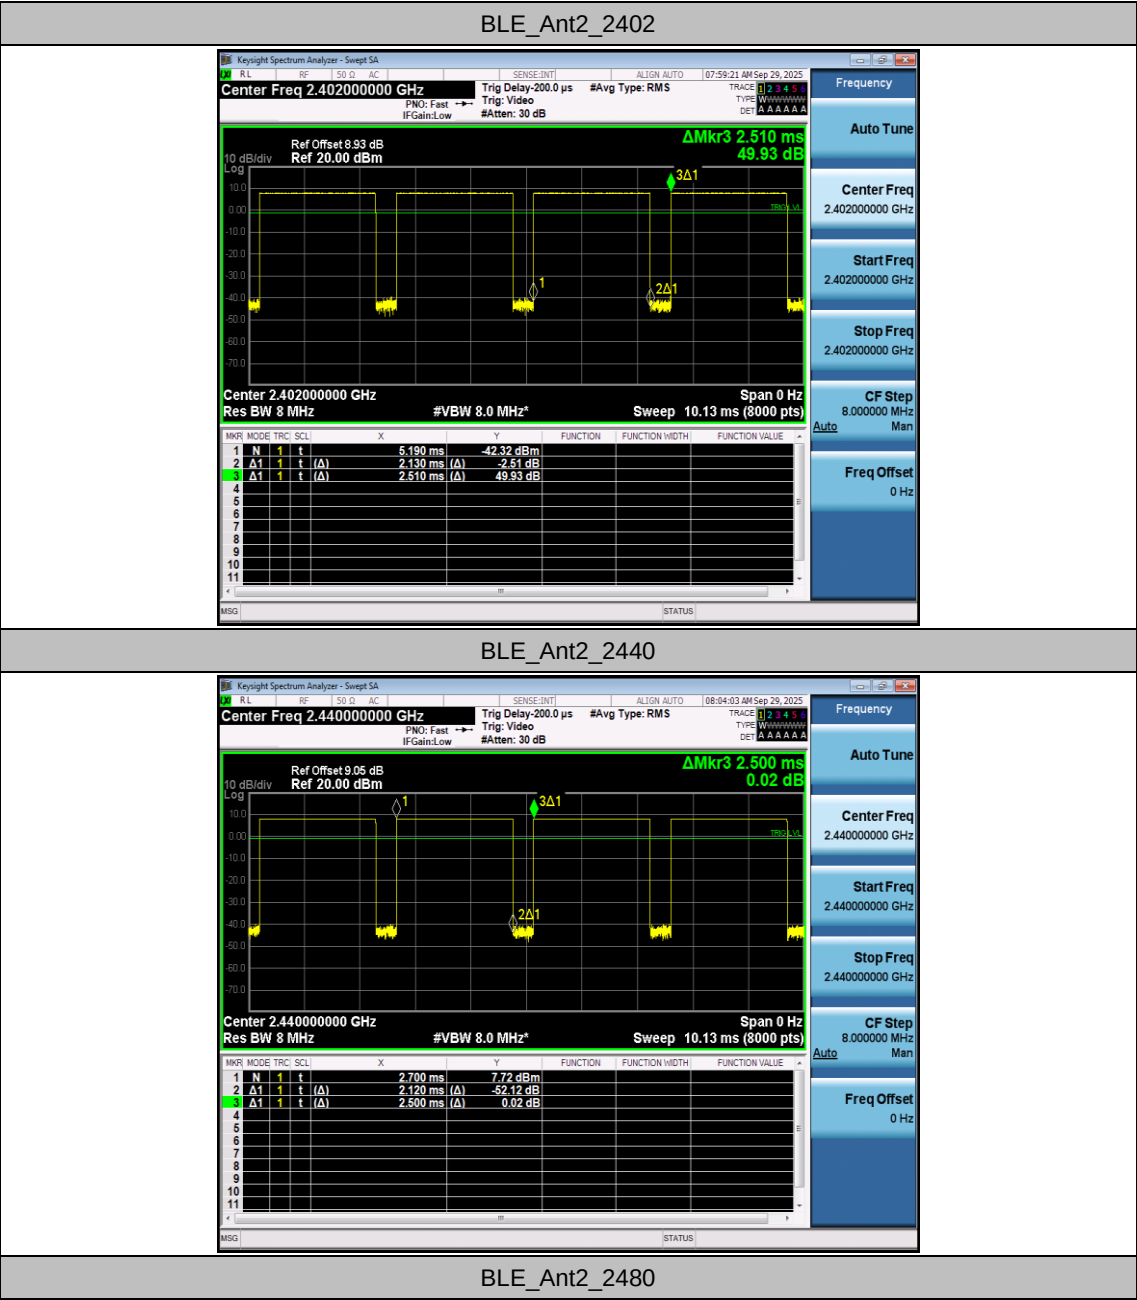

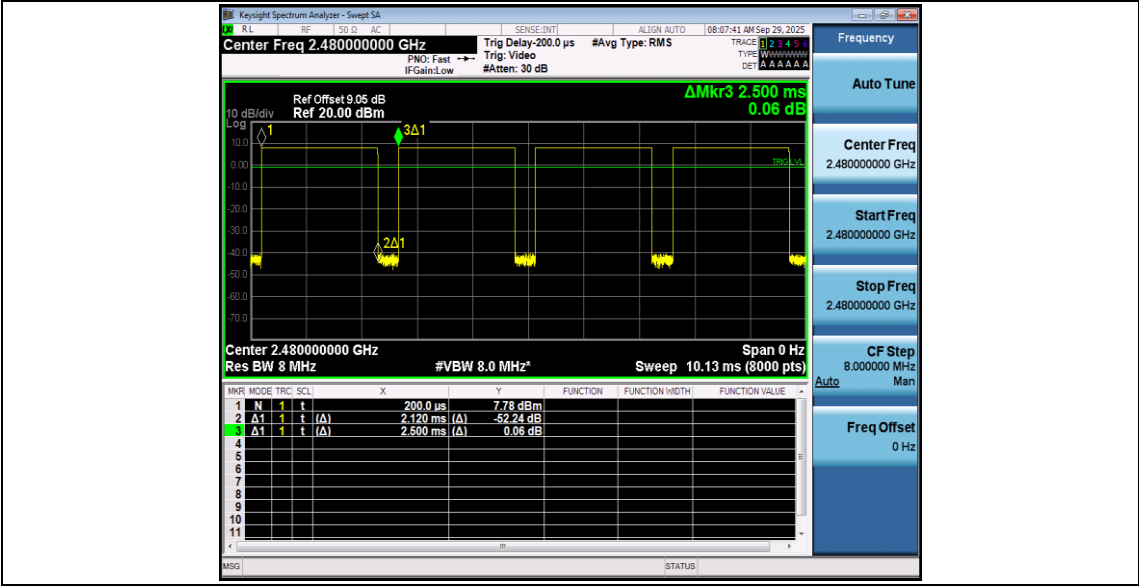

Appendix B.8:Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Freq(MHz)	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE	Ant2	Low	2402	AV	2310.000	-49.16	≤-41.20	46.04	≤54	PASS
				AV	2384.420	-48.67	≤-41.20	46.53	≤54	PASS
				AV	2390.000	-48.78	≤-41.20	46.42	≤54	PASS
				Peak	2310.000	-41.17	≤-21.20	54.03	≤74	PASS
				Peak	2366.885	-38.36	≤-21.20	56.84	≤74	PASS
				Peak	2390.000	-40.74	≤-21.20	54.46	≤74	PASS
		High	2480	AV	2483.500	-45.31	≤-41.20	49.89	≤54	PASS
				AV	2483.520	-45.31	≤-41.20	49.89	≤54	PASS
				AV	2500.000	-48.48	≤-41.20	46.72	≤54	PASS
				Peak	2483.500	-39.44	≤-21.20	55.76	≤74	PASS
				Peak	2490.640	-38.75	≤-21.20	56.45	≤74	PASS
				Peak	2500.000	-41.6	≤-21.20	53.60	≤74	PASS

Note:

1. The Antenna Gain is compensated in the graph.
2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
3. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

