



LCSC08015009EB

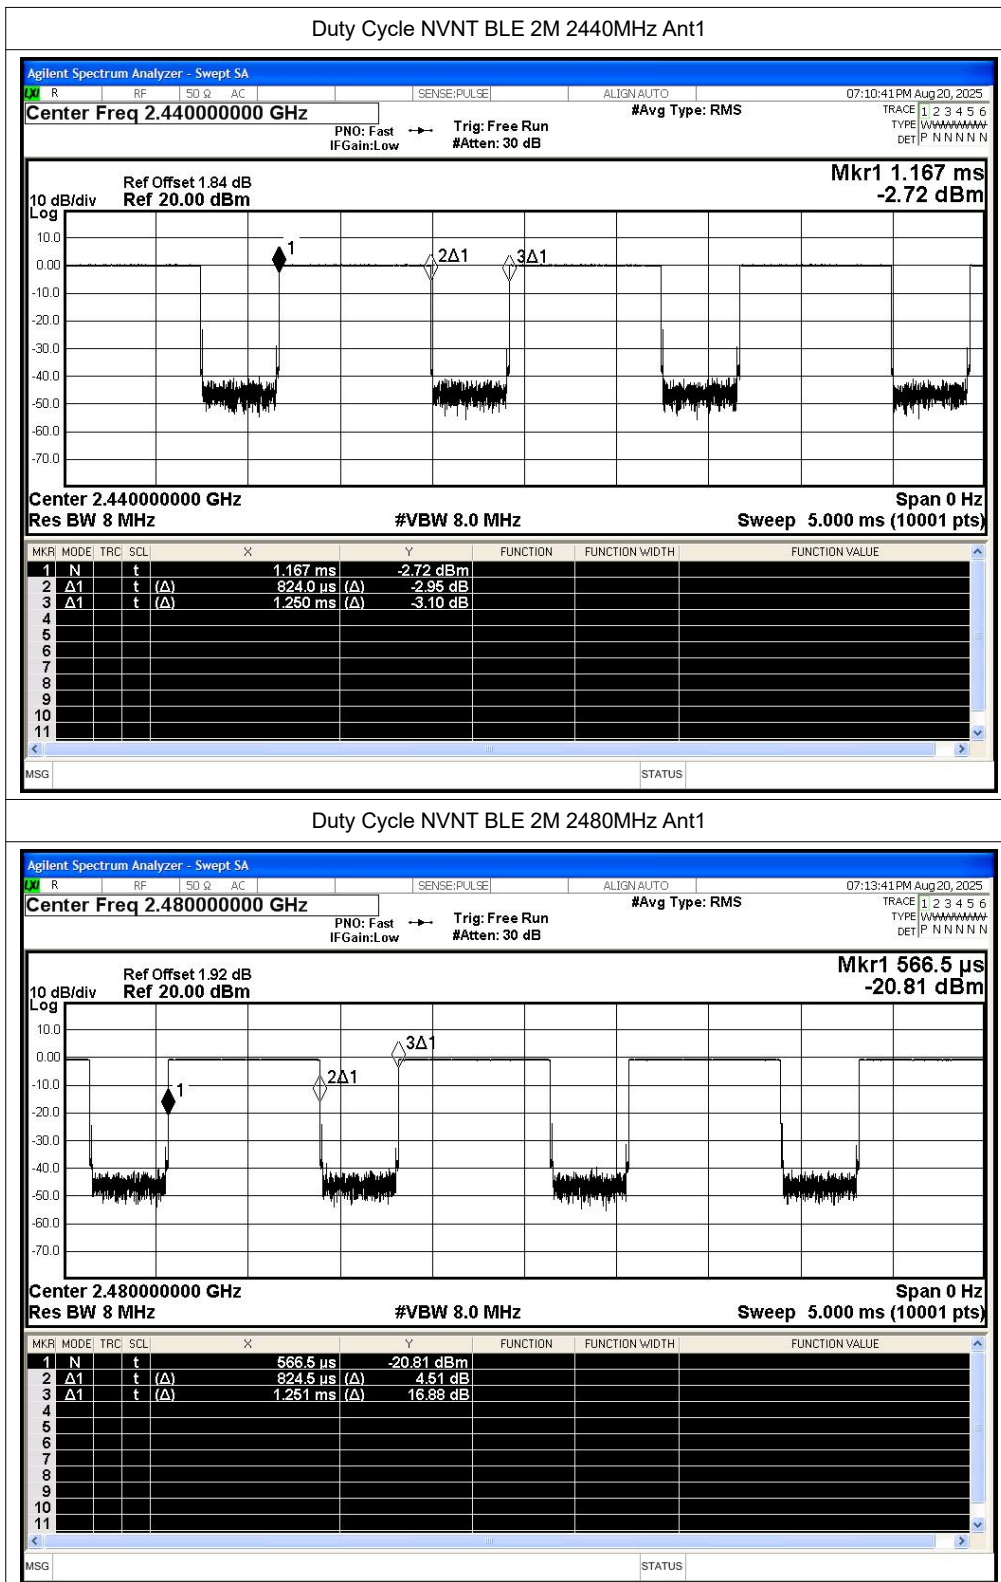



LCSC08015009EB


B.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.63	3.68	-	47.31	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-58.82	3.68	0.59	40.71	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2321.52	-47.37	3.68	-	51.57	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2384.688	-58.3	3.68	0.59	41.23	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.21	3.68	-	47.73	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.6	3.68	0.59	40.93	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-49.63	3.68	-	49.31	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-57.97	3.68	0.59	41.56	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2485.744	-45.79	3.68	-	53.15	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2484.352	-57.77	3.68	0.59	41.76	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-48.78	3.68	-	50.16	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-58.12	3.68	0.59	41.41	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2310	-50.97	3.68	-	47.97	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2310	-59.05	3.68	1.81	41.70	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2358.096	-47.74	3.68	-	51.20	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2389.392	-57.89	3.68	1.81	42.86	Average	54	Pass
NVNT	BLE 2M	2402	Ant1	2390	-50.64	3.68	-	48.30	Peak	74	Pass
NVNT	BLE 2M	2402	Ant1	2390	-58.49	3.68	1.81	42.26	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-49.08	3.68	-	49.86	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.5	-57.74	3.68	1.81	43.01	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2483.632	-44.29	3.68	-	54.65	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2483.752	-57.26	3.68	1.81	43.49	Average	54	Pass
NVNT	BLE 2M	2480	Ant1	2500	-51.88	3.68	-	47.06	Peak	74	Pass
NVNT	BLE 2M	2480	Ant1	2500	-58	3.68	1.81	42.75	Average	54	Pass

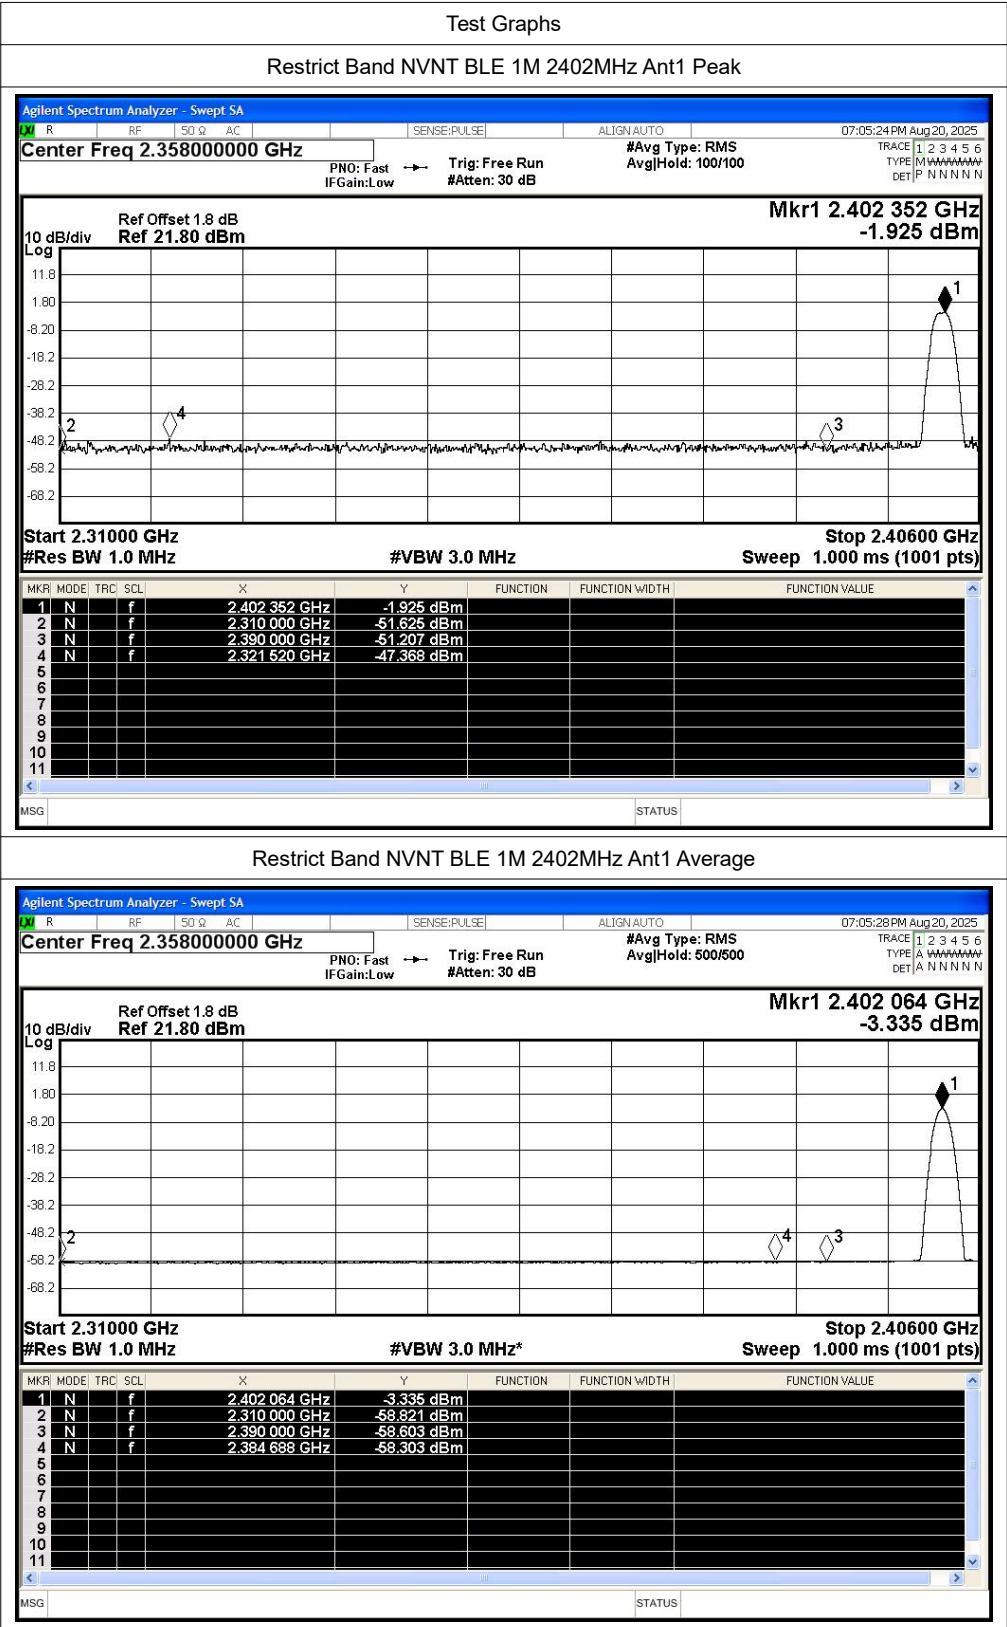

LCSC08015009EB

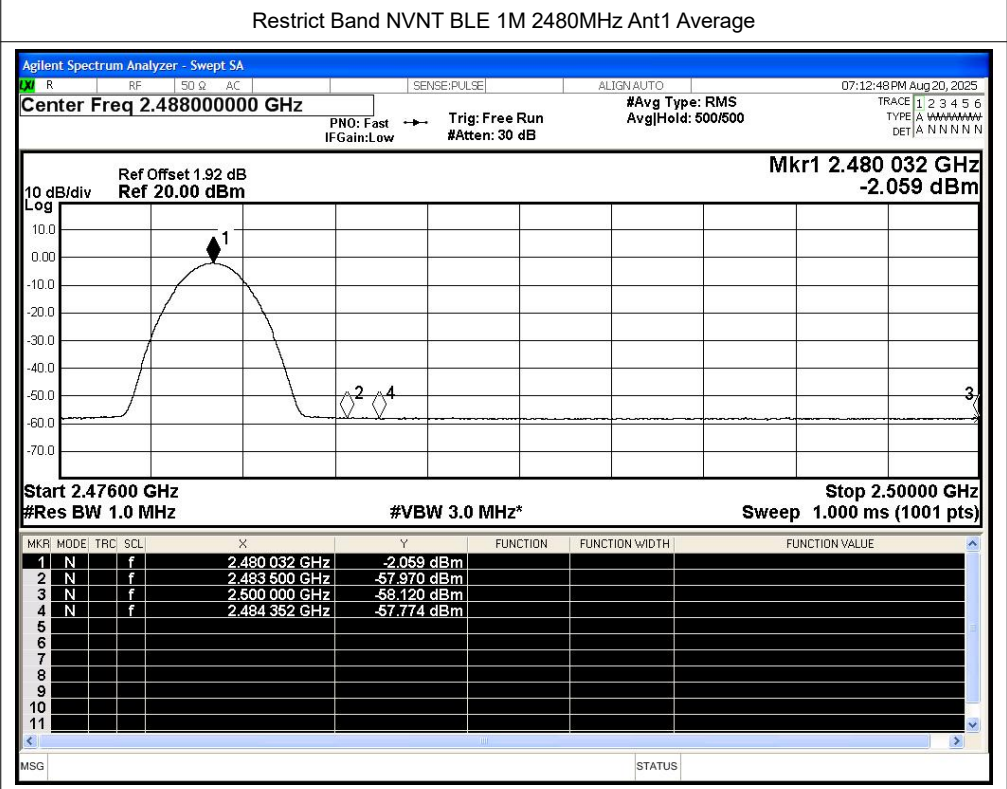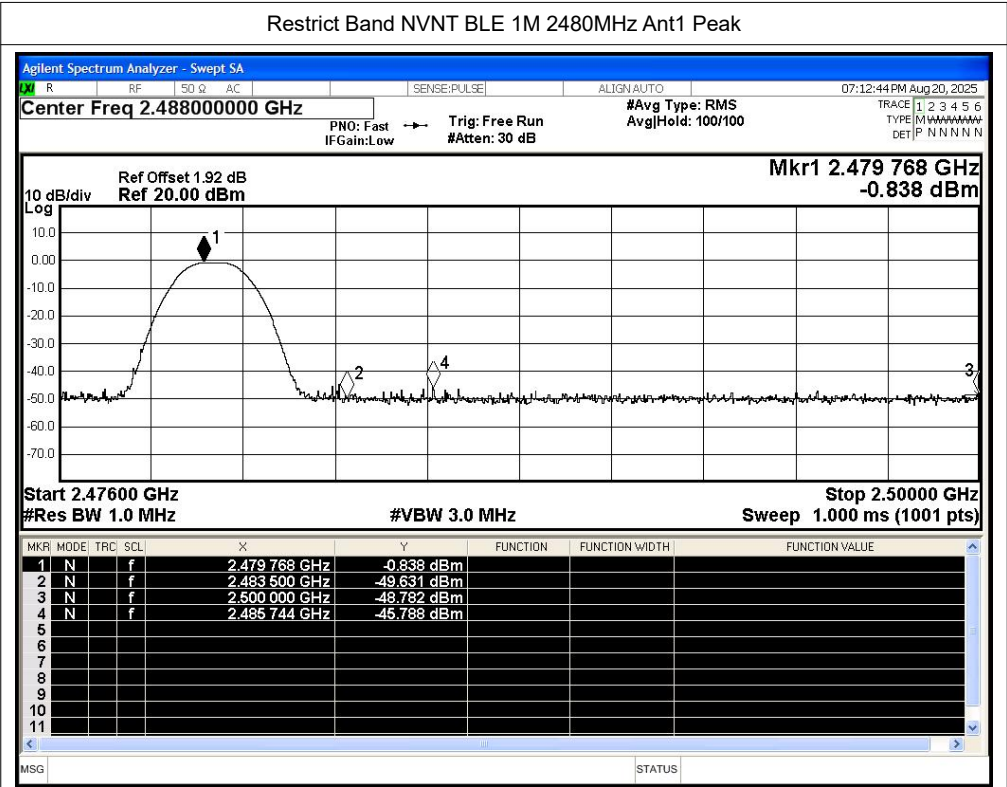

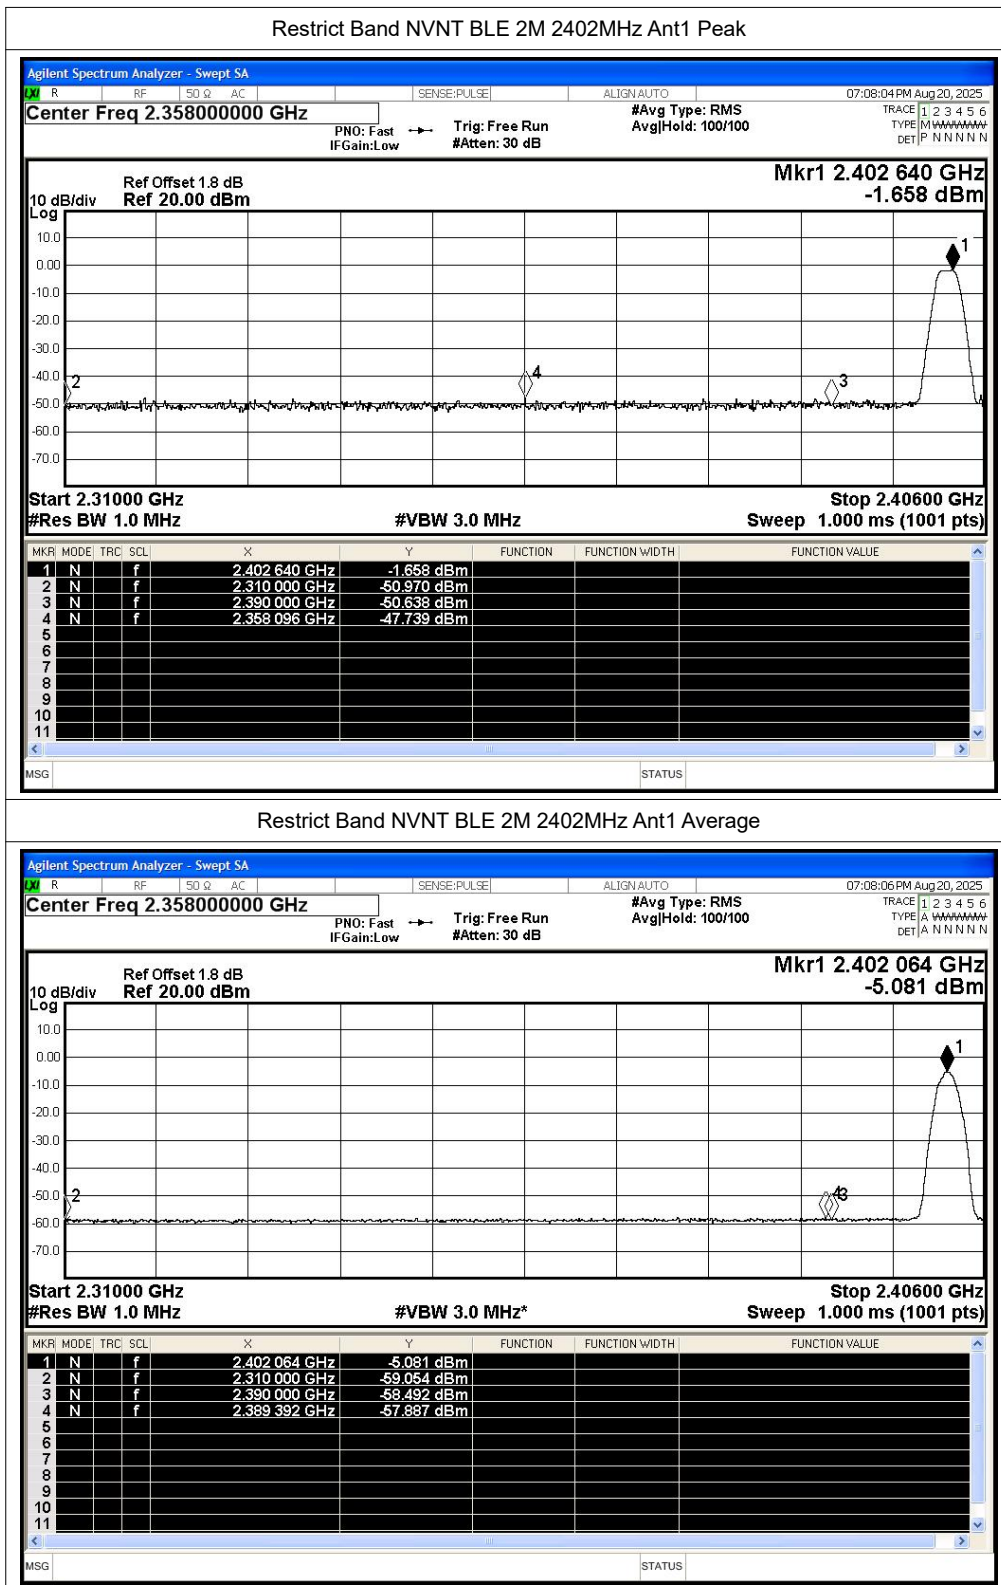

LCSC08015009EB

