Appendix D

RF Test Data for 5.5GWIFI(Conducted Measurement)

Product Name: SmartTouch+

Test Model: STP-001

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant2	25.393	---	Pass
NVNT	a	5580	Ant2	20.161	---	Pass
NVNT	a	5700	Ant2	25.071	---	Pass
NVNT	n20	5500	Ant2	27.594	---	Pass
NVNT	n20	5580	Ant2	21.487	---	Pass
NVNT	n20	5700	Ant2	26.716	---	Pass
NVNT	n40	5510	Ant2	43.678	---	Pass
NVNT	n40	5550	Ant2	39.905	---	Pass
NVNT	n40	5670	Ant2	50.987	---	Pass
NVNT	ac20	5500	Ant2	28.229	---	Pass
NVNT	ac20	5580	Ant2	22.227	---	Pass
NVNT	ac20	5700	Ant2	25.14	---	Pass
NVNT	ac40	5510	Ant2	50.887	---	Pass
NVNT	ac40	5550	Ant2	39.693	---	Pass
NVNT	ac40	5670	Ant2	58.154	---	Pass
NVNT	ac80	5530	Ant2	95.947	---	Pass
NVNT	ac80	5610	Ant2	78.83	---	Pass
NVNT	ax20	5500	Ant2	26.807	---	Pass
NVNT	ax20	5580	Ant2	21.972	---	Pass
NVNT	ax20	5700	Ant2	25.965	---	Pass
NVNT	ax40	5510	Ant2	50.599	---	Pass
NVNT	ax40	5550	Ant2	39.261	---	Pass
NVNT	ax40	5670	Ant2	52.764	---	Pass
NVNT	ax80	5530	Ant2	81.435	---	Pass
NVNT	ax80	5610	Ant2	79.302	---	Pass
NVNT	ac160	5570	Ant2	164.199	---	Pass
NVNT	ax160	5570	Ant2	162.154	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5500MHz Ant2

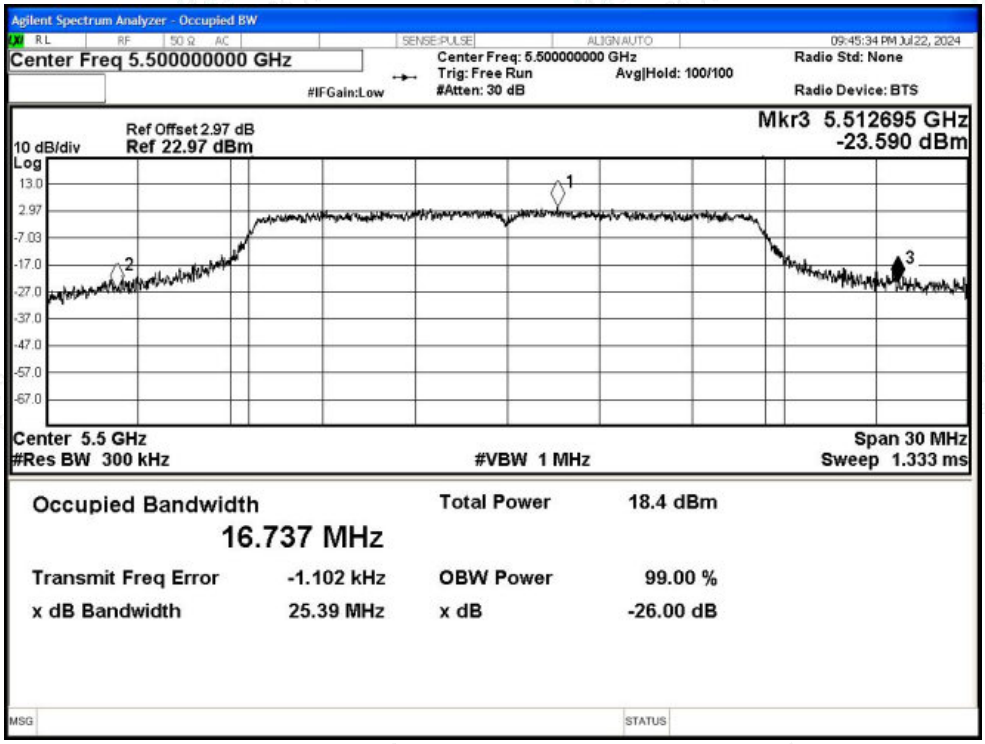

-26dB Bandwidth NVNT a 5580MHz Ant2

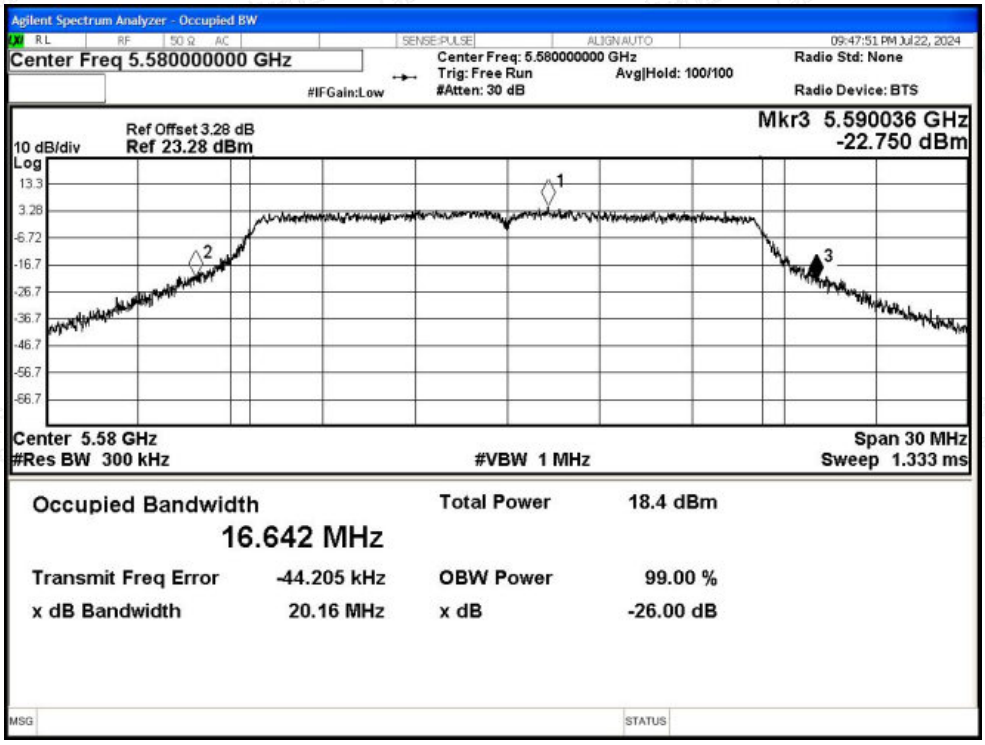

-26dB Bandwidth NVNT a 5700MHz Ant2

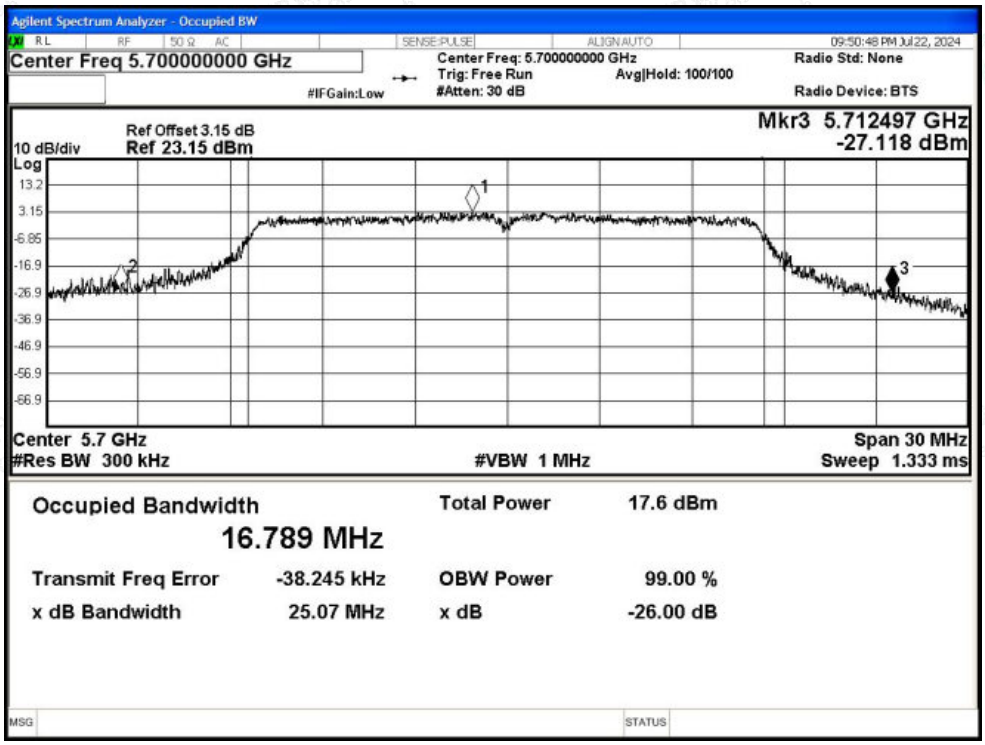

-26dB Bandwidth NVNT n20 5500MHz Ant2

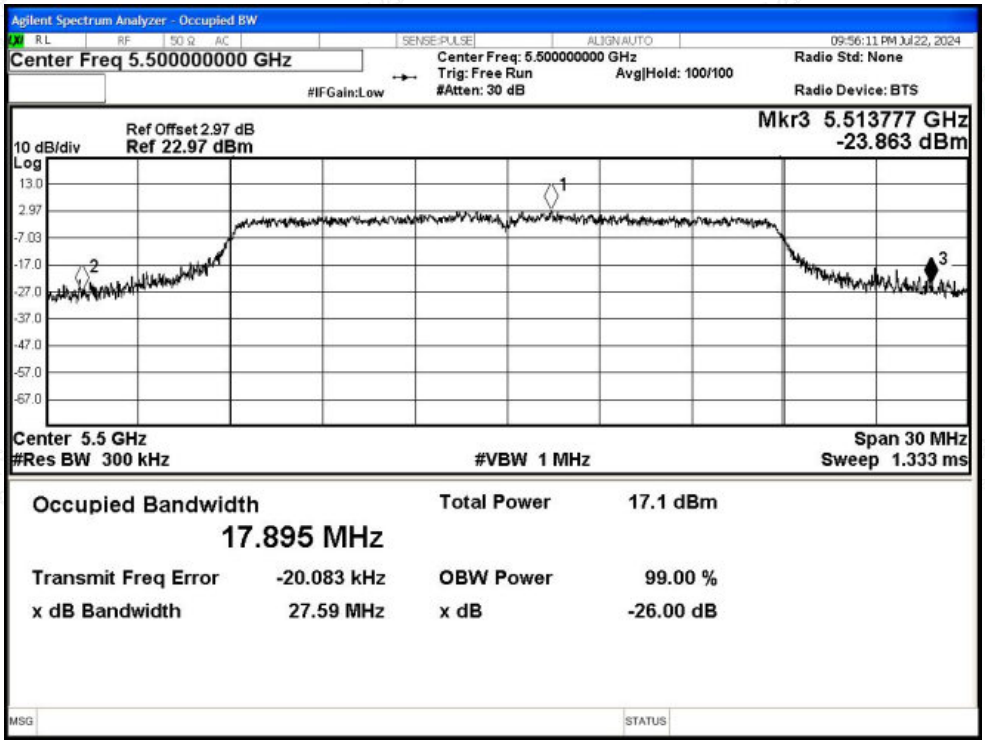

-26dB Bandwidth NVNT n20 5580MHz Ant2

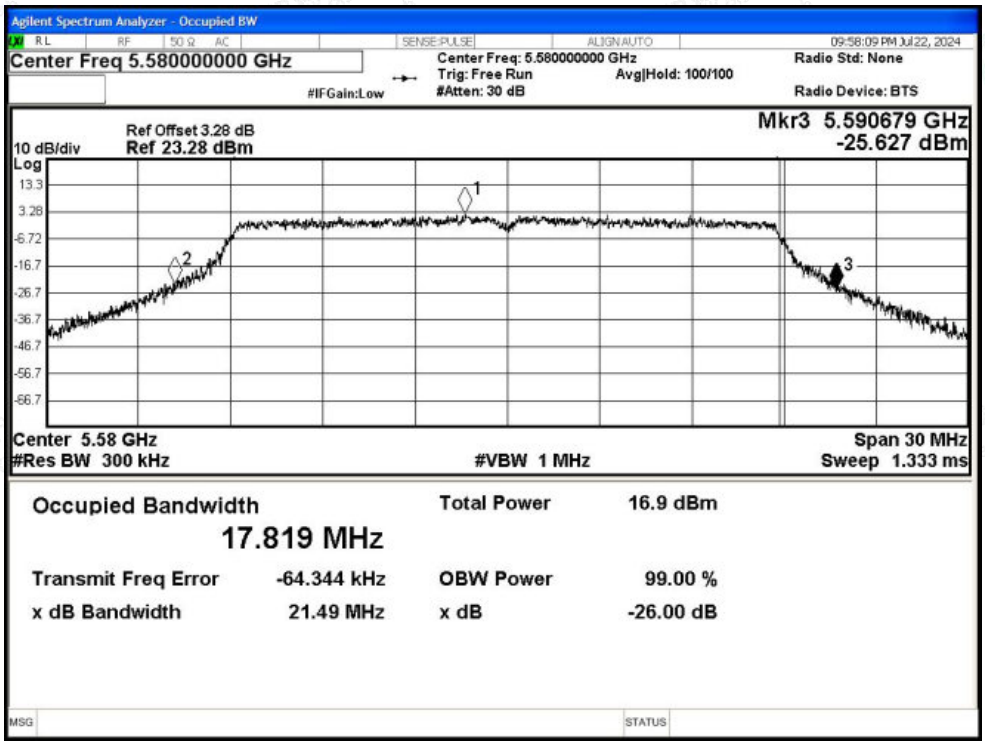

-26dB Bandwidth NVNT n20 5700MHz Ant2

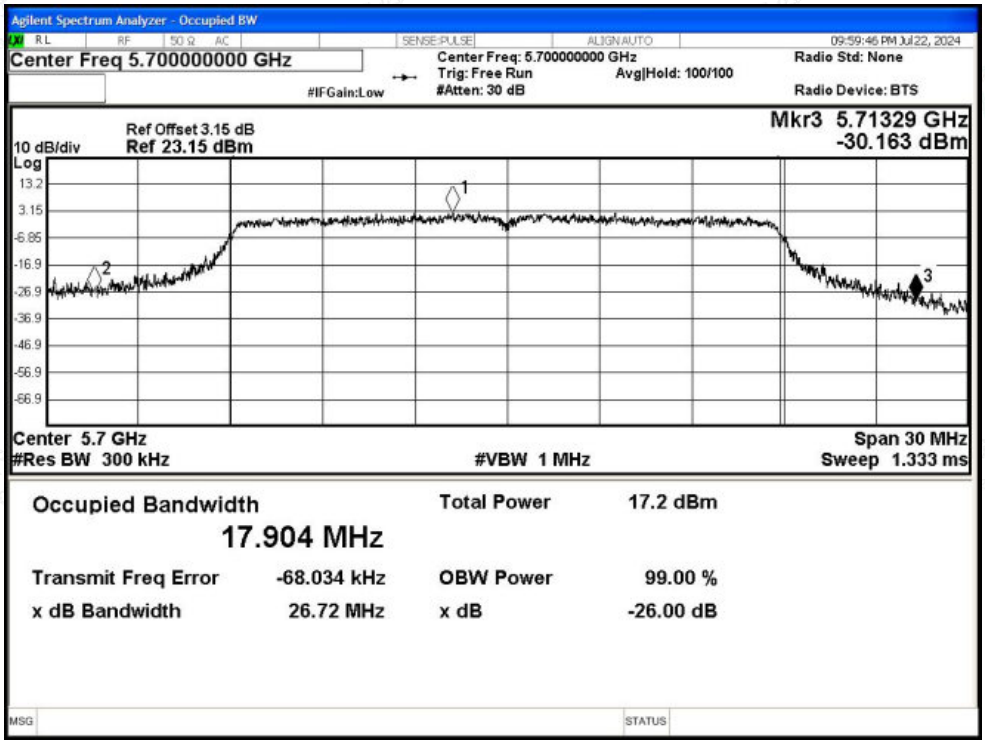

-26dB Bandwidth NVNT n40 5510MHz Ant2

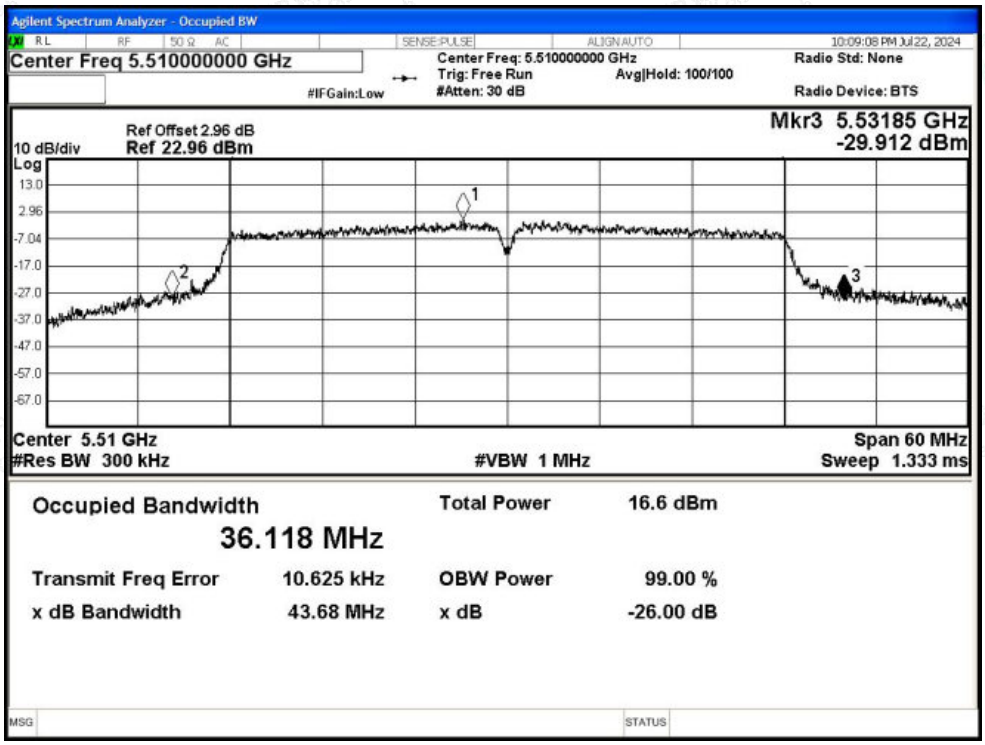

-26dB Bandwidth NVNT n40 5550MHz Ant2

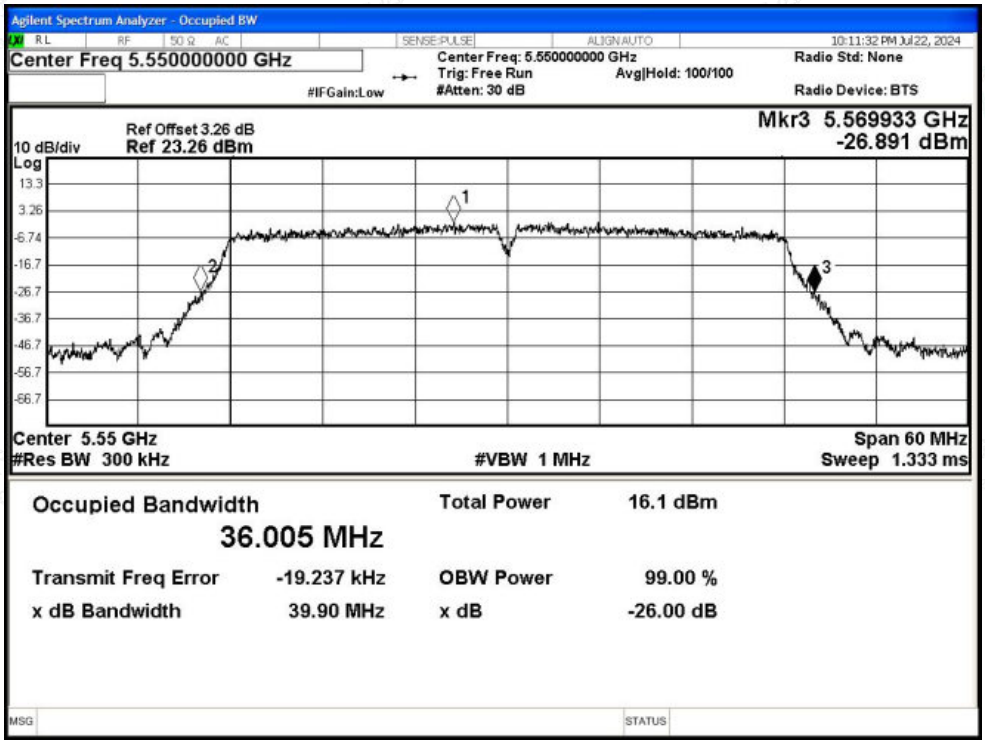

-26dB Bandwidth NVNT n40 5670MHz Ant2

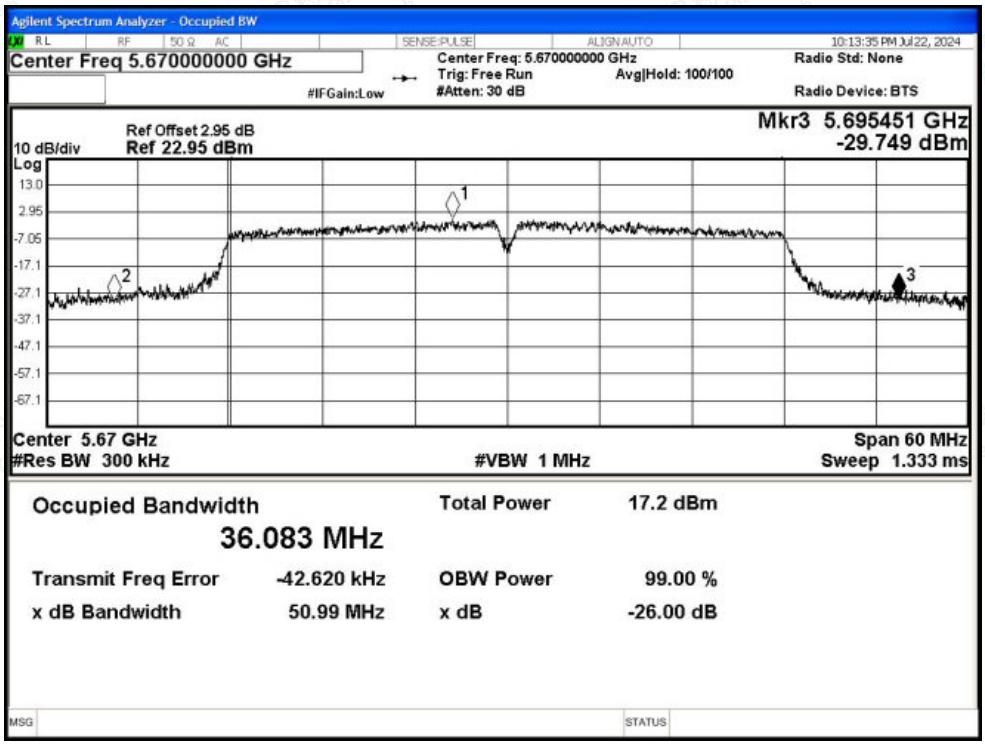

-26dB Bandwidth NVNT ac20 5500MHz Ant2

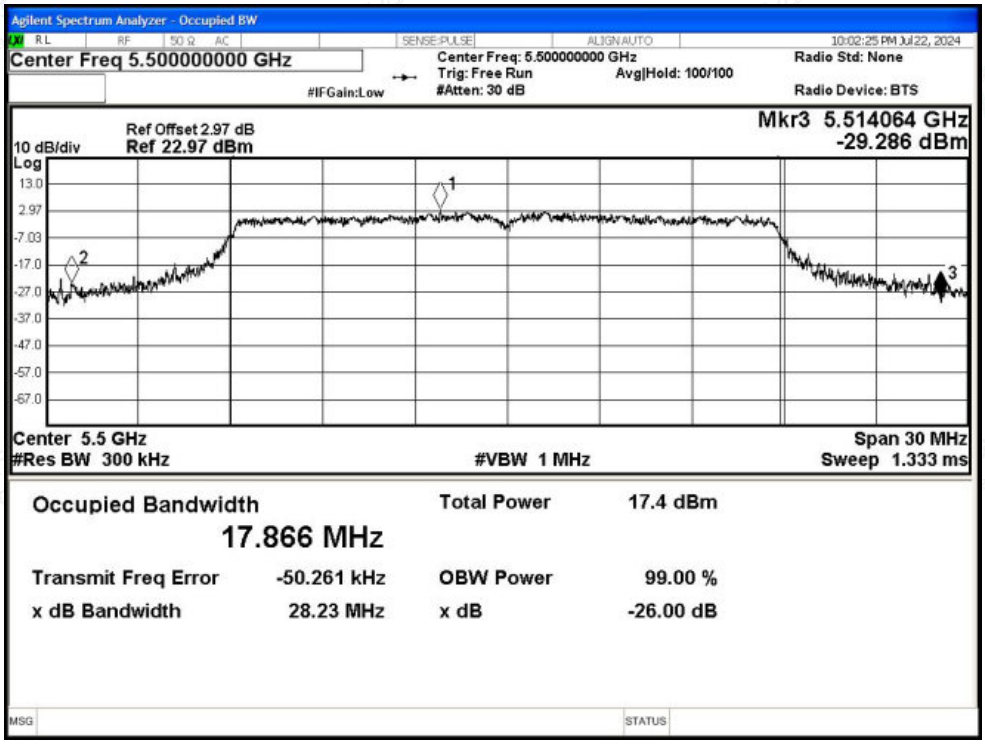

-26dB Bandwidth NVNT ac20 5580MHz Ant2

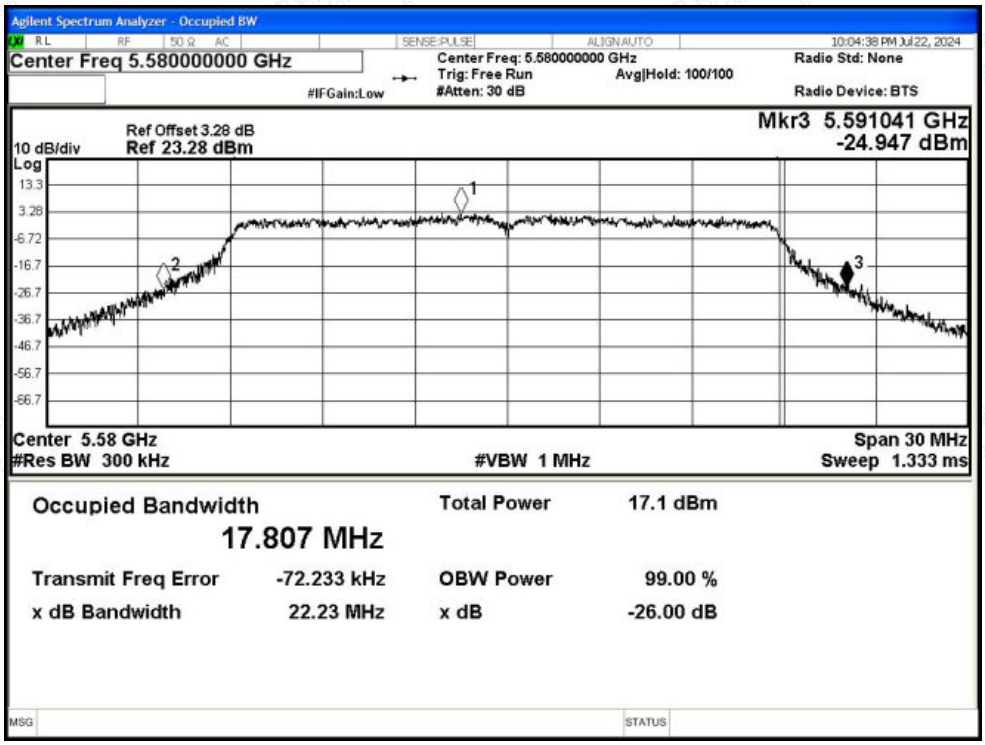

-26dB Bandwidth NVNT ac20 5700MHz Ant2

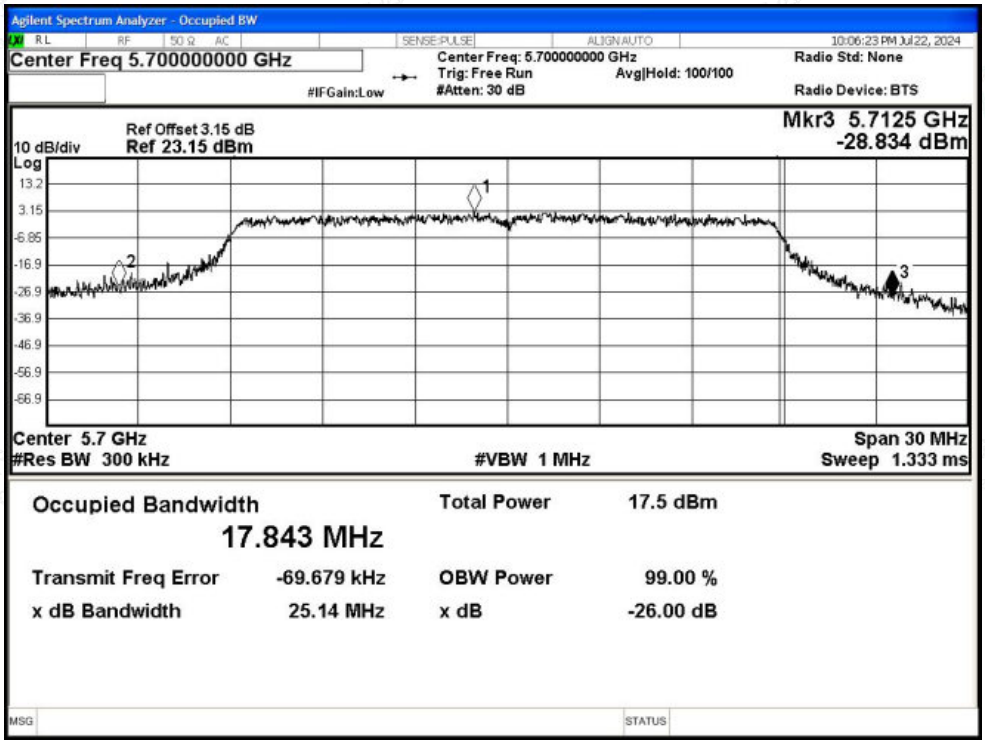

-26dB Bandwidth NVNT ac40 5510MHz Ant2

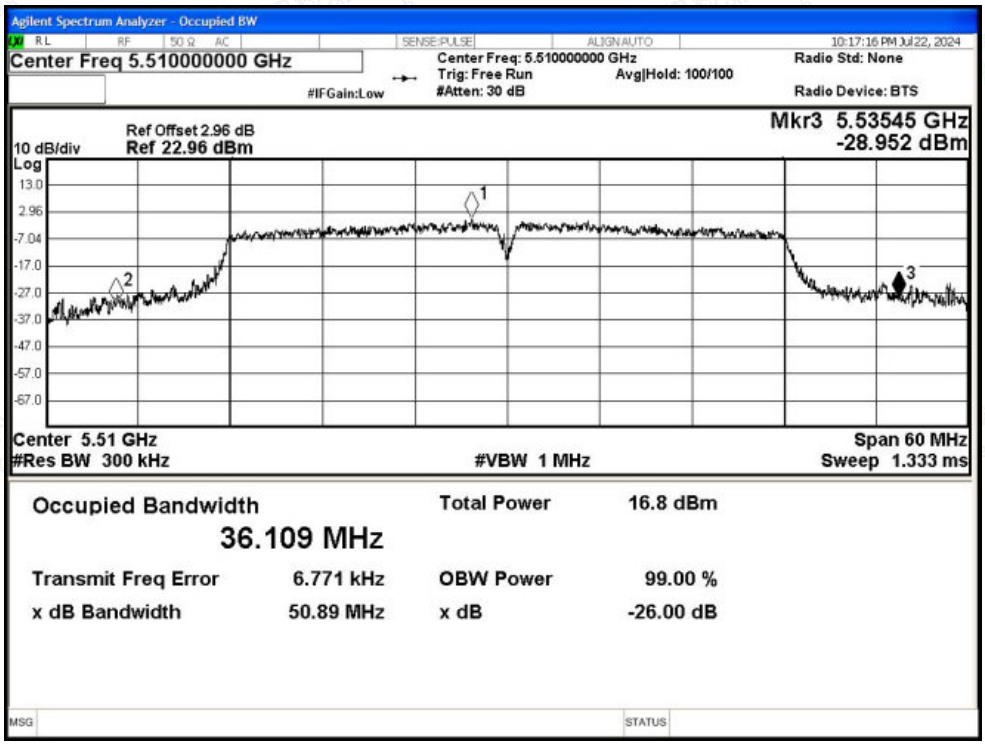

-26dB Bandwidth NVNT ac40 5550MHz Ant2

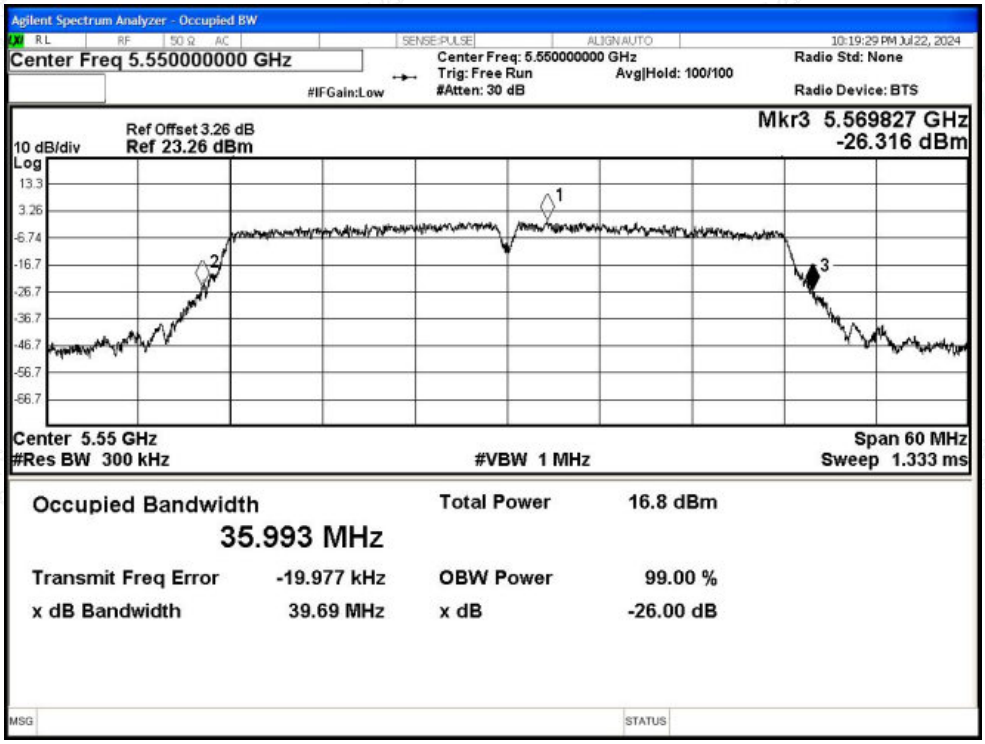

-26dB Bandwidth NVNT ac40 5670MHz Ant2

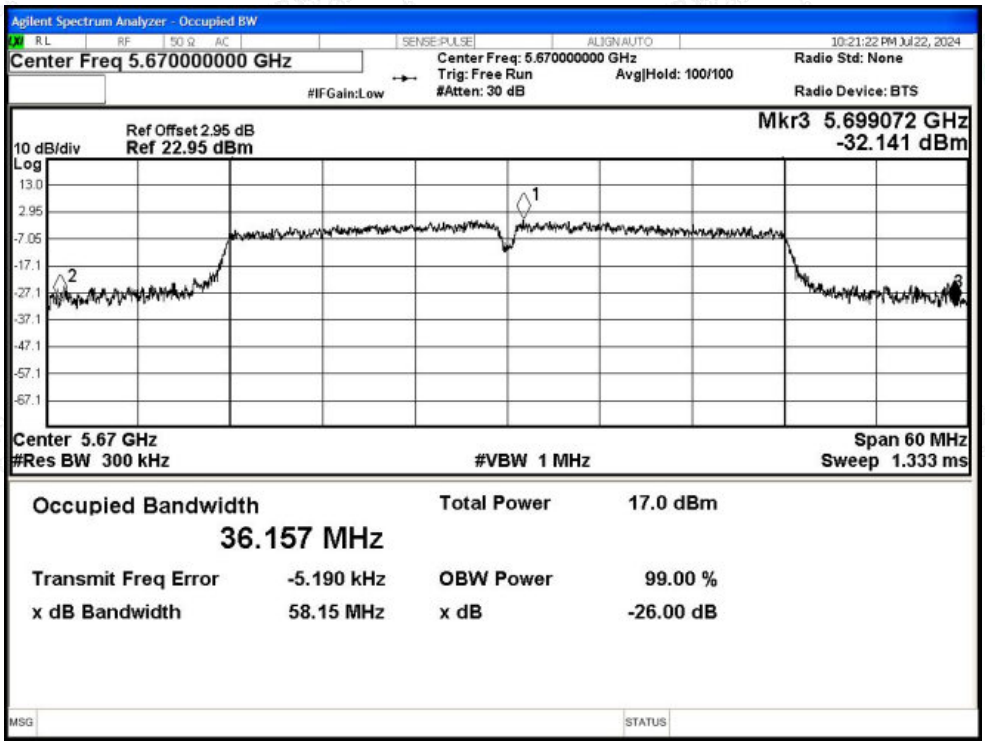

-26dB Bandwidth NVNT ac80 5530MHz Ant2

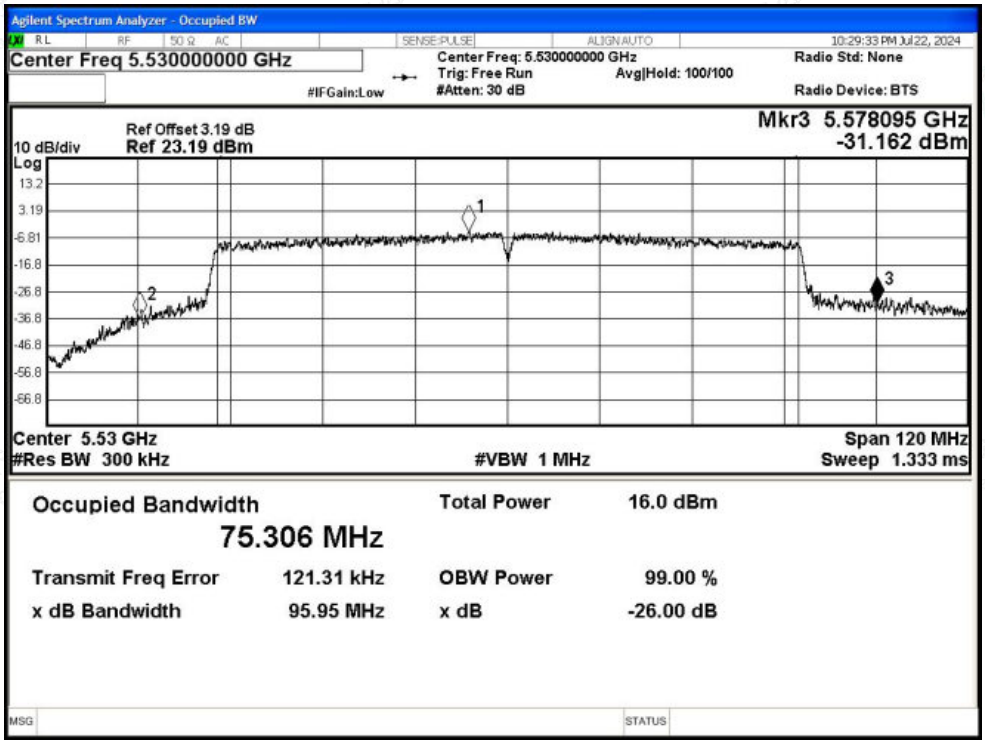

-26dB Bandwidth NVNT ac80 5610MHz Ant2

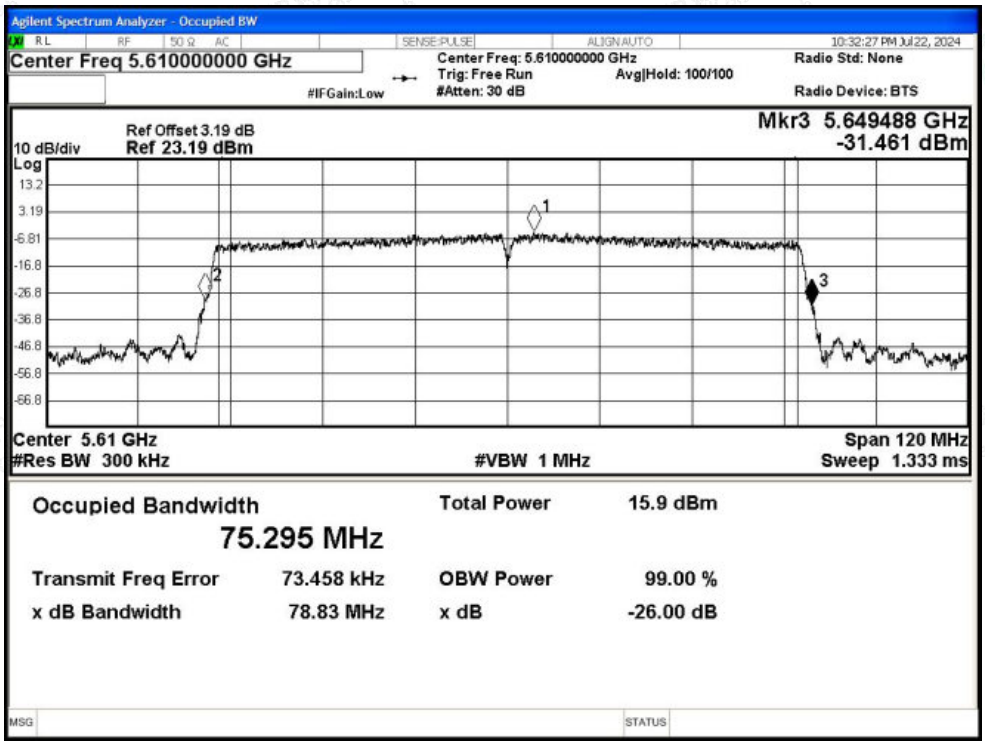

-26dB Bandwidth NVNT ax20 5500MHz Ant2

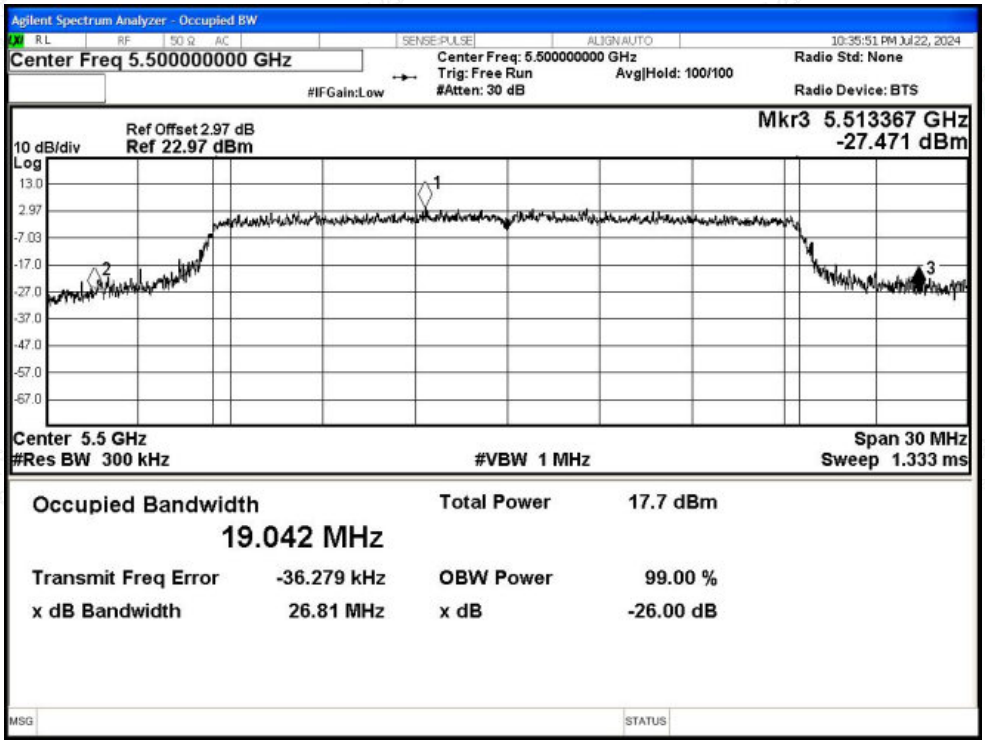

-26dB Bandwidth NVNT ax20 5580MHz Ant2

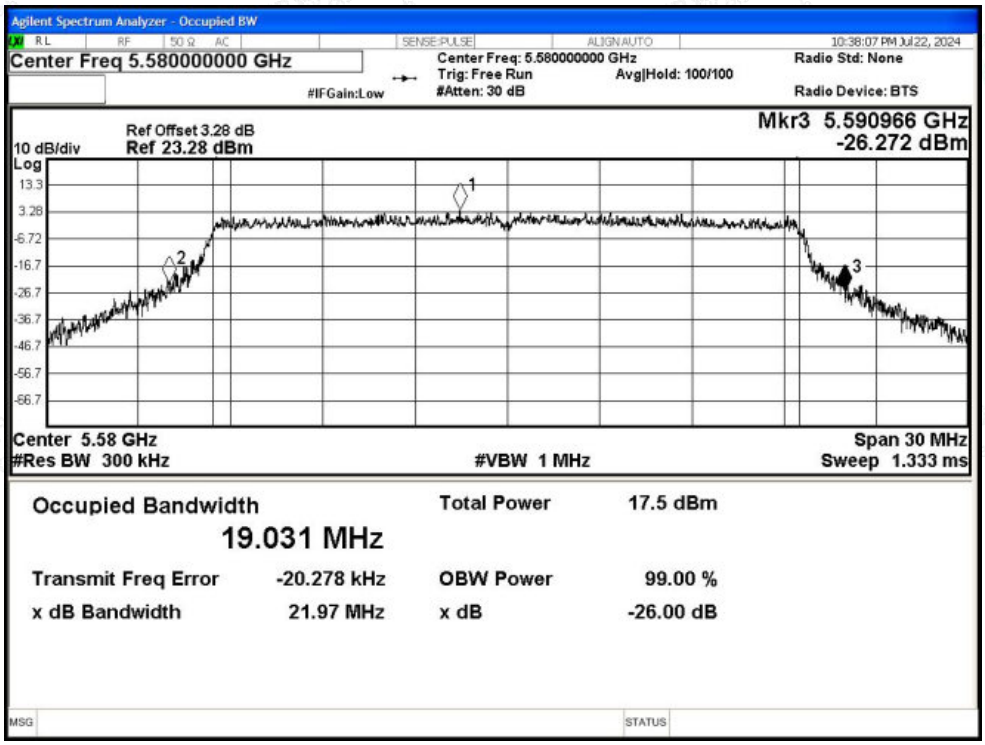

-26dB Bandwidth NVNT ax20 5700MHz Ant2

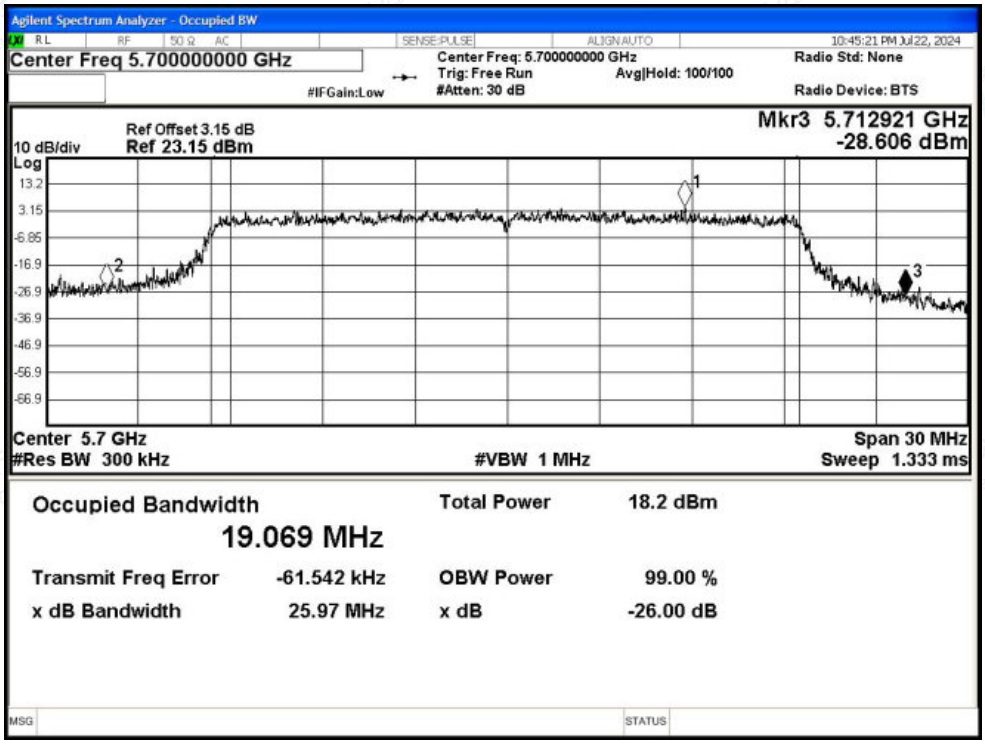

-26dB Bandwidth NVNT ax40 5510MHz Ant2

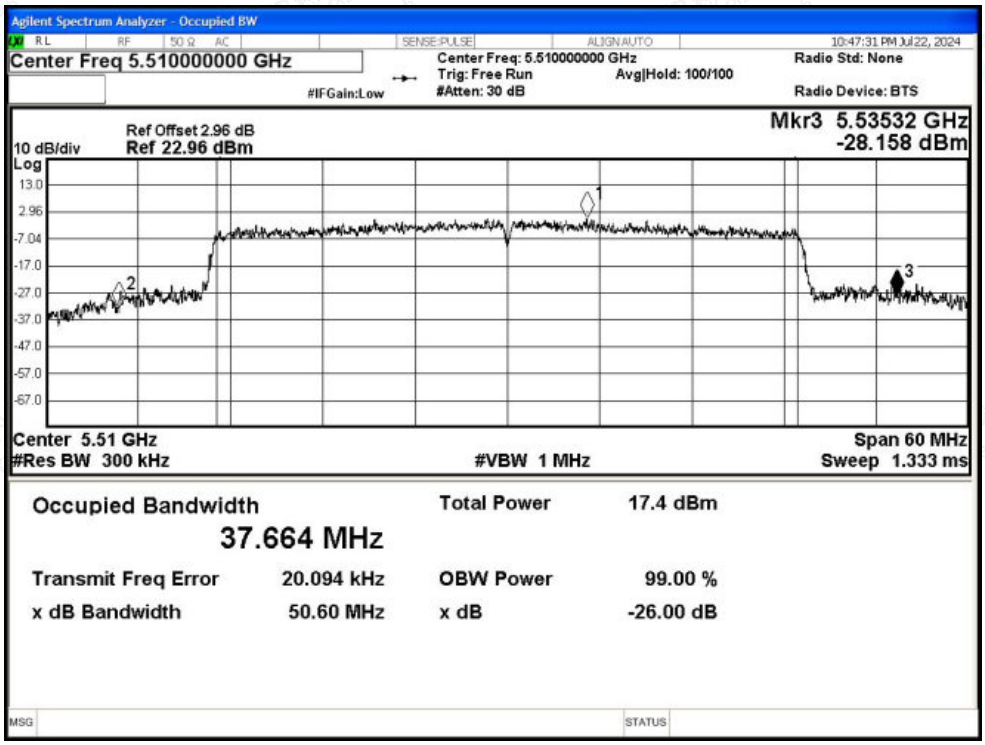

-26dB Bandwidth NVNT ax40 5550MHz Ant2

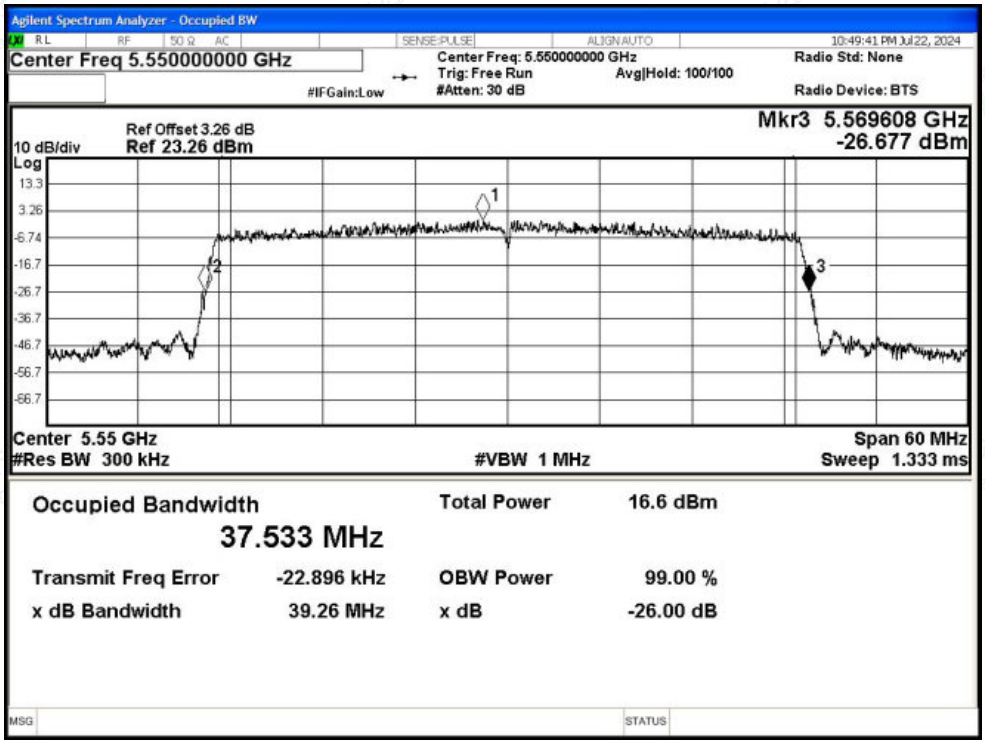

-26dB Bandwidth NVNT ax40 5670MHz Ant2

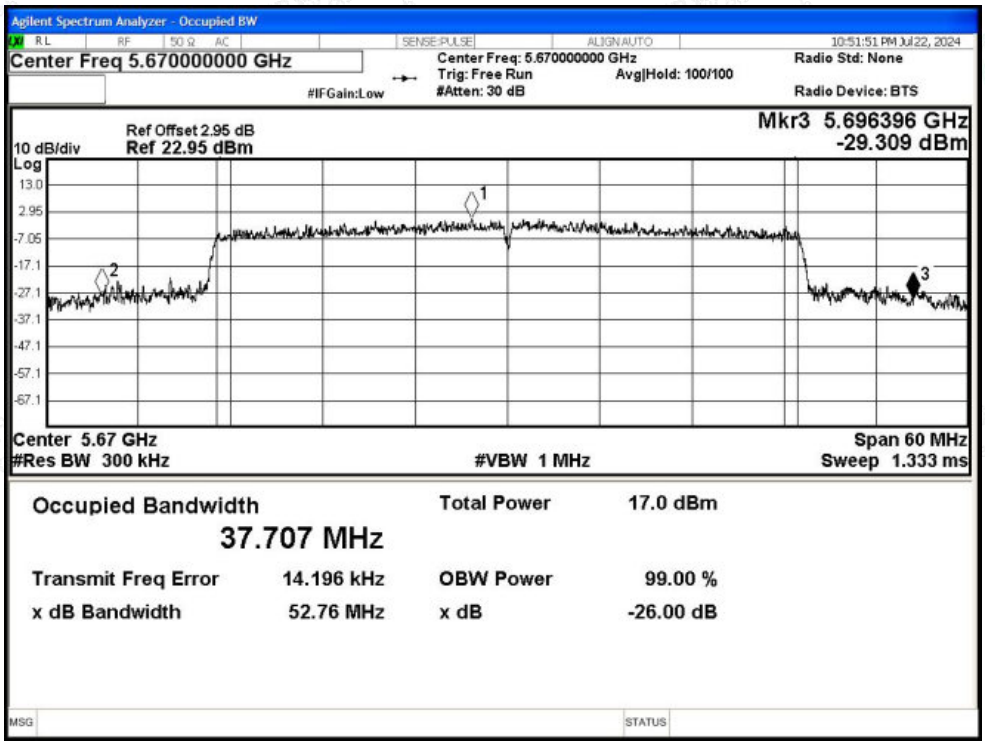

-26dB Bandwidth NVNT ax80 5530MHz Ant2

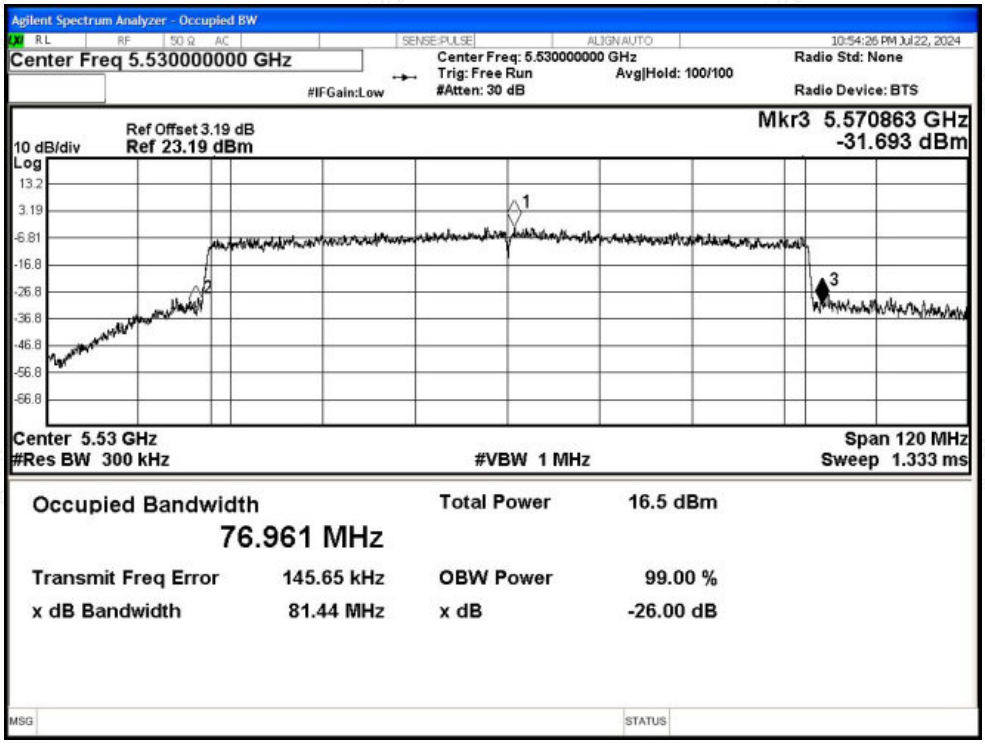

-26dB Bandwidth NVNT ax80 5610MHz Ant2

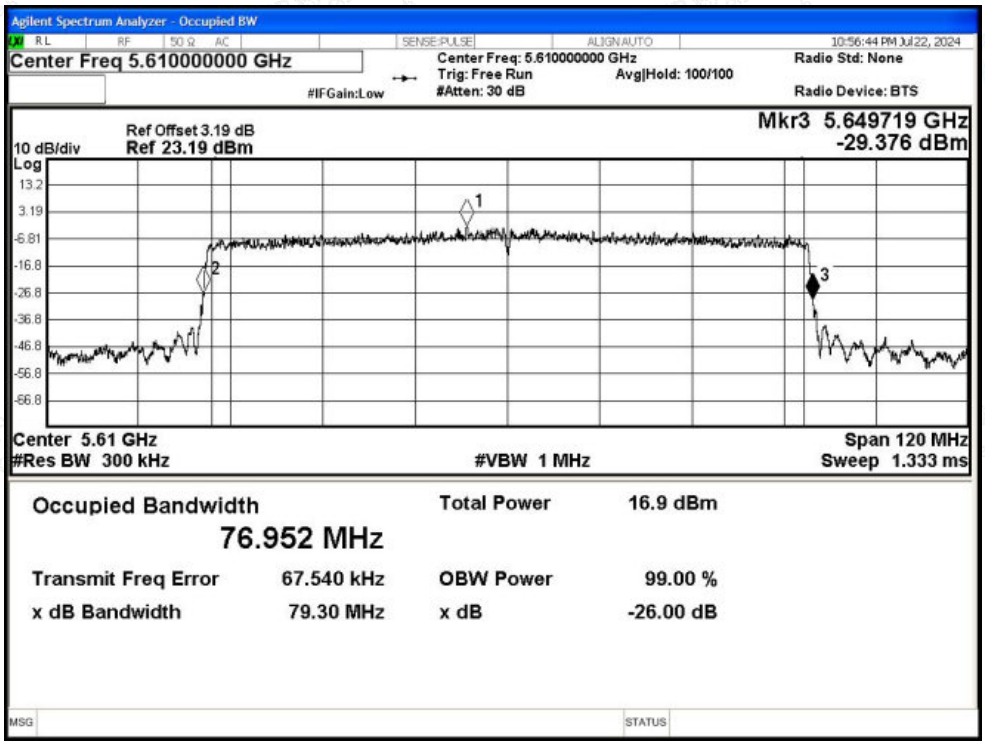

-26dB Bandwidth NVNT ac160 5570MHz Ant2

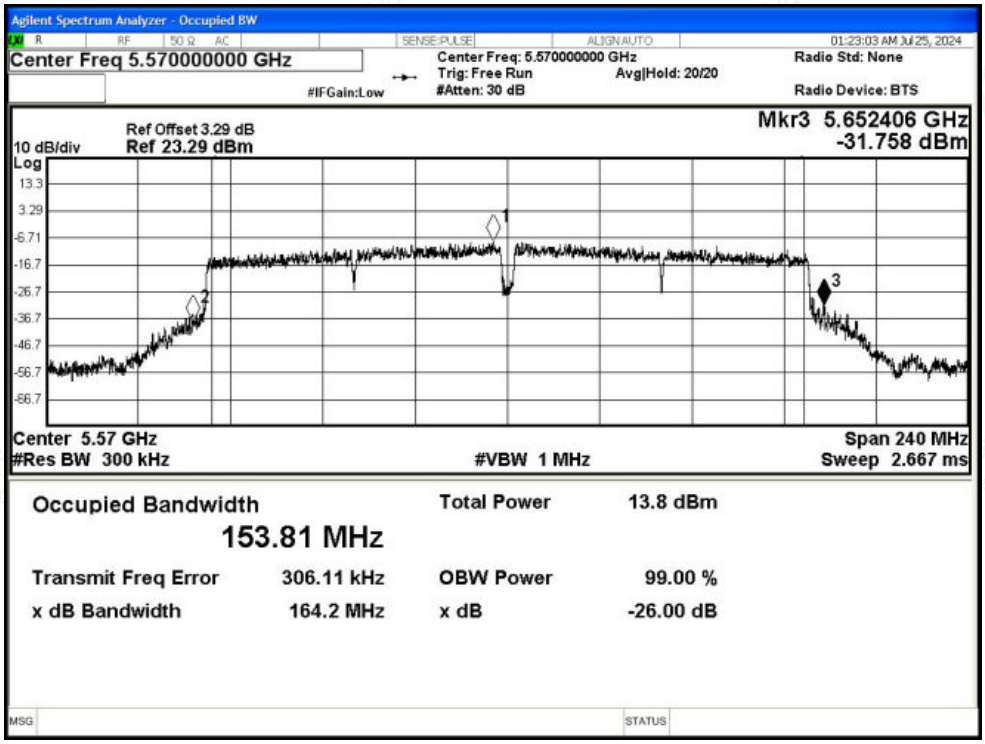

-26dB Bandwidth NVNT ax160 5570MHz Ant2

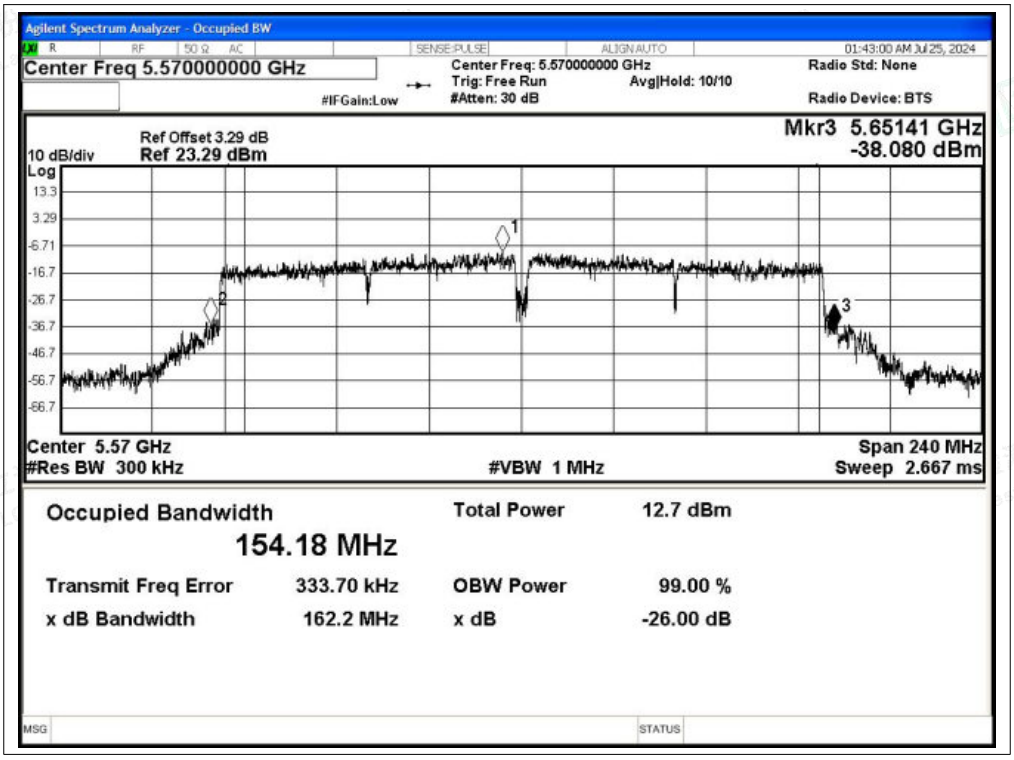
Agilent Spectrum Analyzer - Occupied BW
Center Freq 5.570000000 GHz
Center Freq: 5.570000000 GHz
Trig: Free Run
#Atten: 30 dB
Avg|Hold: 10/10
#IFGain:Low
Radio Std: None
Radio Device: BTS
01:43:00 AM Jul 25, 2024
Ref Offset 3.29 dB
10 dB/div
Ref 23.29 dBm
Log
Mkr3 5.65141 GHz
-38.080 dBm
Center 5.57 GHz
#Res BW 300 kHz
#VBW 1 MHz
Span 240 MHz
Sweep 2.667 ms
Occupied Bandwidth
154.18 MHz
Total Power 12.7 dBm
Transmit Freq Error 333.70 kHz
OBW Power 99.00 %
x dB Bandwidth 162.2 MHz
x dB -26.00 dB
MSG
STATUS

D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant2	12.6	0.22	12.82	24	Pass
NVNT	a	5580	Ant2	12.67	0.22	12.89	24	Pass
NVNT	a	5700	Ant2	12.36	0.22	12.58	24	Pass
NVNT	n20	5500	Ant2	11.34	0.23	11.57	24	Pass
NVNT	n20	5580	Ant2	11.16	0.23	11.39	24	Pass
NVNT	n20	5700	Ant2	11.41	0.23	11.64	24	Pass
NVNT	n40	5510	Ant2	10.57	0.36	10.93	24	Pass
NVNT	n40	5550	Ant2	10.1	0.37	10.47	24	Pass
NVNT	n40	5670	Ant2	10.72	0.37	11.09	24	Pass
NVNT	ac20	5500	Ant2	11.28	0.58	11.86	24	Pass
NVNT	ac20	5580	Ant2	11.03	0.58	11.61	24	Pass
NVNT	ac20	5700	Ant2	11.27	0.6	11.87	24	Pass
NVNT	ac40	5510	Ant2	10.22	0.51	10.73	24	Pass
NVNT	ac40	5550	Ant2	10.29	0.51	10.8	24	Pass
NVNT	ac40	5670	Ant2	10.73	0.51	11.24	24	Pass
NVNT	ac80	5530	Ant2	9.29	0.7	9.99	24	Pass
NVNT	ac80	5610	Ant2	9.15	0.7	9.85	24	Pass
NVNT	ax20	5500	Ant2	11.09	0.23	11.32	24	Pass
NVNT	ax20	5580	Ant2	11.34	0.23	11.57	24	Pass
NVNT	ax20	5700	Ant2	11.44	0.33	11.77	24	Pass
NVNT	ax40	5510	Ant2	10.48	0.55	11.03	24	Pass
NVNT	ax40	5550	Ant2	10.04	0.54	10.58	24	Pass
NVNT	ax40	5670	Ant2	10.08	0.54	10.62	24	Pass
NVNT	ax80	5530	Ant2	9.07	0.68	9.75	24	Pass
NVNT	ax80	5610	Ant2	9.5	0.68	10.18	24	Pass
NVNT	ac160	5570	Ant2	8.15	0.56	8.71	24	Pass
NVNT	ax160	5570	Ant2	8.15	0.55	8.71	24	Pass

D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant2	2.45	0.22	2.67	11	Pass
NVNT	a	5580	Ant2	2.96	0.22	3.18	11	Pass
NVNT	a	5700	Ant2	1.61	0.22	1.83	11	Pass
NVNT	n20	5500	Ant2	1.02	0.23	1.25	11	Pass
NVNT	n20	5580	Ant2	0.94	0.23	1.17	11	Pass
NVNT	n20	5700	Ant2	1.16	0.23	1.39	11	Pass
NVNT	n40	5510	Ant2	-2.01	0.36	-1.65	11	Pass
NVNT	n40	5550	Ant2	-2.63	0.37	-2.26	11	Pass
NVNT	n40	5670	Ant2	-1.72	0.37	-1.35	11	Pass
NVNT	ac20	5500	Ant2	1.27	0.58	1.85	11	Pass
NVNT	ac20	5580	Ant2	0.58	0.58	1.16	11	Pass
NVNT	ac20	5700	Ant2	0.9	0.6	1.5	11	Pass
NVNT	ac40	5510	Ant2	-3	0.51	-2.49	11	Pass
NVNT	ac40	5550	Ant2	-2.55	0.51	-2.04	11	Pass
NVNT	ac40	5670	Ant2	-2.05	0.51	-1.54	11	Pass
NVNT	ac80	5530	Ant2	-6.48	0.7	-5.78	11	Pass
NVNT	ac80	5610	Ant2	-6.71	0.7	-6.01	11	Pass
NVNT	ax20	5500	Ant2	0.67	0.23	0.9	11	Pass
NVNT	ax20	5580	Ant2	0.55	0.23	0.78	11	Pass
NVNT	ax20	5700	Ant2	0.77	0.33	1.1	11	Pass
NVNT	ax40	5510	Ant2	-2.26	0.55	-1.71	11	Pass
NVNT	ax40	5550	Ant2	-3.22	0.54	-2.68	11	Pass
NVNT	ax40	5670	Ant2	-2.93	0.54	-2.39	11	Pass
NVNT	ax80	5530	Ant2	-6.39	0.68	-5.71	11	Pass
NVNT	ax80	5610	Ant2	-6.32	0.68	-5.64	11	Pass
NVNT	ac160	5570	Ant2	-9.8	0.56	-9.24	11	Pass
NVNT	ax160	5570	Ant2	-10.58	0.55	-10.03	11	Pass

Test Graphs

PSD NVNT a 5500MHz Ant2

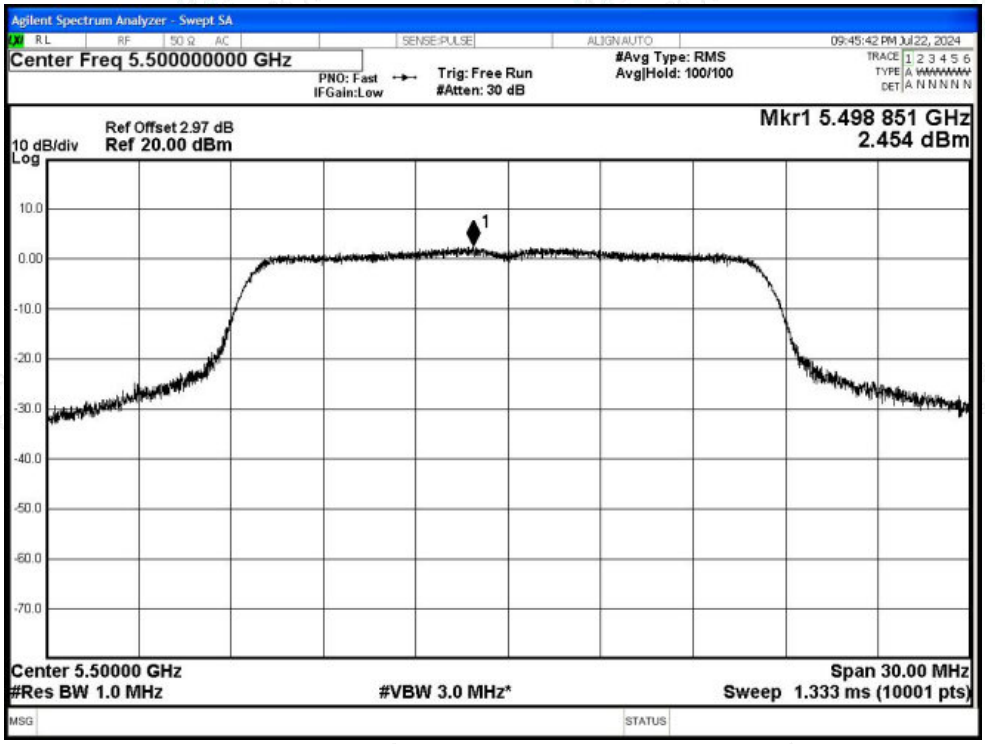

PSD NVNT a 5580MHz Ant2

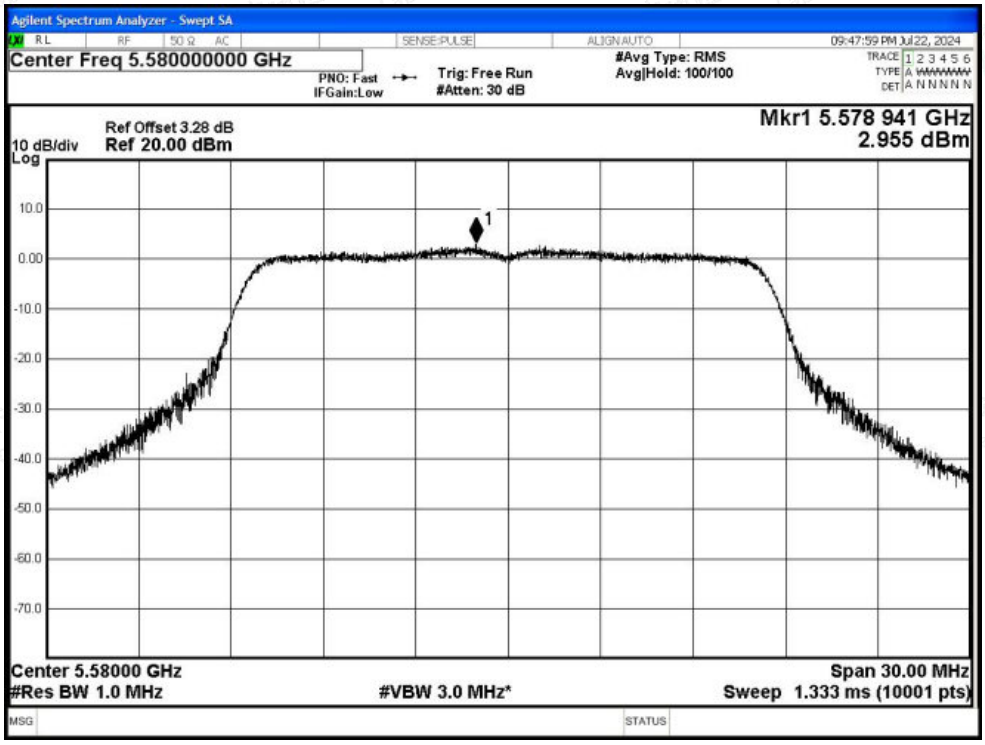

PSD NVNT a 5700MHz Ant2

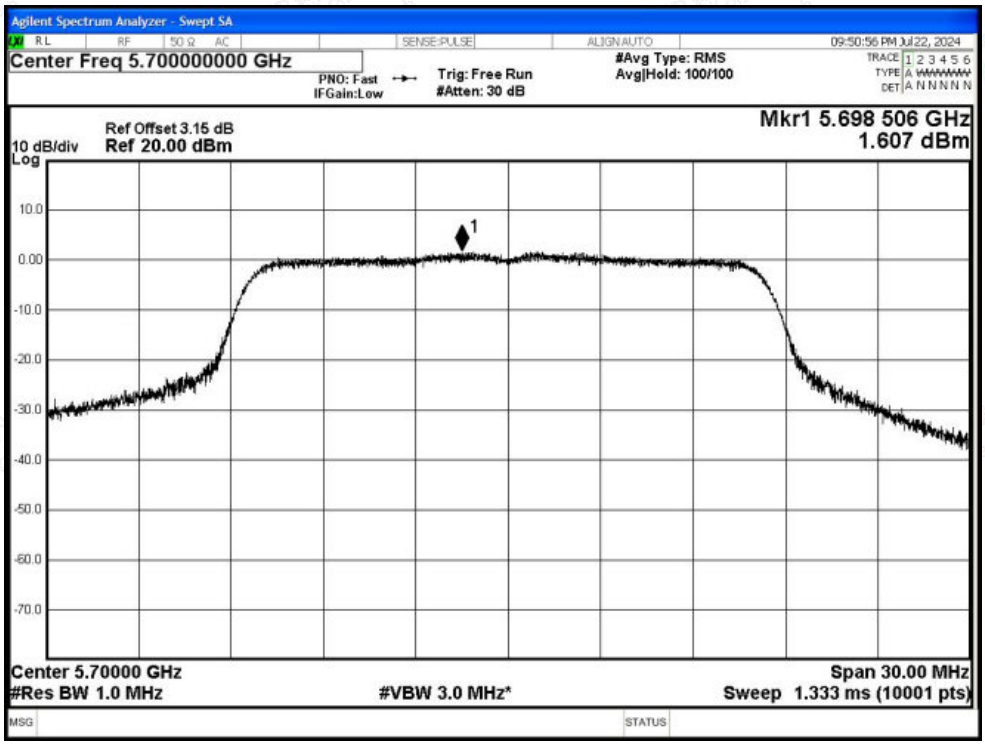

PSD NVNT n20 5500MHz Ant2

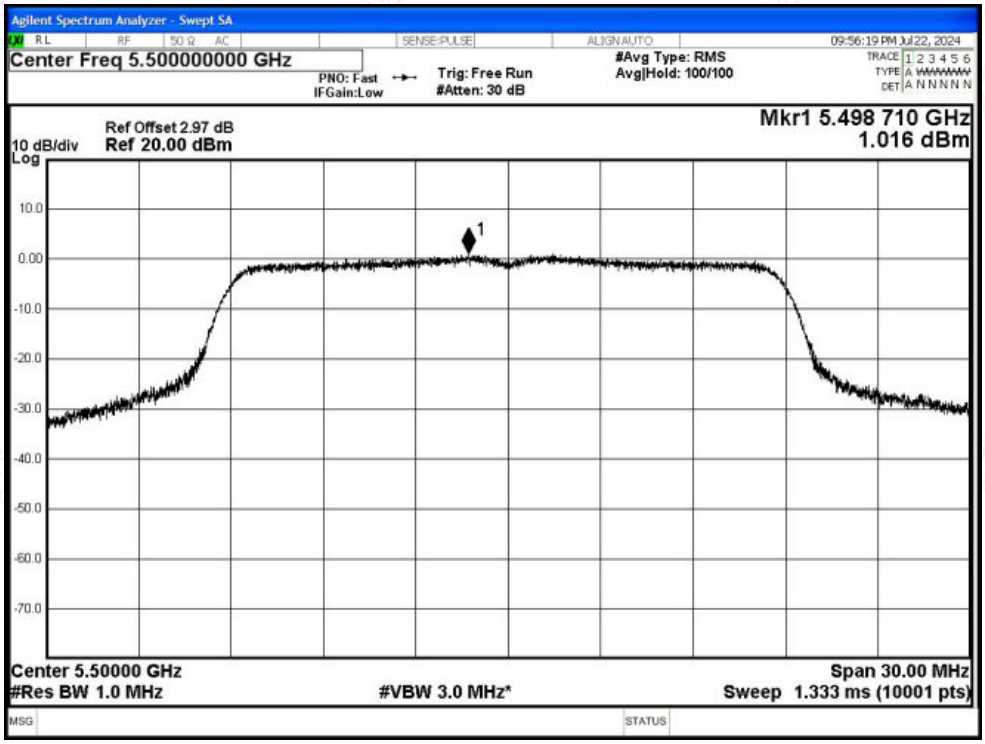

PSD NVNT n20 5580MHz Ant2

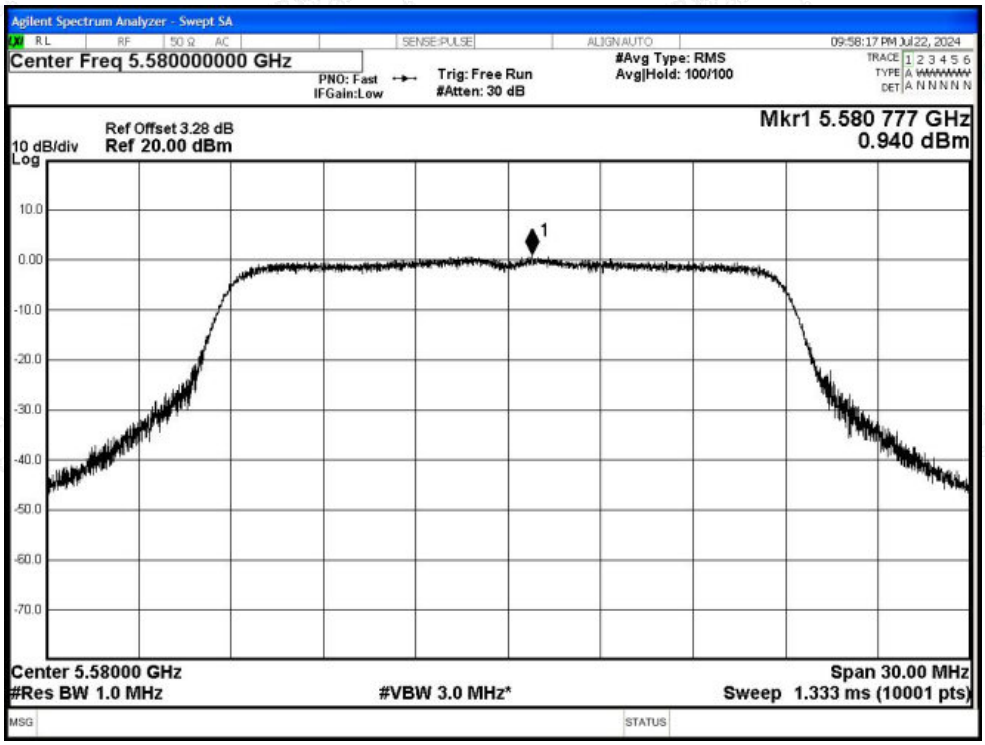

PSD NVNT n20 5700MHz Ant2

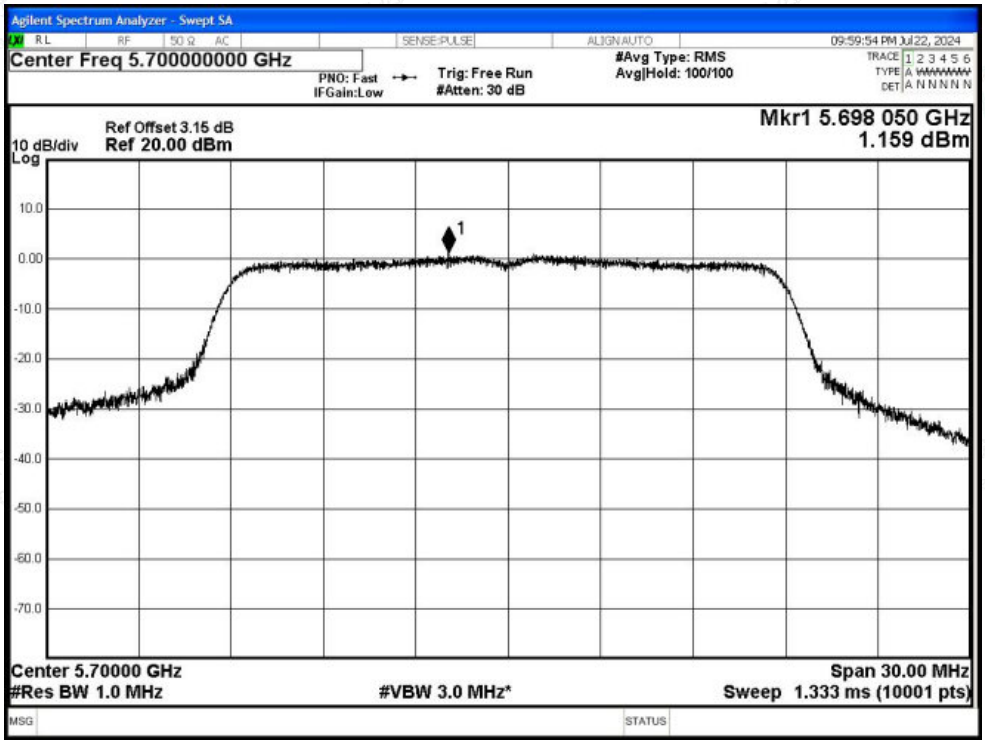

PSD NVNT n40 5510MHz Ant2

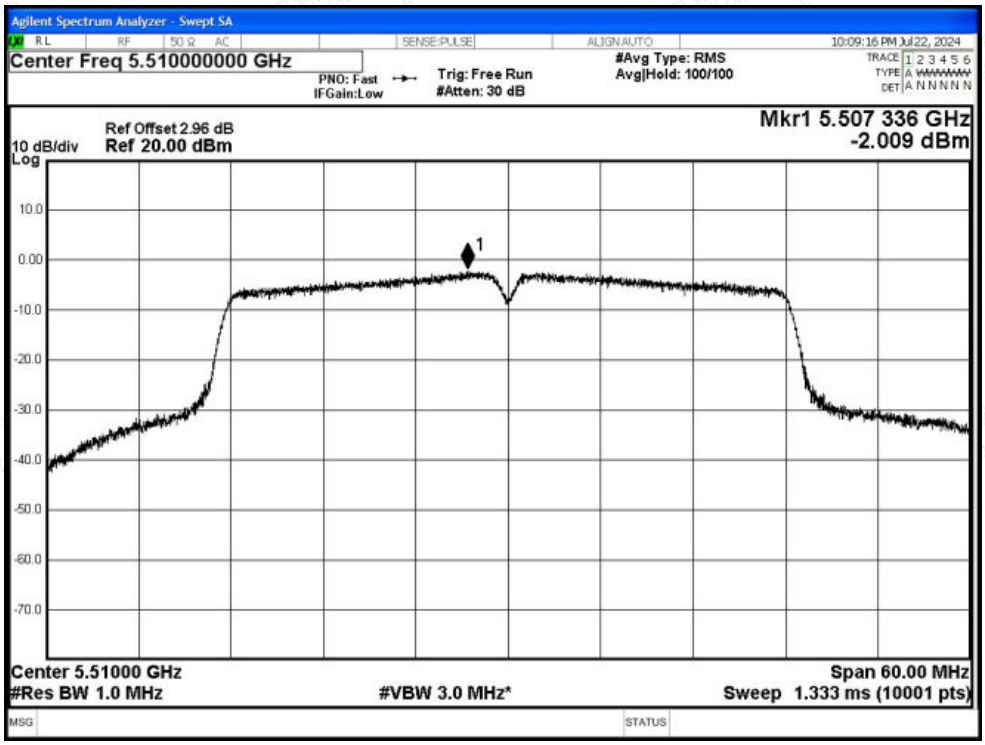

PSD NVNT n40 5550MHz Ant2

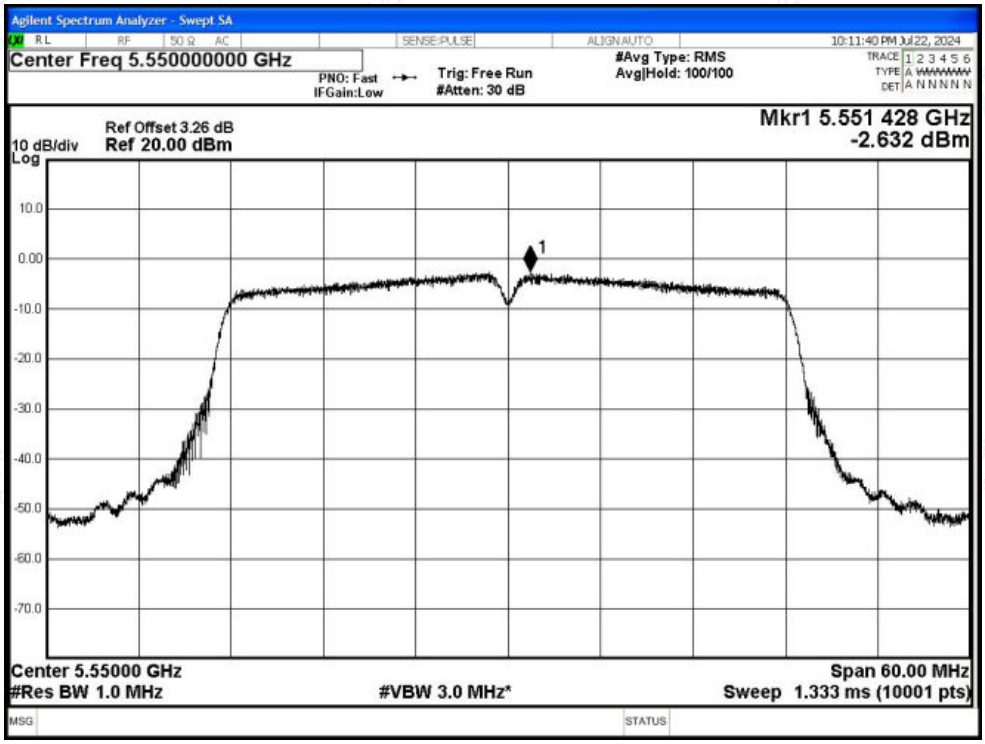

PSD NVNT n40 5670MHz Ant2

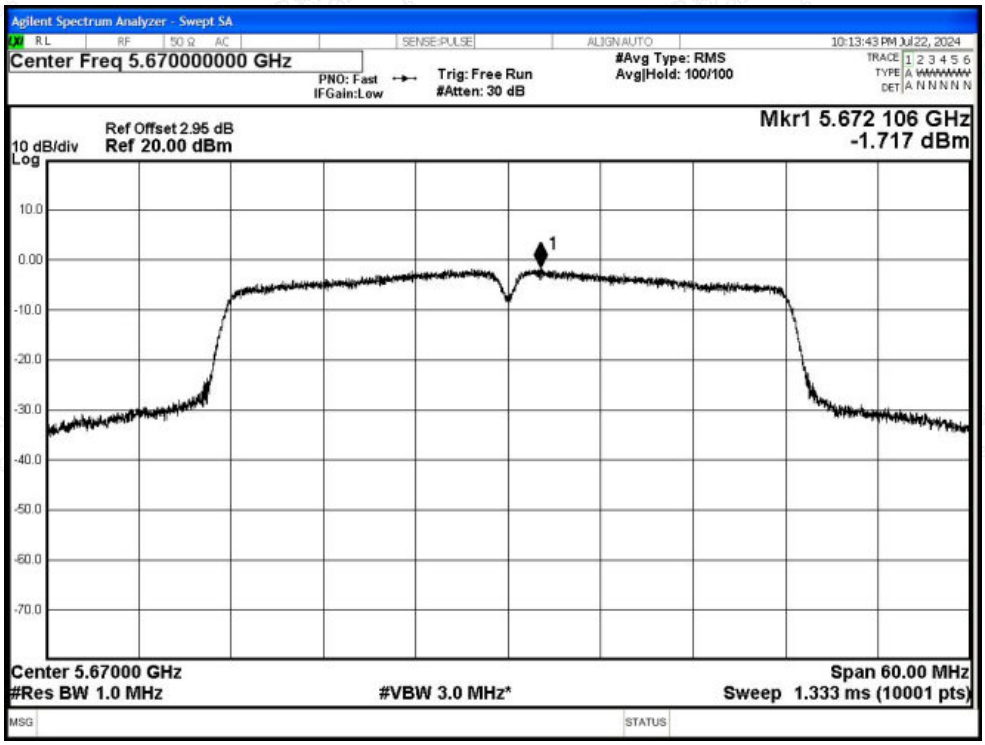

PSD NVNT ac20 5500MHz Ant2

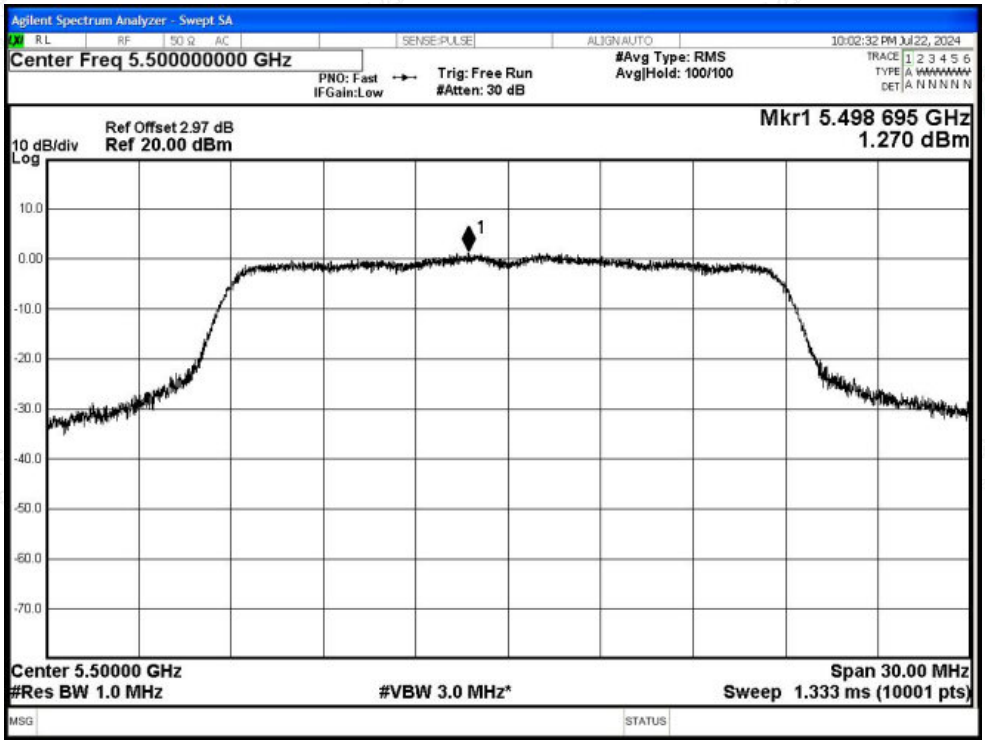

PSD NVNT ac20 5580MHz Ant2

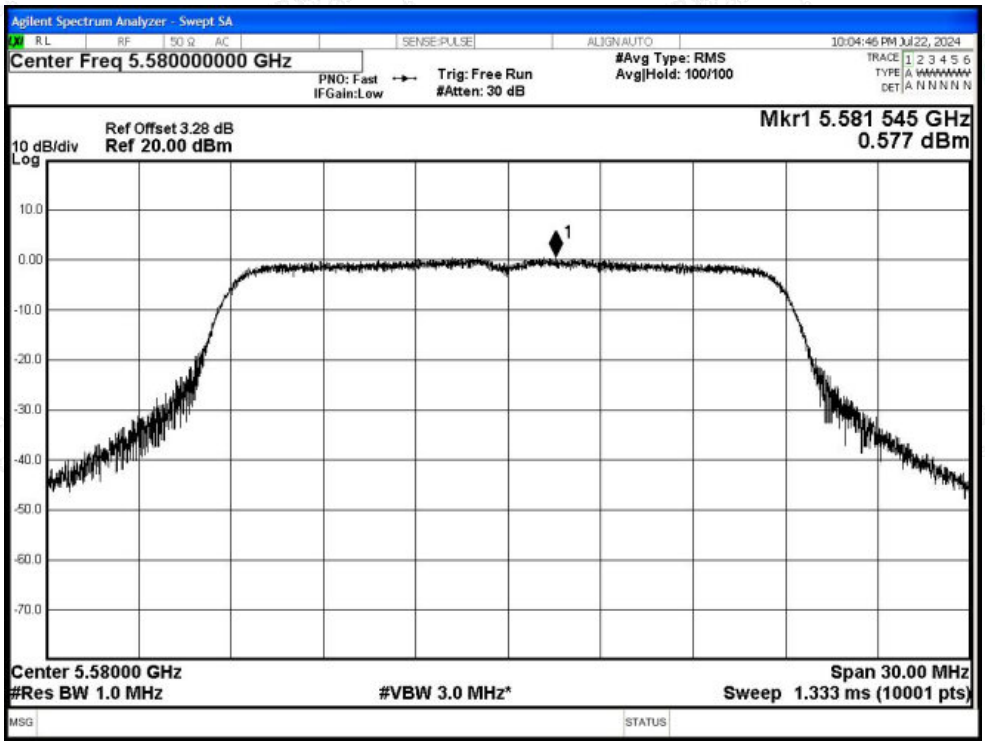

PSD NVNT ac20 5700MHz Ant2

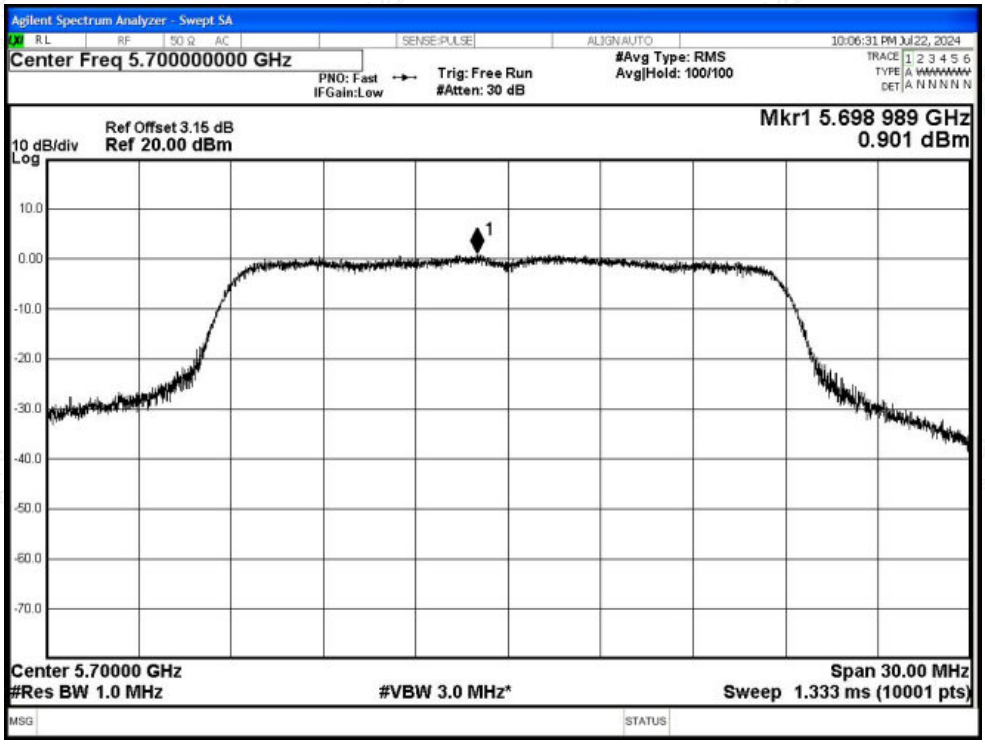

PSD NVNT ac40 5510MHz Ant2

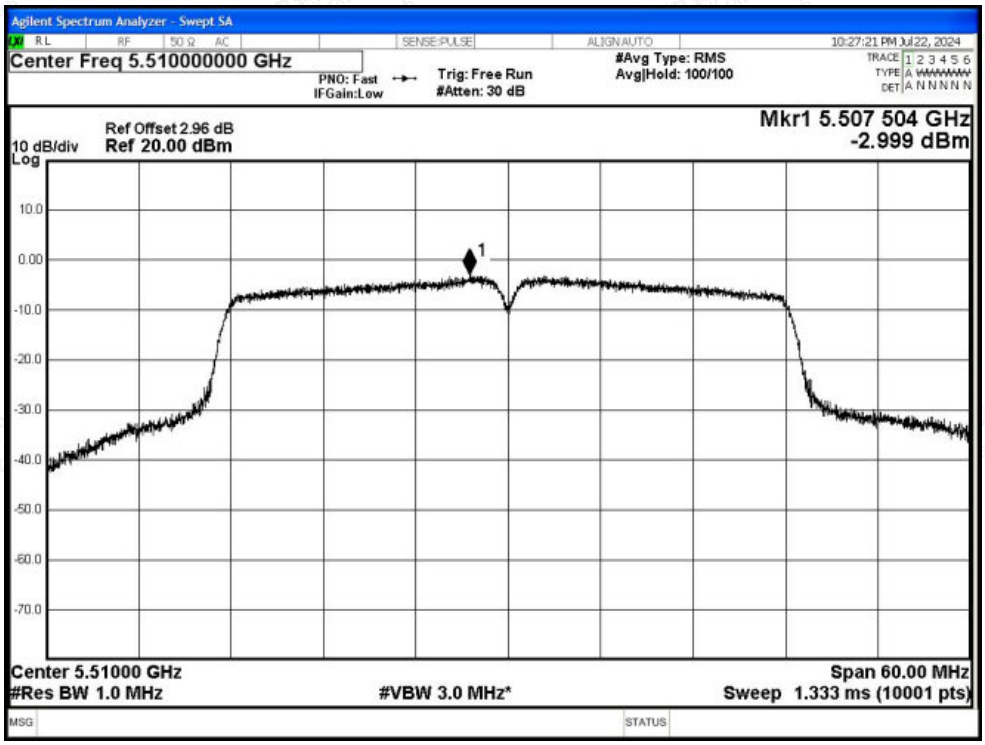

PSD NVNT ac40 5550MHz Ant2

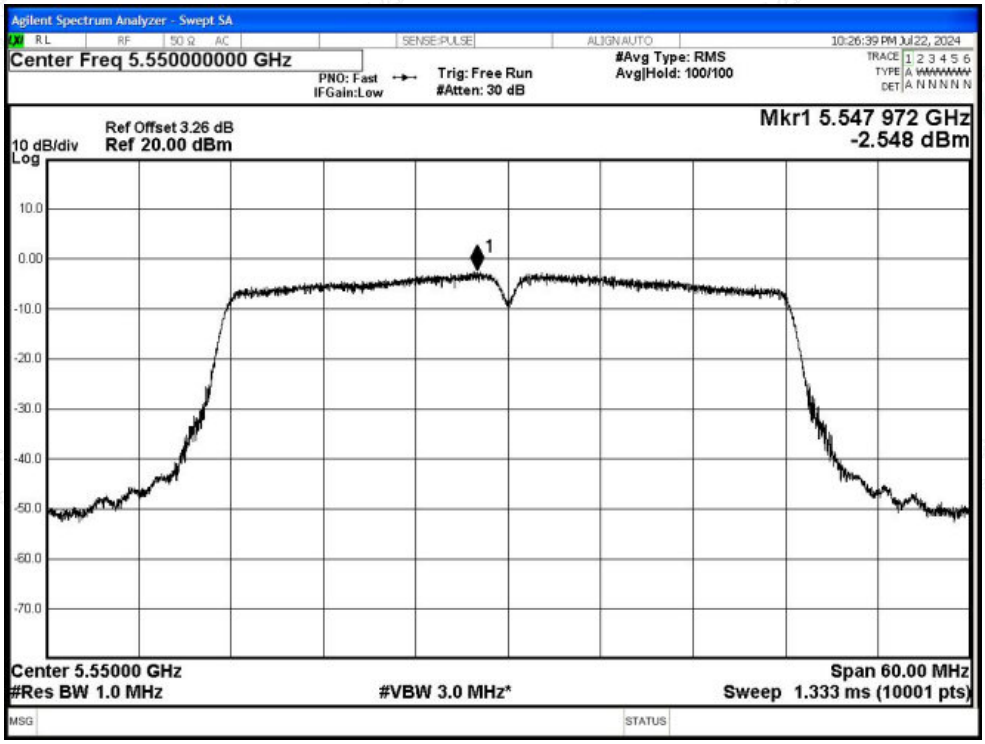

PSD NVNT ac40 5670MHz Ant2

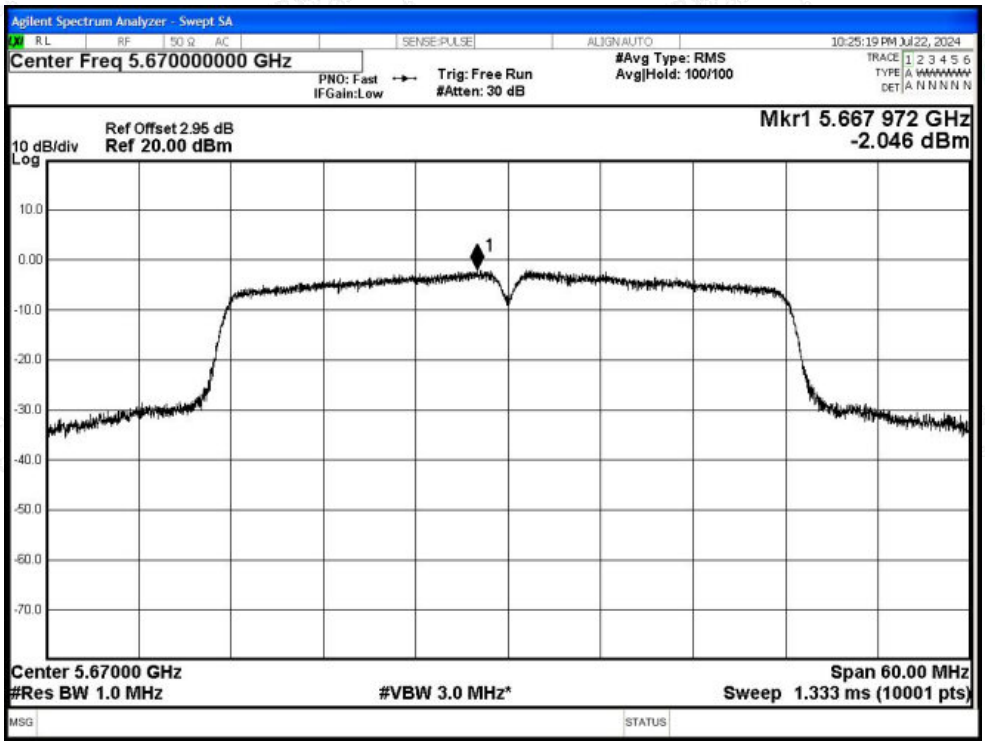

PSD NVNT ac80 5530MHz Ant2

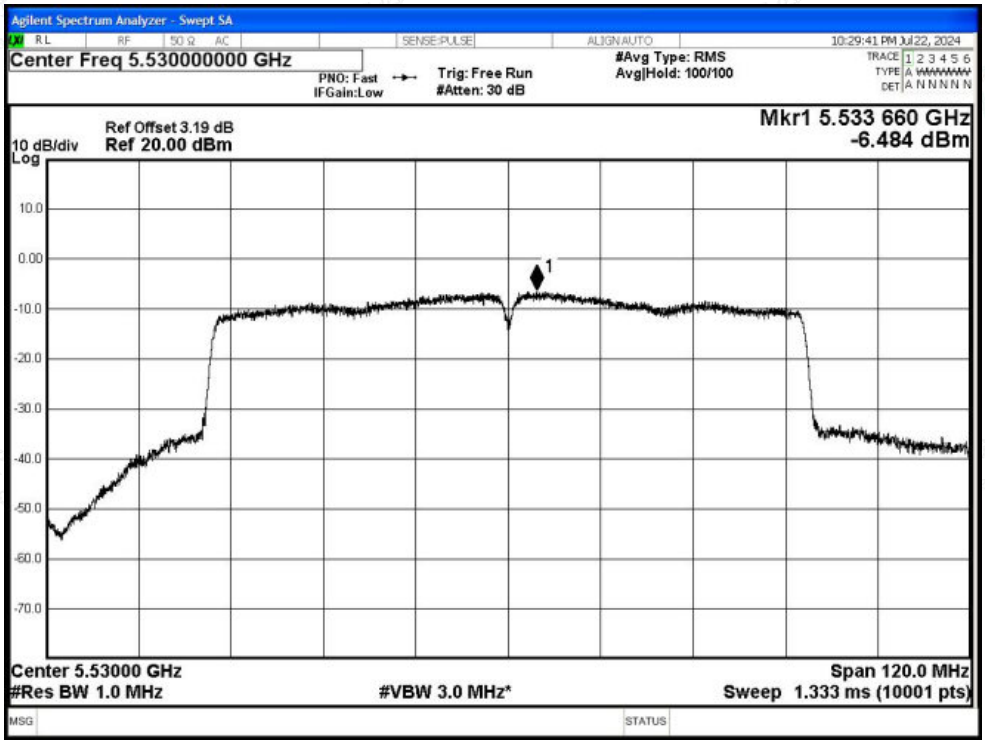

PSD NVNT ac80 5610MHz Ant2

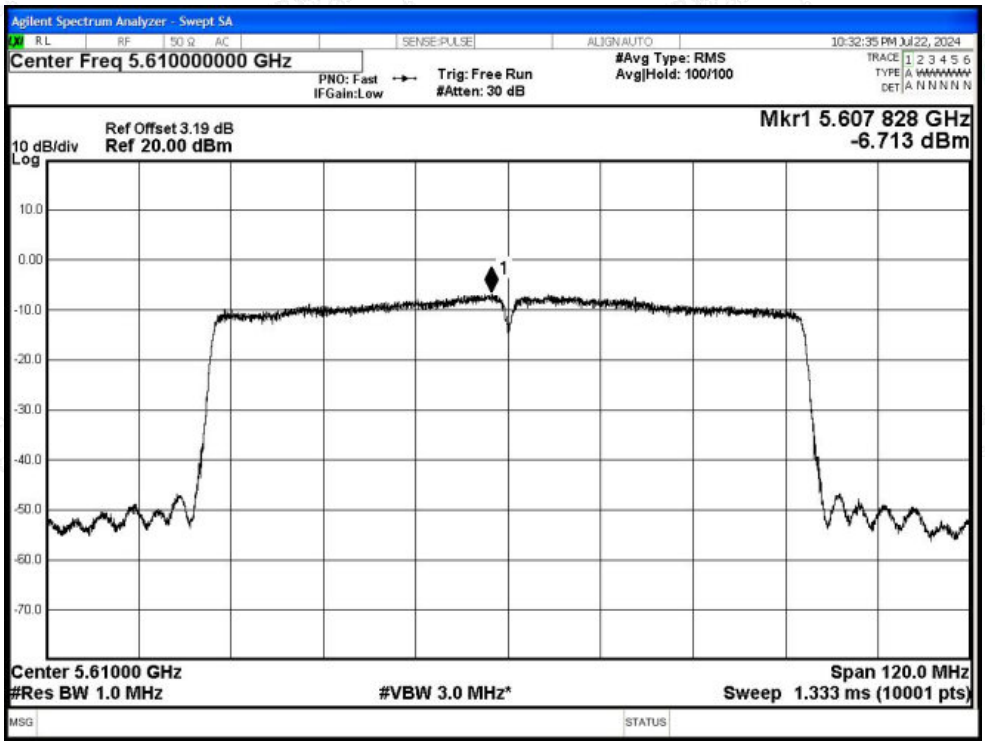

PSD NVNT ax20 5500MHz Ant2

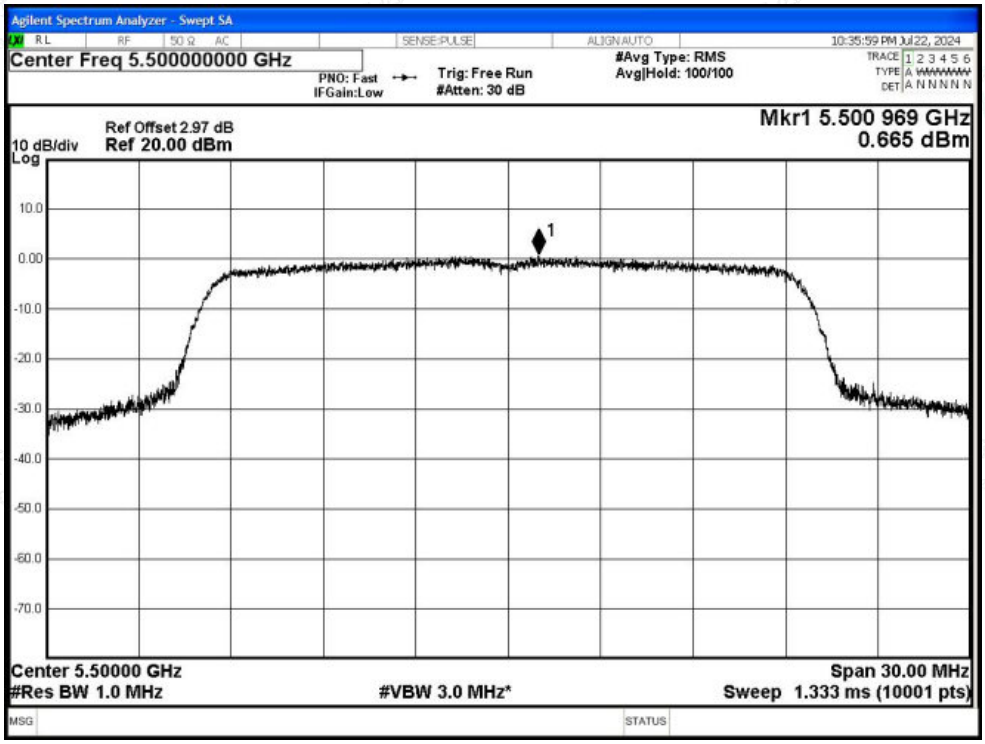

PSD NVNT ax20 5580MHz Ant2

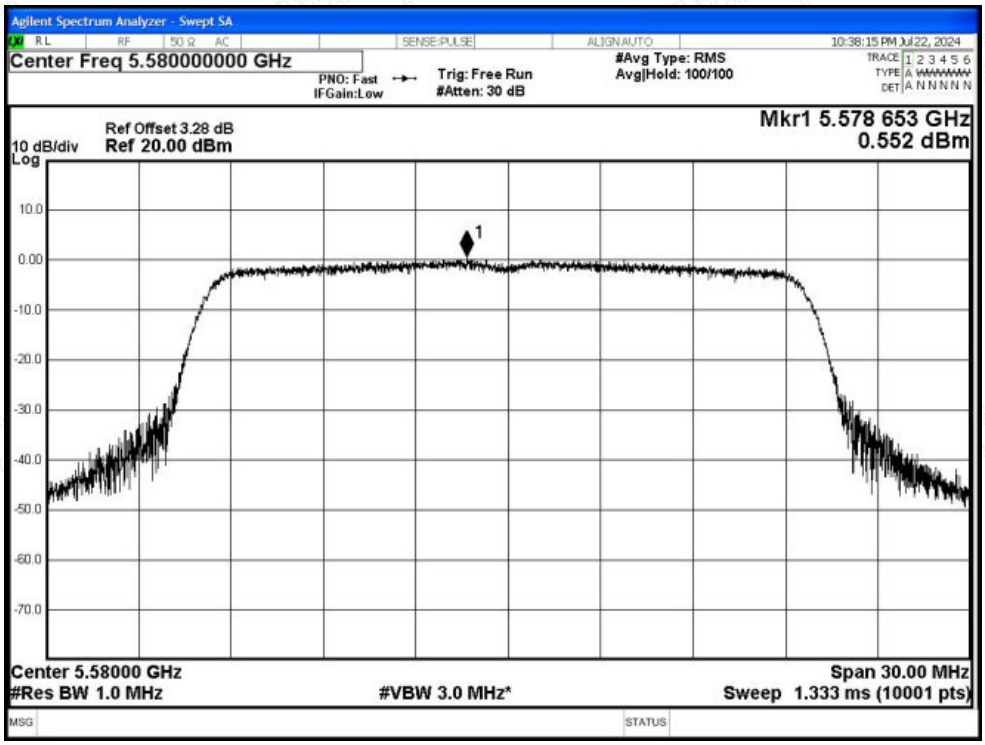

PSD NVNT ax20 5700MHz Ant2

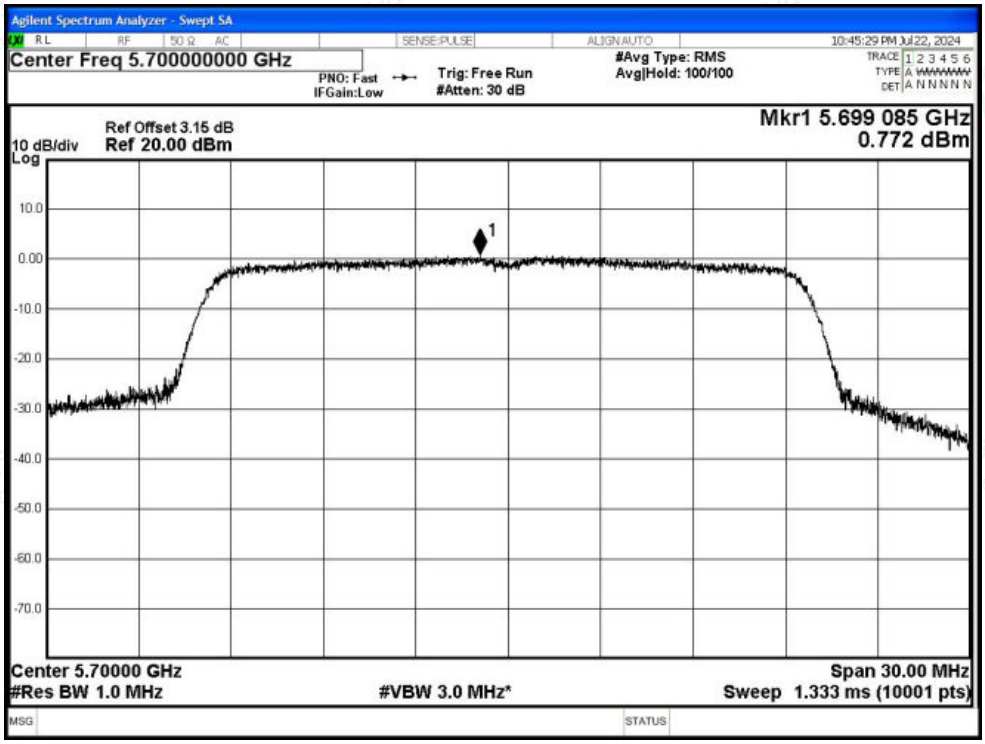

PSD NVNT ax40 5510MHz Ant2

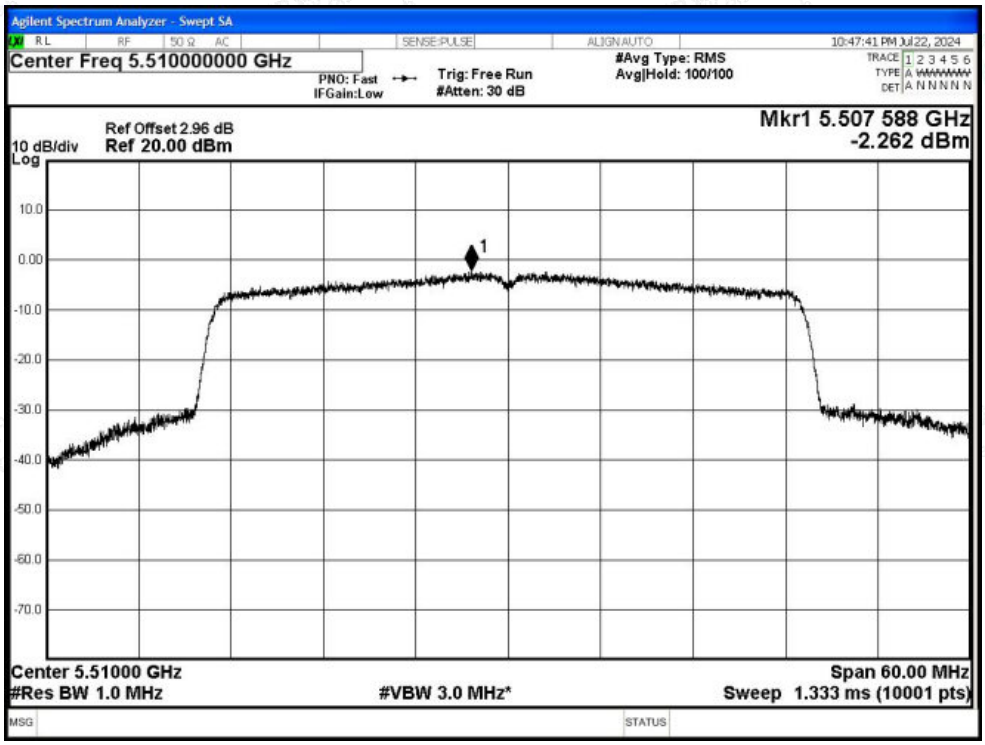

PSD NVNT ax40 5550MHz Ant2

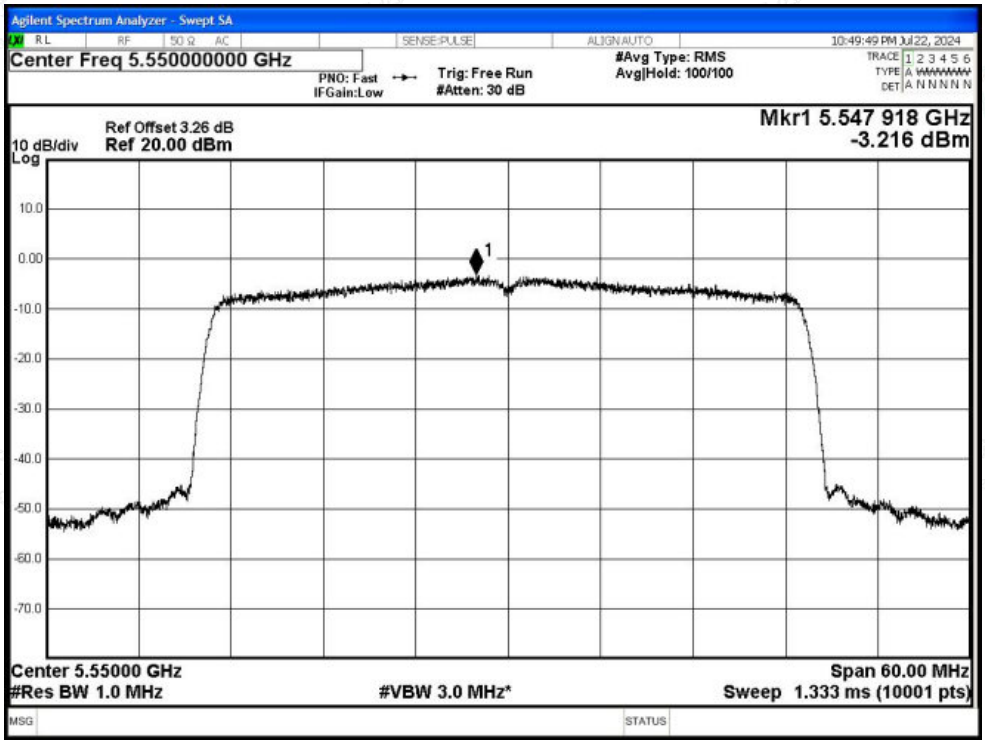

PSD NVNT ax40 5670MHz Ant2

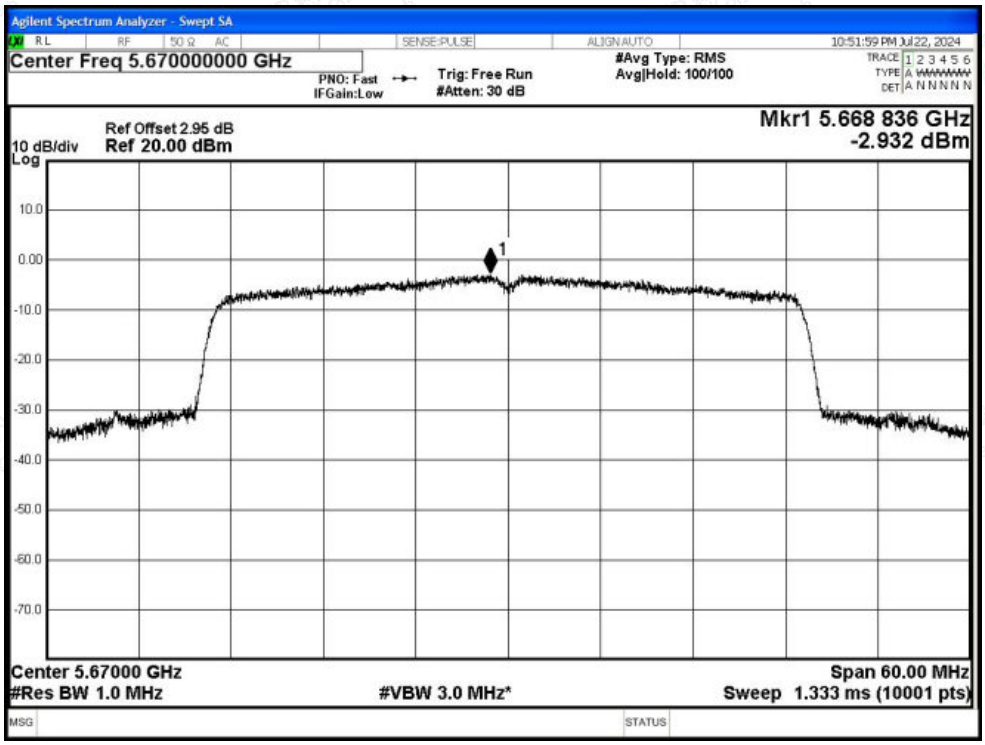

PSD NVNT ax80 5530MHz Ant2

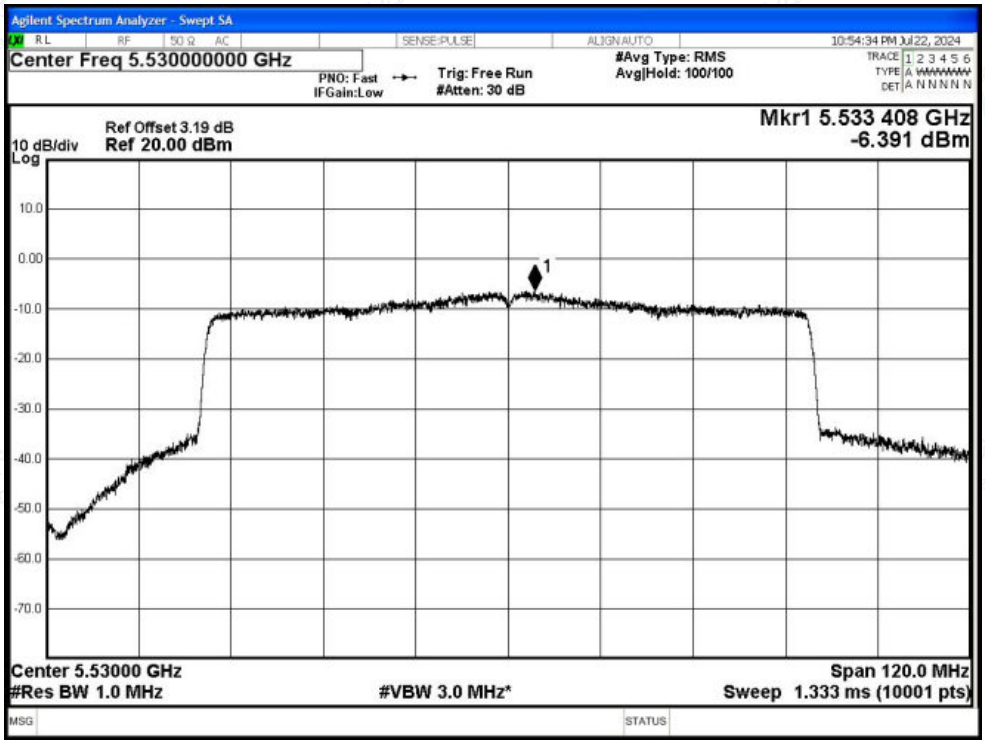

PSD NVNT ax80 5610MHz Ant2

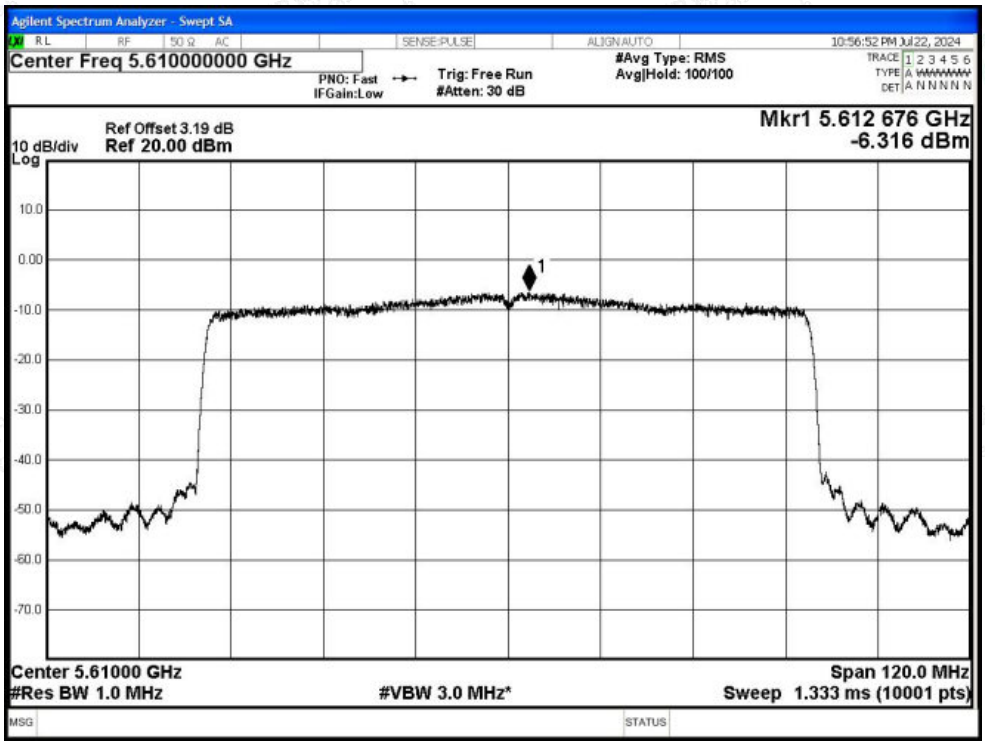

PSD NVNT ac160 5570MHz Ant2

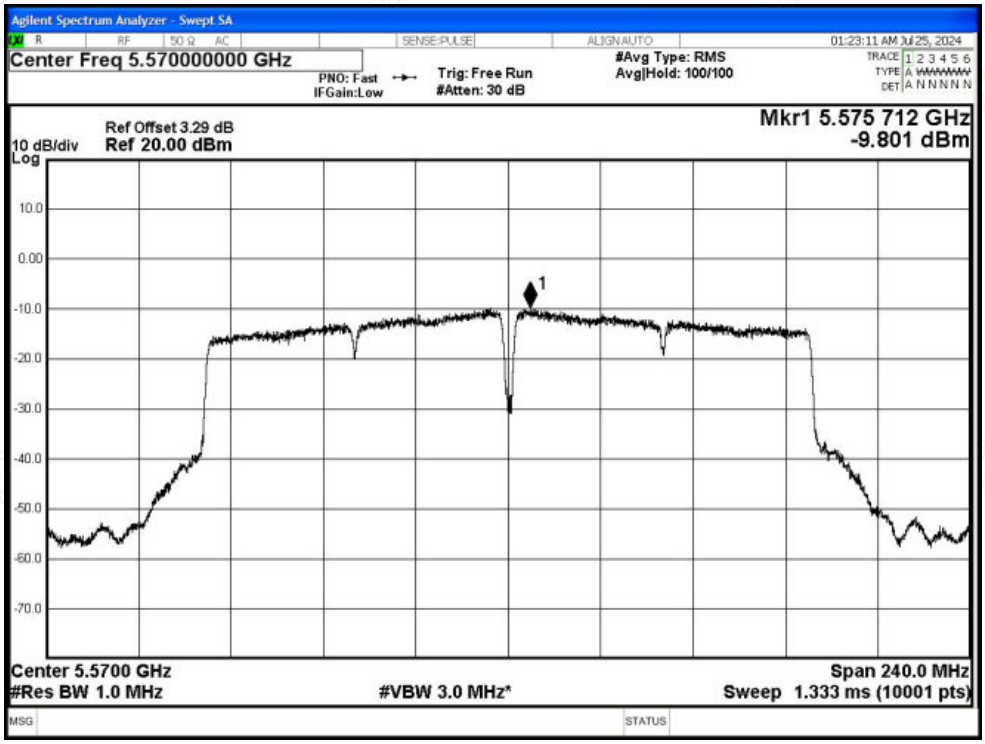

PSD NVNT ax160 5570MHz Ant2

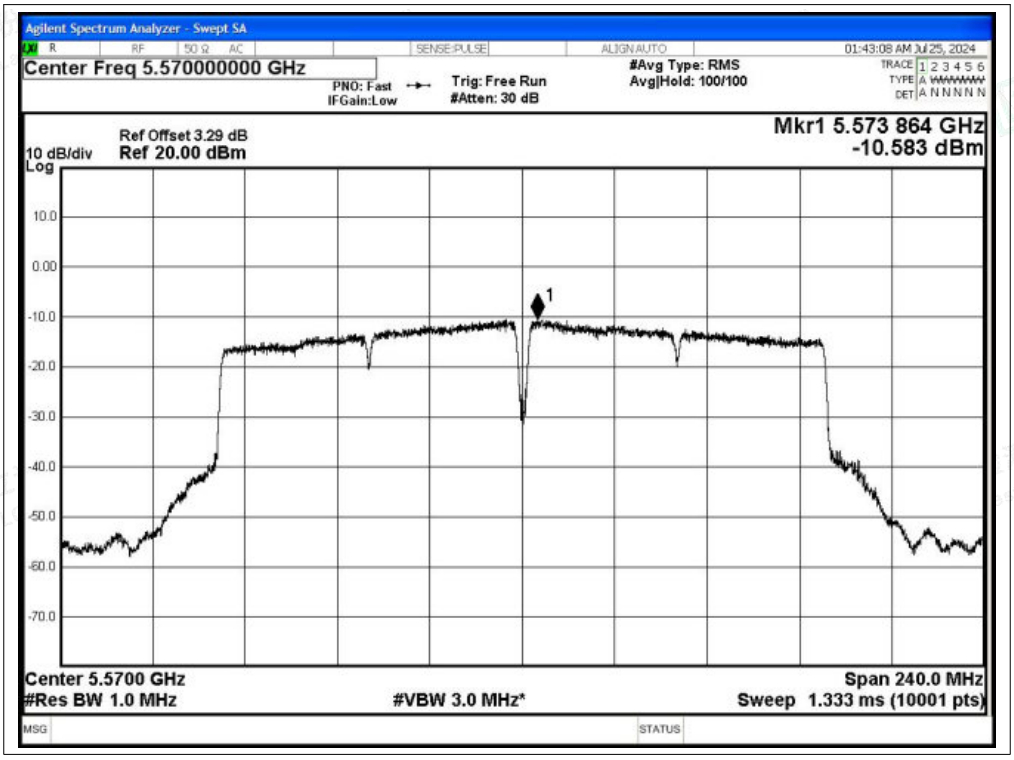
Agilent Spectrum Analyzer - Swept SA
Center Freq 5.570000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 100/100
01:43:08 AM Jul 25, 2024
Ref Offset 3.29 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr1 5.573 864 GHz
-10.583 dBm
Center 5.5700 GHz
#Res BW 1.0 MHz
#VBW 3.0 MHz*
Span 240.0 MHz
Sweep 1.333 ms (10001 pts)

D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant2	5460	-49.5	2	-	47.73	Peak	68.2	Pass
NVNT	a	5500	Ant2	5460	-56.35	2	0.22	41.1	Average	54	Pass
NVNT	a	5500	Ant2	5460.4	-45.78	2	-	51.45	Peak	68.2	Pass
NVNT	a	5500	Ant2	5469.8	-55.68	2	0.22	41.77	Average	54	Pass
NVNT	a	5500	Ant2	5470	-48.26	2	-	48.97	Peak	68.2	Pass
NVNT	a	5500	Ant2	5470	-56.44	2	0.22	41.01	Average	54	Pass
NVNT	a	5700	Ant2	5725	-48.09	2	-	49.14	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725	-55.77	2	0.22	41.68	Average	54	Pass
NVNT	a	5700	Ant2	5729.4	-45.2	2	-	52.03	Peak	68.2	Pass
NVNT	a	5700	Ant2	5725.2	-55.22	2	0.22	42.23	Average	54	Pass
NVNT	a	5700	Ant2	5735	-46.96	2	-	50.27	Peak	68.2	Pass
NVNT	a	5700	Ant2	5735	-55.72	2	0.22	41.73	Average	54	Pass
NVNT	n20	5500	Ant2	5460	-47.64	2	-	49.59	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5460	-56.38	2	0.23	41.08	Average	54	Pass
NVNT	n20	5500	Ant2	5464.2	-47.55	2	-	49.68	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5468.4	-56.06	2	0.23	41.4	Average	54	Pass
NVNT	n20	5500	Ant2	5470	-48.35	2	-	48.88	Peak	68.2	Pass
NVNT	n20	5500	Ant2	5470	-56.52	2	0.23	40.94	Average	54	Pass
NVNT	n20	5700	Ant2	5725	-48.08	2	-	49.15	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5725	-56.01	2	0.23	41.45	Average	54	Pass
NVNT	n20	5700	Ant2	5734.4	-45.29	2	-	51.94	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5728.2	-55.2	2	0.23	42.26	Average	54	Pass
NVNT	n20	5700	Ant2	5735	-47.9	2	-	49.33	Peak	68.2	Pass
NVNT	n20	5700	Ant2	5735	-56.43	2	0.23	41.03	Average	54	Pass
NVNT	n40	5510	Ant2	5460	-47.78	2	-	49.45	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5460	-56.94	2	0.36	40.65	Average	54	Pass
NVNT	n40	5510	Ant2	5463.2	-45.86	2	-	51.37	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5465.8	-55.39	2	0.36	42.2	Average	54	Pass
NVNT	n40	5510	Ant2	5470	-47.12	2	-	50.11	Peak	68.2	Pass
NVNT	n40	5510	Ant2	5470	-56.26	2	0.36	41.33	Average	54	Pass
NVNT	n40	5670	Ant2	5725	-48.96	2	-	48.27	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5725	-56.43	2	0.37	41.17	Average	54	Pass
NVNT	n40	5670	Ant2	5726.4	-47.18	2	-	50.05	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5729.4	-56.23	2	0.37	41.37	Average	54	Pass
NVNT	n40	5670	Ant2	5735	-49.71	2	-	47.52	Peak	68.2	Pass
NVNT	n40	5670	Ant2	5735	-57.04	2	0.37	40.56	Average	54	Pass
NVNT	ac20	5500	Ant2	5460	-46.96	2	-	50.27	Peak	68.2	Pass

NVNT	ac20	5500	Ant2	5460	-56.77	2	0.58	41.04	Average	54	Pass
NVNT	ac20	5500	Ant2	5465.6	-45.7	2	-	51.53	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5464	-55.48	2	0.58	42.33	Average	54	Pass
NVNT	ac20	5500	Ant2	5470	-47.91	2	-	49.32	Peak	68.2	Pass
NVNT	ac20	5500	Ant2	5470	-55.88	2	0.58	41.93	Average	54	Pass
NVNT	ac20	5700	Ant2	5725	-47.4	2	-	49.83	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5725	-55.87	2	0.6	41.96	Average	54	Pass
NVNT	ac20	5700	Ant2	5725.2	-45.66	2	-	51.57	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5729	-55.13	2	0.6	42.7	Average	54	Pass
NVNT	ac20	5700	Ant2	5735	-46.82	2	-	50.41	Peak	68.2	Pass
NVNT	ac20	5700	Ant2	5735	-56.38	2	0.6	41.45	Average	54	Pass
NVNT	ac40	5510	Ant2	5460	-48.92	2	-	48.31	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5460	-56.35	2	0.51	41.39	Average	54	Pass
NVNT	ac40	5510	Ant2	5463.8	-45.01	2	-	52.22	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5468.8	-56.27	2	0.51	41.47	Average	54	Pass
NVNT	ac40	5510	Ant2	5470	-47.89	2	-	49.34	Peak	68.2	Pass
NVNT	ac40	5510	Ant2	5470	-56.27	2	0.51	41.47	Average	54	Pass
NVNT	ac40	5670	Ant2	5725	-48.36	2	-	48.87	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5725	-56.57	2	0.51	41.17	Average	54	Pass
NVNT	ac40	5670	Ant2	5733	-47.49	2	-	49.74	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5728.6	-56.19	2	0.51	41.55	Average	54	Pass
NVNT	ac40	5670	Ant2	5735	-49.37	2	-	47.86	Peak	68.2	Pass
NVNT	ac40	5670	Ant2	5735	-56.32	2	0.51	41.42	Average	54	Pass
NVNT	ac80	5530	Ant2	5460	-49.26	2	-	47.97	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5460	-56.44	2	0.7	41.49	Average	54	Pass
NVNT	ac80	5530	Ant2	5465.2	-43.52	2	-	53.71	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5469.8	-52.56	2	0.7	45.37	Average	54	Pass
NVNT	ac80	5530	Ant2	5470	-45.17	2	-	52.06	Peak	68.2	Pass
NVNT	ac80	5530	Ant2	5470	-53.08	2	0.7	44.85	Average	54	Pass
NVNT	ac80	5610	Ant2	5725	-49.92	2	-	47.31	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5725	-56.8	2	0.7	41.13	Average	54	Pass
NVNT	ac80	5610	Ant2	5727.005	-46.68	2	-	50.55	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5731.515	-56.31	2	0.7	41.62	Average	54	Pass
NVNT	ac80	5610	Ant2	5735	-48.96	2	-	48.27	Peak	68.2	Pass
NVNT	ac80	5610	Ant2	5735	-56.62	2	0.7	41.31	Average	54	Pass
NVNT	ax20	5500	Ant2	5460	-48.45	2	-	48.78	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5460	-56.29	2	0.23	41.17	Average	54	Pass
NVNT	ax20	5500	Ant2	5469.2	-46.96	2	-	50.27	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5461	-56.07	2	0.23	41.39	Average	54	Pass
NVNT	ax20	5500	Ant2	5470	-47.73	2	-	49.5	Peak	68.2	Pass
NVNT	ax20	5500	Ant2	5470	-56.41	2	0.23	41.05	Average	54	Pass
NVNT	ax20	5700	Ant2	5725	-47.33	2	-	49.9	Peak	68.2	Pass

NVNT	ax20	5700	Ant2	5725	-55.94	2	0.33	41.62	Average	54	Pass
NVNT	ax20	5700	Ant2	5730.4	-45	2	-	52.23	Peak	68.2	Pass
NVNT	ax20	5700	Ant2	5726	-55.28	2	0.33	42.28	Average	54	Pass
NVNT	ax20	5700	Ant2	5735	-47.06	2	-	50.17	Peak	68.2	Pass
NVNT	ax20	5700	Ant2	5735	-55.91	2	0.33	41.65	Average	54	Pass
NVNT	ax40	5510	Ant2	5460	-49.22	2	-	48.01	Peak	68.2	Pass
NVNT	ax40	5510	Ant2	5460	-56.83	2	0.55	40.95	Average	54	Pass
NVNT	ax40	5510	Ant2	5466.8	-46.96	2	-	50.27	Peak	68.2	Pass
NVNT	ax40	5510	Ant2	5470	-55.35	2	0.55	42.43	Average	54	Pass
NVNT	ax40	5510	Ant2	5470	-48.1	2	-	49.13	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5725	-47.66	2	-	49.57	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5725	-56.93	2	0.54	40.84	Average	54	Pass
NVNT	ax40	5670	Ant2	5725.2	-47.14	2	-	50.09	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5726.8	-56.14	2	0.54	41.63	Average	54	Pass
NVNT	ax40	5670	Ant2	5735	-48.84	2	-	48.39	Peak	68.2	Pass
NVNT	ax40	5670	Ant2	5735	-56.53	2	0.54	41.24	Average	54	Pass
NVNT	ax80	5530	Ant2	5460	-47.71	2	-	49.52	Peak	68.2	Pass
NVNT	ax80	5530	Ant2	5460	-56.48	2	0.68	41.43	Average	54	Pass
NVNT	ax80	5530	Ant2	5469	-43.1	2	-	54.13	Peak	68.2	Pass
NVNT	ax80	5530	Ant2	5469.8	-52.55	2	0.68	45.36	Average	54	Pass
NVNT	ax80	5530	Ant2	5470	-45.42	2	-	51.81	Peak	68.2	Pass
NVNT	ax80	5530	Ant2	5470	-53.01	2	0.68	44.9	Average	54	Pass
NVNT	ax80	5610	Ant2	5725	-49.97	2	-	47.26	Peak	68.2	Pass
NVNT	ax80	5610	Ant2	5725	-57.22	2	0.68	40.69	Average	54	Pass
NVNT	ax80	5610	Ant2	5729.465	-46.66	2	-	50.57	Peak	68.2	Pass
NVNT	ax80	5610	Ant2	5731.31	-56.32	2	0.68	41.59	Average	54	Pass
NVNT	ax80	5610	Ant2	5735	-49.58	2	-	47.65	Peak	68.2	Pass
NVNT	ax80	5610	Ant2	5735	-57.07	2	0.68	40.84	Average	54	Pass
NVNT	ac160	5570	Ant2	5725	-49.3	2	-	47.93	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5725	-58.68	2	0.56	39.11	Average	54	Pass
NVNT	ac160	5570	Ant2	5730.45	-49.25	2	-	47.98	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5730.125	-56.88	2	0.56	40.91	Average	54	Pass
NVNT	ac160	5570	Ant2	5735	-53.57	2	-	43.66	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5735	-60.21	2	0.56	37.58	Average	54	Pass
NVNT	ac160	5570	Ant2	5460	-52.28	2	-	44.95	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5460	-61	2	0.56	36.79	Average	54	Pass
NVNT	ac160	5570	Ant2	5463.78	-47.62	2	-	49.61	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5464.59	-55.4	2	0.56	42.39	Average	54	Pass
NVNT	ac160	5570	Ant2	5470	-51.21	2	-	46.02	Peak	68.2	Pass
NVNT	ac160	5570	Ant2	5470	-59.58	2	0.56	38.21	Average	54	Pass
NVNT	ax160	5570	Ant2	5725	-51.3	2	-	45.93	Peak	68.2	Pass
NVNT	ax160	5570	Ant2	5725	-59.03	2	0.55	38.75	Average	54	Pass