



**FCC PART 15.247
TEST REPORT**

For

WISEASY TECHNOLOGY PTE. LTD.

70 Anson Road, #18-02, Hub Synergy Point, Singapore 079905

FCC ID: 2BFPOP5LPINPAD

Report Type: Original Report	Product Name: Retail Smart PIN Pad
Report Number: RKSA250411002-00B	
Report Date: 2025-07-11	
Reviewed By:	Bard Liu 
Approved By:	Kyle Xu 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu Province, China Tel: +86-512-86175000 Fax: +86-512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Kunshan). This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, or any agency of the U.S. Government.

TABLE OF CONTENTS

REPORT REVISION HISTORY.....	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EUT EXERCISE SOFTWARE	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	10
TEST EQUIPMENT LIST	11
FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	13
FCC §15.203 – ANTENNA REQUIREMENT.....	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
TEST SYSTEM SETUP.....	16
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	17
TEST RESULTS SUMMARY	17
TEST DATA: SEE APPENDIX	17
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	18
APPLICABLE STANDARD	18
TEST SYSTEM SETUP.....	18
EMI TEST RECEIVER SETUP.....	19
TEST PROCEDURE	19
TEST RESULTS SUMMARY	20
TEST DATA: SEE APPENDIX	20
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATD: SEE APPENDIX	21
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATD: SEE APPENDIX	22
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23

TEST DATD: SEE APPENDIX	23
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATD: SEE APPENDIX	24
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATD: SEE APPENDIX	25
FCC §15.247(d) - BAND EDGES TESTING	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATD: SEE APPENDIX	26
APPENDIX - TEST DATA.....	27
AC LINE CONDUCTED EMISSIONS	27
RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS	30
CHANNEL SEPARATION TEST	49
20 dB BANDWIDTH TEST	51
QUANTITY OF HOPPING CHANNEL TEST	54
TIME OF OCCUPANCY (DWELL TIME)	56
PEAK OUTPUT POWER MEASUREMENT.....	59
BAND EDGES.....	62
EUT PHOTOGRAPHS	65
TEST SETUP PHOTOGRAPHS	66

REPORT REVISION HISTORY

Number of Revisions	Report No.	Version	Issue Date	Description
0	RKSA250411002-00B	R1V1	2025-07-11	Initial Release

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	WISEASY TECHNOLOGY PTE. LTD.
Tested Model	P5L-PINPad
Product Name	Retail Smart PIN Pad
Power Supply	DC 5V powered by adapter
Maximum Output Power:	GFSK: 9.86 dBm $\pi/4$ -DQPSK: 9.04 dBm 8DPSK: 9.34 dBm
RF Function:	Classic BT
Operating Band/Frequency:	2402-2480 MHz
Channel Number:	79
Channel Separation:	1 MHz
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
★Maximum Antenna Gain:	0.69 dBi

Adapter Information:

Model: TPA-418G050200UU01

Input: 100-240V, 50/60Hz, 0.3A

Output: 5.0V, 2.0A 10.0W

Note: The maximum antenna gain was declared by the manufacturer.

All measurement and test data in this report was gathered from production sample serial number: RKSA250411002-1 (Assigned by the BACL (Kunshan). The EUT supplied by the applicant was received on 2025-04-11.)

Objective

This test report is prepared for *WISEASY TECHNOLOGY PTE. LTD.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2020, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	9 kHz~150 kHz	3.8dB
	150 kHz~30 MHz	3.4dB
	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu Province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) is accredited in accordance with ISO/IEC 17025:2017 by NVLAP (Lab code: 600338-0), and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No.: CN5055.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF Test Tool: engineering mode

★Power level: Default

Note: The power level was declared by the applicant.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	Hub	/	/
TP-LINK	Router	TL-XDR3010	12373X0002080

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Power Cable 1	1.0	Hub	Adapter
Power Cable 2	1.0	Adapter	LISN
Data Cable	0.3	Hub	EUT
RJ45	5.0	Hub	Router

Block Diagram of Test Setup


For Conducted Emissions:

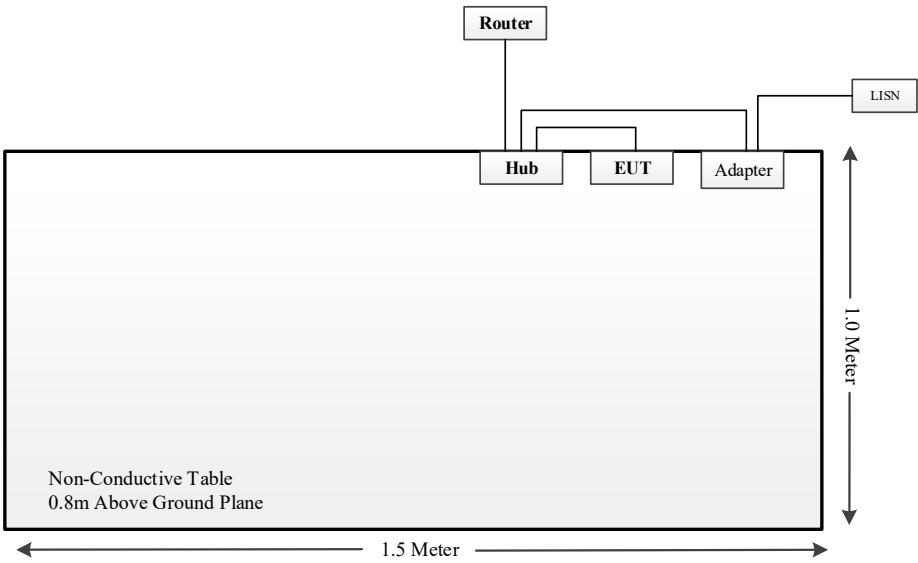

For Radiated Emissions (Below 1GHz):

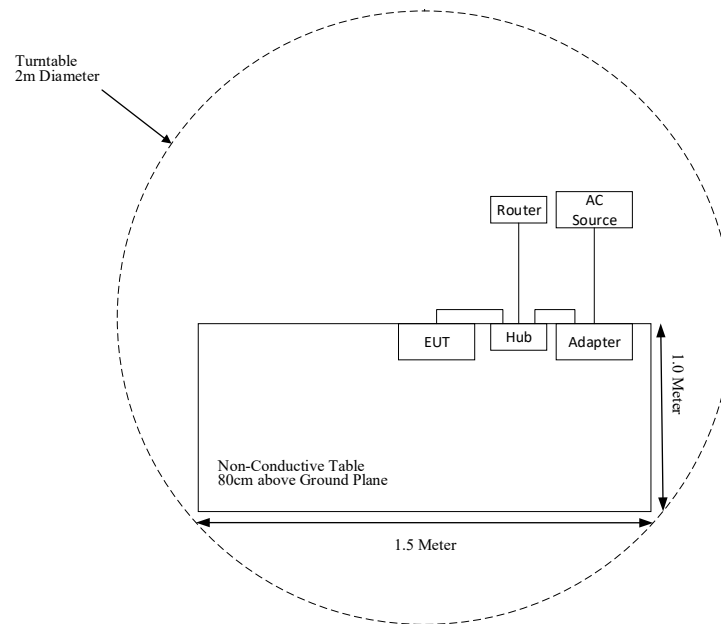

For Radiated Emissions (Above 1GHz):

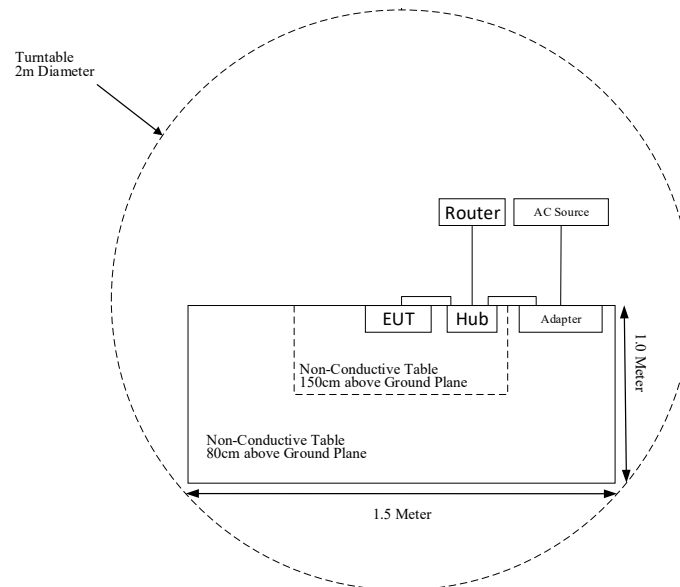

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber #1)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2025-04-09	2026-04-08
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2024-11-08	2027-11-07
Narda	6dB Attenuator	773-6	10690812-2-1	2024-10-29	2027-10-28
BACL	Active Loop Antenna	1313-1A	4041511	2024-11-22	2027-11-21
Sonoma Instrument	Pre-amplifier	310N	171205	2025-04-09	2026-04-08
Rohde & Schwarz	Auto Test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-9	009	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-10	010	2025-04-09	2026-04-08
Radiated Emission Test (Chamber #2)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207/040	2025-04-09	2026-04-08
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2024-12-02	2025-12-01
ETS-LINDGREN	Horn Antenna	3116	2516	2024-12-12	2027-12-11
A.H.Systems, inc	Amplifier	PAM-0118P	512	2025-04-09	2026-04-08
SELECTOR	Amplifier	EM18G40G	060726	2025-04-09	2026-04-08
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2024-08-05	2025-08-04
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-11	011	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-12	012	2025-04-09	2026-04-08
MICRO-COAX	Coaxial Cable	Cable-13	013	2025-04-09	2026-04-08
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSU26	200103	2025-04-09	2026-04-08
Narda	Attenuator	10dB	010	2025-04-08	2026-04-07
XHFDZ	RG316 Coaxial Cable	SMA-316	XHF-1175	Each time	N/A

Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2024-07-28	2025-07-27
Rohde & Schwarz	LISN	ENV216	101115	2025-04-08	2026-04-07
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	100552	2025-04-08	2026-04-07
MICRO-COAX	Coaxial Cable	Cable-15	015	2025-04-08	2026-04-07

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power★		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)	MPE ratio
		(dBi)	(numeric)	(dBm)	(mW)				
2.4G Wi-Fi	2412-2462	0.69	1.17	19.5	89.13	20	0.0207	1.00	0.0207
BLE	2402-2480	0.69	1.17	7.0	5.01	20	0.0012	1.00	0.0012
BT	2402-2480	0.69	1.17	10	10	20	0.0023	1.00	0.0023
5G Wi-Fi	5150-5250	0.96	1.25	17.0	50.12	20	0.0125	1.00	0.0125
	5725-5850	1.11	1.29	16.0	39.81	20	0.0102	1.00	0.0102
NFC	13.56	0	1.00	-20.5	0.0089	20	0.000002	0.98	0.000002

1. For the above tune up power were declared by the manufacturer.
2. For NFC, the power of EUT: E Field@3m is 74.35 dBuV/m = -20.85 dBm EIRP. That equal to antenna gain is 0 dBi and used the EIRP value as conducted power.
3. $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.
4. NFC and 2.4G Wi-Fi/5G WIFI/BT/BLE can transmit simultaneously.

$$\sum_i \frac{S_i}{S_{\text{Limit},i}}$$

$$= S_{\text{NFC}}/S_{\text{limitNFC}} + S_{2.4\text{G Wi-Fi}}/S_{\text{limit2.4G Wi-Fi}}$$

$$= 0.000002 + 0.0207$$

$$= 0.020702$$

$$< 1.0$$

Result: The device meets MPE at distance 20cm.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT have an FPC antenna which permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

Test System Setup

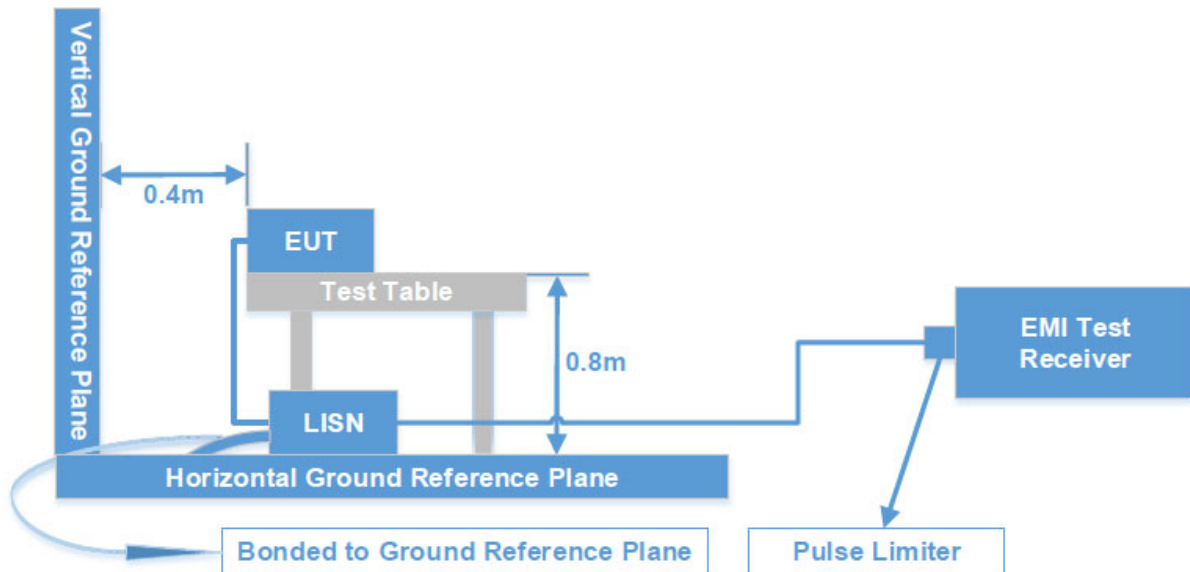

The measurement procedure of EUT setup is according with ANSI C63.10-2020. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	VBW
150 kHz - 30 MHz	9 kHz	30 kHz

Test Procedure

ANSI C63.10-2020 clause 6.2

During the conducted emission test, the EUT or adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

If the maximum peak value of the emissions is below the average limit, the QP value and average value measurement will not need to be performed and only record the maximum peak measured value to meet the requirements.

Level & Over Limit Calculation

The Level is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation from the Meter Reading. The basic equation is as follows:

Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

Level (dBμV) = Read level (dBμV) + Factor (dB)

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

Over Limit (dB) = Level (dBμV) - Limit (dBμV)



Test Results Summary


According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data: See Appendix

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

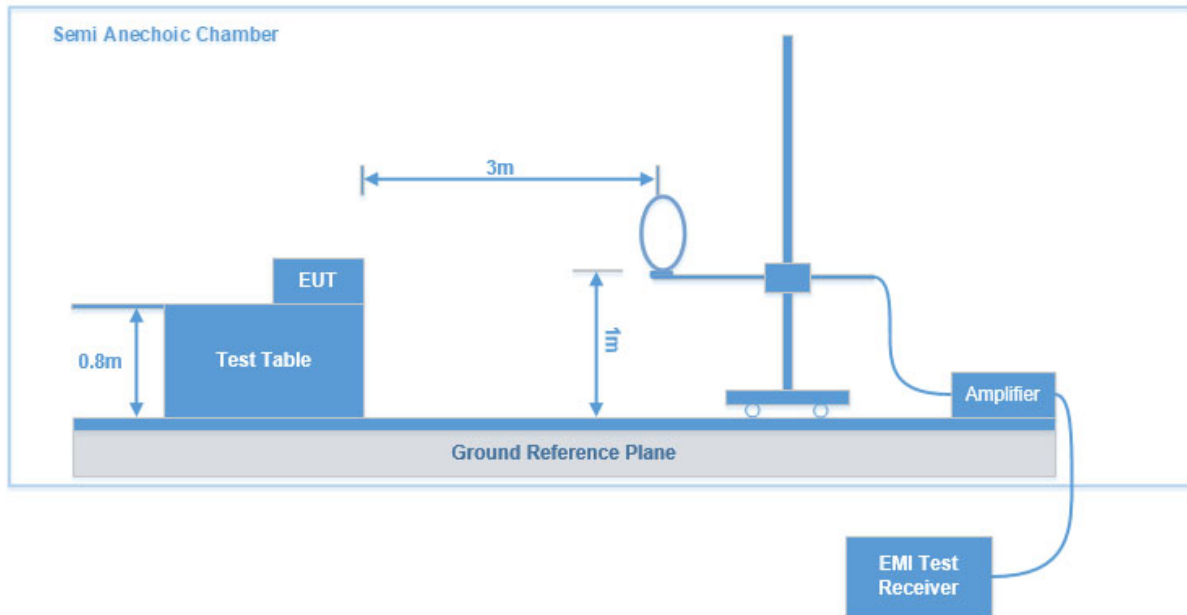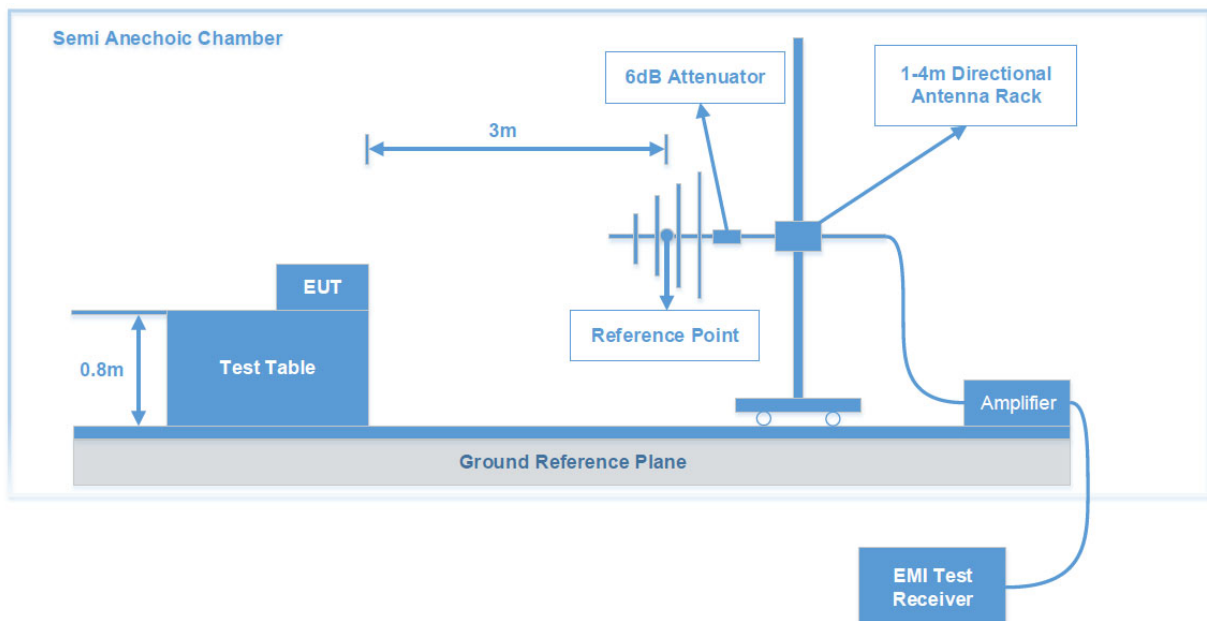Test System Setup**9 kHz - 30 MHz:****30 MHz - 1 GHz:**

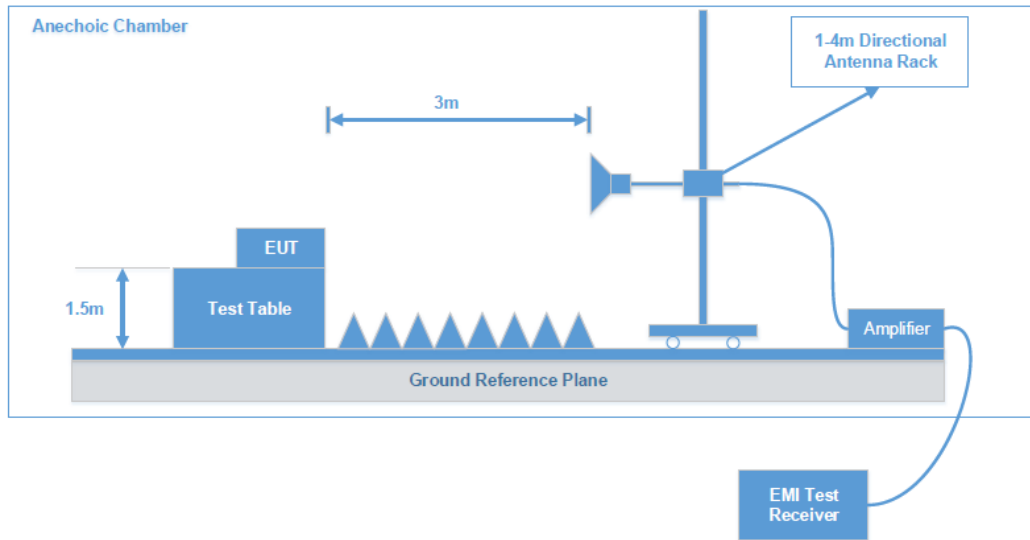Above 1 GHz:

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	VBW	IF B/W	Measurement
9 kHz - 150 kHz	200 Hz	1 kHz	200 Hz	QP/Average
150 kHz - 30 MHz	9 kHz	30 kHz	9 kHz	QP/ Average
30 MHz - 1000 MHz	100 kHz	300 kHz	/	Peak
	/	/	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	/	Average

Test Procedure

According to ANSI C63.10-2020 clause 6.4, 6.5 and 6.6.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

If the measured peak level of the emissions that the measuring receiver reading level plus corrected factor is at least 6 dB below the QP emission limit, there's no need to record the measured QP level of the emissions in the report.

For 9 kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dBμV/m) = Meter Reading (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Note: The QuasiPeak (dBμV/m), MaxPeak (dBμV/m), Average (dBμV/m) which shown in the data table are all Corrected Amplitude.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data: See Appendix

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.


Test Procedure

According to ANSI C63.10-2020 sub-clause 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH


Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

According to ANSI C63.10-2020 sub-clause 6.9.2

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


Test Procedure

According to ANSI C63.10-2020 sub-clause 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**


Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

According to ANSI C63.10-2020 sub-clause 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Zero span, centered on a hopping channel.
- b. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d. Detector function: Peak.
- e. Trace: Max hold.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard


According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

According to ANSI C63.10-2020 sub-clause 7.8.5

a. Use the following spectrum analyzer settings:

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.



Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

FCC §15.247(d) - BAND EDGES TESTING


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2020 sub-clause 7.8.7

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.




Note: Offset (10.5dB) = Attenuator (10dB) + Cable Loss (0.5dB)

Test Datd: See Appendix

APPENDIX - TEST DATA**AC LINE CONDUCTED EMISSIONS****Environmental Conditions & Test Information**


Test Date:	2025-06-07
Temperature:	25.1 °C
Relative Humidity:	45 %
ATM Pressure:	100.7 kPa
Test Result:	Pass
Test Engineer:	Myles Miao

EUT operation mode: Transmitting in GFSK Mode middle channel (maximum output power mode)

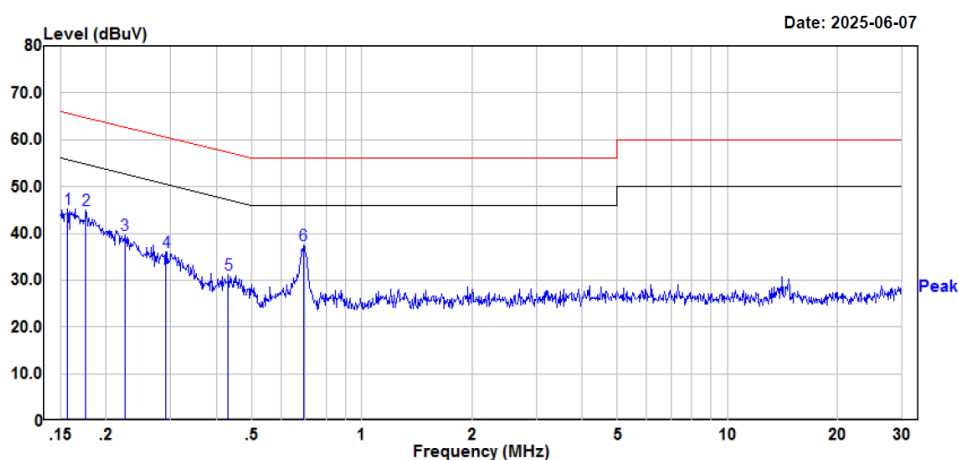

Site : CE
 Condition : limit\FCC PART 15.207
 : DET:Peak
 Project No. : RKSA250411002
 Model : PSL-PINPad
 Phase : L
 Voltage : 120V/60Hz
 Mode : BT
 Test Equipment : ENV216,ESR3
 Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
 Temperature : 25.1℃
 Humidity : 45%
 Atmospheric pressure: 100.7KPa
 Test Engineer : Myles Miao

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.157	24.95	20.23	45.18	65.63	-20.45	Peak
2	0.176	24.84	20.22	45.06	64.68	-19.62	Peak
3	0.225	19.37	20.21	39.58	62.65	-23.07	Peak
4	0.291	15.91	20.22	36.13	60.49	-24.36	Peak
5	0.432	10.83	20.25	31.08	57.22	-26.14	Peak
6	0.693	17.28	20.30	37.58	56.00	-18.42	Peak

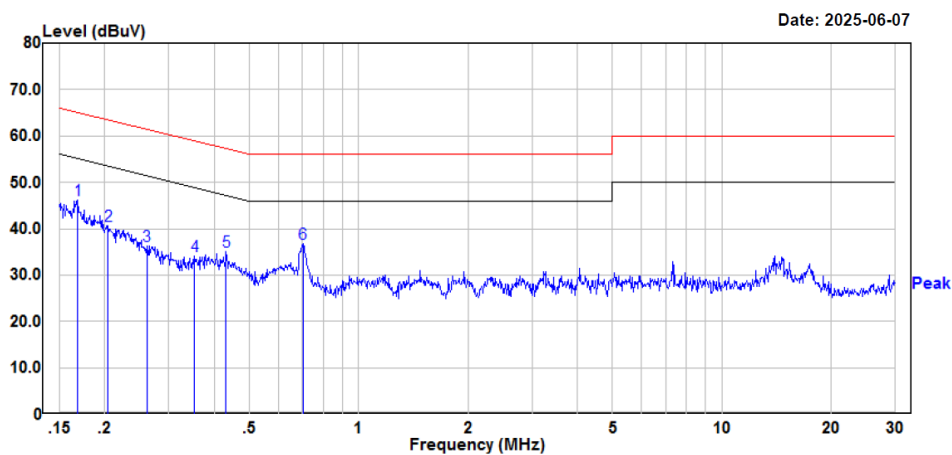

Site : CE
Condition : limit\FCC PART 15.207
Project No. : RKSA250411002
Model : P5L-PINPad
Phase : N
Voltage : 120V/60Hz
Mode : BT
Test Equipment : ENV216,ESR3
Receiver Setting : RBW: 9 kHz,Sweep Time: Auto
Temperature : 25.1℃
Humidity : 45%
Atmospheric pressure: 100.7KPa
Test Engineer : Myles Miao

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.168	25.94	20.22	46.16	65.05	-18.89	Peak
2	0.204	20.52	20.21	40.73	63.43	-22.70	Peak
3	0.261	16.04	20.21	36.25	61.40	-25.15	Peak
4	0.354	13.91	20.24	34.15	58.88	-24.73	Peak
5	0.432	14.90	20.25	35.15	57.22	-22.07	Peak
6	0.703	16.53	20.30	36.83	56.00	-19.17	Peak

RADIATED EMISSIONS & RESTRICTED BANDS EMISSIONS

Environmental Conditions & Test Information


Test Item:	SPURIOUS EMISSIONS			
	9kHz – 30MHz	30MHz - 1GHz	1 GHz - 18 GHz	18 GHz - 25 GHz
Test Date:	2025-06-07	2025-04-27	2025-04-24	2025-06-07
Temperature:	25.1 °C	22.6 °C	25.5 °C	25.1 °C
Relative Humidity:	45 %	45 %	46 %	45 %
ATM Pressure:	100.7 kPa	101.2 kPa	101.3 kPa	100.7 kPa
Test Result:	Pass	Pass	Pass	Pass
Test Engineer:	Jonathan	Jonathan	Destine Hu	Hugh Wu

EUT operation mode: Transmitting


9 kHz-30 MHz: (Transmitting maximum output power GFSK Mode middle channel)

Parallel(worst case)

9kHz-150kHz

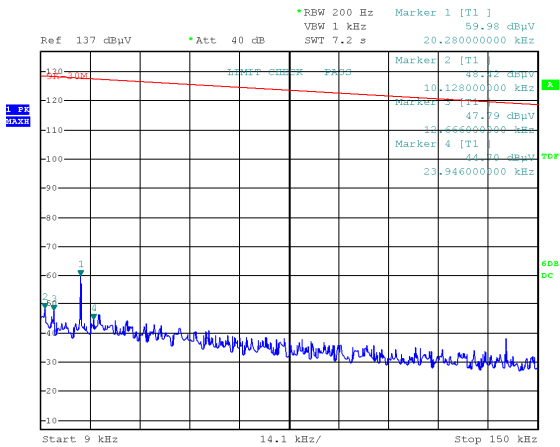

150kHz-30MHz

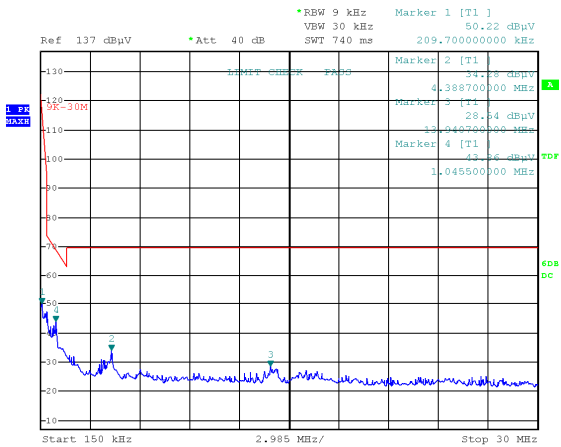

Project No.RKSA250411002
Date: 7.JUN.2025 16:00:43

Tester:Jonathan

Project No.RKSA250411002
Date: 7.JUN.2025 16:04:18

Tester:Jonathan

9kHz-150kHz


Frequency (MHz)	Corrected Amplitude (dB μ V/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dB μ V/m) @3m	Margin (dB)
0.010128	48.42	PK	-0.51	127.49	79.07
0.012666	47.79	PK	-0.52	125.55	77.76
0.020280	59.98	PK	-0.56	121.46	61.48
0.023946	44.70	PK	-0.58	119.43	74.73

150kHz-30MHz

Frequency (MHz)	Corrected Amplitude (dB μ V/m) @3m	Detector PK/QP/Ave.	Corrected Factor (dB/m)	Limit (dB μ V/m) @3m	Margin (dB)
0.2097	50.22	PK	-13.87	101.17	50.95
1.0455	43.86	PK	-27.76	127.22	83.36
4.3887	34.28	PK	-31.97	69.54	35.26
13.9407	28.54	PK	-33.11	69.54	41.00

30 MHz - 1 GHz (Transmitting in maximum output power GFSK mode middle channel):**Middle channel: 2441MHz****Common Information**

Project No: RKSA250411002
 EUT Model: P5L PINPad
 Test Mode: Transmitting in BT mode middle channel
 Standard: FCC Part 15.205 & FCC Part 15.209 & FCC Part 15.247
 Test Equipment: ESCI, JB3, 310N
 Receiver Setting: RBW: 100 kHz, VBW: 300 kHz, Sweep Time: Auto
 Temperature: 22.6°C
 Humidity: 45%
 Barometric Pressure: 101.2kPa
 Test Engineer: Jonathan
 Test Date: 2025/4/27

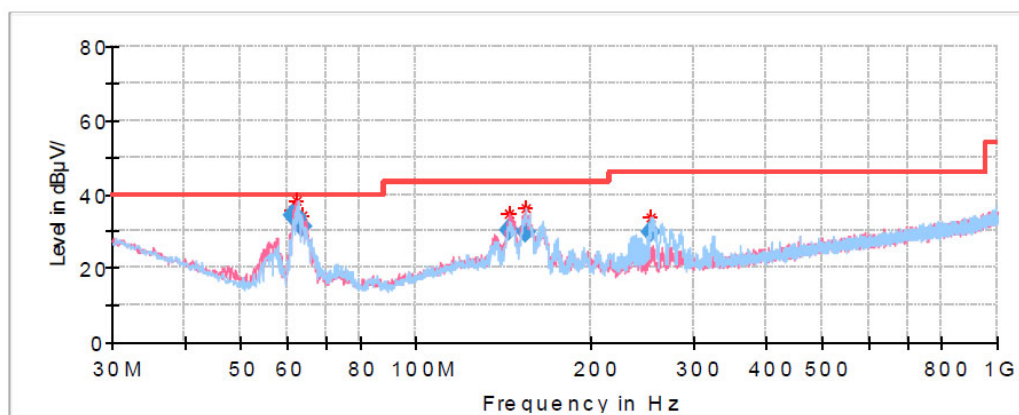
**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
61.403950	34.23	40.00	5.77	V	-16.9
62.134610	33.64	40.00	6.36	V	-16.9
63.585150	31.22	40.00	8.78	V	-16.9
144.491200	30.07	43.50	13.43	V	-11.4
154.162700	29.86	43.50	13.64	H	-11.9
253.702200	29.71	46.00	16.29	H	-12.0

1 GHz - 18 GHz:**GFSK:****Low Channel: 2402 MHz****Common Information**

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5℃
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24


Fundamental Test with
Band Reject Filter

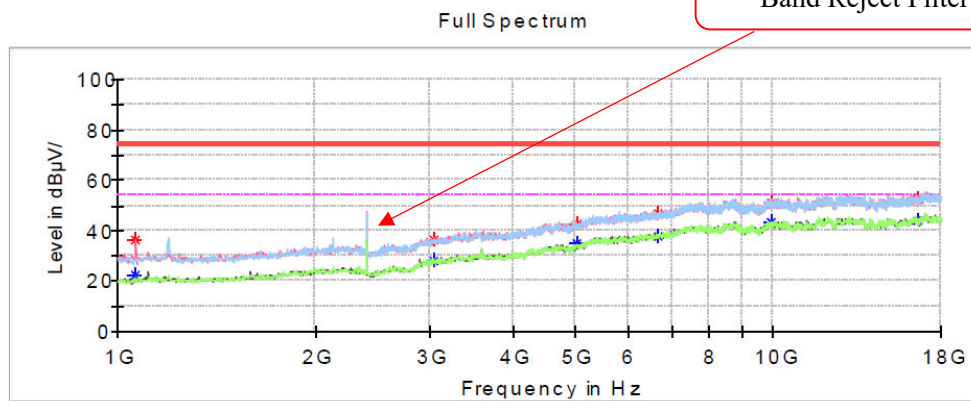**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	22.53	54.00	31.47	V	-15.4
1064.600000	36.45	---	74.00	37.55	V	-15.4
3043.400000	---	28.12	54.00	25.88	V	-8.2
3043.400000	36.67	---	74.00	37.33	V	-8.2
5001.800000	---	34.72	54.00	19.28	V	-2.4
5001.800000	42.31	---	74.00	31.69	V	-2.4
6664.400000	---	38.01	54.00	15.99	H	1.2
6664.400000	46.85	---	74.00	27.15	H	1.2
9904.600000	---	43.05	54.00	10.95	V	6.8
9904.600000	50.99	---	74.00	23.01	V	6.8
16572.000000	---	44.13	54.00	9.87	H	11.0
16572.000000	52.16	---	74.00	21.84	H	11.0

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

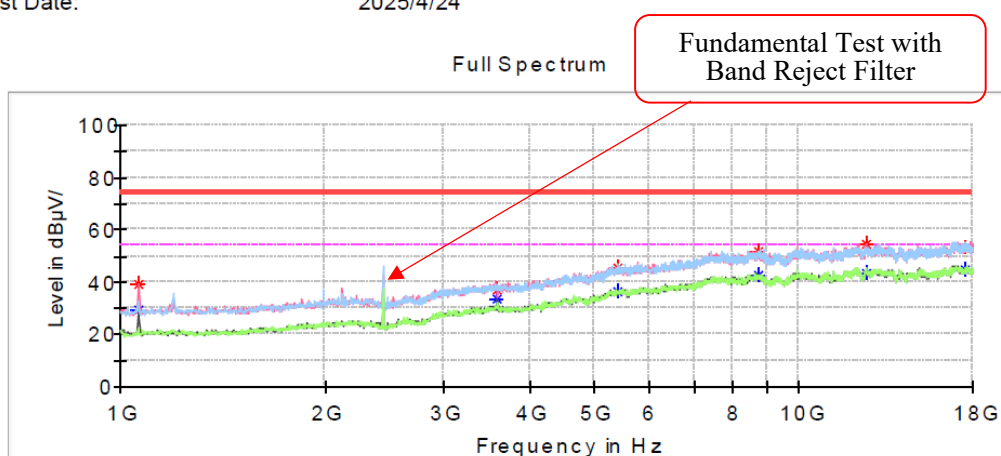**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	29.65	54.00	24.35	V	-15.4
1061.200000	39.38	---	74.00	34.62	V	-15.4
3597.600000	36.85	---	74.00	37.15	H	-6.3
3597.600000	---	33.62	54.00	20.38	H	-6.3
5413.200000	---	36.13	54.00	17.87	H	-0.7
5413.200000	45.41	---	74.00	28.59	H	-0.7
8694.200000	---	42.65	54.00	11.35	V	5.4
8694.200000	51.90	---	74.00	22.10	V	5.4
12539.600000	---	43.63	54.00	10.37	H	9.7
12539.600000	54.39	---	74.00	19.61	H	9.7
17609.000000	---	45.07	54.00	8.93	H	11.6
17609.000000	53.18	---	74.00	20.82	H	11.6

High Channel: 2480 MHz**Common Information**

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

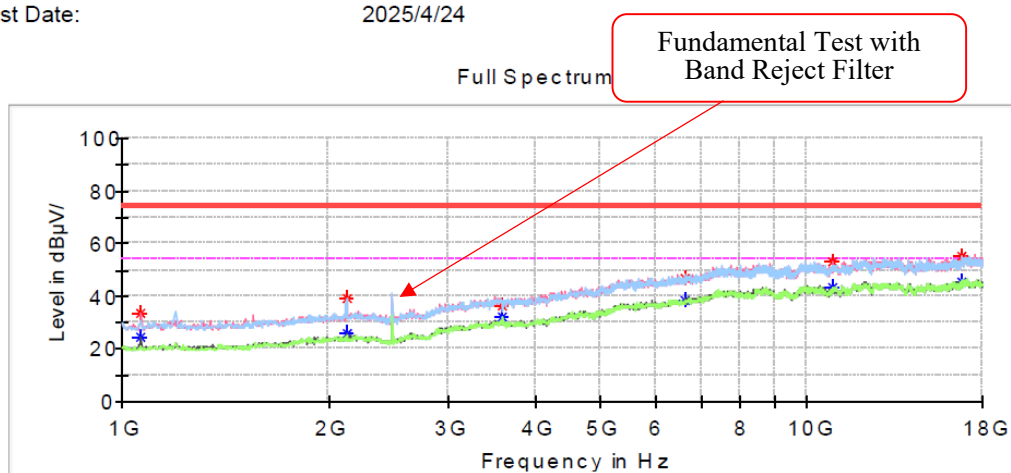**Critical_Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	24.78	54.00	29.22	V	-15.4
1064.600000	33.66	---	74.00	40.34	V	-15.4
2125.400000	---	25.99	54.00	28.01	H	-11.3
2125.400000	38.95	---	74.00	35.05	H	-11.3
3597.600000	36.42	---	74.00	37.58	V	-6.3
3597.600000	---	32.26	54.00	21.74	V	-6.3
6644.000000	---	38.47	54.00	15.53	H	1.1
6644.000000	46.71	---	74.00	27.29	H	1.1
10917.800000	---	43.40	54.00	10.60	V	7.3
10917.800000	53.15	---	74.00	20.85	V	7.3
16772.600000	---	45.17	54.00	8.83	H	11.6
16772.600000	55.12	---	74.00	18.88	H	11.6

$\pi/4$ -DQPSK:

Low Channel: 2402 MHz

Common Information


Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

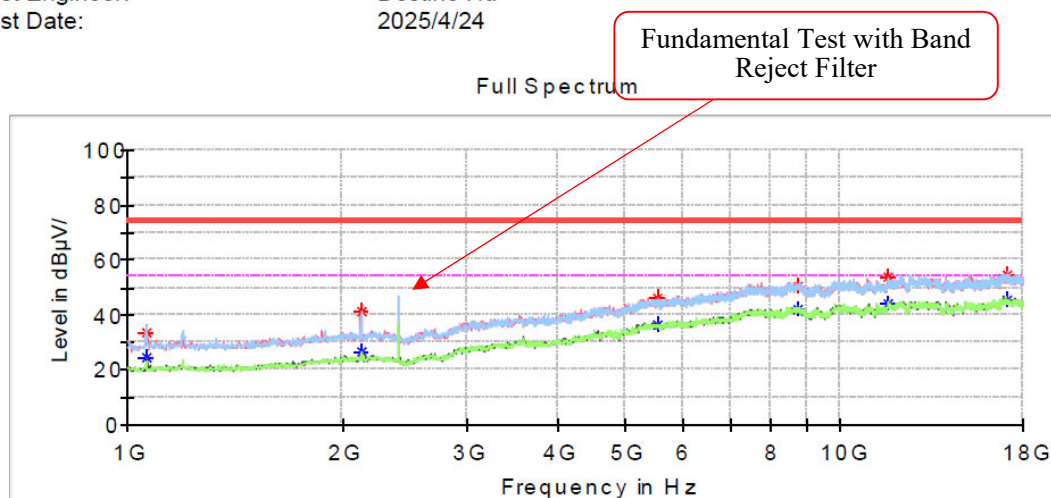**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	24.76	54.00	29.24	V	-15.4
1064.600000	33.73	---	74.00	40.27	V	-15.4
2125.400000	---	26.60	54.00	27.40	H	-11.3
2125.400000	41.32	---	74.00	32.68	H	-11.3
5556.000000	---	36.43	54.00	17.57	V	-0.3
5556.000000	46.16	---	74.00	27.84	V	-0.3
8728.200000	---	42.21	54.00	11.79	H	5.4
8728.200000	50.50	---	74.00	23.50	H	5.4
11693.000000	---	44.25	54.00	9.75	H	8.9
11693.000000	53.82	---	74.00	20.18	H	8.9
17095.600000	---	45.20	54.00	8.80	V	12.1
17095.600000	54.29	---	74.00	19.71	V	12.1

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA250411002
 EUT Model: P5L-PINPPad
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.5°C
 Humidity: 46%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/24

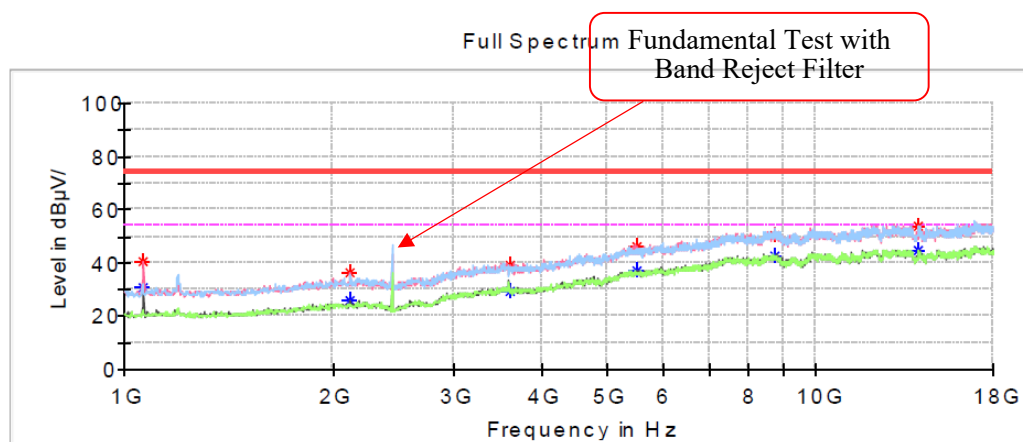**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	30.89	54.00	23.11	V	-15.4
1064.600000	40.81	---	74.00	33.19	V	-15.4
2122.000000	---	25.60	54.00	28.40	V	-11.4
2122.000000	36.56	---	74.00	37.44	V	-11.4
3621.400000	---	29.61	54.00	24.39	H	-6.2
3621.400000	38.90	---	74.00	35.10	H	-6.2
5501.600000	---	36.77	54.00	17.23	V	-0.3
5501.600000	45.95	---	74.00	28.05	V	-0.3
8697.600000	---	42.92	54.00	11.08	H	5.4
8697.600000	50.69	---	74.00	23.31	H	5.4
14018.600000	---	44.48	54.00	9.52	V	9.8
14018.600000	53.75	---	74.00	20.25	V	9.8

High Channel: 2480 MHz**Common Information**


Project No.: RKSA250411002
 EUT Model: P5L-PINPPad
 Test Mode: BT
 Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.5°C
 Humidity: 46%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/24

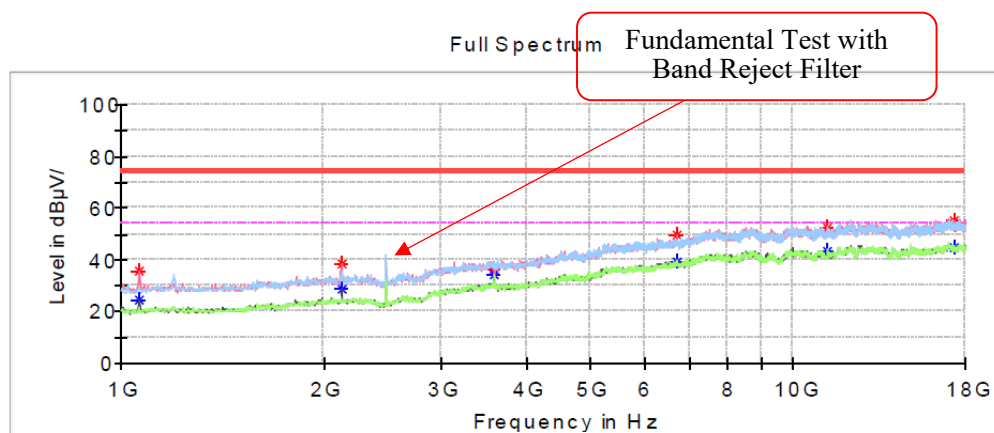**Critical Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	24.67	54.00	29.33	V	-15.4
1064.600000	35.86	---	74.00	38.14	V	-15.4
2128.800000	---	28.92	54.00	25.08	V	-11.3
2128.800000	38.51	---	74.00	35.49	V	-11.3
3597.600000	36.12	---	74.00	37.88	H	-6.3
3597.600000	---	34.29	54.00	19.71	H	-6.3
6701.800000	---	39.46	54.00	14.54	H	1.4
6701.800000	49.68	---	74.00	24.32	H	1.4
11244.200000	---	43.42	54.00	10.58	V	8.1
11244.200000	52.13	---	74.00	21.87	V	8.1
17384.600000	---	44.67	54.00	9.33	V	11.7
17384.600000	54.97	---	74.00	19.03	V	11.7

8DPSK:**Low Channel: 2402 MHz****Common Information**


Project No.: RKSA250411002
 EUT Model: P5L-PINPPad
 Test Mode: BT
 Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
 Test Equipment: ESU40,3115,PAM-0118P
 Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
 Temperature: 25.5°C
 Humidity: 46%
 Atmospheric Pressure: 101.3kPa
 Test Engineer: Destine Hu
 Test Date: 2025/4/24

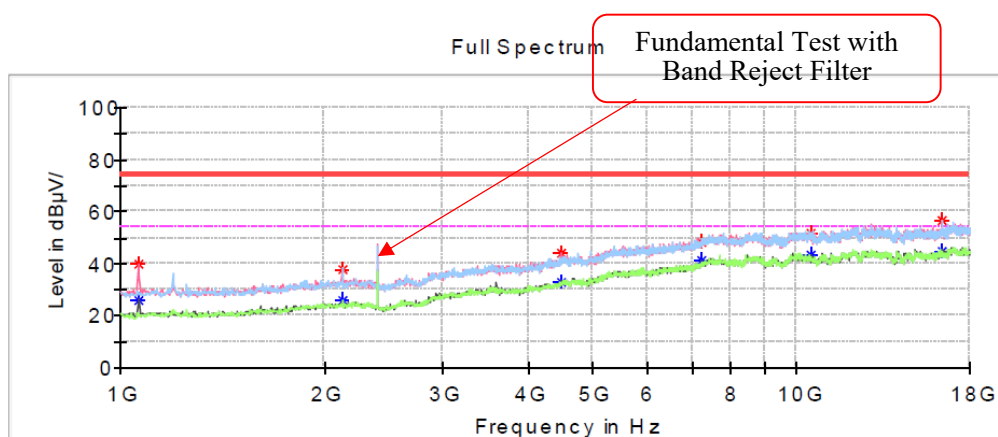**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	25.86	54.00	28.14	V	-15.4
1061.200000	39.56	---	74.00	34.44	V	-15.4
2125.400000	---	25.63	54.00	28.37	V	-11.3
2125.400000	37.49	---	74.00	36.51	V	-11.3
4478.200000	---	32.74	54.00	21.26	H	-4.3
4478.200000	43.75	---	74.00	30.25	H	-4.3
7249.200000	---	41.49	54.00	12.51	V	3.3
7249.200000	48.55	---	74.00	25.45	V	3.3
10475.800000	---	43.09	54.00	10.91	V	7.1
10475.800000	52.00	---	74.00	22.00	V	7.1
16381.600000	---	45.09	54.00	8.91	H	10.5
16381.600000	56.62	---	74.00	17.38	H	10.5

Middle Channel: 2441 MHz**Common Information**


Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

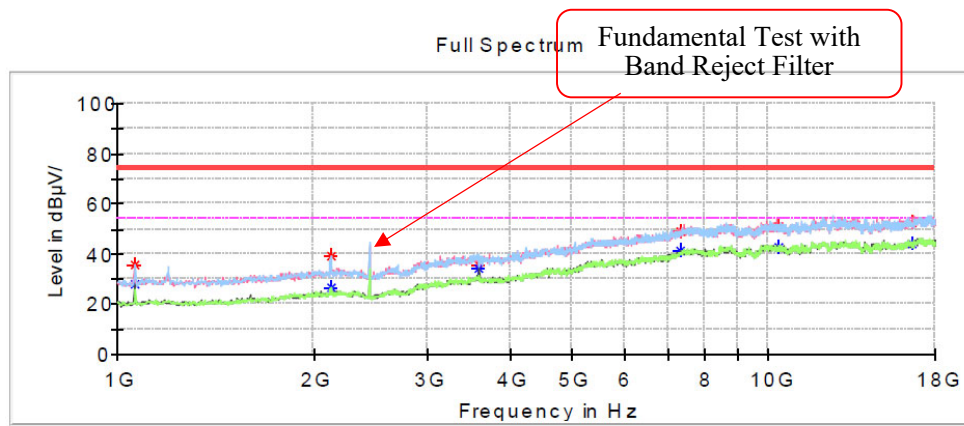**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1061.200000	---	27.76	54.00	26.24	V	-15.4
1061.200000	35.45	---	74.00	38.55	V	-15.4
2125.400000	---	26.91	54.00	27.09	H	-11.3
2125.400000	38.86	---	74.00	35.14	H	-11.3
3597.600000	35.59	---	74.00	38.41	V	-6.3
3597.600000	---	34.08	54.00	19.92	V	-6.3
7341.000000	---	41.21	54.00	12.79	V	3.5
7341.000000	49.29	---	74.00	24.71	V	3.5
10339.800000	---	42.83	54.00	11.17	V	7.1
10339.800000	51.11	---	74.00	22.89	V	7.1
16592.400000	---	44.04	54.00	9.96	H	11.1
16592.400000	52.60	---	74.00	21.40	H	11.1

High Channel: 2480 MHz**Common Information**


Project No.:	RKSA250411002
EUT Model:	P5L-PINPPad
Test Mode:	BT
Standard:	FCC Part 15.247 & FCC Part 15.205 & FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	25.5°C
Humidity:	46%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/24

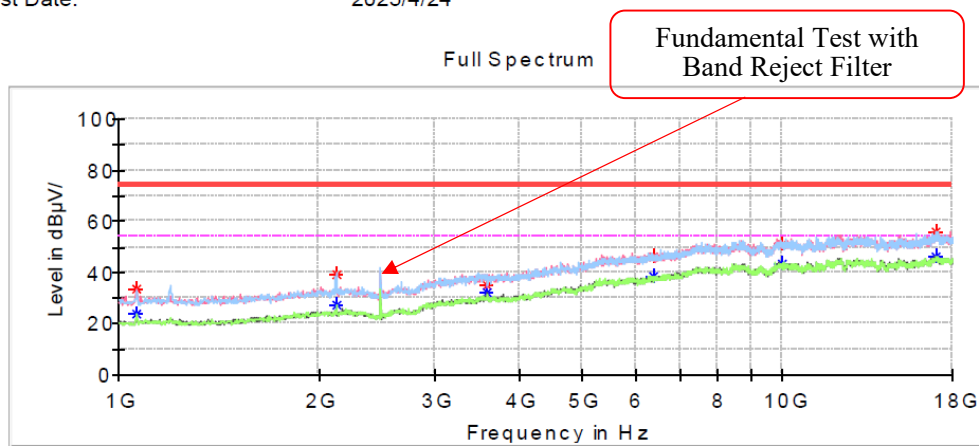**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
1064.600000	---	23.55	54.00	30.45	V	-15.4
1064.600000	33.68	---	74.00	40.32	V	-15.4
2132.200000	---	27.59	54.00	26.41	H	-11.3
2132.200000	39.24	---	74.00	34.76	H	-11.3
3597.600000	35.25	---	74.00	38.75	V	-6.3
3597.600000	---	31.92	54.00	22.08	V	-6.3
6406.000000	---	38.54	54.00	15.46	V	0.4
6406.000000	46.19	---	74.00	27.81	V	0.4
10006.600000	---	43.37	54.00	10.63	H	7.2
10006.600000	51.40	---	74.00	22.60	H	7.2
17027.600000	---	45.89	54.00	8.11	H	12.2
17027.600000	55.83	---	74.00	18.17	H	12.2

Band Edge:**GFSK:****Left Side****Common Information**


Project No.:	RKSA250411002
EUT Model:	P5L-PINPPad
Test Mode:	BT
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	25.5℃
Humidity:	46%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/24

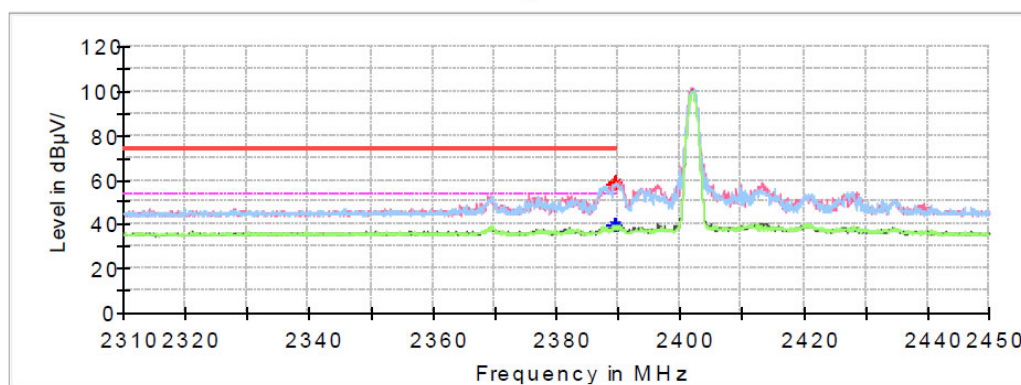Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.352000	58.01	---	74.00	15.99	H	-0.6
2389.352000	---	39.48	54.00	14.52	H	-0.6
2389.744000	58.91	---	74.00	15.09	V	-0.6
2389.744000	---	39.46	54.00	14.54	V	-0.6

Right Side**Common Information**

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

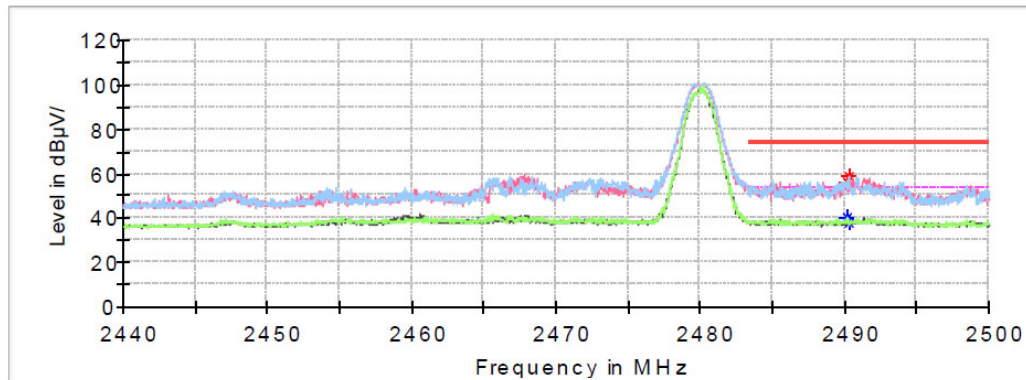Full Spectrum**Critical_Freqs**

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2490.232000	---	40.58	54.00	13.42	H	-0.2
2490.232000	56.31	---	74.00	17.69	H	-0.2
2490.256000	---	38.07	54.00	15.93	V	-0.2
2490.256000	59.07	---	74.00	14.93	V	-0.2


$\pi/4$ -DQPSK:

Left Side

Common Information

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

Full Spectrum

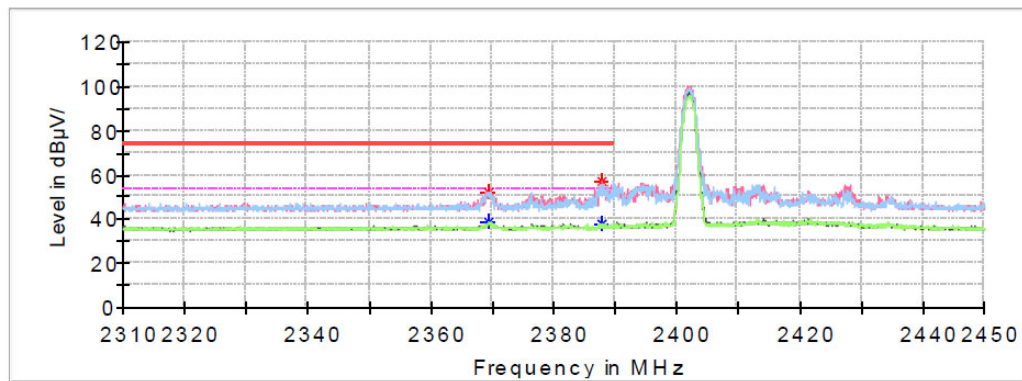

Critical_Freqs


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2369.360000	---	38.76	54.00	15.24	V	-0.6
2369.360000	51.76	---	74.00	22.24	V	-0.6
2387.896000	---	37.49	54.00	16.51	H	-0.6
2387.896000	57.06	---	74.00	16.94	H	-0.6

Right Side

Common Information

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24

Full Spectrum

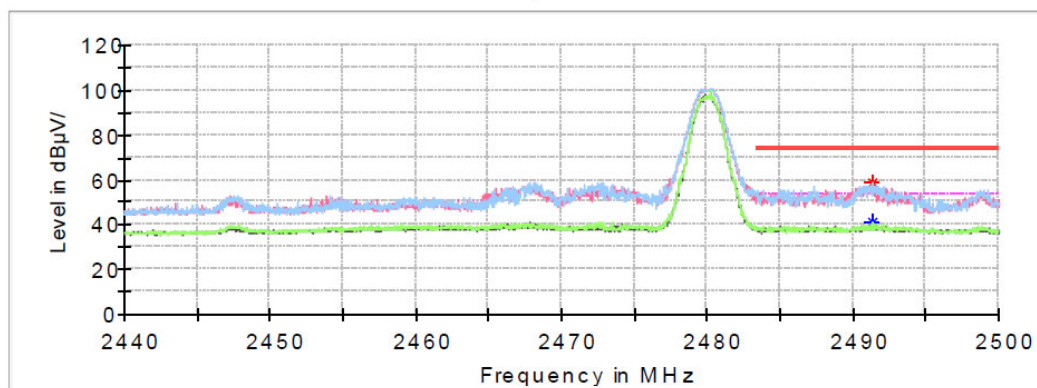


Critical_Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2491.288000	---	40.84	54.00	13.16	H	-0.2
2491.288000	58.37	---	74.00	15.63	H	-0.2

8DPSK:**Left Side****Common Information**

Project No.:	RKSA250411002
EUT Model:	P5L-PINPPad
Test Mode:	BT
Standard:	FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment:	ESU40,3115,PAM-0118P
Receiver Setting:	RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature:	25.5°C
Humidity:	46%
Atmospheric Pressure:	101.3kPa
Test Engineer:	Destine Hu
Test Date:	2025/4/24

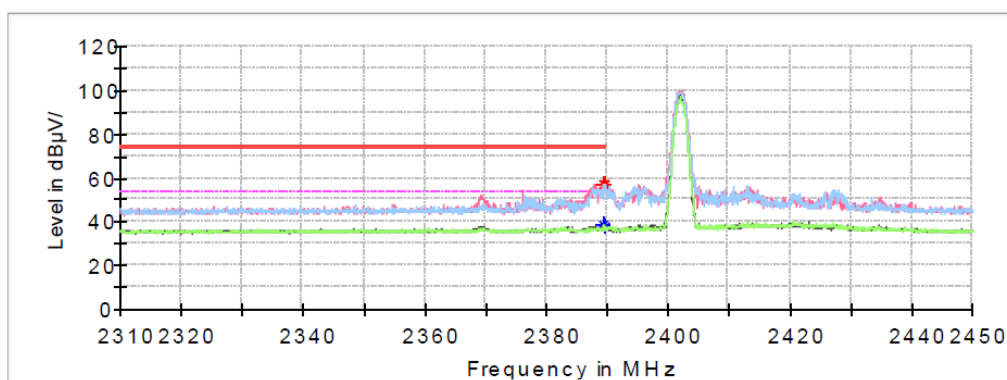Full Spectrum**Critical Freqs**


Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2389.464000	---	38.46	54.00	15.54	H	-0.6
2389.464000	56.71	---	74.00	17.29	H	-0.6
2389.632000	---	38.09	54.00	15.91	H	-0.6
2389.632000	57.32	---	74.00	16.68	H	-0.6

Right Side

Common Information

Project No.: RKSA250411002
EUT Model: P5L-PINPPad
Test Mode: BT
Standard: FCC Part 15.247& FCC Part 15.205& FCC Part 15.209
Test Equipment: ESU40,3115,PAM-0118P
Receiver Setting: RBW: 1MHz, VBW: 3MHz, Sweep Time: Auto
Temperature: 25.5°C
Humidity: 46%
Atmospheric Pressure: 101.3kPa
Test Engineer: Destine Hu
Test Date: 2025/4/24



Full Spectrum

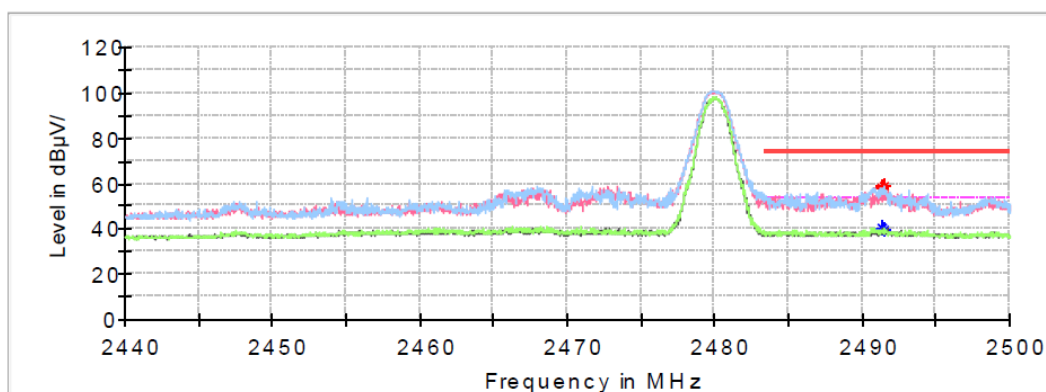

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
2491.336000	---	40.69	54.00	13.31	V	-0.2
2491.336000	57.66	---	74.00	16.34	V	-0.2
2491.456000	---	39.17	54.00	14.83	H	-0.2
2491.456000	58.50	---	74.00	15.50	H	-0.2

18 GHz - 25 GHz (GFSK Mode middle channel):

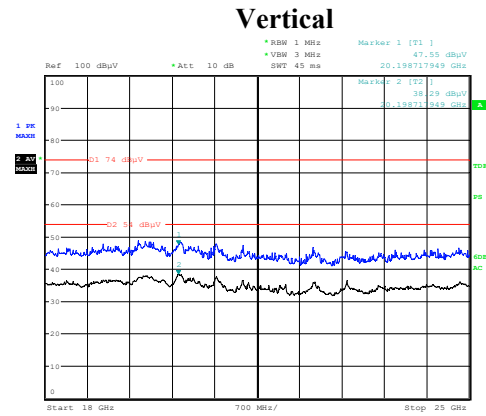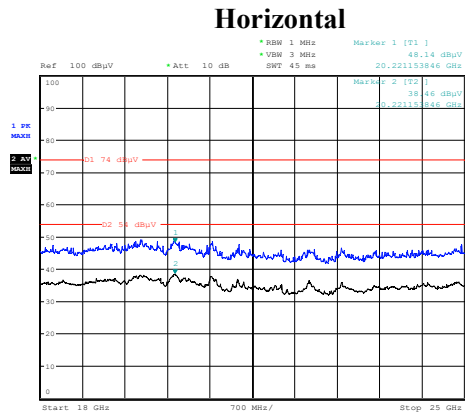

Project No : RKSA250411002
Date: 7.JUN.2025 17:26:22

Tester :Hugh Wu

Project No : RKSA250411002
Date: 7.JUN.2025 18:04:24

Tester :Hugh Wu

Frequency (GHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Pol	Corr. (dB/m)
20.20	---	38.29	54	15.71	V	12.46
20.20	47.55	---	74	26.45	V	12.46
20.22	---	38.46	54	15.54	H	12.48
20.22	48.14	---	74	25.86	H	12.48

Note: The test distance is 3m. The limit is 74dB μ V/m(Peak) and 54dB μ V/m(Average).


CHANNEL SEPARATION TEST**Environmental Conditions & Test Information**

Test Date:	2025-04-27
Temperature:	22.6 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou


EUT operation mode: Transmitting

Mode	Channel	Result (MHz)	Limit (MHz)	Result
GFSK	Low	1.006	0.856	Pass
	Middle	1.003	0.856	Pass
	High	1.004	0.856	Pass


Note: Only GFSK mode result is reported since EDR($\pi/4$ -DQPSK, 8DPSK) has the exact same channel plan.
Limit = 20 dB bandwidth*2/3

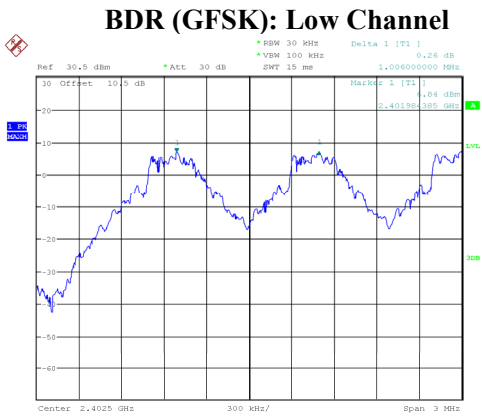

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:17:51

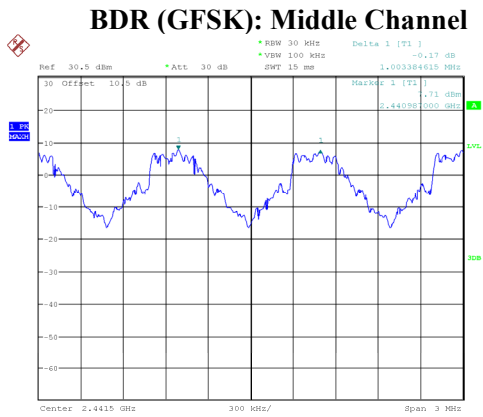

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:24:25

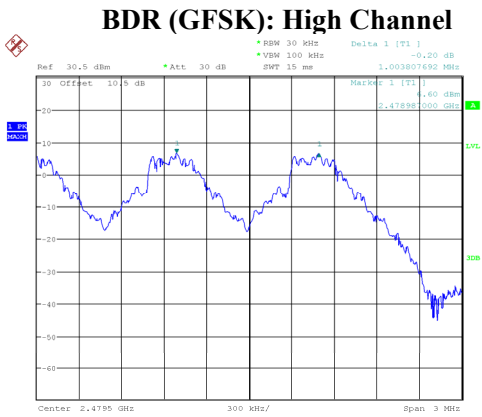

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:32:11


20 dB BANDWIDTH TEST**Environmental Conditions & Test Information**

Test Date:	2025-04-25
Temperature:	25.7 °C
Relative Humidity:	49 %
ATM Pressure:	102.1 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT operation mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.897
	Middle	2441	0.900
	High	2480	0.900
EDR ($\pi/4$-DQPSK)	Low	2402	1.266
	Middle	2441	1.272
	High	2480	1.284
EDR (8DPSK)	Low	2402	1.257
	Middle	2441	1.257
	High	2480	1.251

BDR (GFSK): Low Channel

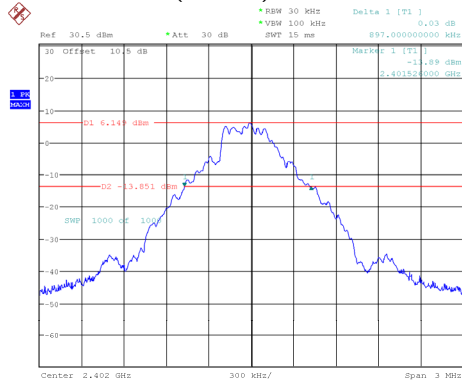


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:54:54

BDR (GFSK): Middle Channel

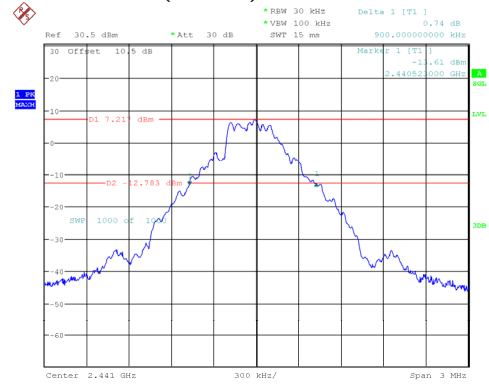


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:07:16

BDR (GFSK): High Channel

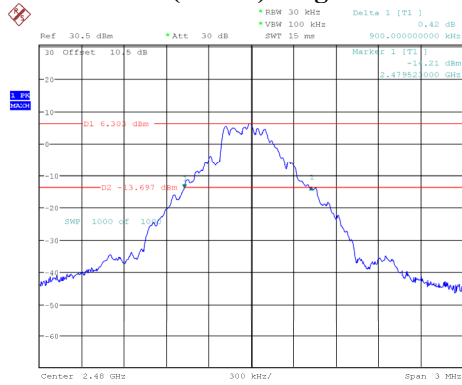


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:16:25

EDR ($\pi/4$ -DQPSK): Low Channel

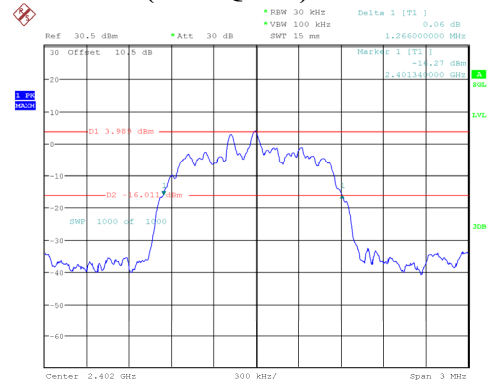


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:27:02

EDR($\pi/4$ -DQPSK): Middle Channel

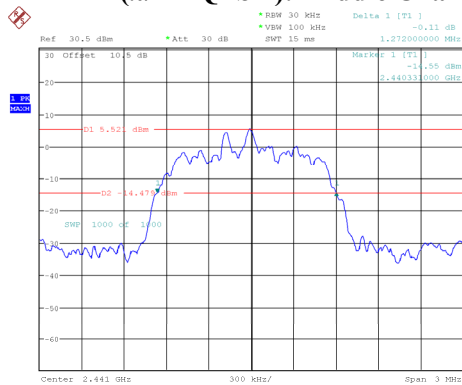


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:35:57

EDR ($\pi/4$ -DQPSK): High Channel

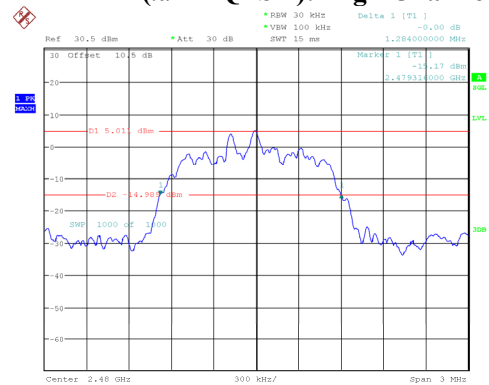


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:43:17

EDR (8DPSK): Low Channel

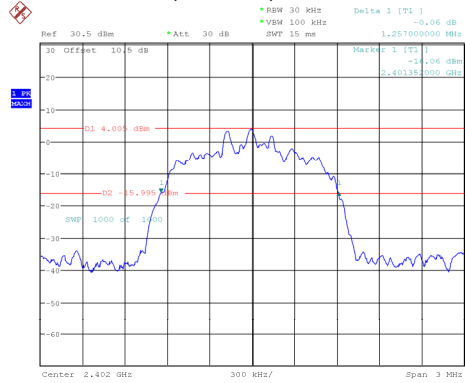


ProjectNo.: RKSA250411002 Tester: Neil Zhou
Date: 25.APR.2025 13:53:31

EDR (8DPSK): Middle Channel

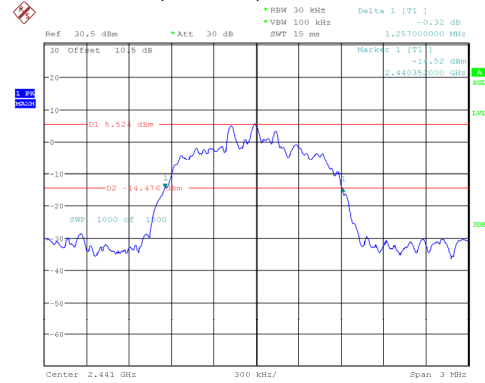

ProjectNo.: RKSA250411002 Tester: Neil Zhou
Date: 25.APR.2025 14:03:19

EDR (8DPSK): High Channel

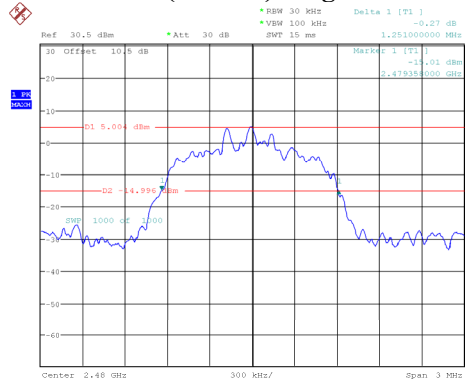

ProjectNo.: RKSA250411002 Tester: Neil Zhou
Date: 25.APR.2025 14:11:54


QUANTITY OF HOPPING CHANNEL TEST**Environmental Conditions & Test Information**

Test Date:	2025-04-27
Temperature:	22.6 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT operation mode: Hopping


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

BDR (GFSK): Number of Hopping Channels

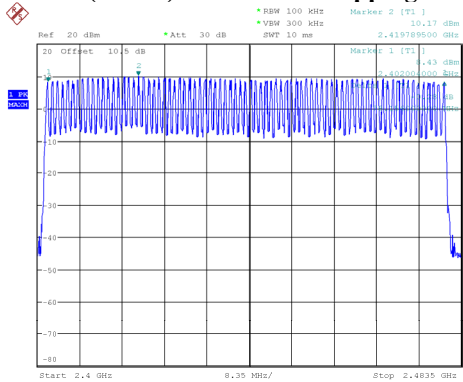


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 16:46:04

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

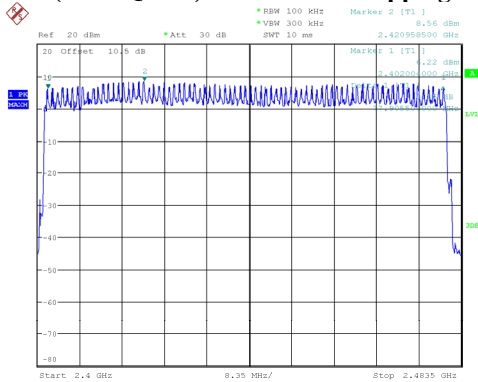

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 16:52:04

EDR (8DPSK): Number of Hopping Channels

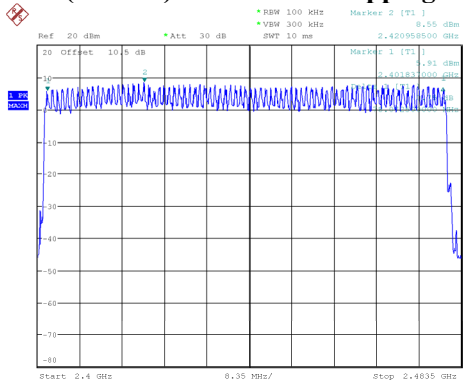

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 16:56:27

TIME OF OCCUPANCY (DWELL TIME)**Environmental Conditions & Test Information**

Test Date:	2025-04-27
Temperature:	22.6 °C
Relative Humidity:	45 %
ATM Pressure:	101.2 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Middle	0.405	0.130	0.4	Pass
	DH3		1.671	0.267	0.4	Pass
	DH5		2.930	0.313	0.4	Pass
EDR ($\pi/4$ -DQPSK)	2DH1		0.413	0.132	0.4	Pass
	2DH3		1.671	0.267	0.4	Pass
	2DH5		2.940	0.314	0.4	Pass
EDR (8DPSK)	3DH1		0.414	0.132	0.4	Pass
	3DH3		1.674	0.268	0.4	Pass
	3DH5		2.945	0.314	0.4	Pass

Note:

DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

2DH1: Dwell time = Pulse time*(1600/2/79)*31.6S


2DH3: Dwell time = Pulse time*(1600/4/79)*31.6S

2DH5: Dwell time = Pulse time*(1600/6/79)*31.6S


3DH1: Dwell time = Pulse time*(1600/2/79)*31.6S

3DH3: Dwell time = Pulse time*(1600/4/79)*31.6S


3DH5: Dwell time = Pulse time*(1600/6/79)*31.6S

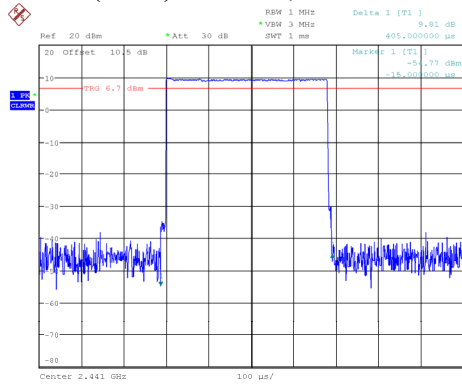BDR (GFSK): Pulse time, Middle Channel, DH1


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:00:20

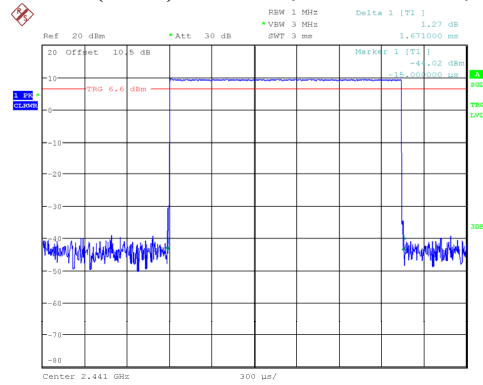BDR (GFSK): Pulse time, Middle Channel, DH3


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:01:08

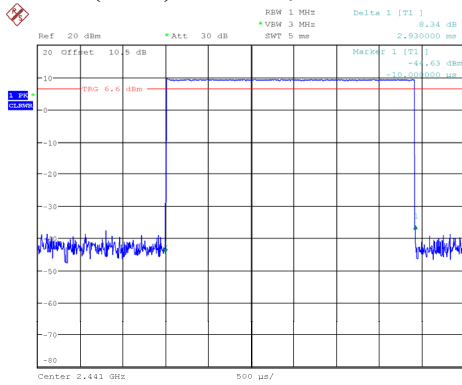BDR (GFSK): Pulse time, Middle Channel, DH5


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:02:06

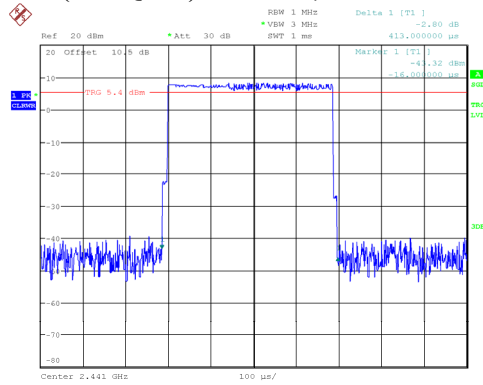EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH1

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:02:53

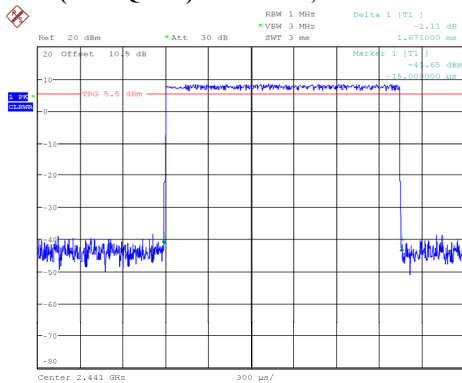
EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH3

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:03:53

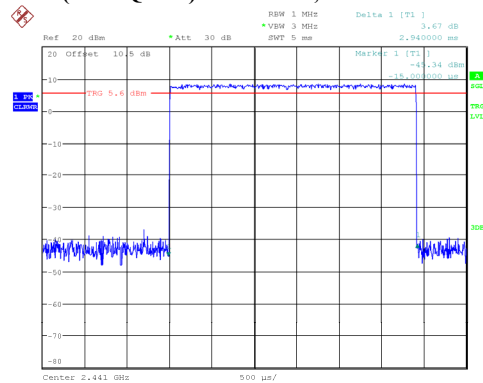EDR ($\pi/4$ -DQPSK): Pulse time, Middle Channel, 2DH5


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:04:48

EDR (8DPSK): Pulse time, Middle Channel, 3DH1

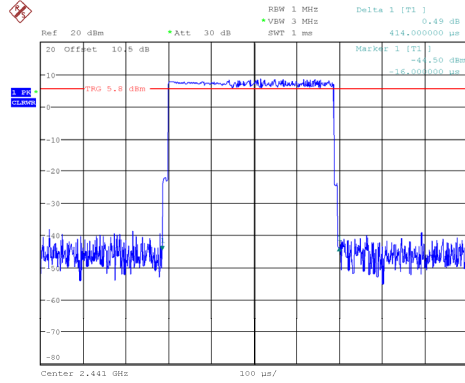


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:06:12

EDR (8DPSK): Pulse time, Middle Channel, 3DH3

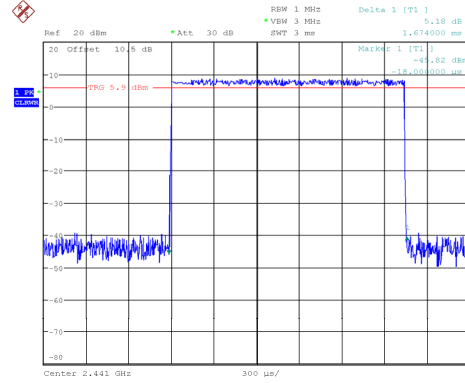

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:07:03

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

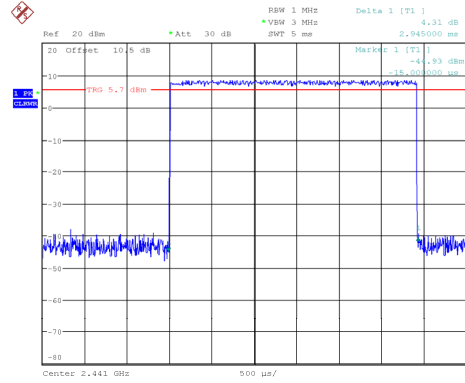

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 27.APR.2025 17:07:44


PEAK OUTPUT POWER MEASUREMENT**Environmental Conditions & Test Information**

Test Date:	2025-04-25
Temperature:	25.7 °C
Relative Humidity:	49 %
ATM Pressure:	102.1 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou

EUT operation mode: Transmitting


Mode	Channel	Frequency (MHz)	Result (dBm)	Limit (dBm)
GFSK	Low	2402	8.80	21
	Middle	2441	9.86	
	High	2480	8.88	
$\pi/4$ DQPSK	Low	2402	7.87	
	Middle	2441	9.04	
	High	2480	8.27	
8DPSK	Low	2402	8.18	
	Middle	2441	9.34	
	High	2480	8.46	

BDR (GFSK): 2402MHz

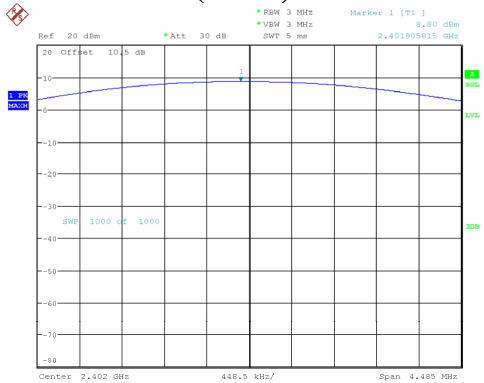


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:04:06

BDR (GFSK): 2441MHz

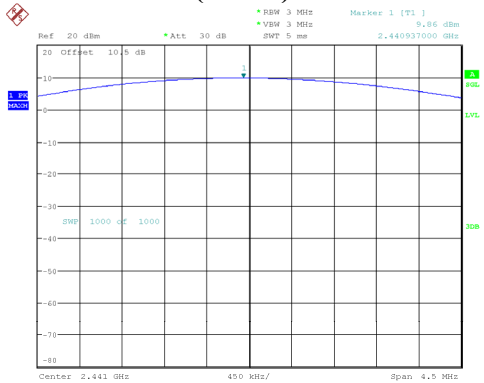


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:15:17

BDR (GFSK): 2480MHz

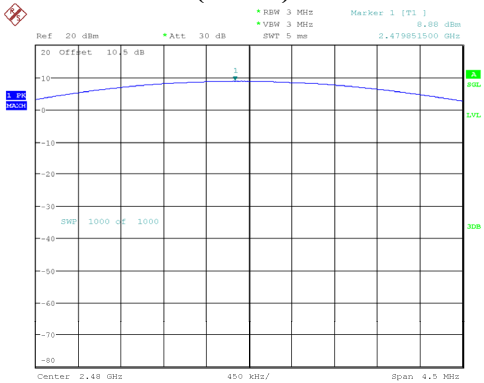


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:25:48

EDR($\pi/4$ -DQPSK): 2402MHz

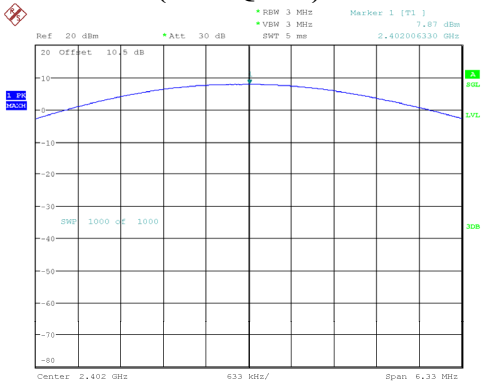


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:34:49

EDR($\pi/4$ -DQPSK): 2441MHz

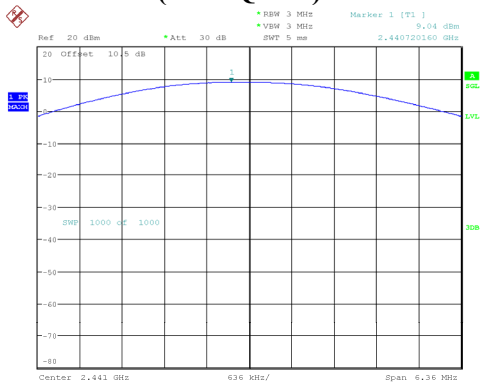


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:42:06

EDR($\pi/4$ -DQPSK): 2480MHz

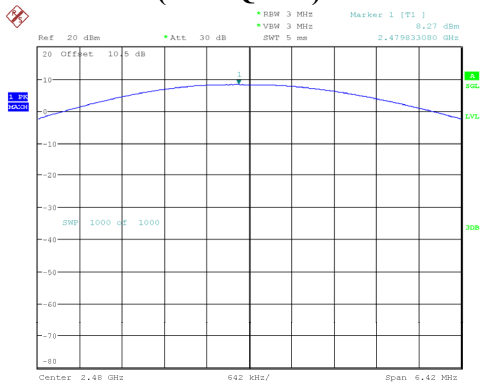


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 13:52:12

EDR(8DPSK): 2402MHz

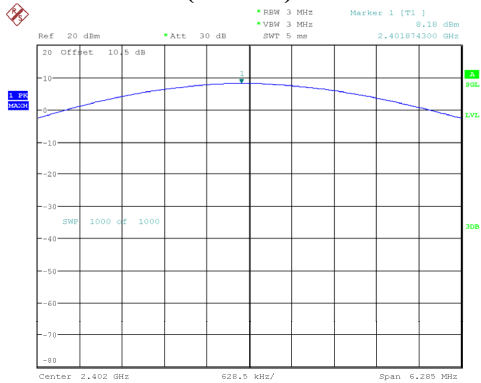


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 14:02:13

EDR(8DPSK):2441MHz

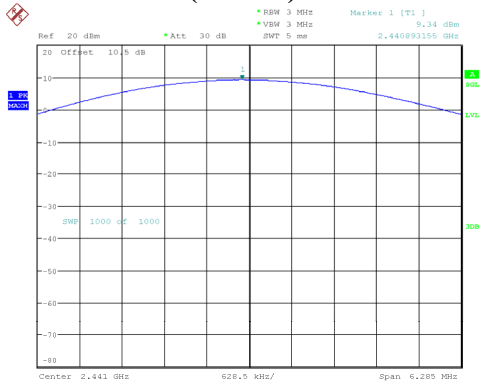

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 14:10:48

EDR(8DPSK): 2480MHz

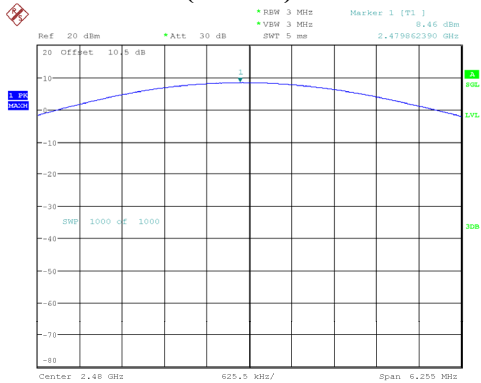

ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 25.APR.2025 14:20:13

BAND EDGES**Environmental Conditions & Test Information**

Test Date:	2025-07-03
Temperature:	24.8 °C
Relative Humidity:	51 %
ATM Pressure:	101.4 kPa
Test Result:	Pass
Test Engineer:	Neil Zhou


EUT operation mode: Transmitting & Hopping

Test Result: Compliant.

Mode	Channel	Frequency (MHz)	Result (dBc)	Limit (dBc)
GFSK	Low	2402	47.63	20
	High	2480	52.33	
$\pi/4$ DQPSK	Low	2402	48.85	
	High	2480	49.27	
8DPSK	Low	2402	50.42	
	High	2480	45.96	
GFSK (Hopping)	Low	2402	40.43	
	High	2480	52.61	
$\pi/4$ DQPSK (Hopping)	Low	2402	51.53	
	High	2480	52.36	
8DPSK (Hopping)	Low	2402	51.77	
	High	2480	52.33	


Band Edge

BDR (GFSK): Left Side

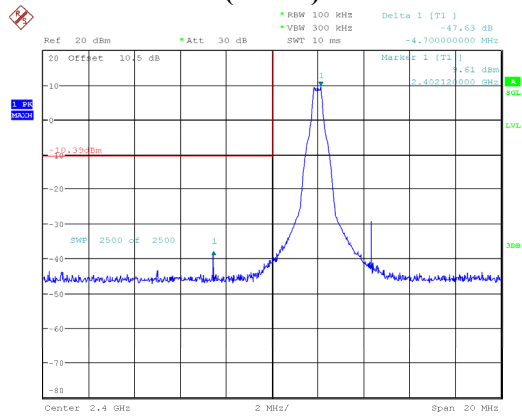


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:24:47

BDR (GFSK): Right Side

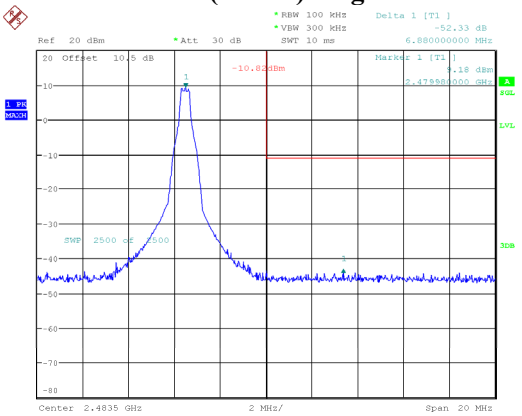


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:27:25

EDR ($\pi/4$ -DQPSK): Left Side

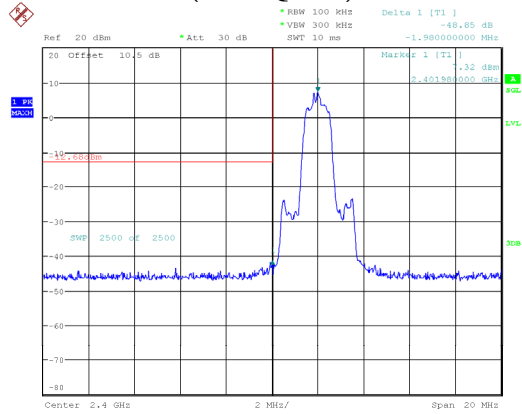


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:35:25

EDR ($\pi/4$ -DQPSK): Right Side

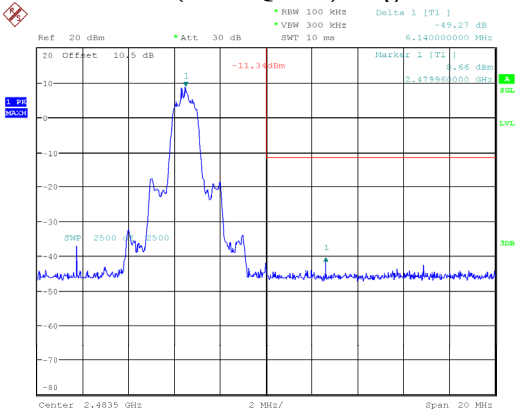


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:38:10

EDR (8DPSK): Left Side

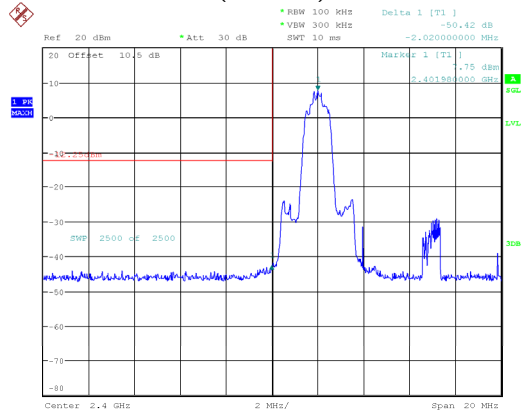


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:46:18

EDR (8DPSK): Right Side

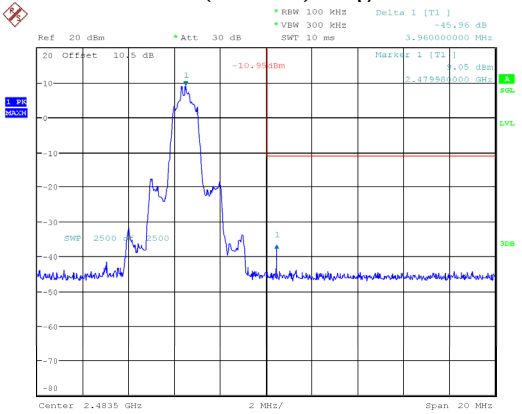


ProjectNo.:RKSA250411002 Tester:Neil Zhou
Date: 3.JUL.2025 19:48:57

BDR (GFSK): Left Side - Hopping

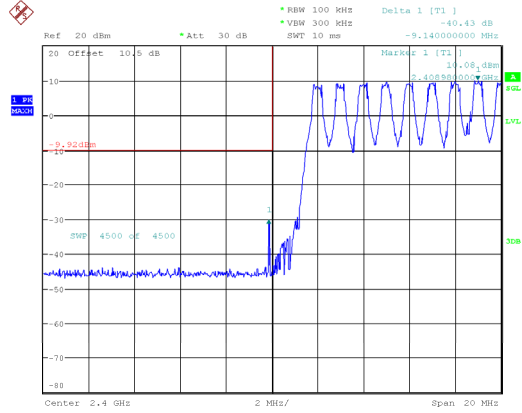


ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:16:44

BDR (GFSK): Right Side - Hopping

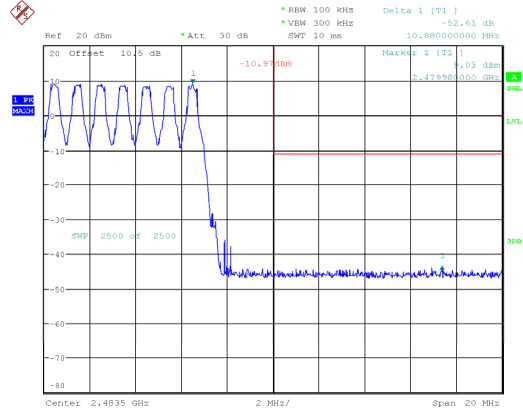


ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:21:50

EDR ($\pi/4$ -DQPSK): Left Side - Hopping

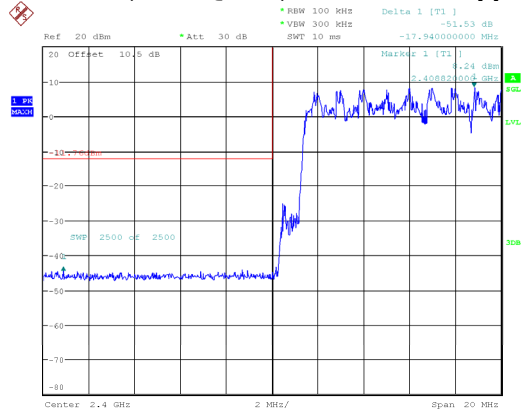


ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:30:11

EDR ($\pi/4$ -DQPSK): Right Side - Hopping

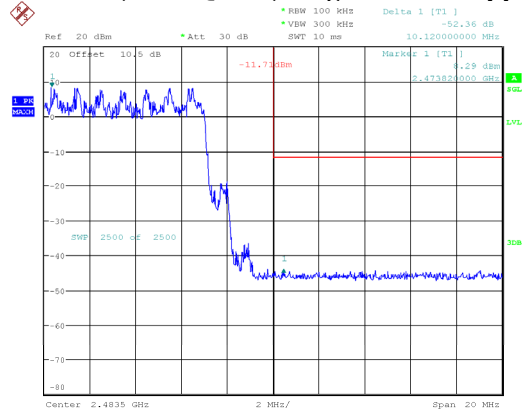


ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:32:29

EDR (8DPSK): Left Side - Hopping

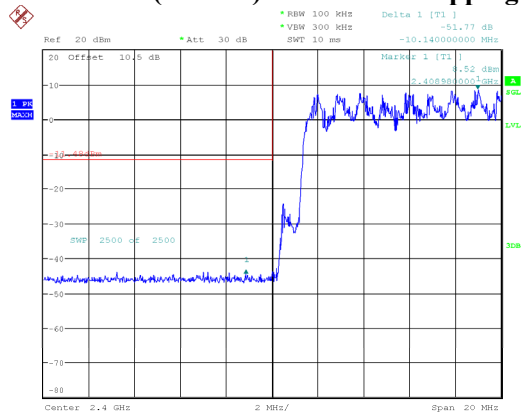

ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:40:59

EDR (8DPSK): Right Side - Hopping

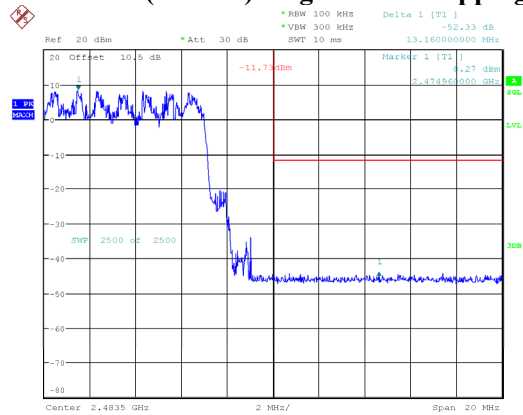

ProjectNo.:RKSA250411002 Tester:Neil Zhou
 Date: 3.JUL.2025 19:43:16

EUT PHOTOGRAPHS

Please refer to the attachment EXHIBIT A - EUT EXTERNAL PHOTOGRAPHS and EXHIBIT B - EUT INTERNAL PHOTOGRAPHS.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment EXHIBIT C - TEST SETUP PHOTOGRAPHS.

Declarations

1. The laboratory is not responsible for the authenticity of any information provided by the applicant. Information from the applicant that may affect test results is marked with “★”.
2. The test data was only valid for the test sample(s).
3. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
4. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
5. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor $k=2$ with the 95.45% confidence interval.

******* END OF REPORT *******