

1 KEYWORDS

- *AN02*
- *2.4 GHz*
- *Inverted F Antenna*

2 INTRODUCTION

The PCB antenna used on the AN02 reference design is described in this application note.

This application note describes the antenna dimensions, the RF performance

and considerations for complying with regulatory limits when using this design.

The antenna design requires no more than 15.2 x 5.7 mm of space and ensures a VSWR ratio of less than 2 across the 2.4 GHz ISM band when connected to a 50 ohm source.

KKM

2.1 Layout and Implementation


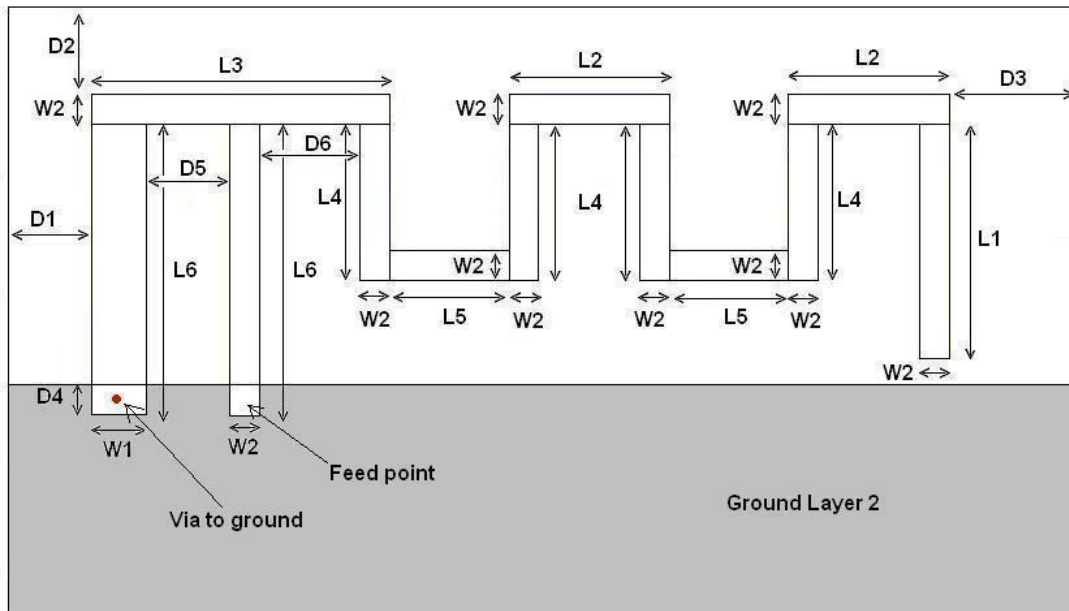


Figure 4: Antenna Dimensions

L1	3.94 mm
L2	2.70 mm
L3	5.00 mm
L4	2.64 mm
L5	2.00 mm
L6	4.90 mm
W1	0.90 mm
W2	0.50 mm
D1	0.50 mm
D2	0.30 mm
D3	0.30 mm
D4	0.50 mm
D5	1.40mm
D6	1.70 mm


Table 1: Antenna Dimensions

3 S Parameter_Return Loss&VSWR - Smith

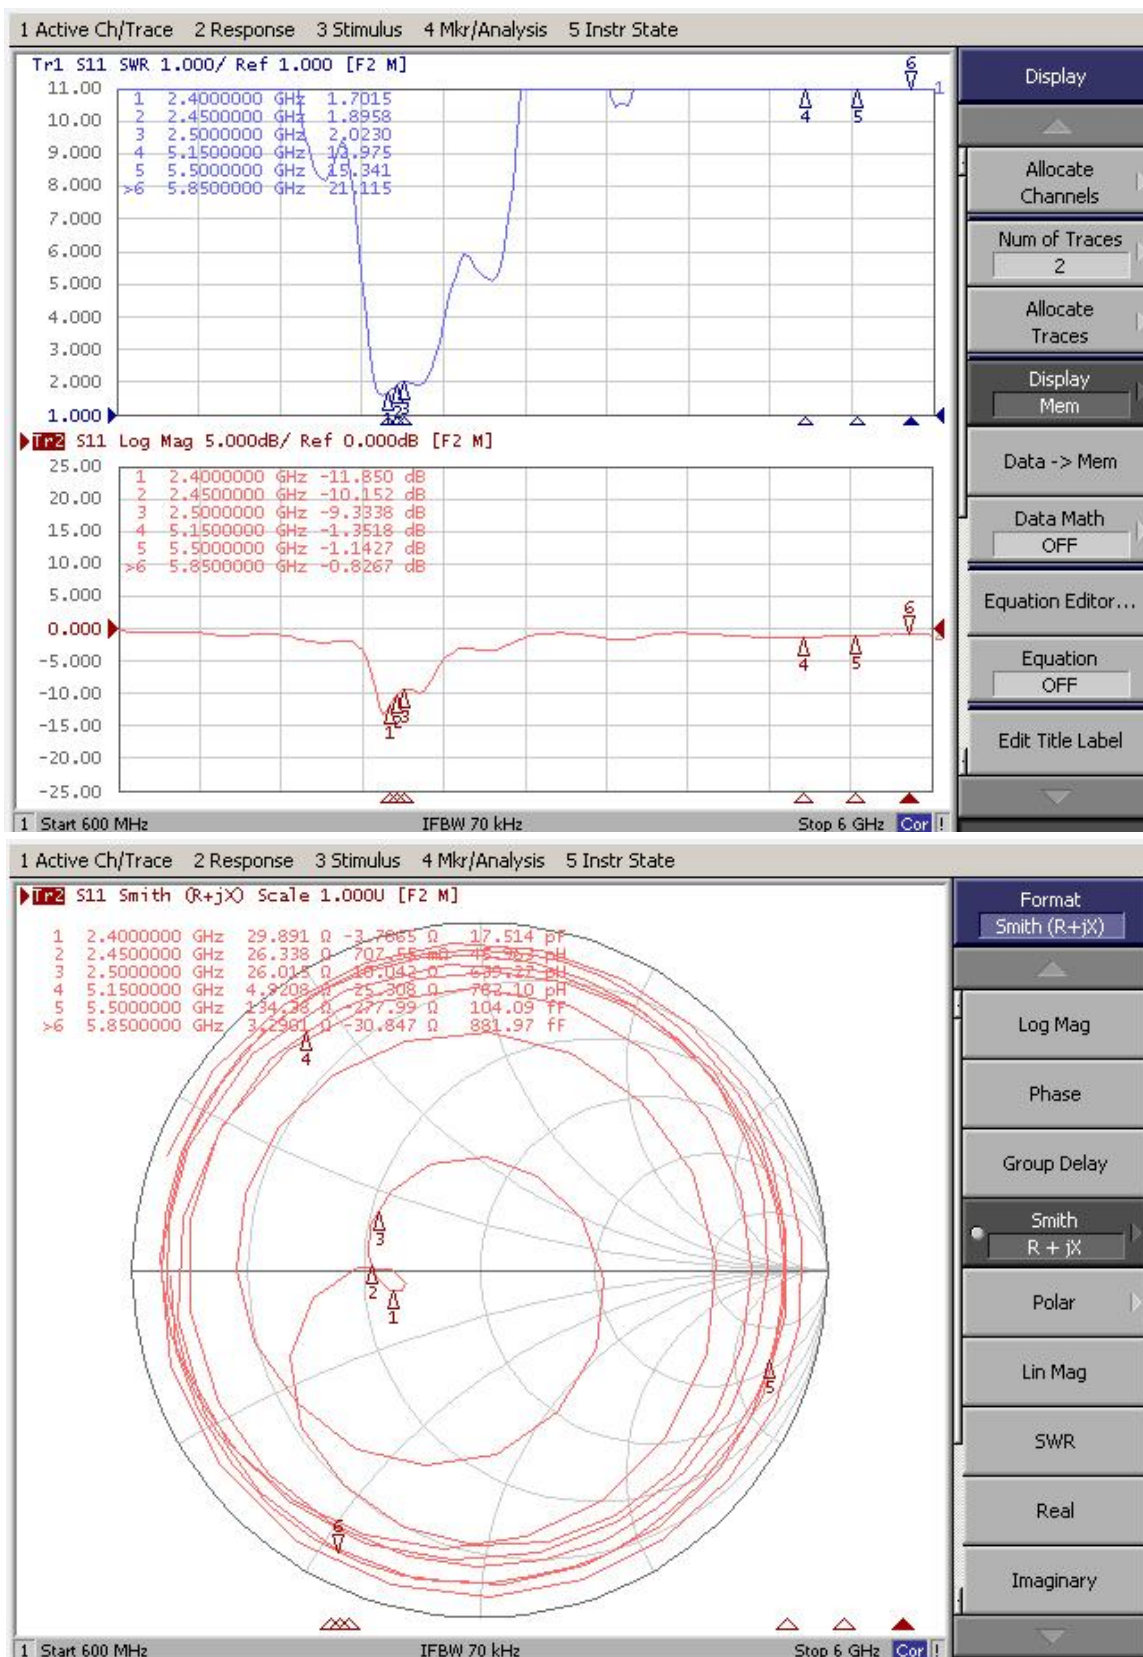


4 Efficiency and Gain

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Gain (dBi)	1.81	1.82	2.10	2.24	1.82	1.67	2.09	2.27	2.23	2.53	2.51
Efficiency (%)	48.27	47.10	46.98	47.49	46.99	46.48	45.89	46.60	46.91	46.51	46.35

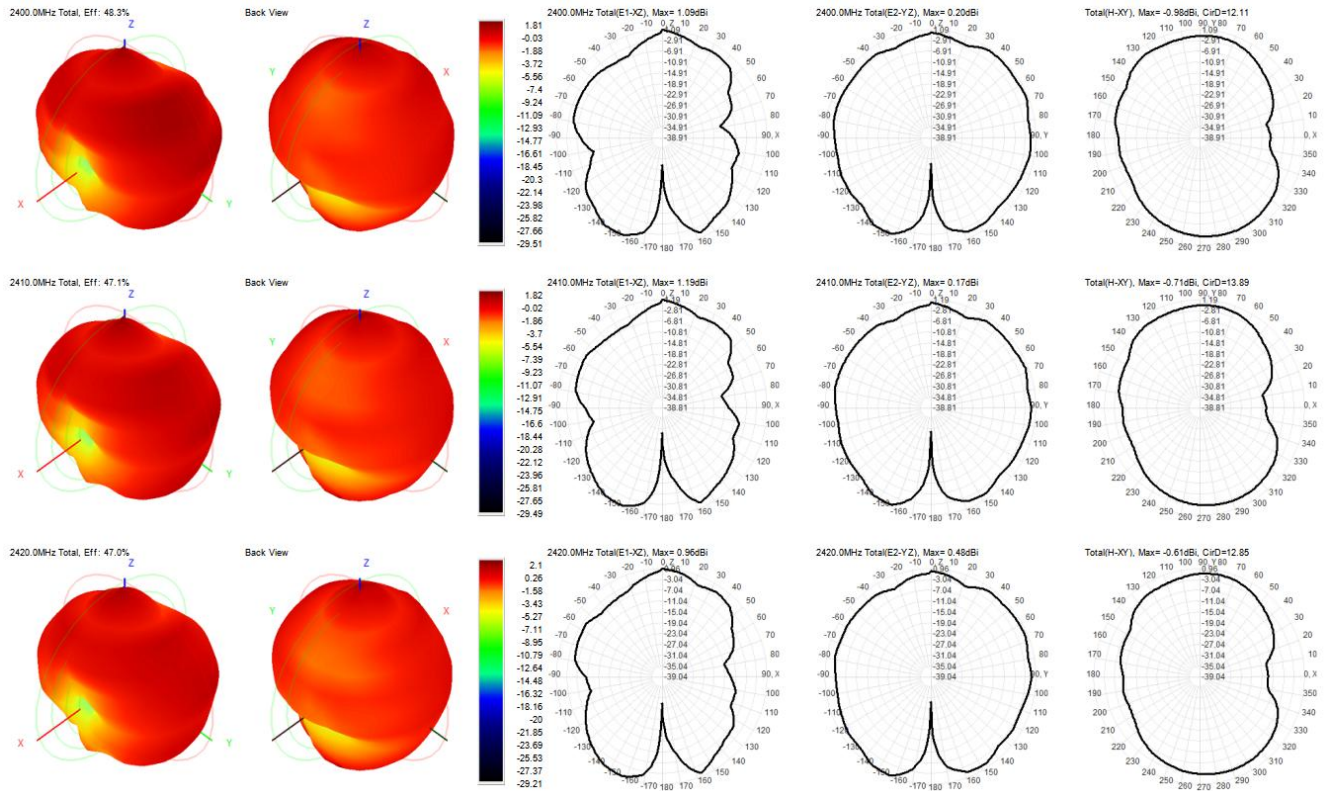


KKM



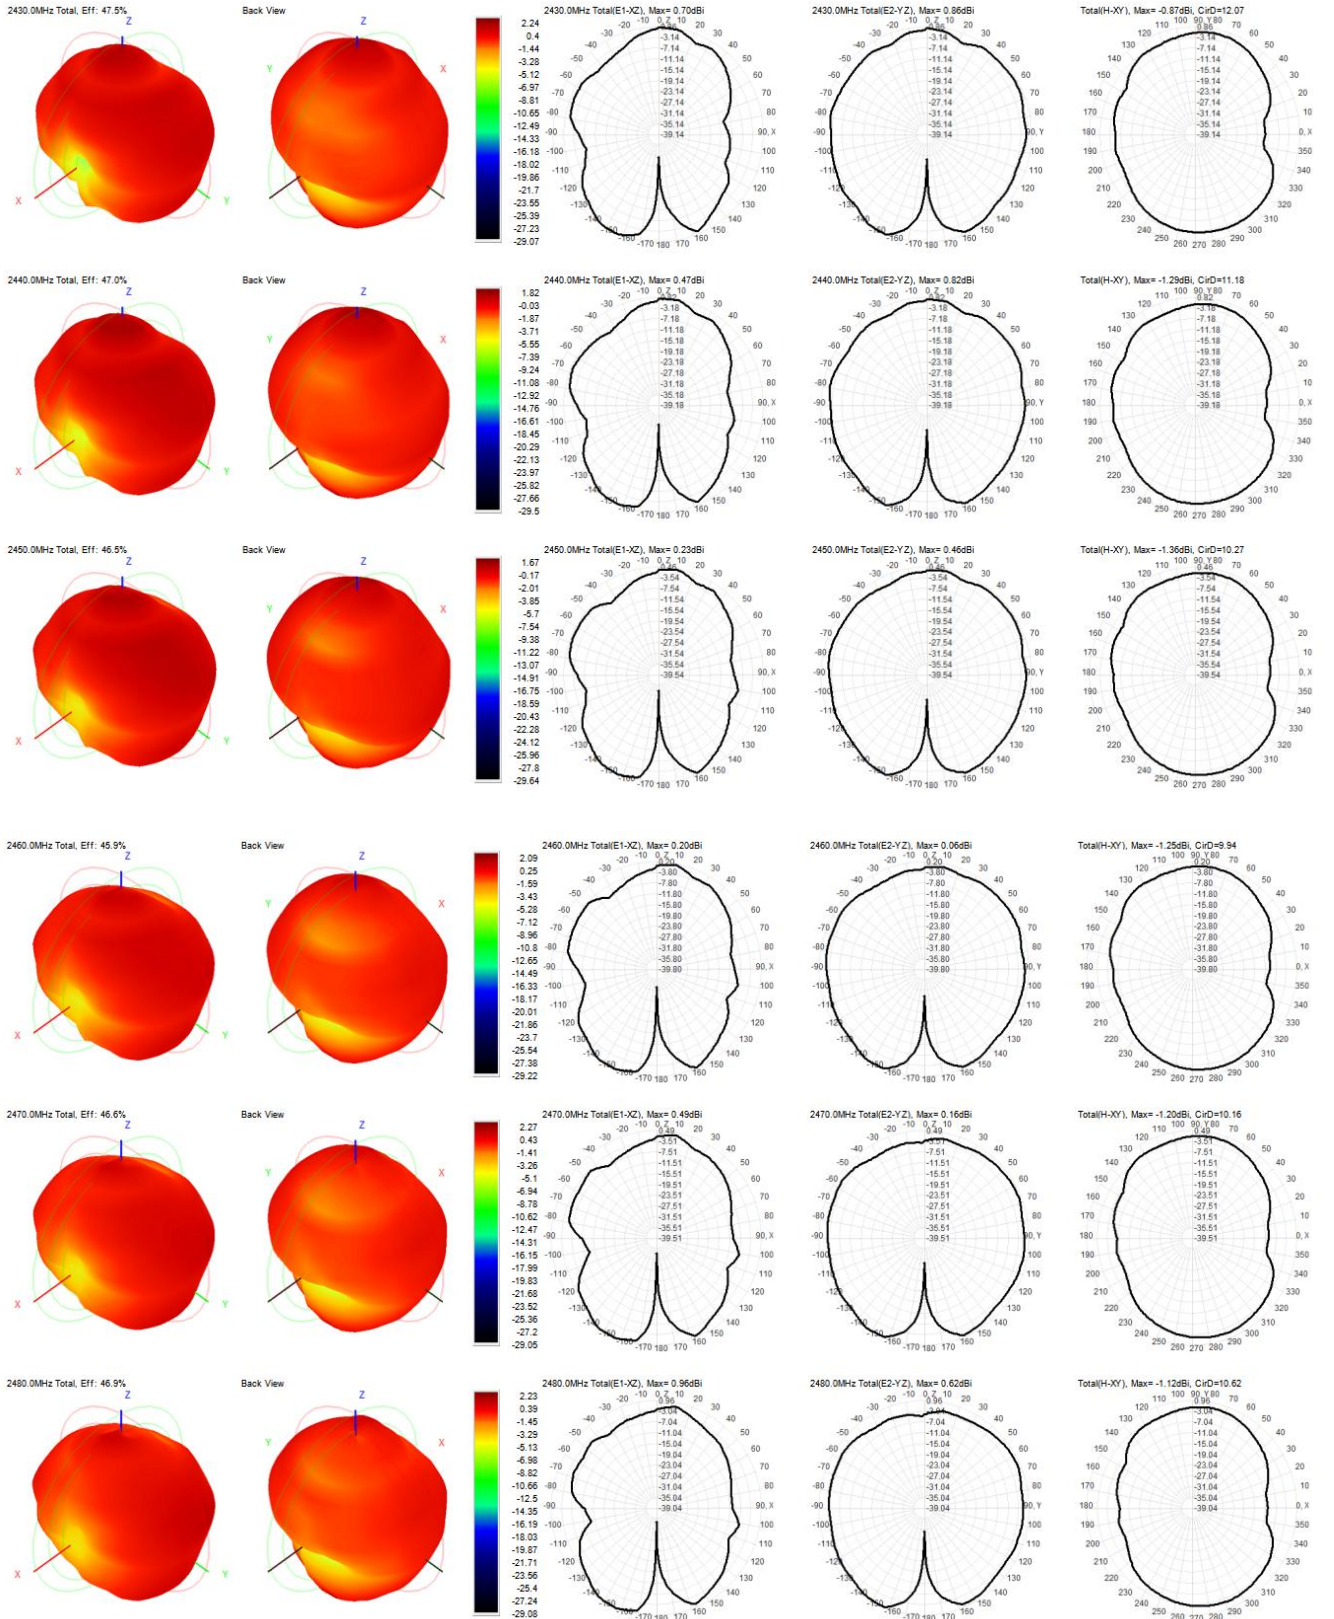


KKM


2490.0MHz Total, Eff: 46.5%




Back View




2490.0MHz Total(E2-YZ), Max= 1.04dBi






Total(H+XY), Max=-0.96dBi, C/D=10.75




2500.0MHz Total, Eff: 46.3%



Back View



2500.0MHz Total(E2-YZ), Max= 1.01dBi



Total(H+XY), Max=-1.00dBi, C/D=10.36

