



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-Mail: ctl@ctl-lab.com

FCC SDoC Test Report

FCC PART 15 Subpart B

Report Reference No.: CTL2604233061-F

Compiled by:
(printed name+signature)

Andy Su

Reviewed by:
(printed name+signature)

Happy Guo

Approved by:
(printed name+signature)

Ivan Xie



Date of issue: May. 07, 2026

Representative Laboratory Name.: Shenzhen CTL Testing Technology Co., Ltd.

Address: Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community
Fenghuang Street, Guangming District, Shenzhen, Guangdong,
P.R.C

Web: www.ctl-lab.com

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address: Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community
Fenghuang Street, Guangming District, Shenzhen, Guangdong,
P.R.C

FCC ID: 2BFQK-HZ01

Applicant's name: Shenzhen Huazhichuangxing Technology Co., LTD.

Address: 301, Building B, Factory Building, No. 9, Longshan Industrial Zone,
Nanling Village Community, Nanwan Street, Longgang District,
Shenzhen, China

Test specification:

Standard: FCC PART 15 Subpart B

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Hidden Camera Detectors

Trade Mark: N/A

Ratings: BATTY: DC 3.7V
INPUT: DC 5V from adapter

Result: Pass

FCC Test Report

Test Report No. : CTL2604233061-F	May. 07, 2026 Date of issue
--	--------------------------------

Equipment under Test : Hidden Camera Detectors

Type / Model : HZ01

Listed Models : N/A

Applicant : **Shenzhen Huazhichuangxing Technology Co., LTD.**

Address : 301, Building B, Factory Building, No. 9, Longshan Industrial Zone,
Nanling Village Community, Nanwan Street, Longgang District,
Shenzhen, China

Manufacturer : **Shenzhen Huazhichuangxing Technology Co., LTD.**

Address : 301, Building B, Factory Building, No. 9, Longshan Industrial Zone,
Nanling Village Community, Nanwan Street, Longgang District,
Shenzhen, China

Test Result	Pass
--------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

History of this test report

Report No.	Version	Description	Issued Date
CTL2604233061-F	V1.0	Initial Issued Report	May. 07, 2026

Content

1. TEST STANDARDS	5
2. SUMMARY	6
2.1. General Remarks	6
2.2. Equipment Under Test	6
2.3. Short description of the Equipment under Test (EUT)	6
2.4. EUT operation mode	6
2.5. EUT configuration	8
2.7. Related Submittal(s) / Grant (s)	8
2.8. Modifications	8
2.9. Test Result Summary	8
3. TEST ENVIRONMENT	9
3.1. Address of the test laboratory	9
3.2. Test Facility	9
3.3. Environmental conditions	9
3.4. Statement of the measurement uncertainty	10
3.5. Equipments Used during the Test	10
4 TEST CONDITIONS AND RESULTS	12
4.1. Radiated Emission Test	12
4.2. Conducted Emissions Test	18
5. TEST SETUP PHOTOS OF THE EUT	21
6. PHOTOS OF THE EUT	23

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15 Subpart B - Unintentional Radiators](#)

[ANSI C63.4: 2014](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample : Apr. 27, 2026

Sampling and Testing commenced on : Apr. 27, 2026

Testing concluded on : May. 07, 2026

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz
 o 3.7 V DC o 5 V DC
 ■ Other (specified in blank below)

DC 5V from adapter AC 120V/60Hz, DC 3.7V

2.3. Short description of the Equipment under Test (EUT)

Hidden Camera Detectors.

For more details, refer to the user's manual of the EUT.

2.4. EUT operation mode

The EUT were tested under the following modes, the final worst mode was marked in bold face and recorded in this report.

Receiving frequency range:1MHz-6.5GHz

EMISSION TESTS: Radiated Emission

Description of Test Mode	Test Voltage
CHARGING	DC 5V from adapter AC 120V/60Hz
WORKING(Lens Scan)	DC 3.7V
WORKING(WIF Signal)	DC 3.7V
WORKING(GPS Tracker)	DC 3.7V
WORKING(Full RF Scan)	DC 3.7V
WORKING(IR Detect)	DC 3.7V
WORKING(Motion Alarm)	DC 3.7V
CHARGING+WORKING(Lens Scan)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(WIF Signal)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(GPS Tracker)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(Full RF Scan)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(IR Detect)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(Motion Alarm)	DC 5V from adapter AC 120V/60Hz

EMISSION TESTS: Conducted Emission

Description of Test Mode	Test Voltage
CHARGING	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(Lens Scan)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(WIF Signal)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(GPS Tracker)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(Full RF Scan)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(IR Detect)	DC 5V from adapter AC 120V/60Hz
CHARGING+WORKING(Motion Alarm)	DC 5V from adapter AC 120V/60Hz

Note:

For the test results, the EUT had been tested with all conditions. But only the worst case was showed in test report.

2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

2.7. Related Submittal(s) / Grant (s)

This test report is intended for Hidden Camera Detectors filing to comply with the FCC Part 15, Subpart B Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. Test Result Summary

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15 Subpart B	Section 15.109	PASS
Conducted Emission	FCC PART 15 Subpart B	Section 15.107	PASS

EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	Adapter	Manufacturer :	HUAWEI
		Model No. :	HW-100225C00

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community Fenghuang Street, Guangming District, Shenzhen, Guangdong, P.R.C

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 22/EN 55022 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Certificated by CNAS

Registration No.:CNAS L7497

Valid until:Feb. 14, 2030

Certificated by A2LA, USA

Registration No.:4343.01

Valid until:Feb. 29, 2028

IC CAB identifier: CN0041

Main Company Number :9618B

Satellite Company Number:35187

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B .

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission(wooden table)	30~1000MHz	$\pm 4.5\text{dB}$	(1)
Radiated Emission(wooden table)	Above 1GHz	$\pm 5.08\text{dB}$	(1)
Conducted Emission	0.15~30MHz	$\pm 3.11\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

3.5. Equipments Used during the Test

Radiated Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	ULTRA-BROADBAND ANTENNA	Sunol Sciences Corp.	JB1 Antenna	A061713	2025/07/02	2026/07/01
2	EMI Test Receiver	ROHDE & SCHWARZ	ESPI	100434	2025/07/02	2026/07/01
3	Pre-Amplifier	MRT Technology(Suzhou)Co., Ltd	MRT-AP01M06	/	2025/07/02	2026/07/01
4	6dB RF Attenuator	/	/	/	2025/07/02	2026/07/01
5	Spectrum Analyzer	RS	FSP	1164.4391.38	2025/07/03	2026/07/02
6	9kHz-40GHz coaxial line chamber 2	/	Z108-NJ-NJ-9.5M	21121049	2025/07/03	2026/07/02
7	Amplifier	Brief&Smart	LNA-4018	2104197	2025/07/03	2026/07/02
8	Horn Antenna	Ocean Microwave	OBH100400	26999002	2025/07/02	2026/07/01
9	Amplifier	Agilent	8449B	3008A02306	2026/01/05	2027/01/04
Software:						
Name of Software:				Version:		
EZ_EMG(Below 1GHz)				V1.1.4.2		
EZ_EMG(Above 1GHz)				V1.1.4.2		


Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	1166.5950.03	2026/01/05	2027/01/04
2	LISN	ROHDE & SCHWARZ	ESH2-Z5	860014/010	2026/01/05	2027/01/04
3	Limitator	ROHDE & SCHWARZ	ESH3-Z2	100408	2026/01/05	2027/01/04
Software:						
Name of Software:			Version:			
ES-K1			V1.71			

4 TEST CONDITIONS AND RESULTS


4.1. Radiated Emission Test

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

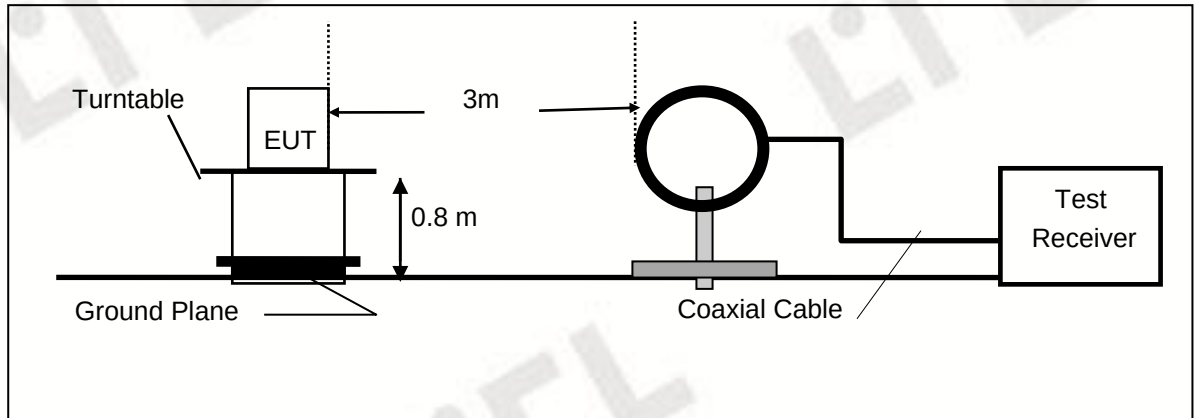

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

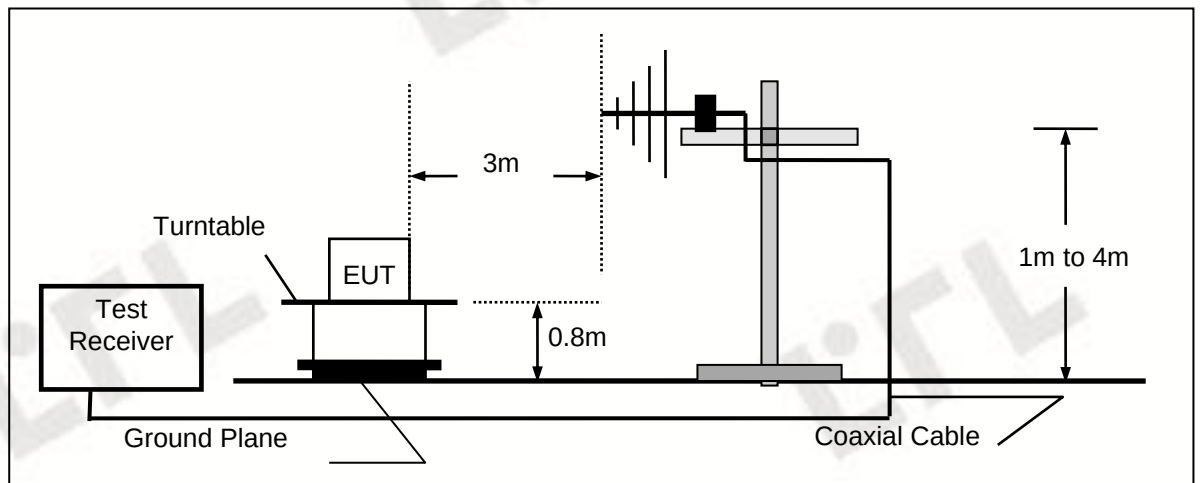

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

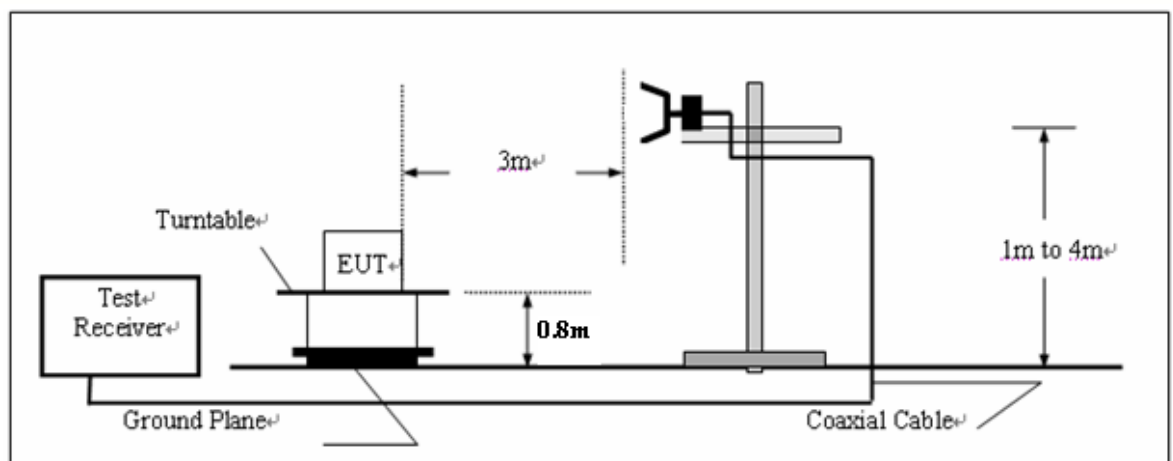

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

RADIATION LIMIT

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
960-1000	3	54.0	500

For frequency above 1000MHz

Frequency(GHz)	Class A(dBμV/m)(at 3m)		Class B(dBμV/m)(at 3m)	
	Peak	Average	Peak	Average
Above 1000MHz	80	60	74	54

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiation Test Results


30-1000MHz



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu

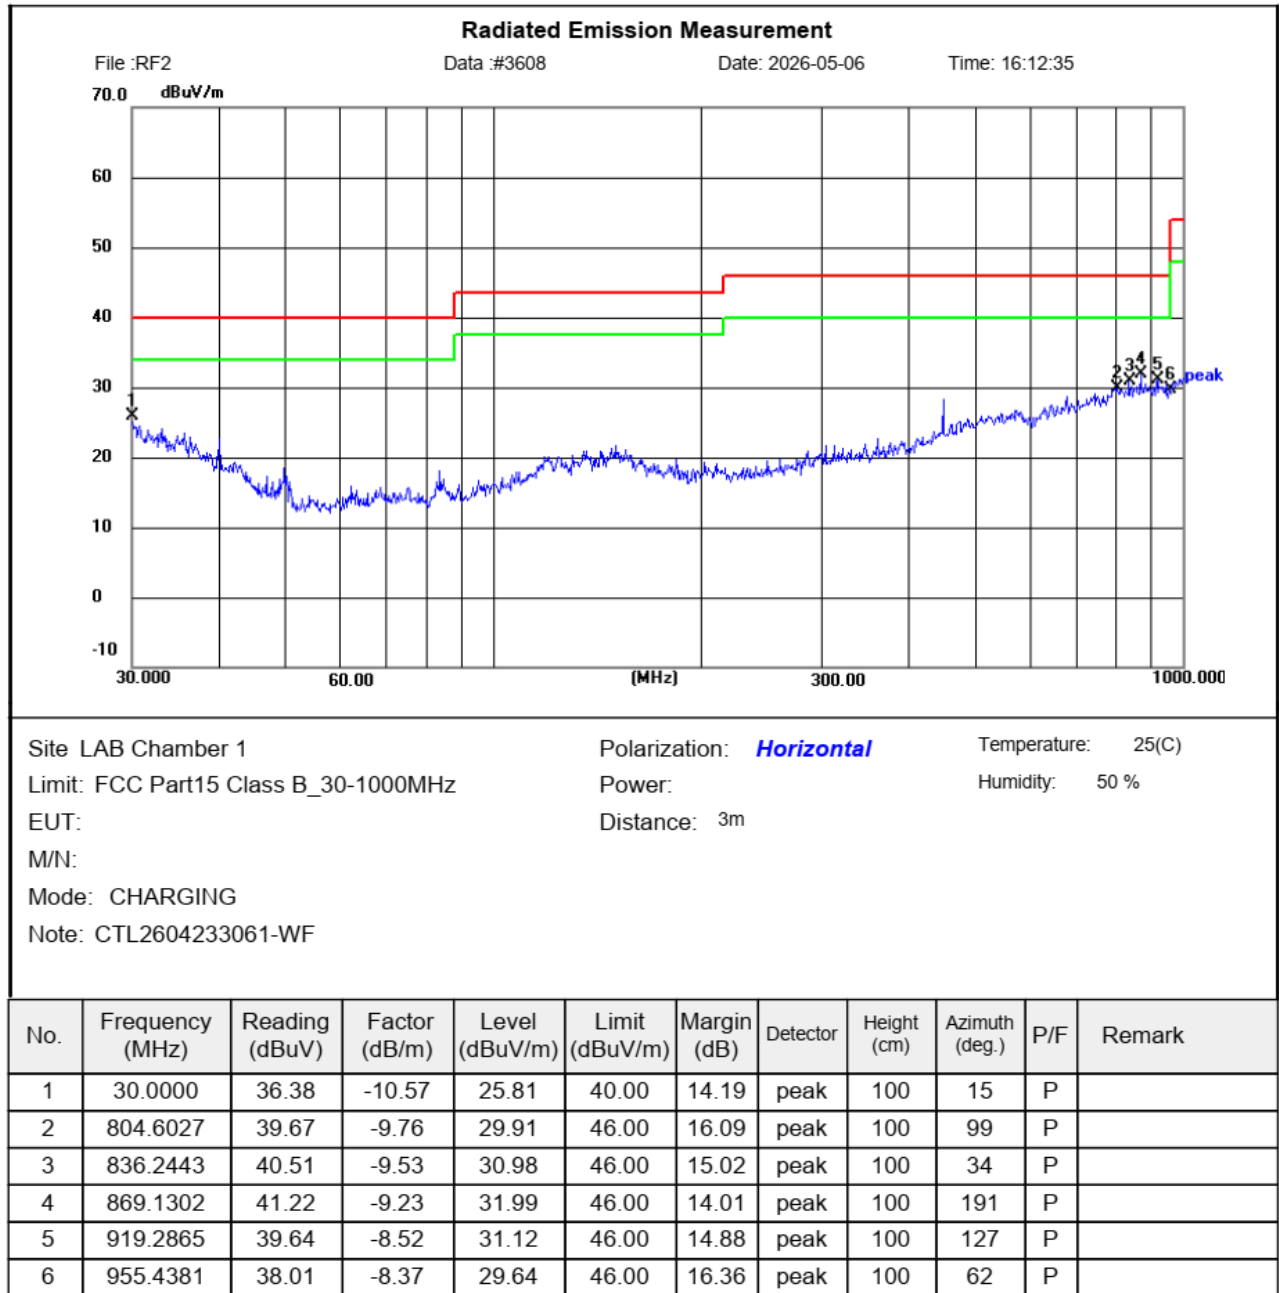



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu

Radiated Emission Measurement


File :RF2

Data :#5105

Date: 2026/05/20

Time: 11:35:58

80.0 dBuV/m

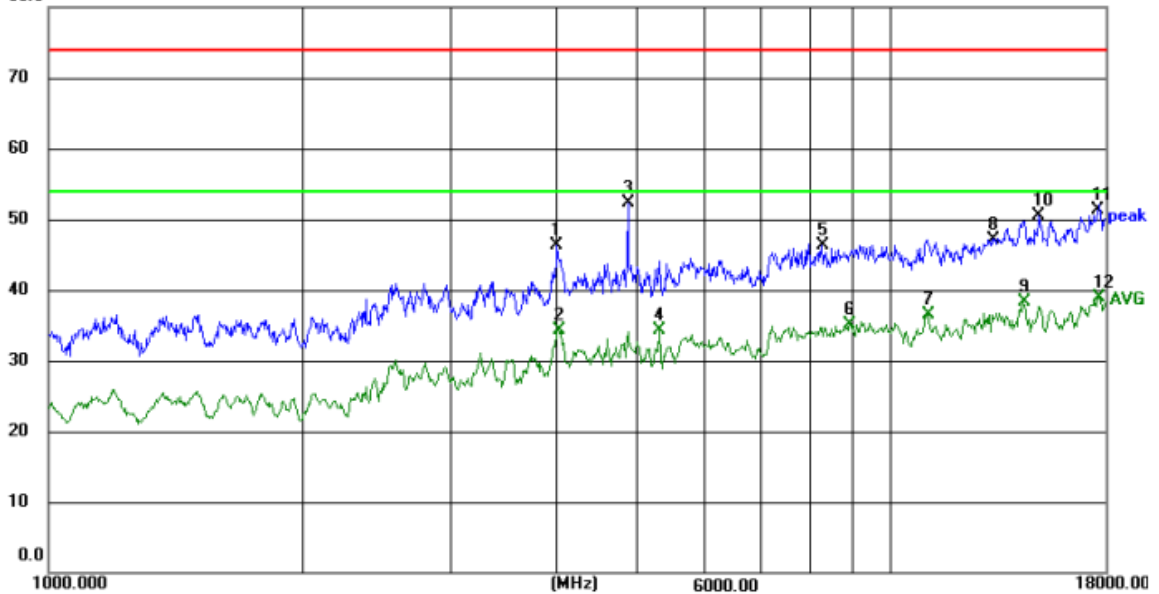

Site LAB Chamber 1

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:

Mode: BT

Note: CTL2604233061-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4015.929	40.80	5.54	46.34	74.00	27.66	peak	100	0	P	
2	4027.554	28.75	5.59	34.34	54.00	19.66	AVG	100	0	P	
3	4874.043	46.92	5.38	52.30	74.00	21.70	peak	100	0	P	
4	5315.541	30.03	4.26	34.29	54.00	19.71	AVG	100	0	P	
5	8271.880	35.60	10.76	46.36	74.00	27.64	peak	100	0	P	
6	8943.274	23.11	11.95	35.06	54.00	18.94	AVG	100	0	P	
7	11076.096	20.08	16.44	36.52	54.00	17.48	AVG	100	0	P	
8	13249.931	29.21	17.99	47.20	74.00	26.80	peak	100	0	P	
9	14366.840	19.13	19.22	38.35	54.00	15.65	AVG	100	0	P	
10	15003.422	31.38	19.09	50.47	74.00	23.53	peak	100	0	P	
11	17588.562	30.71	20.58	51.29	74.00	22.71	peak	100	0	P	
12	17690.531	17.88	21.07	38.95	54.00	15.05	AVG	100	0	P	



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu


Radiated Emission Measurement

File :RF2

Data :#3609

Date: 2026-05-06

Time: 16:13:20

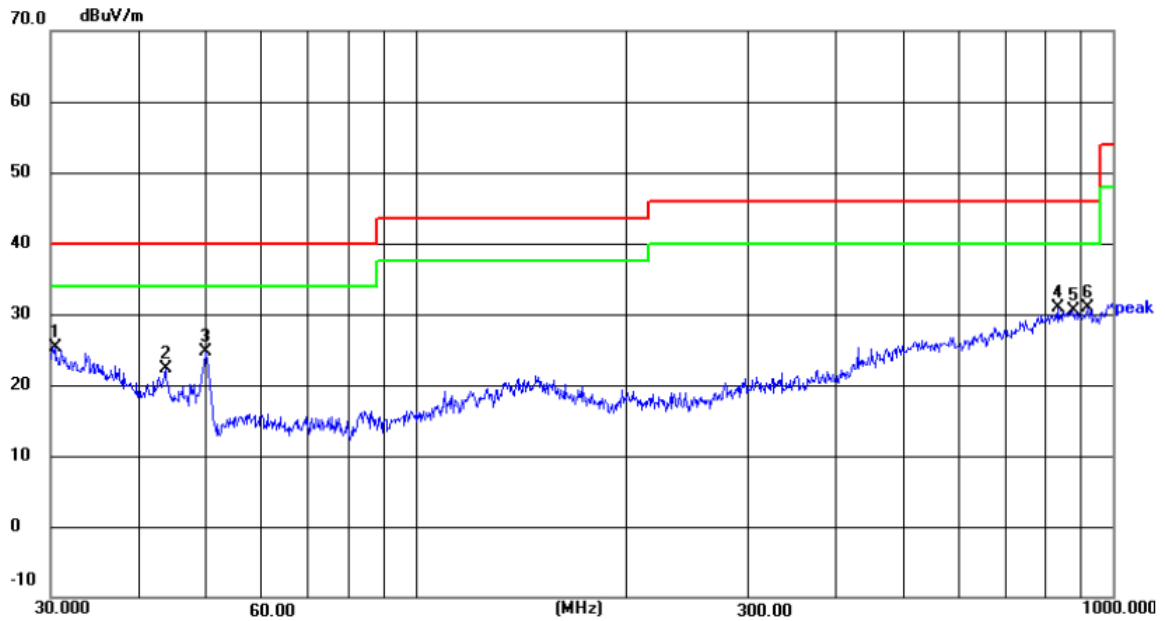

Site LAB Chamber 1

Limit: FCC Part15 Class B_30-1000MHz

EUT:

M/N:

Mode: CHARGING

Note: CTL2604233061-WF

Polarization: **Vertical**

Power:

Distance: 3m

Temperature: 25(C)

Humidity: 50 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.4238	36.26	-10.98	25.28	40.00	14.72	peak	100	123	P	
2	43.8119	41.56	-19.33	22.23	40.00	17.77	peak	100	31	P	
3	50.0566	48.39	-23.74	24.65	40.00	15.35	peak	100	344	P	
4	836.2443	40.50	-9.53	30.97	46.00	15.03	peak	100	206	P	
5	875.2470	39.62	-9.11	30.51	46.00	15.49	peak	100	105	P	
6	922.5157	39.22	-8.40	30.82	46.00	15.18	peak	100	68	P	



Shenzhen CTL Testing Technology Co., Ltd

Tel: +86-755-89486194

Unit 01A&B&C&D-1, Building A3, Guangming Sci-Tech Park, Guan Guang Road, Fenghu

Radiated Emission Measurement


File :RF2

Data :#5106

Date: 2026/05/20

Time: 11:37:54

80.0 dBuV/m

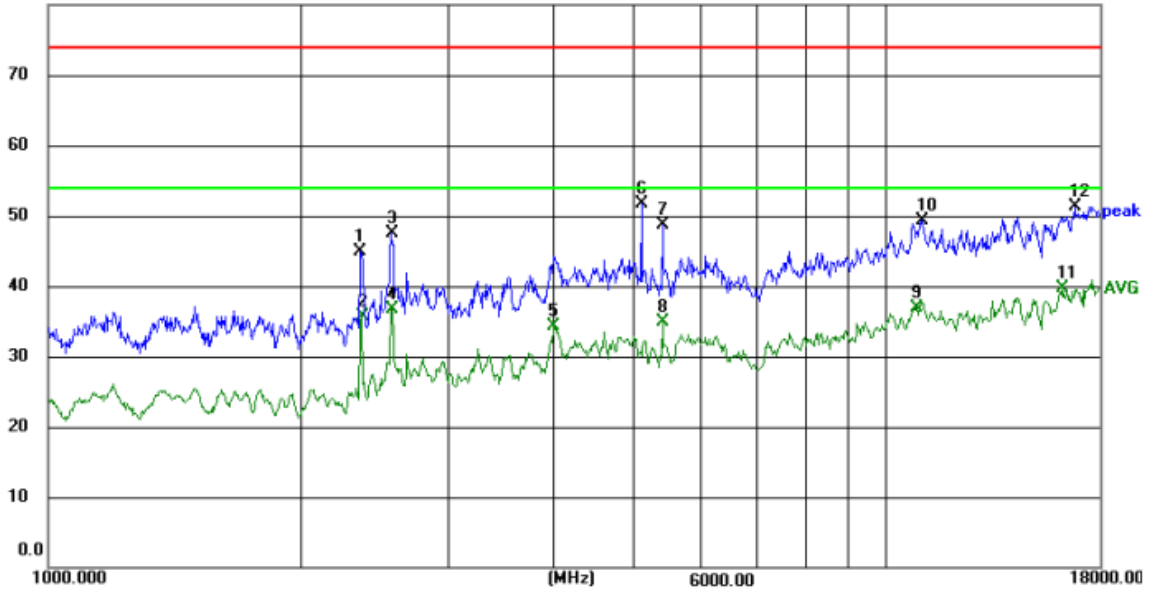

Site LAB Chamber 1

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class B_Above 1GHz_PK

Power:

Humidity: 50 %

EUT:

Distance: 3m

M/N:

Mode: BT


Note: CTL2604233061-WF

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2359.478	48.88	-3.94	44.94	74.00	29.06	peak	100	0	P	
2	2366.308	39.40	-3.75	35.65	54.00	18.35	AVG	100	0	P	
3	2565.777	47.06	0.48	47.54	74.00	26.46	peak	100	0	P	
4	2573.203	36.28	0.42	36.70	54.00	17.30	AVG	100	0	P	
5	4015.929	28.83	5.54	34.37	54.00	19.63	AVG	100	0	P	
6	5104.741	47.64	4.07	51.71	74.00	22.29	peak	100	0	P	
7	5408.529	43.30	5.33	48.63	74.00	25.37	peak	100	0	P	
8	5408.529	29.61	5.33	34.94	54.00	19.06	AVG	100	0	P	
9	10885.668	22.47	14.53	37.00	54.00	17.00	AVG	100	0	P	
10	11012.253	32.63	16.65	49.28	74.00	24.72	peak	100	0	P	
11	16268.142	20.61	19.02	39.63	54.00	14.37	AVG	100	0	P	
12	16793.684	32.06	19.16	51.22	74.00	22.78	peak	100	0	P	

Note: Found the emission level are attenuated 20dB below the limits from 18GHz to 32.5GHz, so it does not recorded in report.

4.2. Conducted Emissions Test

TEST CONFIGURATION

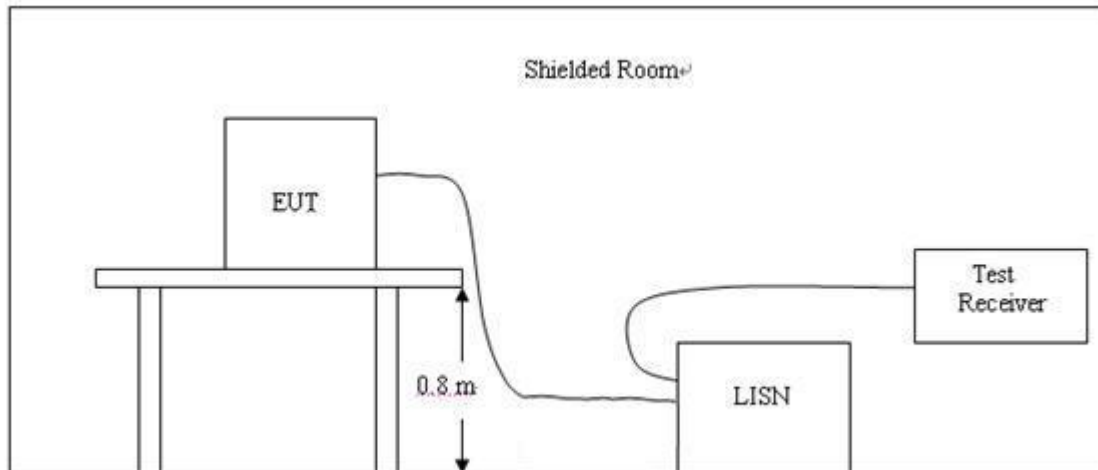

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 The EUT received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.


TEST RESULTS

Shenzhen CTL Testing Technology Co., Ltd.**Voltage Mains Test FCC PART 15 SUBPART B CLASS B**

EUT:
Manufacturer:
Operating Condition: CHARGING
Test Site: /
Operator: Jixun Chen
Test Specification: AC 120V/60Hz
Comment: CTL2604233061-WF
Start of Test: 4/30/2026 / 2:38:26PM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

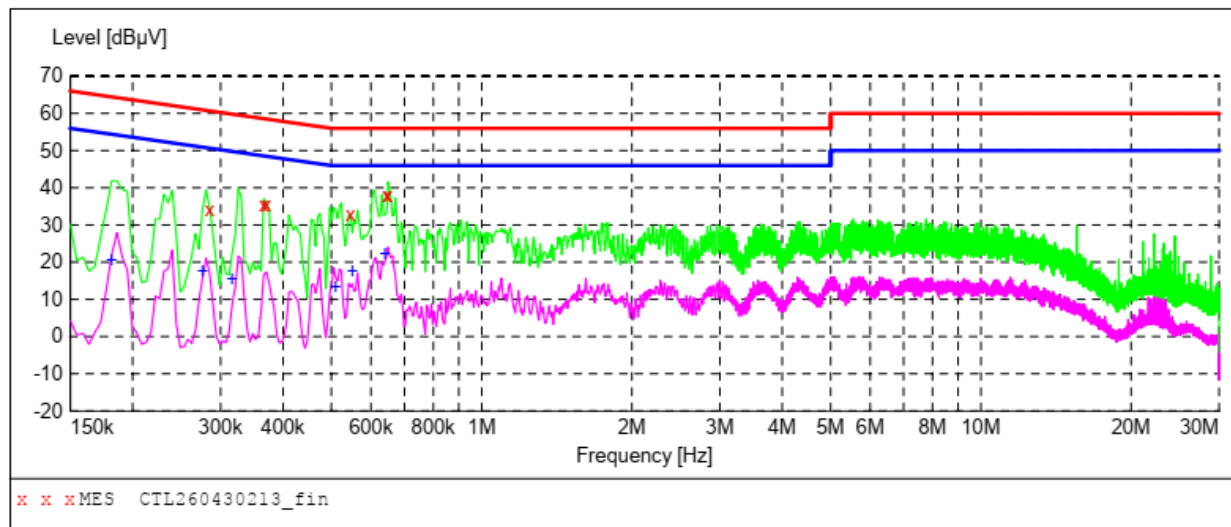**MEASUREMENT RESULT: "CTL260430213_fin"**

4/30/2026 2:40PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.285000	34.00	10.3	61	26.7	QP	L1	GND
0.366000	35.40	10.3	59	23.2	QP	L1	GND
0.370500	35.50	10.3	59	23.0	QP	L1	GND
0.546000	32.90	10.4	56	23.1	QP	L1	GND
0.645000	38.10	10.5	56	17.9	QP	L1	GND
0.649500	37.80	10.5	56	18.2	QP	L1	GND

MEASUREMENT RESULT: "CTL260430213_fin2"

4/30/2026 2:40PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.181500	20.70	10.3	54	33.7	AV	L1	GND
0.276000	17.40	10.3	51	33.5	AV	L1	GND
0.316500	15.30	10.3	50	34.5	AV	L1	GND
0.510000	13.30	10.4	46	32.7	AV	L1	GND
0.550500	17.70	10.4	46	28.3	AV	L1	GND
0.640500	22.10	10.5	46	23.9	AV	L1	GND

Shenzhen CTL Testing Technology Co., Ltd.**Voltage Mains Test FCC PART 15 SUBPART B CLASS B**

EUT:

Manufacturer:

Operating Condition: CHARGING

Test Site: /

Operator: Jixun Chen


Test Specification: AC 120V/60Hz

Comment: CTL2604233061-WF

Start of Test: 4/30/2026 / 2:35:28PM

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

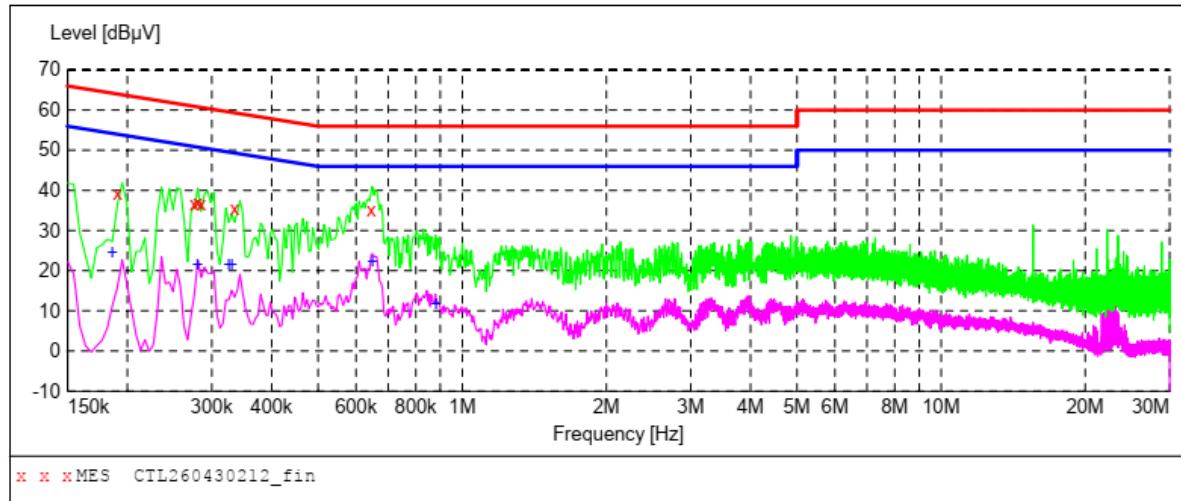**MEASUREMENT RESULT: "CTL260430212_fin"**

4/30/2026 2:37PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.190500	39.10	10.3	64	24.9	QP	N	GND
0.276000	36.70	10.3	61	24.2	QP	N	GND
0.280500	37.10	10.3	61	23.7	QP	N	GND
0.285000	36.70	10.3	61	24.0	QP	N	GND
0.334500	35.60	10.3	59	23.7	QP	N	GND
0.645000	35.00	10.5	56	21.0	QP	N	GND

MEASUREMENT RESULT: "CTL260430212_fin2"

4/30/2026 2:37PM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	24.70	10.3	54	29.5	AV	N	GND
0.280500	21.70	10.3	51	29.1	AV	N	GND
0.325500	21.60	10.3	50	28.0	AV	N	GND
0.330000	21.50	10.3	50	28.0	AV	N	GND
0.649500	22.40	10.5	46	23.6	AV	N	GND
0.883500	11.60	10.6	46	34.4	AV	N	GND

5. Test Setup Photos of the EUT


RADIATED EMISSION TEST(30-1000MHz)



CONDUCTION EMISSION TEST

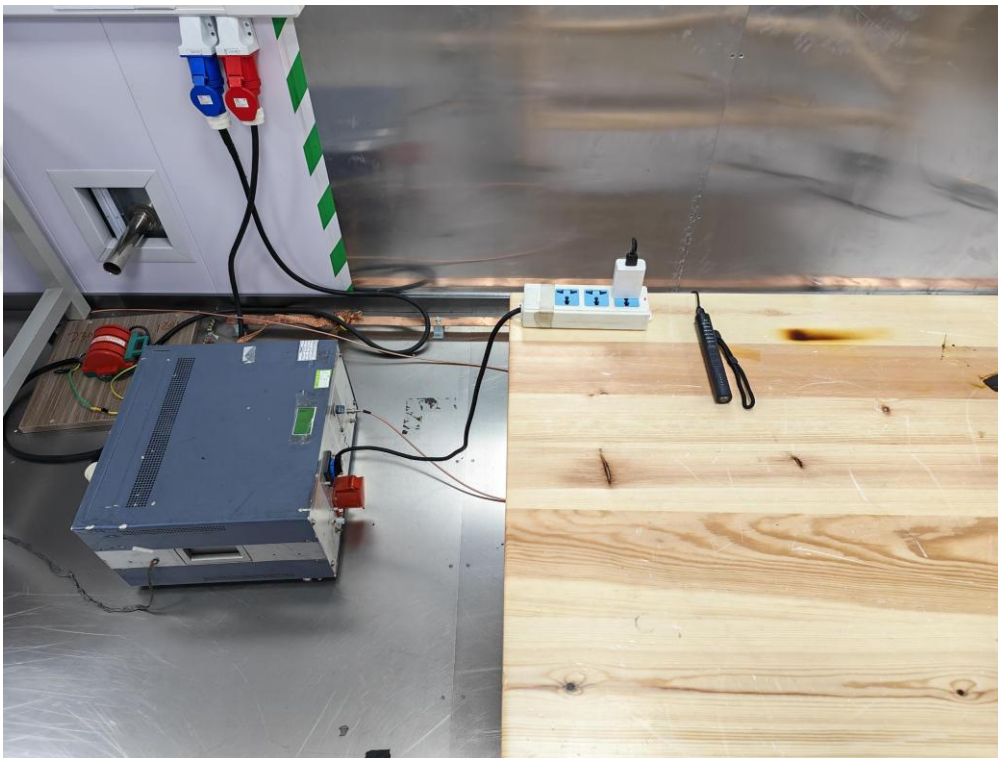

RADIATED EMISSION TEST(1-18GHz)

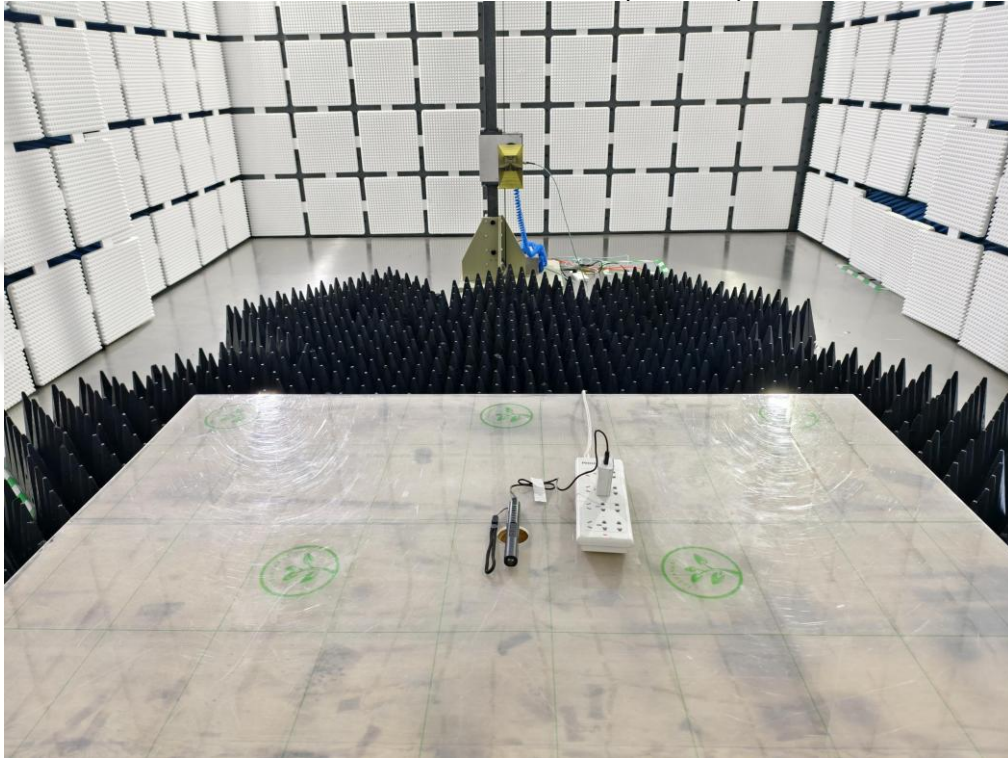

6. Photos of the EUT

External Photos of EUT











Internal Photos of EUT

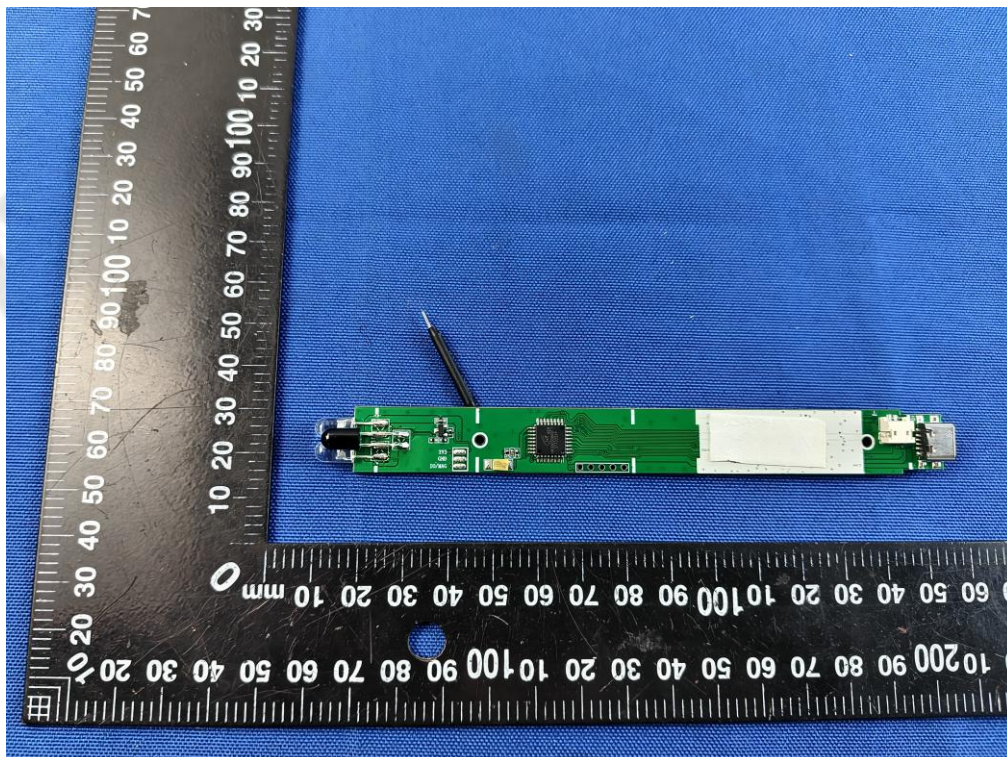

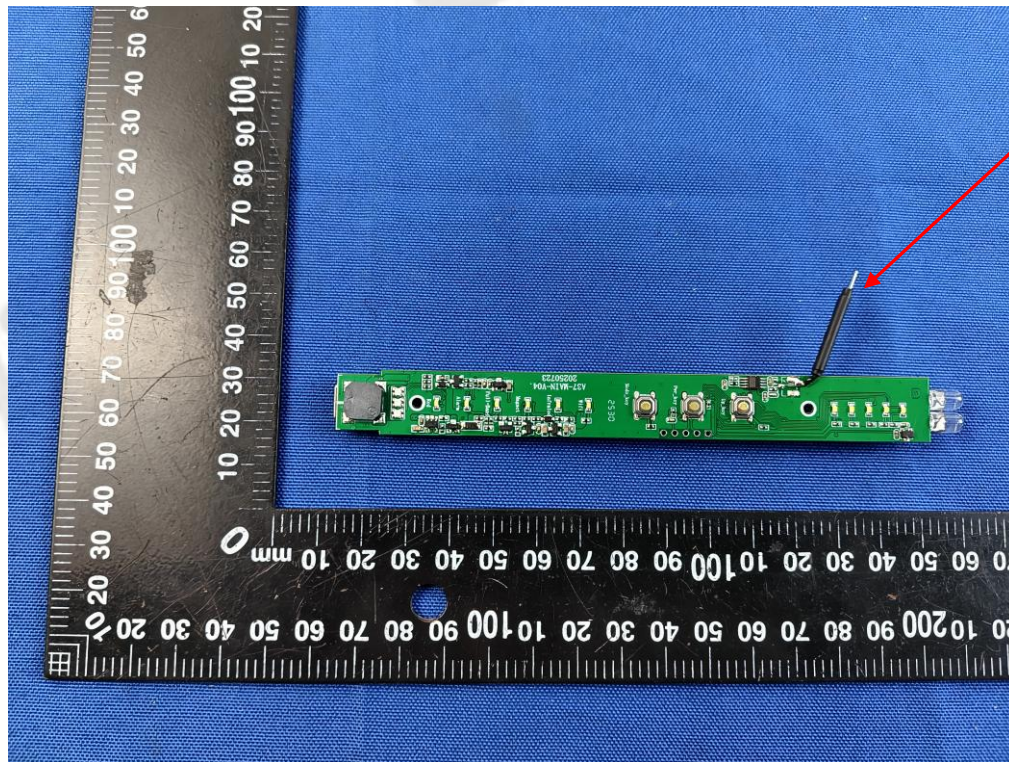



.....End of Report.....