



FCC PART 15.249 TEST REPORT

On Behalf of
Lezhan Toy Factory

Donghu Industrial Zone, Chenghai District Shantou City, Guangdong Province, China

FCC ID: 2BFWP-LF678

Model: LF678, LF631, LF632, LF633, LF635, LF636, LF637, LF638, LF639, LF661, LF662, LF663, LF665, LF666, LF667, LF668, LF669, LF669GPS, LF670, LF671, LF672, LF673, LF675, LF679, LF680, LF681, LF682, LF683, LF685, LF686, LF687, LF688, LF689, LF690, LF691, LF692, LF693, LF695, LF696, LF697, LF698, LF669, LF700, LF701, LF702, LF703, LF704, LF705, LF706, LF707, LF708, LF709, LF710, LF711, LF712, LF713, LF715, LF716, LF717, LF718, LF719, LF720, LF721, LF623, LF625, LF622, LF626, LF628, LF629, X33, X39, LF812, LF831, LF815, LF816, LF817, LF818, LF819, LF890, A13

March 24, 2025

This Report Concerns:

☒ Original Report

Equipment Type:

Unmanned aerial vehicle UAV

Test Engineer:

LBi Li / *LBi Li*

Report Number:

QCT25CR-1314E-01

Test Date:

March 17~19, 2025

Test Result:

Pass

Reviewed By:

Vincent Yang / *Vincent Yang*

Approved By:

Kendy Wang / *Kendy Wang*



Prepared By:

Shenzhen QC Testing Laboratory Co., Ltd.
East of 1/F., Building E, Xinghong Science Park, No.111,
Shuiku Road, Fenghuanggang, Xixiang Street, Bao'an
District, Shenzhen, Guangdong, China
Tel: 0755-23008269
Fax: 0755-23726780



Table of Contents

1. GENERAL INFORMATION.....	4
1.1 Product Description for Equipment under Test (EUT)	4
1.2 System Test Configuration	5
1.3 Test Facility.....	6
1.4 Measurement Uncertainty.....	6
2. SUMMARY OF TEST RESULTS	7
3. LIST OF TEST AND MEASUREMENT INSTRUMENTS	8
3.1 Radiated Emission Test.....	8
3.2 RF Conducted test.....	8
4. ANTENNA REQUIREMENT	9
5. RADIATED EMISSION METHOD	10
5.1. Applicable Standard.....	10
5.2. Limit	10
5.3. Receiver setup.....	10
5.4. Test setup.....	11
5.5. Test Procedure	11
5.6. Test Data	12
6. 20DB OCCUPY BANDWIDTH	17
6.1 Applicable Standard.....	17
6.2 Limit	17
6.3 Test setup.....	17
6.4 Test Data	17



Revision History of This Test Report

Report Number	Description	Issued Date
QCT25CR-1314E-01	Initial Issue	2025-3-24



1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Description	Unmanned aerial vehicle UAV
Model No.	LF678, LF631, LF632, LF633, LF635, LF636, LF637, LF638, LF639, LF661, LF662, LF663, LF665, LF666, LF667, LF668, LF669, LF669GPS, LF670, LF671, LF672, LF673, LF675, LF679, LF680, LF681, LF682, LF683, LF685, LF686, LF687, LF688, LF689, LF690, LF691, LF692, LF693, LF695, LF696, LF697, LF698, LF669, LF700, LF701, LF702, LF703, LF704, LF705, LF706, LF707, LF708, LF709, LF710, LF711, LF712, LF713, LF715, LF716, LF717, LF718, LF719, LF720, LF721, LF623, LF625, LF622, LF626, LF628, LF629, X33, X39, LF812, LF831, LF815, LF816, LF817, LF818, LF819, LF890, A13
Model Difference:	All models in each series have similar construction with the same diagram circuit and PCB layout, but difference is the model name.
Tested Model	LF678
Sample(s) Status	Engineer sample
Operation Frequency:	2420-2460MHz
Channel numbers:	3
Modulation type:	GFSK
Antenna Type:	Wire Antenna
Antenna gain* ¹ :	0.17dBi
Power supply:	DC 3.7V (Powered by battery)
Trade Mark:	N/A
Applicant	Lezhan Toy Factory
Address	Donghu Industrial Zone, Chenghai District Shantou City, Guangdong Province, China
Manufacturer	Lezhan Toy Factory
Address	Donghu Industrial Zone, Chenghai District Shantou City, Guangdong Province, China
Sample No.	Y25C1314E01LY

Note: *¹This information provided by Manufacturer, SZ QC Lab is not responsible for the accuracy of this information.



1.2 System Test Configuration

1.2.1 Channel List

Operation Frequency each of channel					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2420MHz	2	2440MHz	3	2460MHz

Note: In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	Channel	Frequency
The lowest channel	2420MHz	The middle channel	2440MHz
The Highest channel	2460MHz		

1.2.2 Support Equipment

N/A

1.2.3 Test mode and voltage

Transmitting mode: Keep the EUT in continuously transmitting.

Test voltage: DC 3.7V



1.3 Test Facility

Test Firm : Shenzhen QC Testing Laboratory Co., Ltd.

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS – Registration No.: L8464

The EMC Laboratory has been accredited by CNAS, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

A2LA Certificate Number: 6759.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 561109

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 29628

CAB identifier: CN0141

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

1.4 Measurement Uncertainty

Parameter	Uncertainty
Occupied Channel Bandwidth	$\pm 1.42 \times 10^{-4}\%$
RF output power, conducted	$\pm 1.06\text{dB}$
Power Spectral Density, conducted	$\pm 1.06\text{dB}$
Unwanted Emissions, conducted	$\pm 2.51\text{dB}$
AC Power Line Conducted Emission	$\pm 1.80\text{dB}$
Radiated Spurious Emission test (9kHz-30MHz)	$\pm 2.66\text{dB}$
Radiated Spurious Emission test (30MHz-1000MHz)	$\pm 4.04\text{dB}$
Radiated Spurious Emission test (1000MHz-18000MHz)	$\pm 4.70\text{ dB}$
Radiated Spurious Emission test (18GHz-40GHz)	$\pm 4.80\text{dB}$
Temperature	$\pm 0.8^{\circ}\text{C}$
Humidity	$\pm 3.2\%$
DC and low frequency voltages	$\pm 0.1\%$
Time	$\pm 5\%$
Duty cycle	$\pm 5\%$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



2. Summary of Test Results

Test Item	Section	Result
Antenna Requirement	15.203	Pass
Conduction Emission	15.207	Not Applicable
Radiated Emissions	15.205, 15.209, 15.249	Pass
20dB Bandwidth	15.215 (c)	Pass

Note: 1. In the configuration tested, the EUT complied with the standards specified above.
2. Test according to ANSI C63.10:2013
3.. All indications of Pass/Fail in this report are opinions expressed by Shenzhen QC Testing Laboratory Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



3. List of Test and Measurement Instruments

3.1 Radiated Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	EMI Test Receiver	Rohde&Schwarz	ESIB 7	2277573376	2025.03.17	2026.03.16
2.	EMI Test Receiver	Rohde&Schwarz	ESPI3	101131	2025.03.17	2026.03.16
3.	Spectrum Analyzer	Rohde&Schwarz	FSV 40	101458	2025.03.18	2026.03.17
4.	TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB9168	VULB9168-588	2025.03.22	2026.03.21
5.	Loop Antenna	EMCO	6502	2133	2025.03.19	2026.03.18
6.	horn antenna	SCHWARZBECK	BBHA9120D	2069	2024.08.10	2025.08.09
7.	Horn Antenna	COM-MW	ZLB7-18-40G-950	12221225	2024.08.10	2026.08.09
8.	Pre-amplifier	MITEQ	TTA0001-18	2063645	2025.03.17	2026.03.16
9.	Pre-amplifier	MITEQ	TTA1800-30-HG	2063644	2025.03.17	2026.03.16
10.	Pre-amplifier	COM-MW	DLAN-18000-40000-02	10229104	2025.03.22	2026.03.21
11.	966 Camber	ZhongYU	9*6*6	/	2023.05.08	2026.05.07

Radiated Emission Measurement Software: EZ EMC Ver QCT03A2 RE+

3.2 RF Conducted test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due
1.	Wideband Radio Communication Tester	Rohde & Schwarz	CW500	151583	2025.03.18	2026.03.17
2.	Spectrum Analyzer	ROHDE&SCHWARZ	FSV 40	101458	2025.03.18	2026.03.17
3.	Signal Generator	Agilent	N5182A	MY50141563	2025.03.18	2026.03.17
4.	RF Automatic Test System	MW	MW100-RFCB/MW100-PSB	MW2007004	2025.03.18	2026.03.17

RF Conducted Measurement Software: MTS 8310 Ver 2.0.0.0



4. Antenna requirement

Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna: The antenna is Wire Antenna, the best case gain of the antenna is 0.17dBi, reference to the Internal Photos for details.

5. Radiated Emission Method

5.1. Applicable Standard

FCC Part15 C Section 15.249

5.2. Limit

Frequency	Limit (uV/m)	Value	Measurement Distance
0.009MHz-0.490MHz	2400/F(KHz)	QP	300m
0.490MHz-1.705MHz	24000/F(KHz)	QP	30m
1.705MHz-30MHz	30	QP	30m

Frequency	Field Strengths Limits (uV/m at 3 m)	Field Strengths Limits (dBuV/m at 3 m)	Remark
30 – 88	100	40.0	Quasi-peak
88 – 216	150	43.5	Quasi-peak
216 – 960	200	46.0	Quasi-peak
Above 960	500	54.0	Quasi-peak
Above 1GHz	/	74.0	Peak
		54.0	Average

Note: $\text{dB}\mu\text{V/m} = 20\log(\mu\text{V/m})$

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

As per FCC Section 15.249

(c) Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


5.3. Receiver setup

Frequency	Detector	RBW	VBW	Value
9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


Remark: For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission test in these three bands are based on measurements employing an average detector.

5.4. Test setup


For radiated emissions from 9kHz to 30MHz

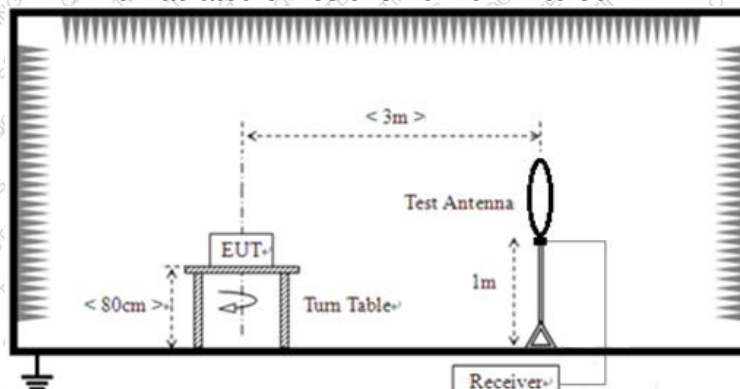

For radiated emissions from 30MHz to 1GHz

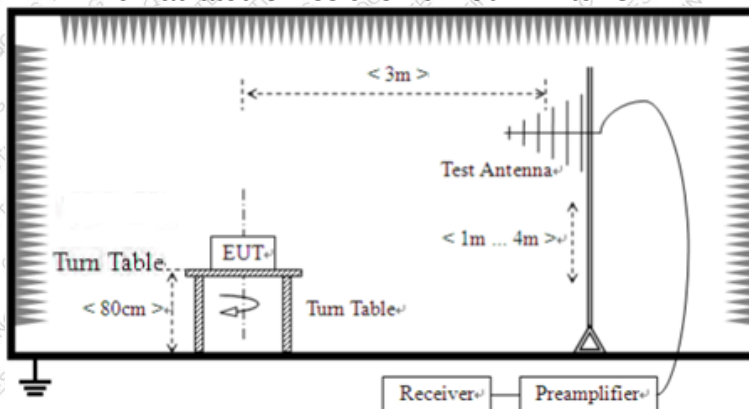

For radiated emissions above 1GHz

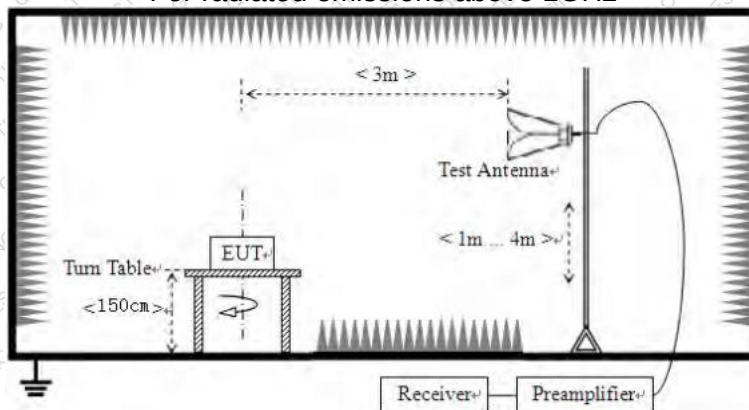

5.5. Test Procedure

1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.



3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

5.6. Test Data

Temperature	25°C	Humidity	49%
ATM Pressure	101.1kPa	Antenna Gain	0.17dBi
Test by	Charlie He	Test result	PASS

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.
2. Data of measurement within frequency range 9kHz-30MHz, 18-26GHz are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured, so test data does not present in this report.




Measurement data:

Pre-scan all test modes, found worst case at GFSK 2420MHz, and so only show the test result of GFSK 2420MHz.

Below 1GHz:

Horizontal

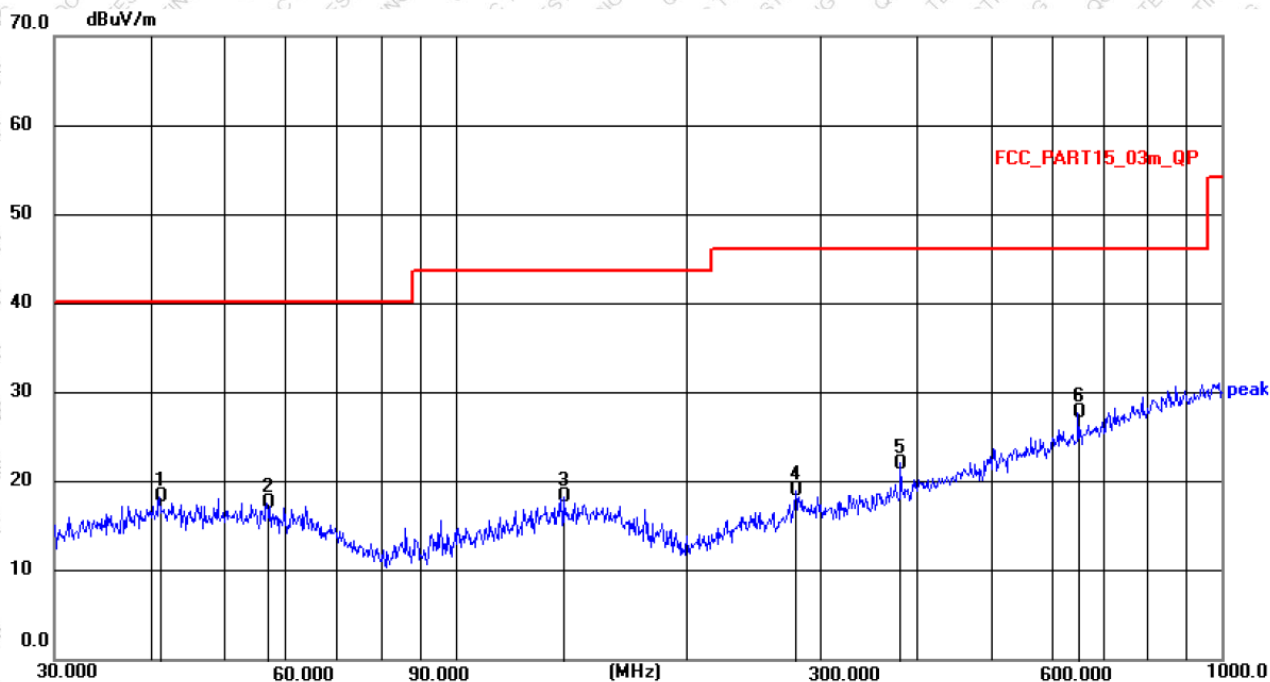


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	41.1320	3.76	14.58	18.34	40.00	21.66	QP
2	56.7917	3.74	13.86	17.60	40.00	22.40	QP
3	138.3873	4.10	14.21	18.31	43.50	25.19	QP
4	278.0668	4.39	14.60	18.99	46.00	27.01	QP
5	381.2485	5.07	16.98	22.05	46.00	23.95	QP
6 *	649.6596	5.77	22.05	27.82	46.00	18.18	QP



Vertical

70.0 dBuV/m

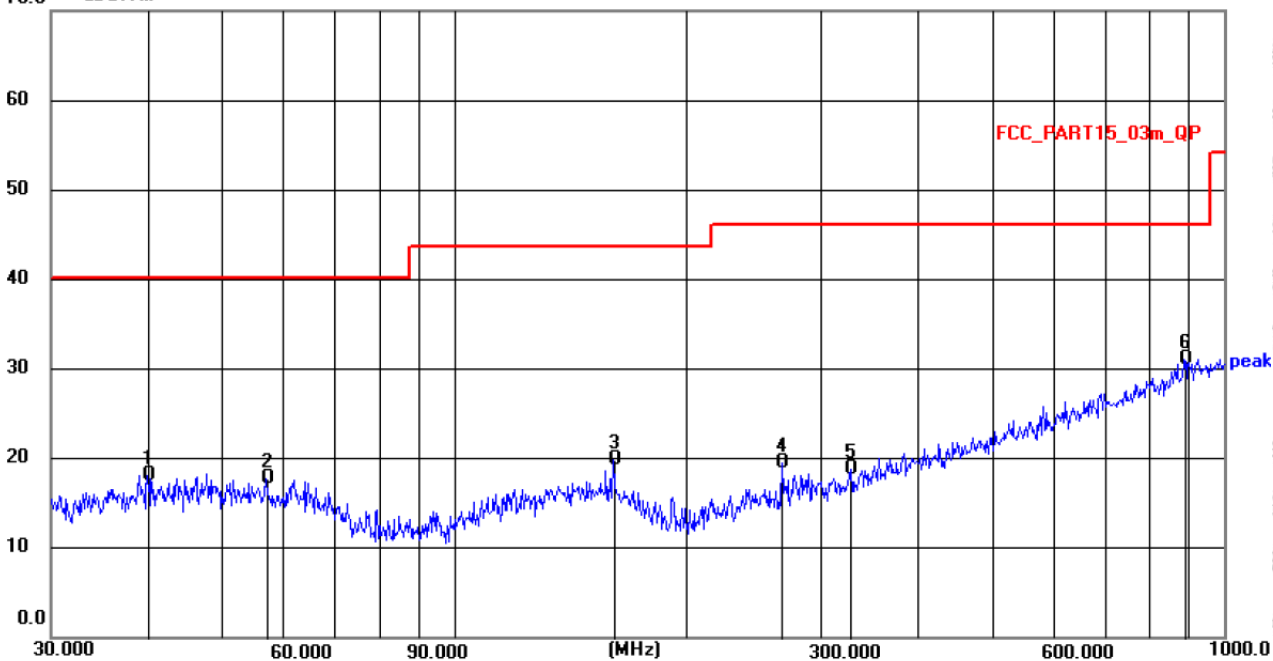

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.9942	3.34	14.79	18.13	40.00	21.87	QP
2	56.9912	3.64	14.12	17.76	40.00	22.24	QP
3	160.9089	5.20	14.62	19.82	43.50	23.68	QP
4	266.6089	5.65	13.85	19.50	46.00	26.50	QP
5	327.8872	3.27	15.46	18.73	46.00	27.27	QP
6 *	887.6098	4.77	26.27	31.04	46.00	14.96	QP



Above 1G:

Test channel: Lowest channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
2310	55.95	H	-22.55	33.4	74	40.6	peak
2310	55.96	V	-22.55	33.41	74	40.59	peak
2390	59.27	H	-22.39	36.88	74	37.12	peak
2390	55.85	V	-22.39	33.46	74	40.54	peak
4840	62.19	H	-18.73	43.46	74	30.54	peak
4840	64.32	V	-18.73	45.59	74	28.41	peak

Test channel: Middle channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
4880	64.92	H	-18.6	46.32	74	30.18	peak
4880	64.82	V	-18.6	46.22	74	28.91	peak

Test channel: Highest channel

Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Level (dBμV/m)	Limit Line (dBμV/m)	Margin (dB)	Detector
2483.5	45.87	H	-10.81	35.06	74	38.94	peak
2483.5	45.77	V	-10.91	34.86	74	39.14	peak
2500	44.95	H	-10.75	34.2	74	39.8	peak
2500	45.35	V	-10.85	34.5	74	39.5	peak
4920	63.87	H	-18.52	45.35	74	28.65	peak
4920	65.04	V	-18.52	46.52	74	27.48	peak



Frequency (MHz)	Read Level (dBμV)	polarization	Factor (dB/m)	Peak value (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)
2420	100.44	H	-22.33	78.11	93.98	15.87
2420	98.12	H	-22.33	75.79	93.98	18.19
2440	98.92	V	-22.3	76.62	93.98	17.36
2440	96.5	V	-22.3	74.2	93.98	19.78
2460	96.25	V	-22.25	74	93.98	19.98
2460	95.7	V	-22.25	73.45	93.98	20.53

Remarks:

1. Level = Receiver Read level + Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. If the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in above table if the peak value complies with average limit.

6. 20dB Occupy Bandwidth


6.1 Applicable Standard

FCC Part15 C Section 15.215

6.2 Limit

N/A

6.3 Test setup

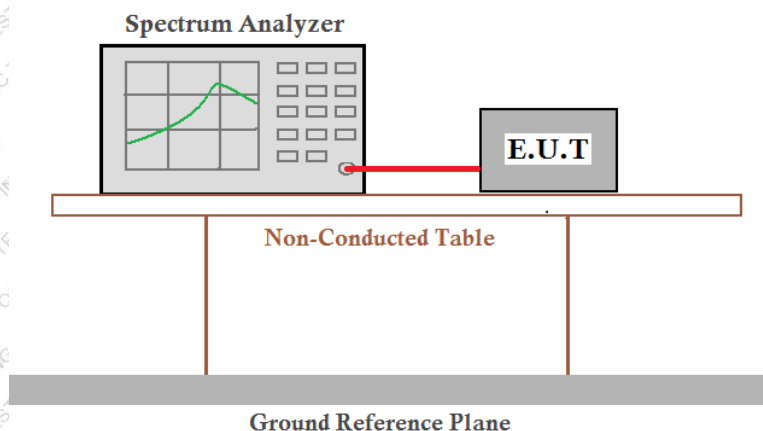

6.4 Test Data



Temperature	25.5 °C	Humidity	50%
ATM Pressure	101.1kPa	Antenna Gain	0.17dBi
Test by	LBi Li	Test result	PASS



Please refer to following table and plots.




Test Frequency (MHz)	20dB bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2420	1.068	1.12
2440	1.072	1.046
2460	1.077	1.038


Test plot as follows:

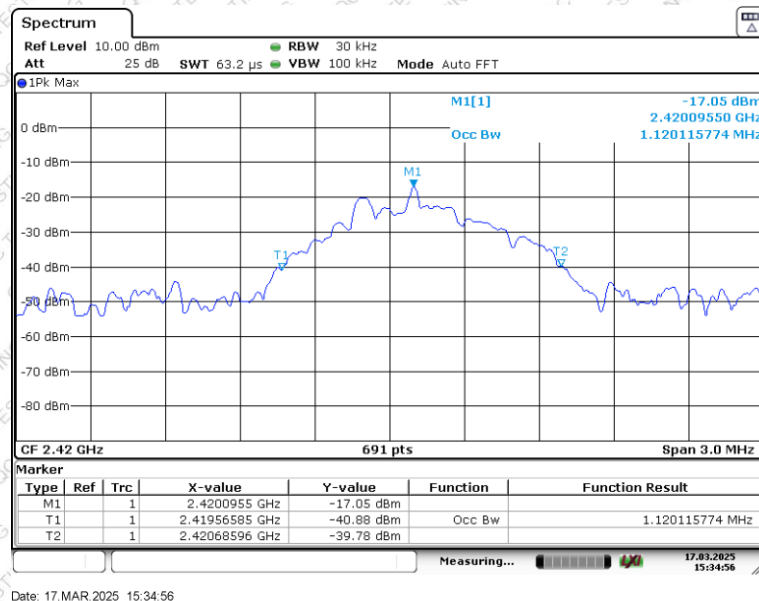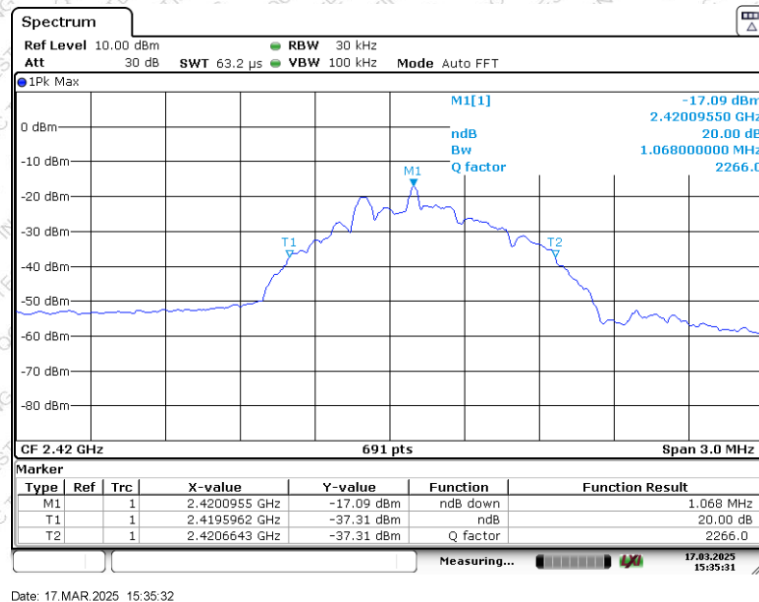

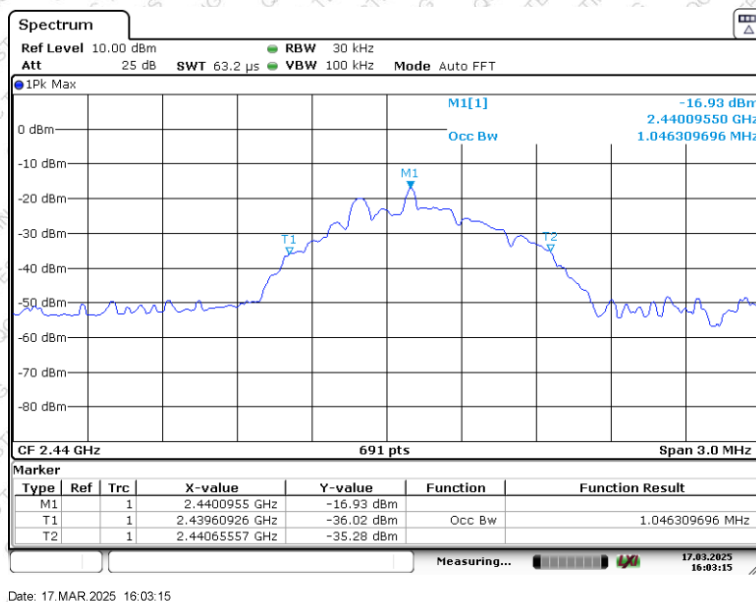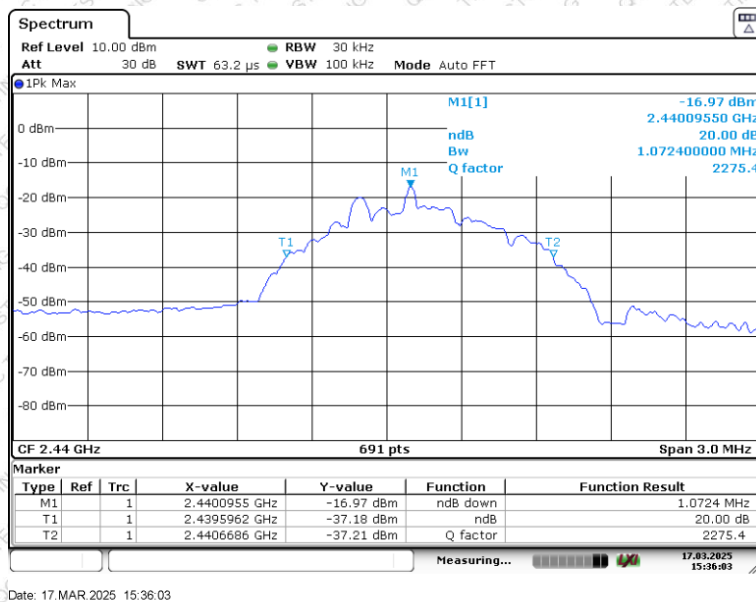

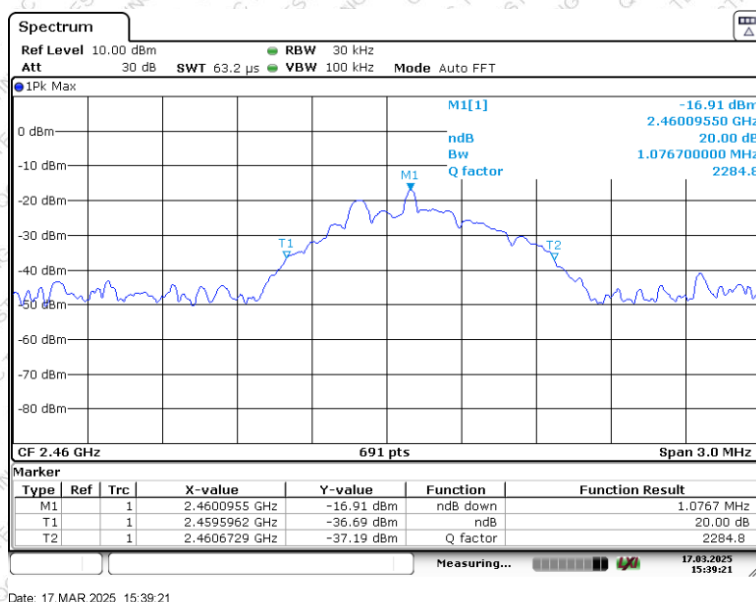

Date: 17. MAR 2025 15:39:21

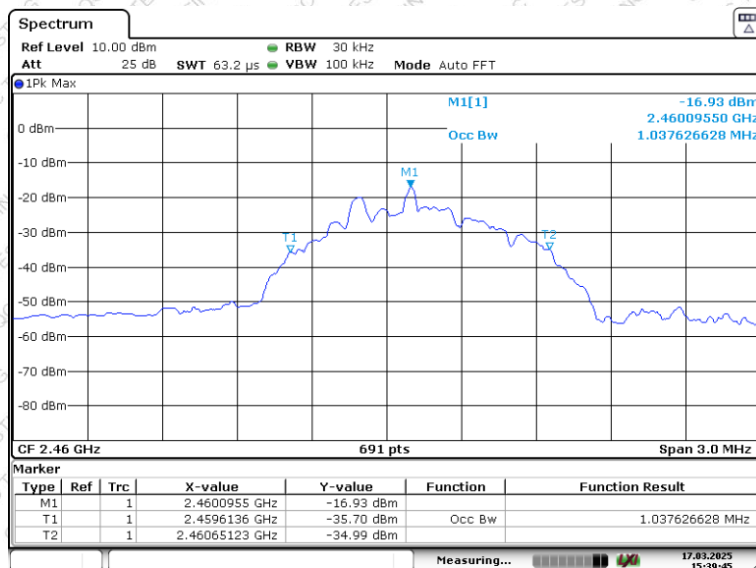

Date: 17. MAR 2025 15:39:45

----- THE END OF TEST REPORT -----