



FCC RF Test Report

APPLICANT : Prime King LLC
EQUIPMENT : Digital Media Receiver
MODEL NAME : P8Z7MN
FCC ID : 2BFXH-1523
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Feb. 13, 2025 ~ Jun. 11, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Product Specification of Equipment Under Test.....	5
1.4 Modification of EUT	5
1.5 Testing Location	6
1.6 Test Software.....	6
1.7 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Spurious Emission Measurement in the Restricted Band	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 LIST OF MEASURING EQUIPMENT.....	22
5 MEASUREMENT UNCERTAINTY	23
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR520501D	Rev. 01	Initial issue of report	Jun. 23, 2025
FR520501D	Rev. 02	Updated Section 3.3.3 Test Procedures on Page 13. This report is an updated version, replacing the report issued on Jun. 23, 2025.	Aug. 01, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 30\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.04 dB at 43.58 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 19.37 dB at 0.157 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Prime King LLC

251 Little Falls Drive, Wilmington Delaware 19808

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	P8Z7MN
FCC ID	2BFXH-1523
SN Code	Conducted: G0G4CW0150350046 Conduction: G0G4CW0151230002 Radiation: G0G4CW0151230003

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	14.19 dBm (0.0262 W)
99% Occupied Bandwidth	2.130MHz
Antenna Type / Gain	FPC Loop Antenna type with gain 2.65 dBi
Type of Modulation	OQPSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH19_2445 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH19_2445 MHz
	Mode 3: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Zigbee Link + WLAN Link (2.4G) + Powered by Adapter
Remark: For Radiated TCs, The tests were performance with Adapter	


RSE Co-location
Zigbee CH26 2480MHZ + Low Power Wideband Radio in Wi-Fi 5GHz 5800MHZ TX
Zigbee CH26 2480MHZ + 802.11ax HE20 CH11 2462MHZ

2.3 Connection Diagram of Test System

AC Conducted Emission:

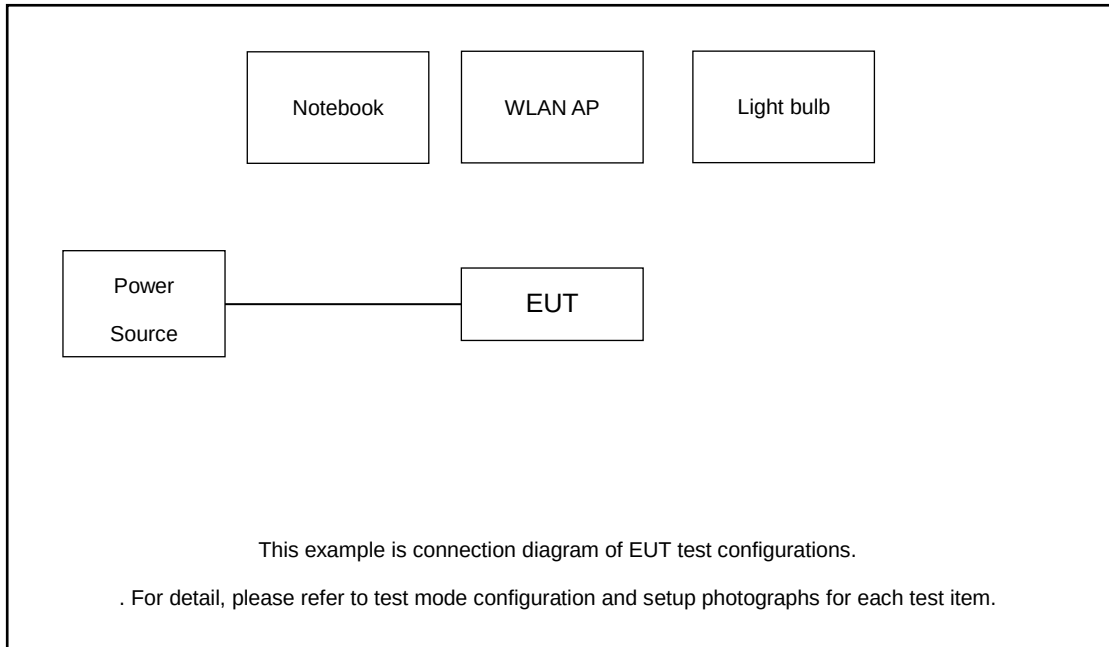

Radiated Emission:

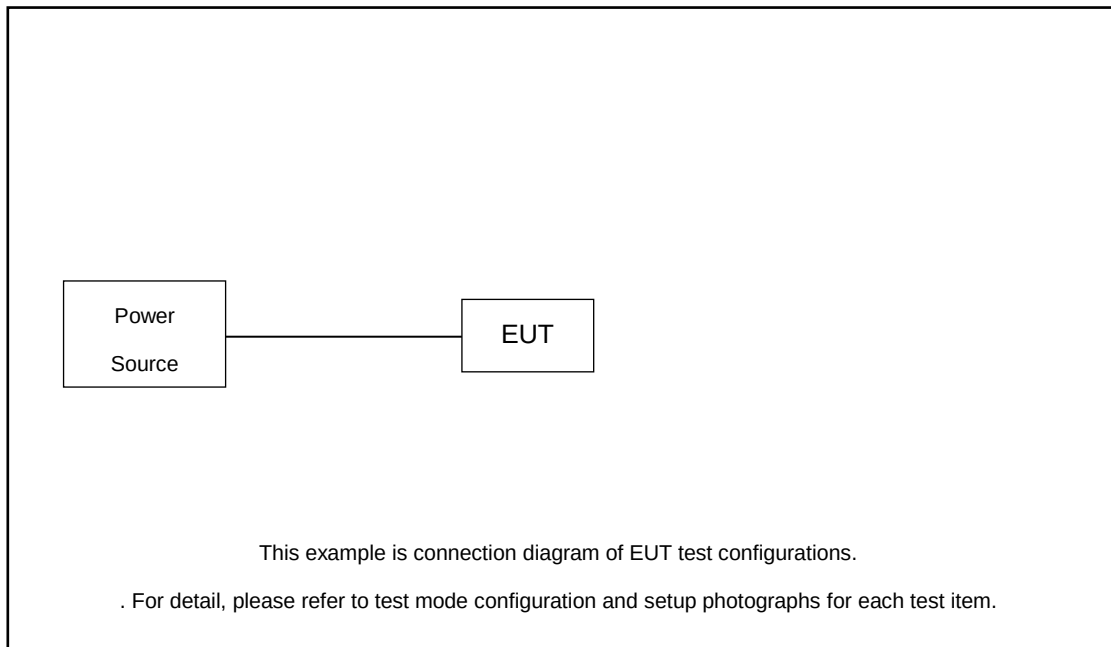

2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	G480	QDS-BRCM1050I	N/A	Shielded cable DC O/P 1.8m, Unshielded AC I/P cable 1.8m
2.	WLAN AP	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Light bulb	N/A	N/A	N/A	Light bulb

2.5 EUT Operation Test Setup

For ZigBee function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor which are included in RF test system.

$$\text{Offset(dB)} = 22.11 \text{ (dB)}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Test data refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.5 Method AVGPSD-2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 10 kHz. Video bandwidth VBW = 30 kHz In order to make an accurate measurement, set the span to at least 1.5 times the OBW.
5. Detector = power averaging (rms), Sweep time = auto couple, Trace mode = max hold, Employ trace averaging (rms) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. Add $10 \log(1/D)$, where D is the duty cycle, to the measured PSD in order to compute the average PSD during the actual transmission times.
8. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Test data refers to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Test data refers to Appendix A.

3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.For Co-location Low Power Wideband Radio in Wi-Fi 5GHz average measurement: use duty cycle correction factor method. (Refer to FR520501F Appendix D)
 - Use an RF detector and oscilloscope to measure the duty cycle of the EUT in normal working status.
 - Duty cycle = On time/100 milliseconds
 - On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$.
 - Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
 - Average Emission Level = Peak Emission Level + Duty cycle correction factor
 - Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.5.4 Test Setup


For radiated emissions below 30MHz

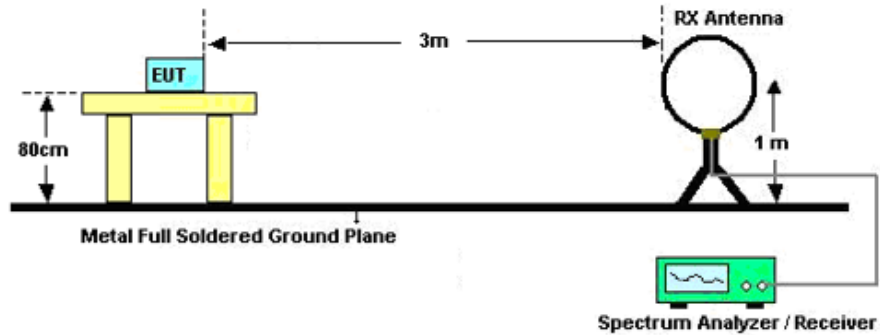

For radiated emissions from 30MHz to 1GHz

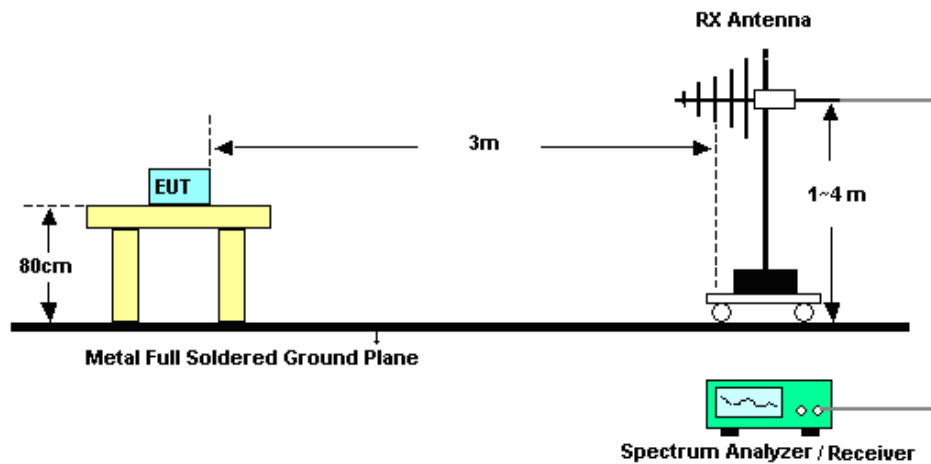

For radiated emissions above 1GHz

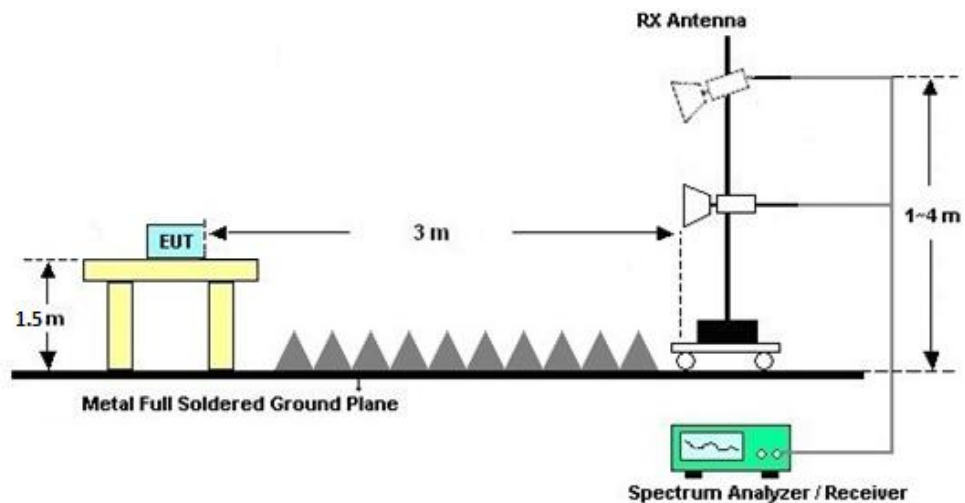

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

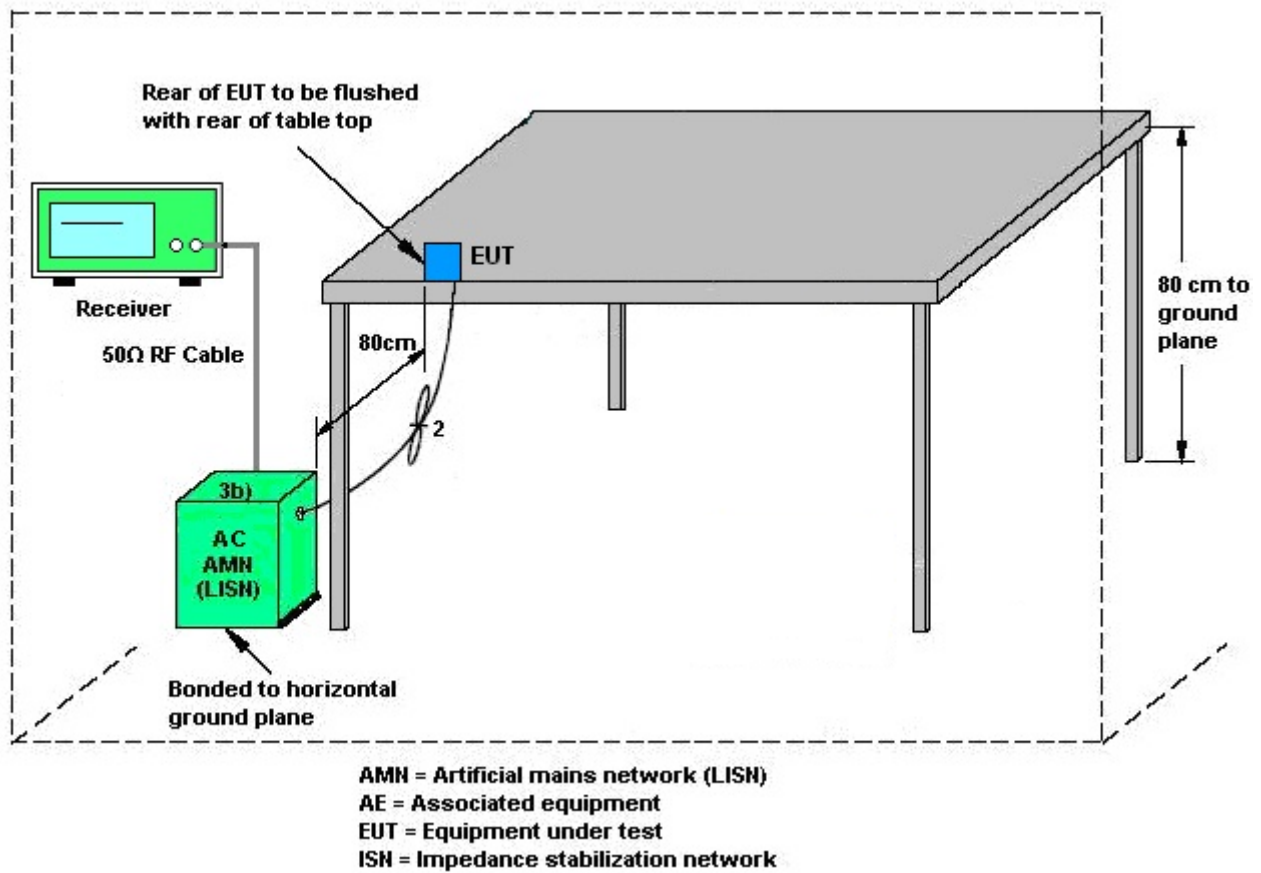

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Feb. 22, 2024	Feb. 13, 2025	Feb. 21, 2025	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 04, 2024	Feb. 13, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 08, 2024	Feb. 13, 2025	Sep. 07, 2025	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Sep. 03, 2024	Feb. 13, 2025	Sep. 02, 2025	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 11, 2024	Feb. 13, 2025	Apr. 10, 2025	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 22, 2024	Feb. 13, 2025	Oct. 21, 2025	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 04, 2024	Feb. 13, 2025	Jul. 03, 2025	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Feb. 13, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2025	Feb. 13, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 09, 2024	Feb. 13, 2025	Oct. 08, 2025	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
6db attenuator	TOJOIN	SMA(JK)	EMC02	2W/DC-18G	Jul. 30, 2024	Feb. 13, 2025	Jul. 29, 2025	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Feb. 13, 2025	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 18, 2024	Apr. 03, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Aug. 20, 2024	Apr. 03, 2025	Aug. 19, 2025	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Apr. 18, 2024	Apr. 03, 2025	Apr. 17, 2025	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 09, 2024	Apr. 03, 2025	Oct. 08, 2025	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Jun. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Oct. 10, 2024	Jun. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Oct. 10, 2024	Jun. 11, 2025	Oct. 09, 2025	Conducted (TH01-KS)
RF Test System	Tonscend	TS1120-3	N/A	N/A	NCR	Jun. 11, 2025	NCR	Conducted (TH01-KS)
automation control unit	Tonscend	JS0806-2	21H8060473	N/A	NCR	Jun. 11, 2025	NCR	Conducted (TH01-KS)
power control unit	Tonscend	JS0806-4ADC	21J8060495	N/A	NCR	Jun. 11, 2025	NCR	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Denstiy	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.06 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.38 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results



Ambient Condition: 25 °C, 45 %RH

Test Date: 2025.6.11

Test Engineer: Jiang Jun


DTS Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Zigbee	Ant1	2405	1.33	2404.34	2405.66	0.5	PASS
		2445	1.33	2444.33	2445.66	0.5	PASS
		2480	1.33	2479.34	2480.66	0.5	PASS



Test Graphs

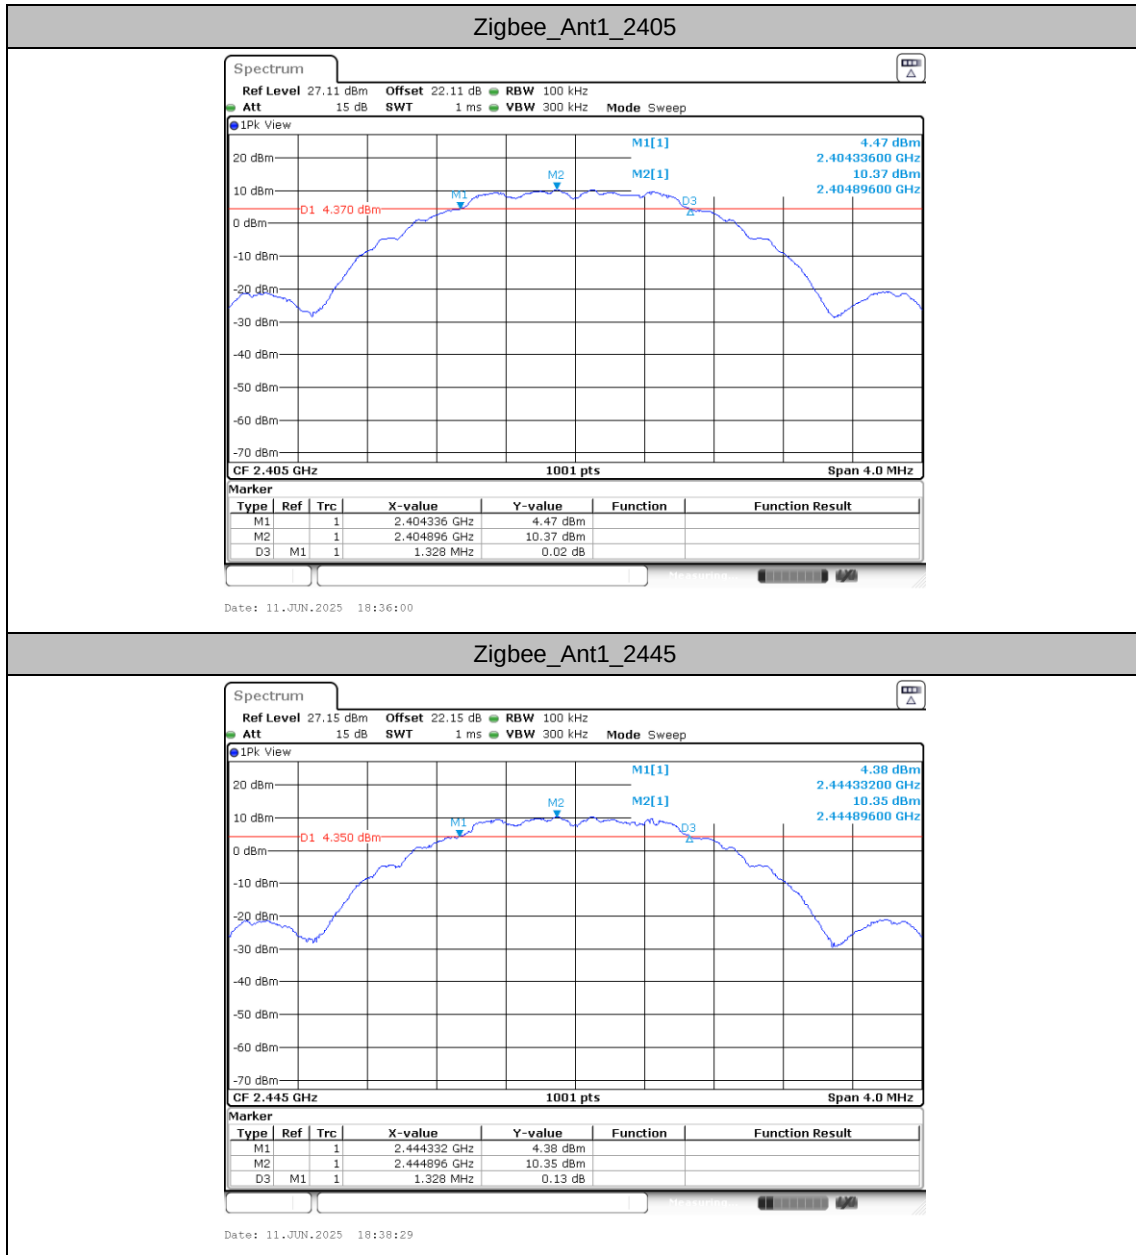

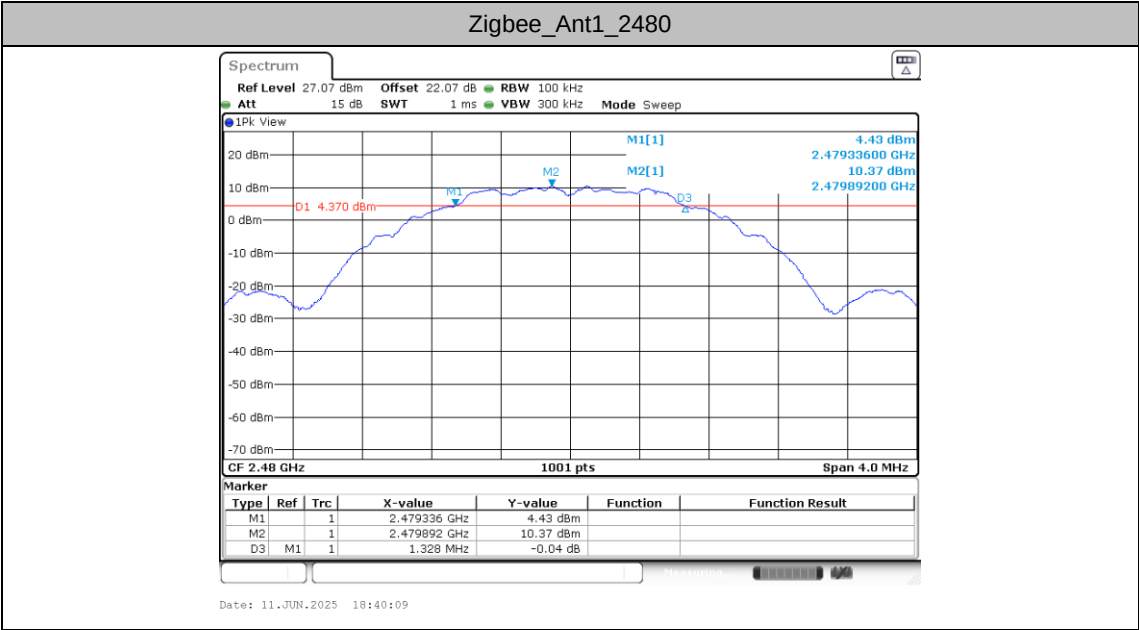



Occupied Channel Bandwidth


Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Zigbee	Ant1	2405	2.126	2403.9291	2406.0549	---	---
		2445	2.126	2443.9291	2446.0549	---	---
		2480	2.13	2478.9291	2481.0589	---	---



Test Graphs



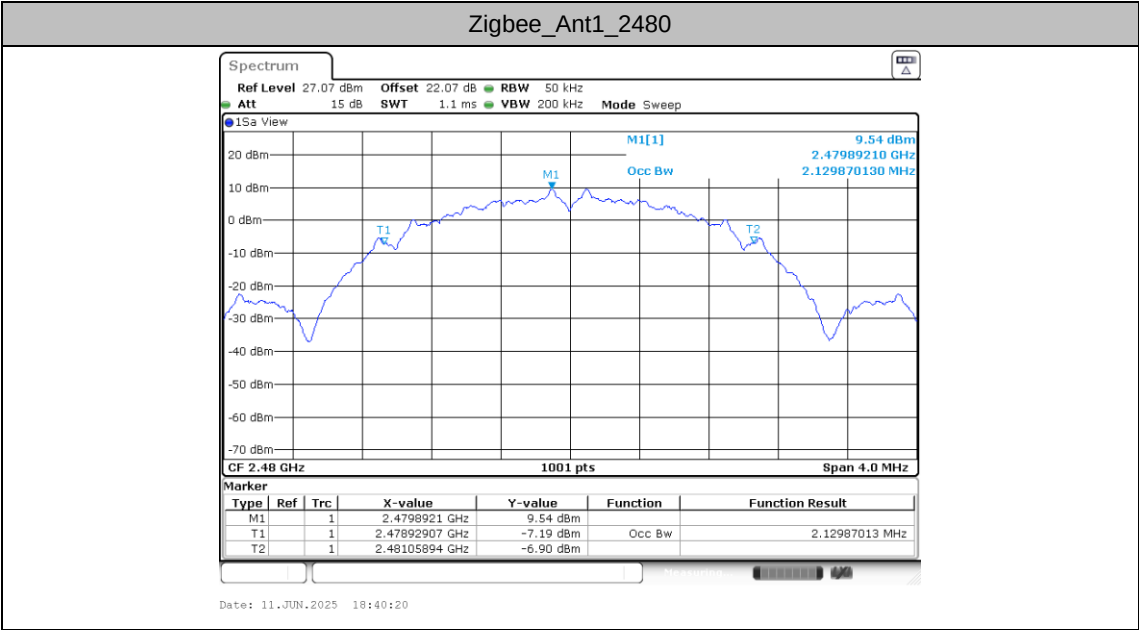



Maximum conducted output power

Test Result Average

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit	Power Setting
Zigbee	Ant 1	11	2.31	14.18	30.00	14.00
		19	2.31	14.12	30.00	14.00
		26	2.31	14.19	30.00	14.00

Maximum power spectral density


Test Result


TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
Zigbee	Ant1	2405	-2.10	≤8.00	PASS
		2445	-1.97	≤8.00	PASS
		2480	-2.11	≤8.00	PASS

The Duty Cycle Factor is compensated in the graph



Test Graphs

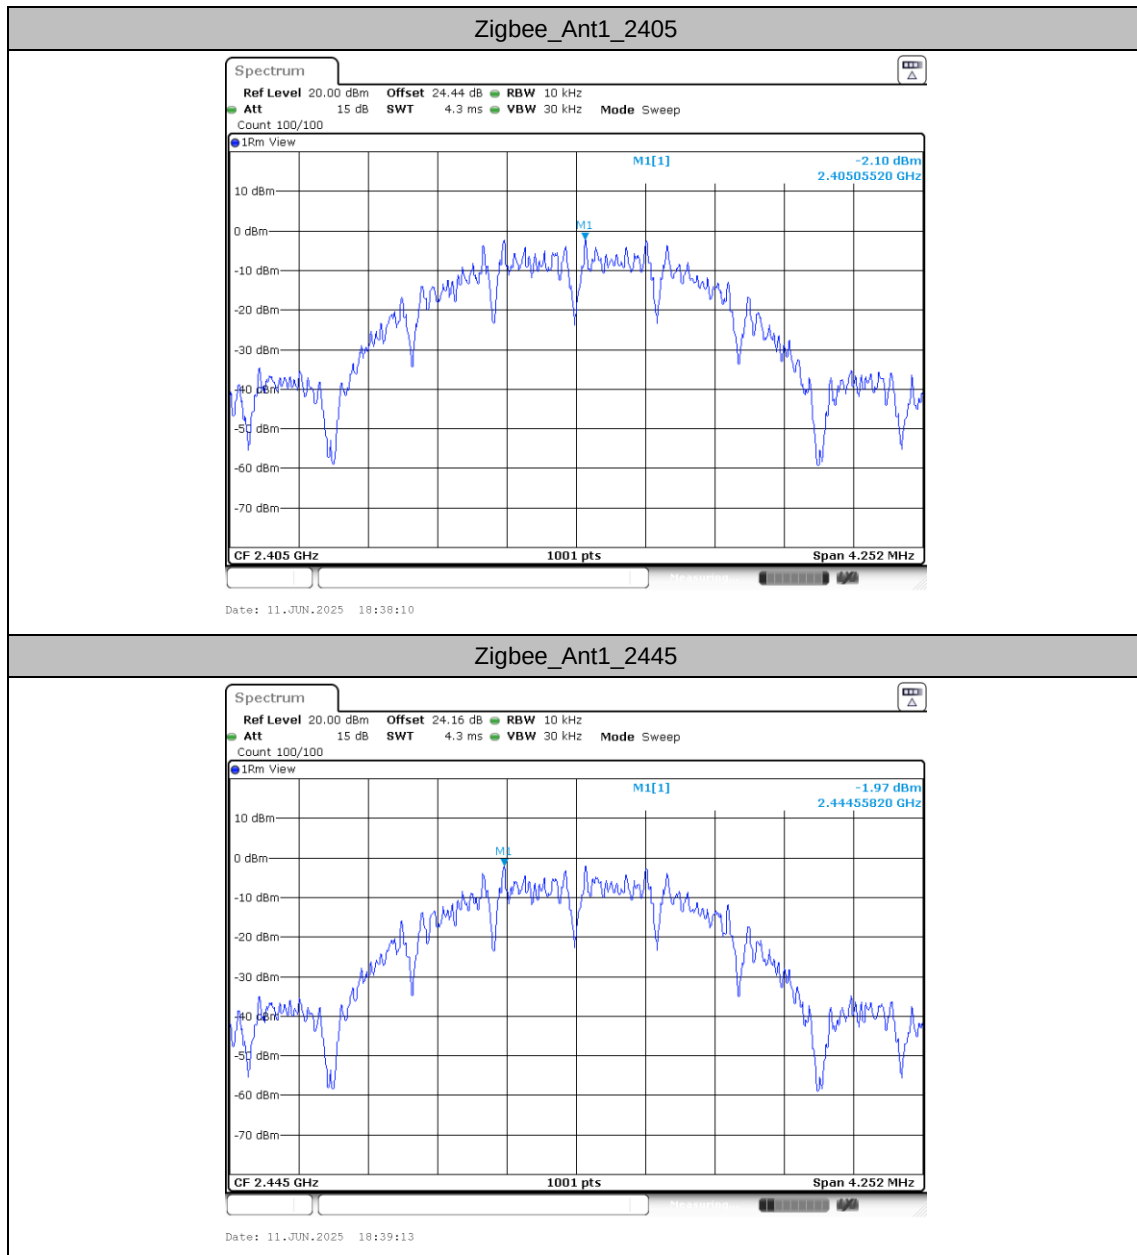

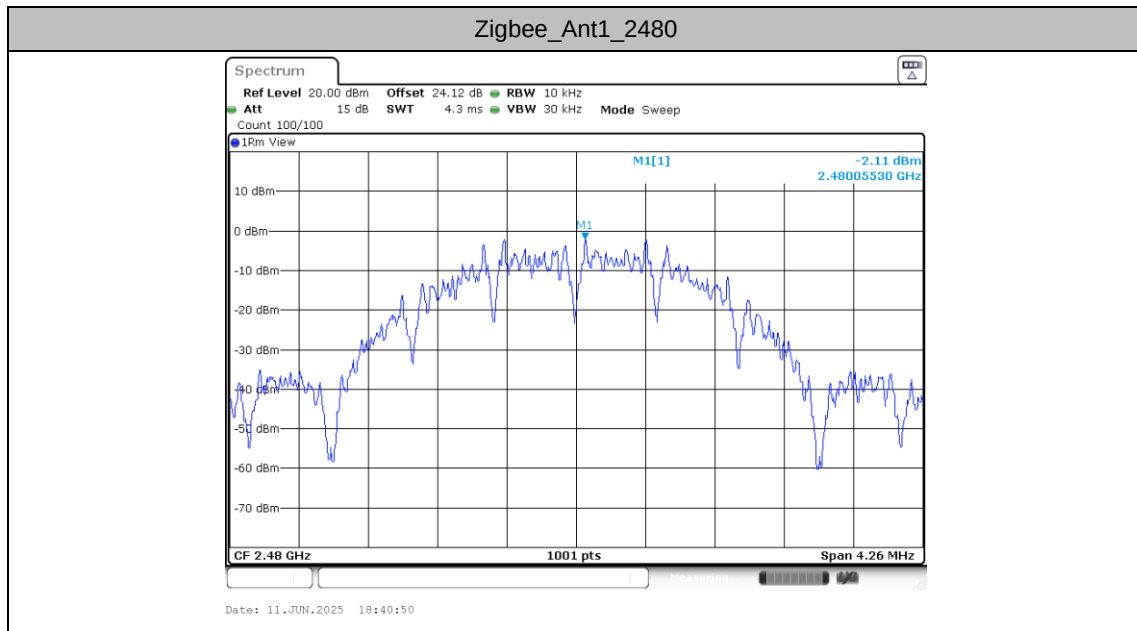



Reference level measurement


Test Result

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
Zigbee	Ant1	2405	2404.89	10.36
		2445	2444.90	10.36
		2480	2479.89	10.36



Test Graphs



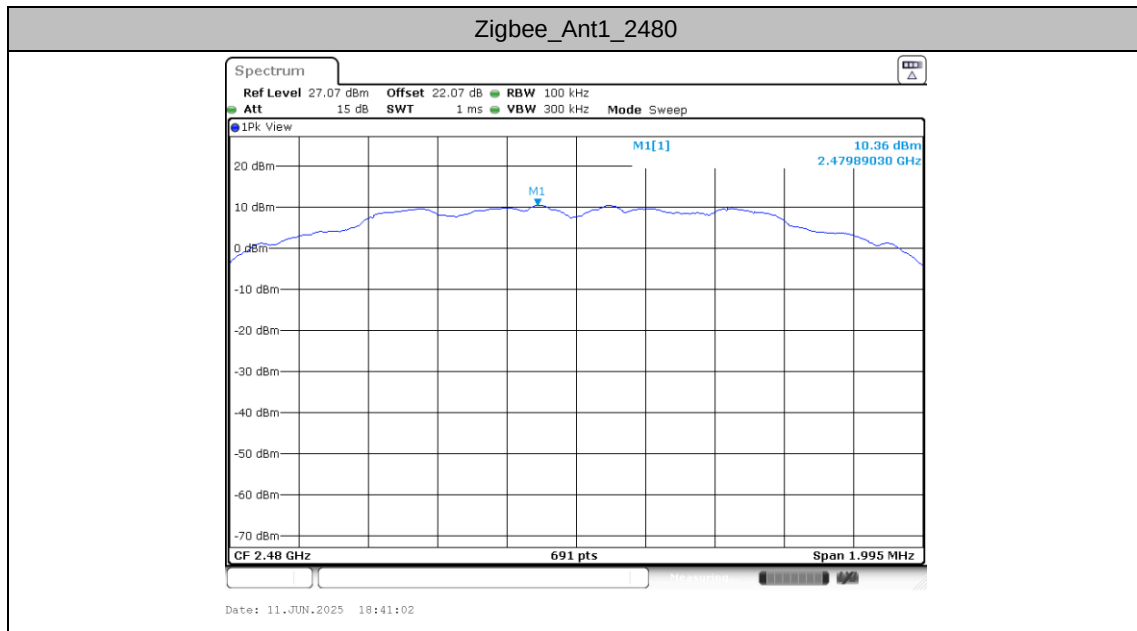




Band edge measurements

Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
Zigbee	Ant1	Low	2405	10.36	-47.04	≤-19.64	PASS
		High	2480	10.36	-43.28	≤-19.64	PASS



Test Graphs

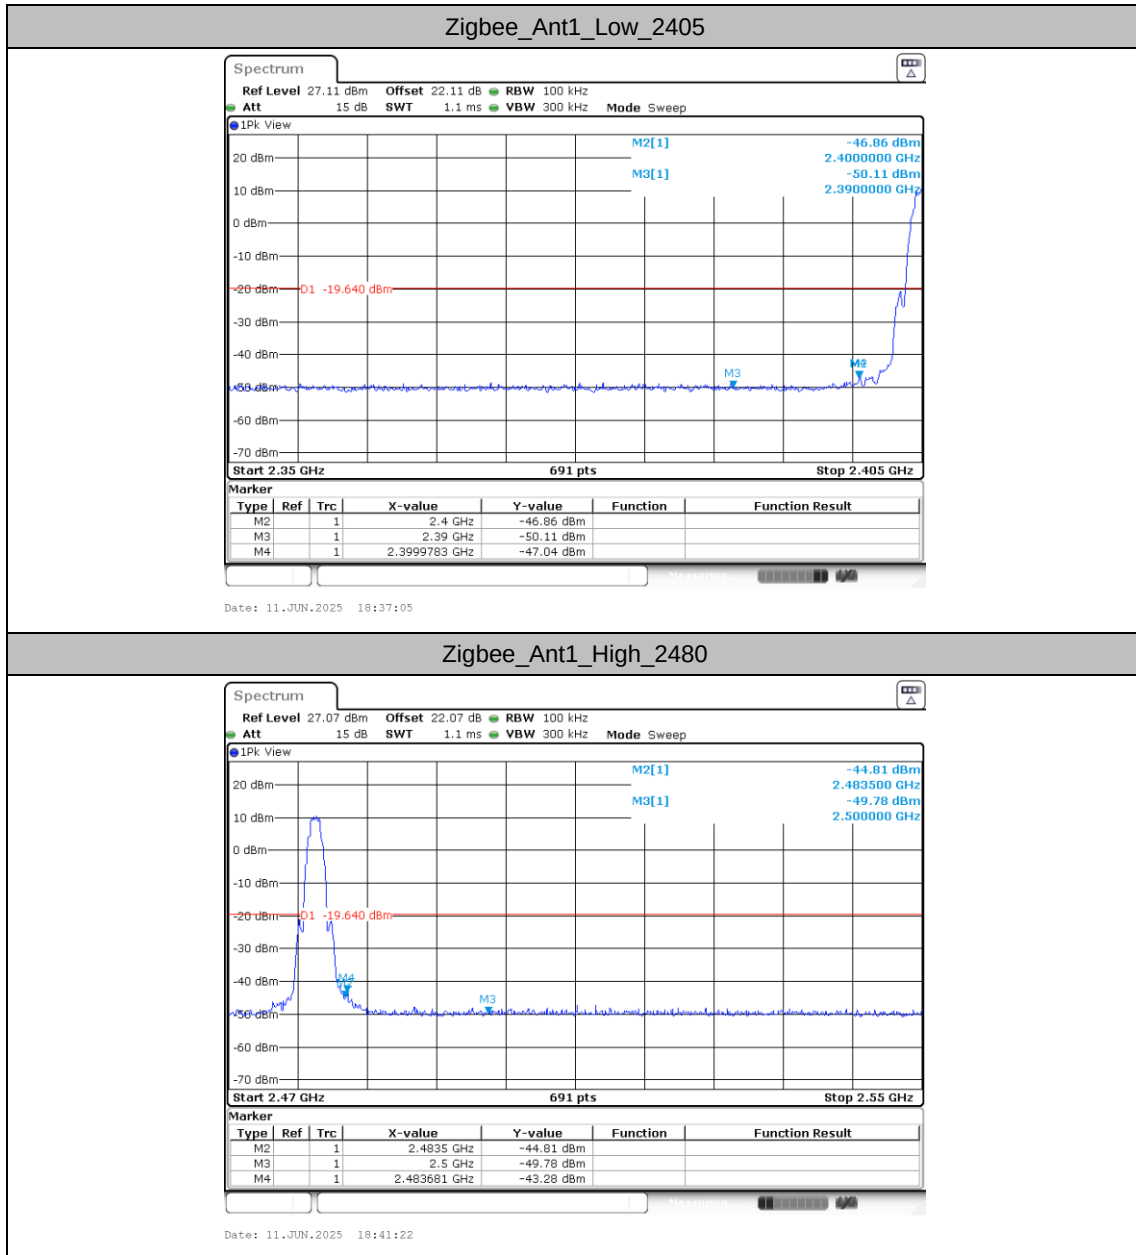




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
Zigbee	Ant1	2405	30~1000	10.36	-43.9	≤ -19.64	PASS
			1000~26500	10.36	-35.64	≤ -19.64	PASS
		2445	30~1000	10.36	-44.01	≤ -19.64	PASS
			1000~26500	10.36	-35.61	≤ -19.64	PASS
		2480	30~1000	10.36	-44.33	≤ -19.64	PASS
			1000~26500	10.36	-36.38	≤ -19.64	PASS



Test Graphs

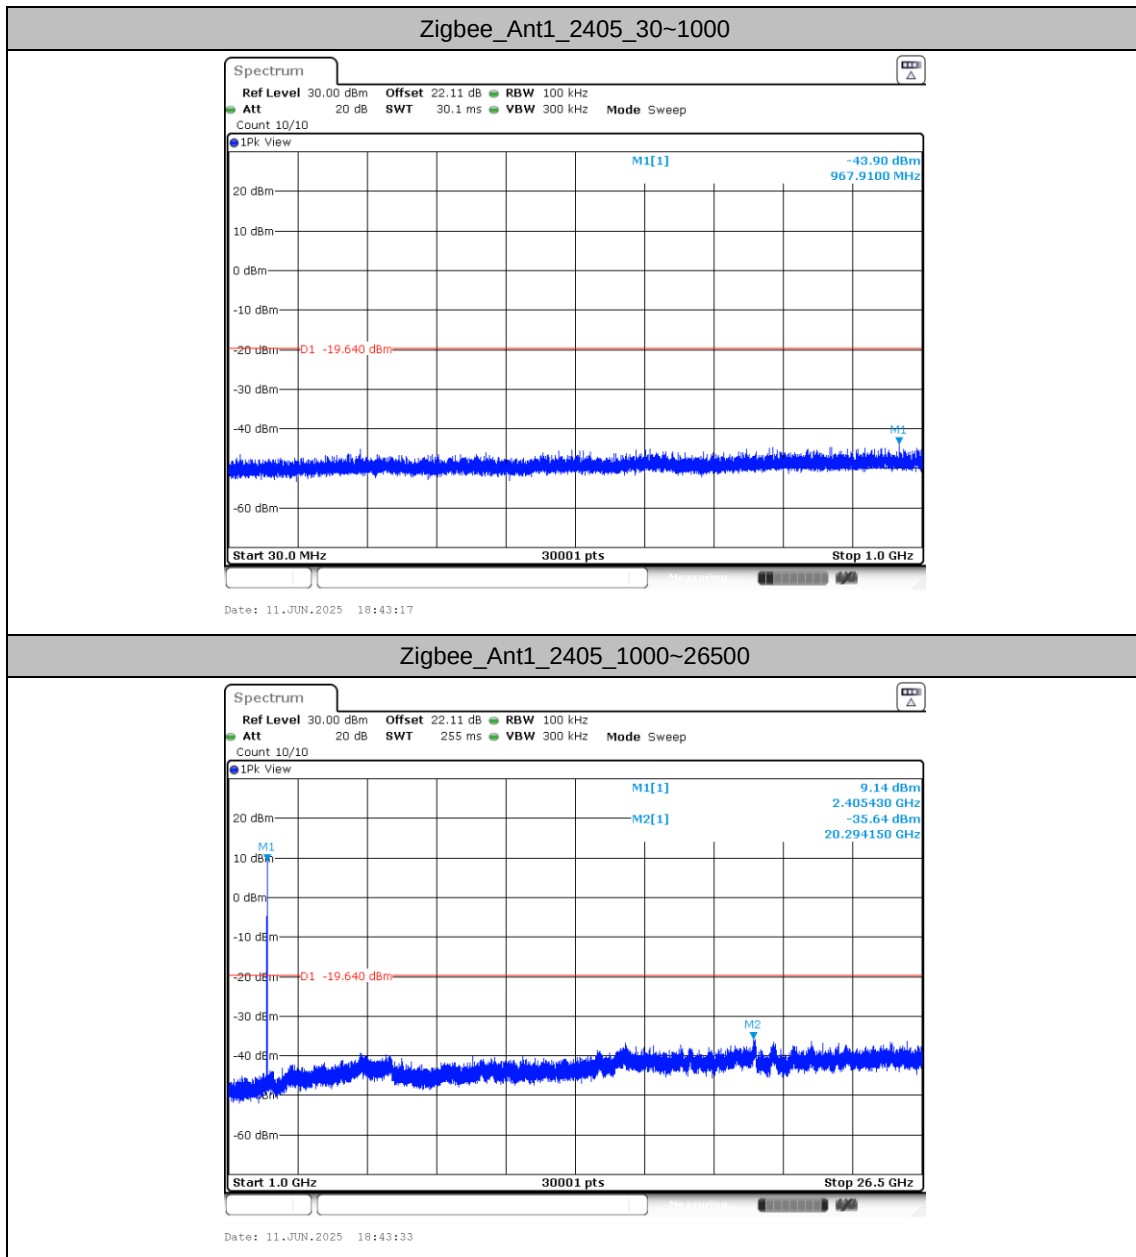

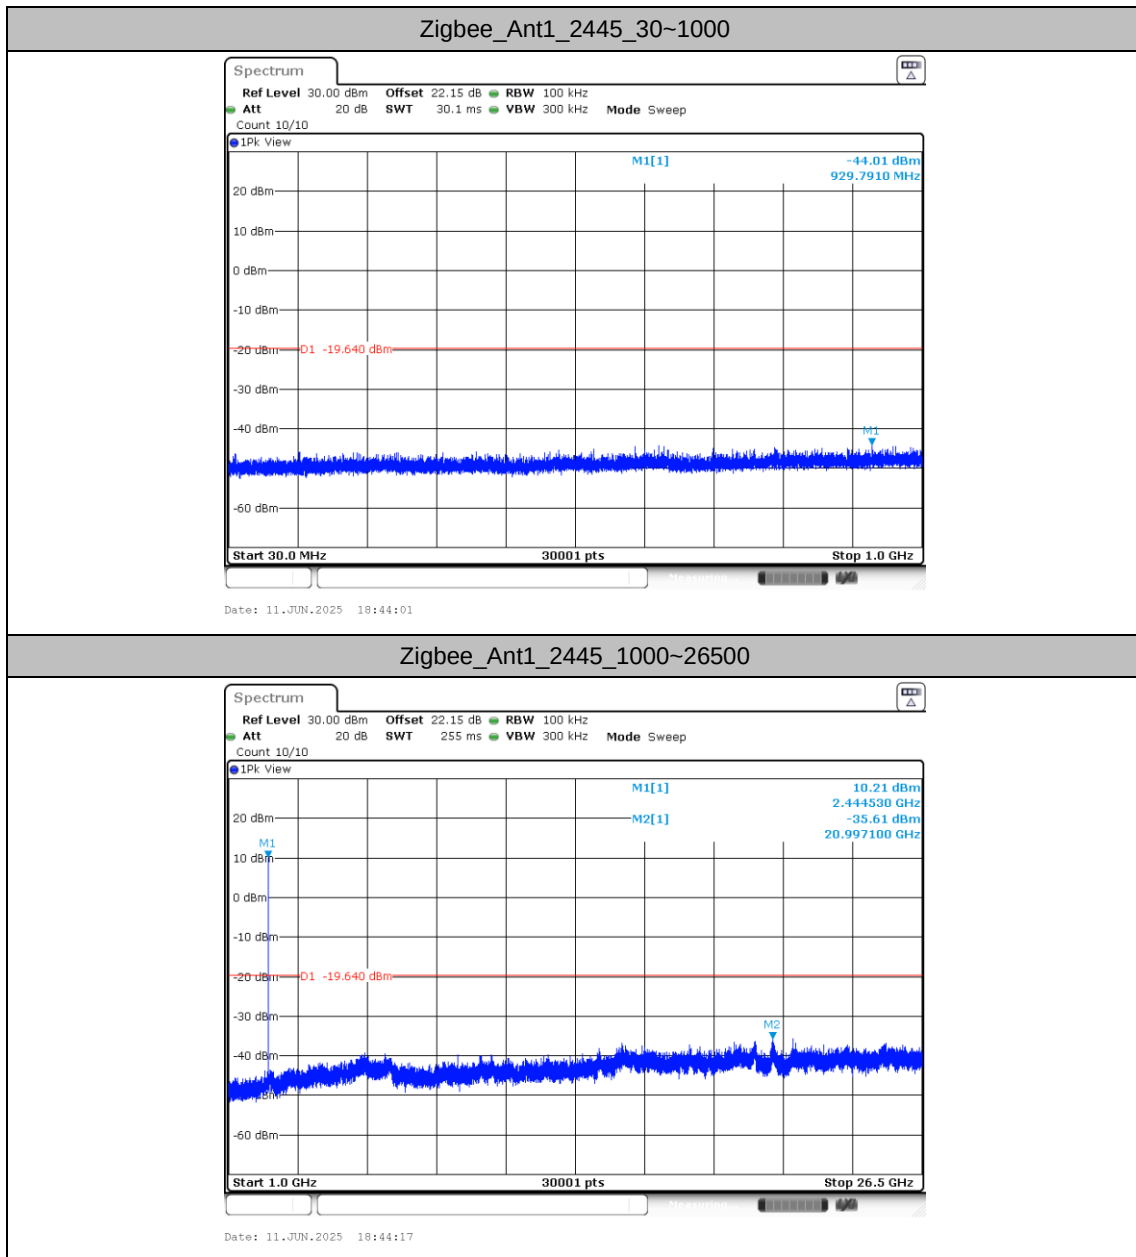


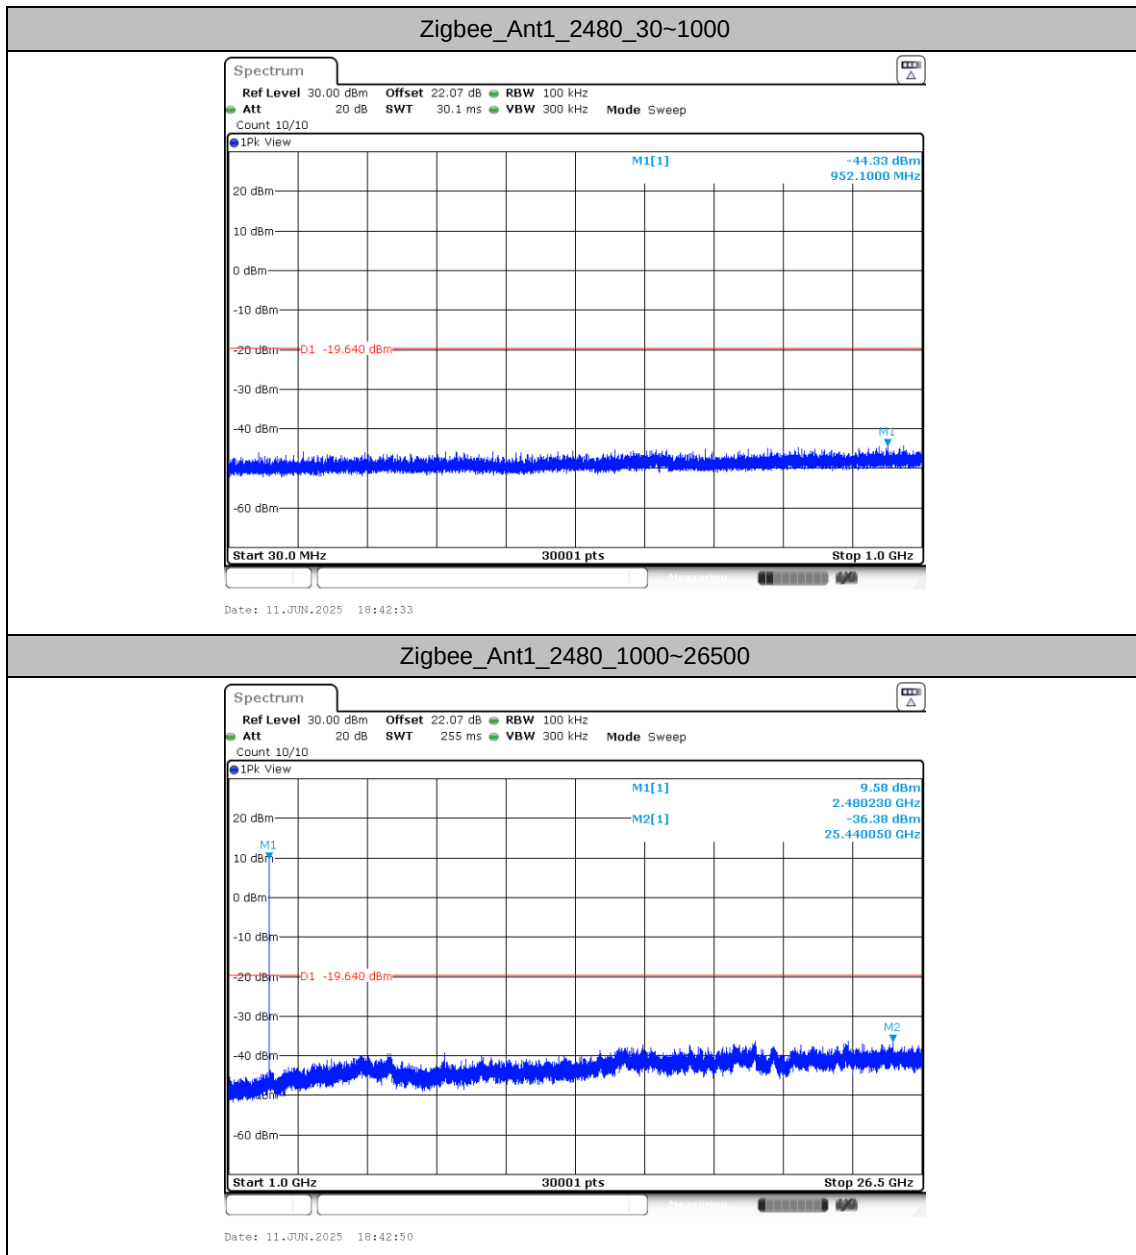



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

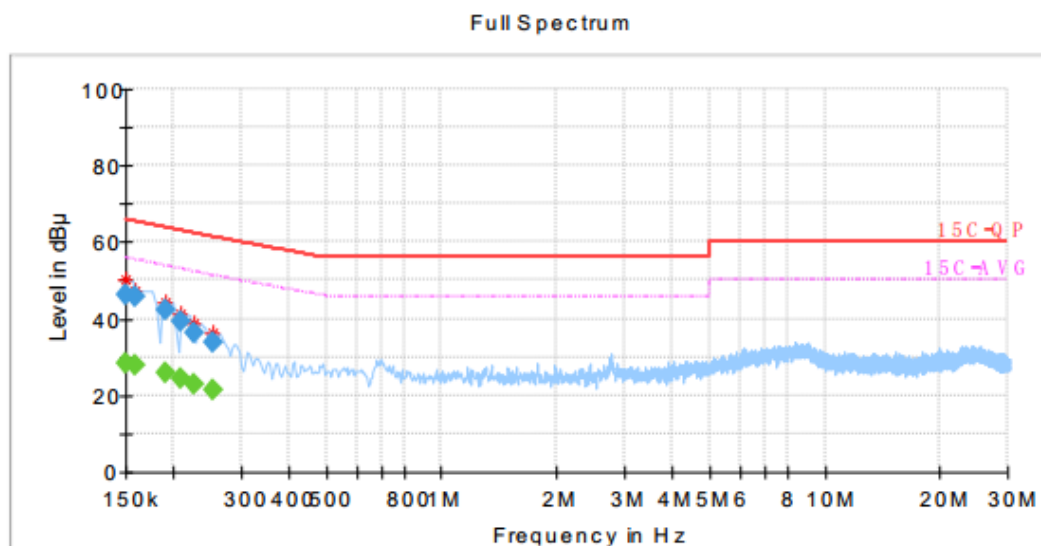


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	28.48	56.00	27.52	L1	OFF	20.1
0.150000	46.47	---	66.00	19.53	L1	OFF	20.1
0.159656	---	27.93	55.43	27.50	L1	OFF	20.1
0.159656	45.83	---	65.44	19.61	L1	OFF	20.1
0.189506	---	26.02	53.90	27.89	L1	OFF	20.0
0.189506	42.07	---	63.93	21.86	L1	OFF	20.0
0.208162	---	24.17	53.08	28.91	L1	OFF	20.0
0.208162	39.37	---	63.11	23.75	L1	OFF	20.0
0.226819	---	22.65	52.34	29.70	L1	OFF	19.9
0.226819	36.52	---	62.38	25.86	L1	OFF	19.9
0.252938	---	21.22	51.42	30.19	L1	OFF	19.9
0.252938	33.60	---	61.46	27.85	L1	OFF	19.9



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

Full Spectrum

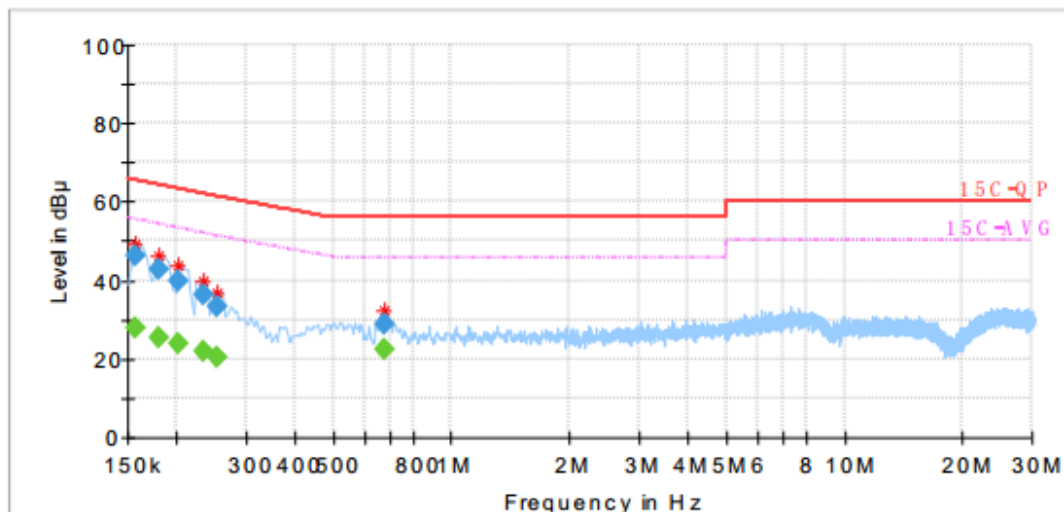

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156694	---	27.70	55.60	27.90	N	OFF	20.2
0.156694	46.24	---	65.61	19.37	N	OFF	20.2
0.179081	---	25.18	54.40	29.23	N	OFF	20.2
0.179081	42.94	---	64.42	21.49	N	OFF	20.2
0.201469	---	23.81	53.37	29.56	N	OFF	20.2
0.201469	40.05	---	63.40	23.35	N	OFF	20.2
0.233569	---	21.87	52.09	30.22	N	OFF	20.1
0.233569	36.12	---	62.13	26.01	N	OFF	20.1
0.253706	---	20.46	51.39	30.93	N	OFF	20.1
0.253706	33.30	---	61.43	28.13	N	OFF	20.1
0.678356	---	22.62	46.00	23.38	N	OFF	19.9
0.678356	28.91	---	56.00	27.09	N	OFF	19.9



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	levi zhao	Relative Humidity :	41~42%
		Temperature :	22~23℃





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Zigbee	11	2405	250k	-	-
Mode 2	2400-2483.5	1	Zigbee	19	2445	250k	-	-
Mode 3	2400-2483.5	1	Zigbee	26	2480	250k	-	-
Mode 4	2400-2483.5	1	Zigbee	26	2480	250k	-	-
	Low Power Wideband Radio in Wi-Fi 5GHz	2	FMCW	Middle	5800	-	-	-
Mode 5	2400-2483.5	1	Zigbee	26	2480	250k	-	-
	2400-2483.5	2	802.11ax HE20	11	2462	MCS0	Full RU	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2389.82	43.48	54.00	-10.52	H	AVERAGE	Pass	Band Edge
1	Zigbee	11	4810.00	38.95	74.00	-35.05	V	PEAK	Pass	Harmonic
2	Zigbee	19	-	-	-	-	-	-	-	Band Edge
2	Zigbee	19	7335.00	42.43	74.00	-31.57	V	PEAK	Pass	Harmonic
3	Zigbee	26	2483.50	46.30	54.00	-7.70	H	AVERAGE	Pass	Band Edge
3	Zigbee	26	7440.00	42.01	74.00	-31.99	H	PEAK	Pass	Harmonic
4	Zigbee	26	2483.62	68.91	74.00	-5.09	H	PEAK	Pass	Band Edge
	Zigbee	26	7440.00	42.69	74.00	-31.31	V	PEAK	Pass	Harmonic
	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	5800.00	106.70	114.00	-7.30	H	PEAK	Pass	Fundamental
	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	5800.00	87.70	94.00	-6.30	H	AVERAGE	Pass	Fundamental
	Low Power Wideband Radio in Wi-Fi 5GHz	Mid	11600.00	46.11	74.00	-27.89	V	PEAK	Pass	Harmonic
5	Zigbee	26	2483.62	67.30	74.00	-6.70	H	PEAK	Pass	Band Edge
	Zigbee	26	7440.00	43.17	74.00	-30.83	V	PEAK	Pass	Harmonic
	802.11ax HE20	11	2483.50	47.89	54.00	-6.11	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	11	7386.00	42.48	74.00	-31.52	H	PEAK	Pass	Harmonic

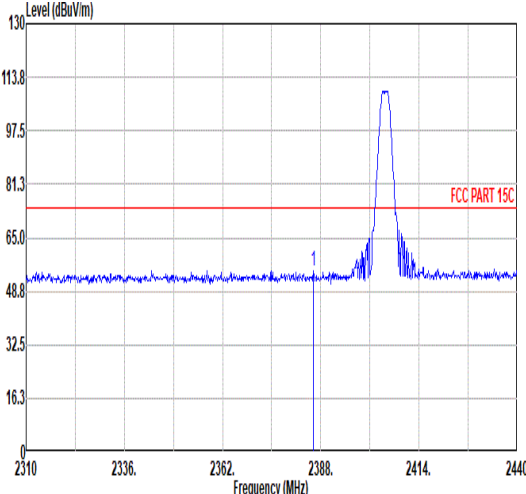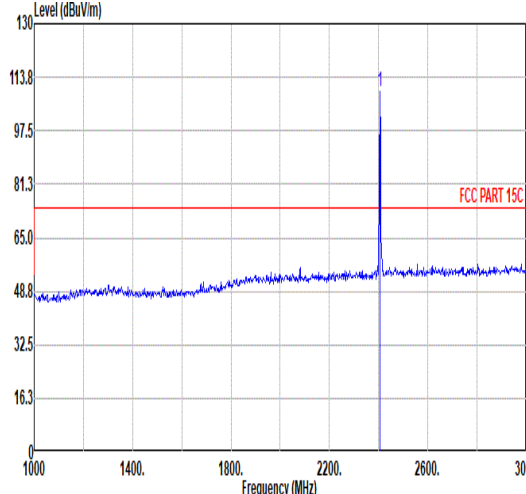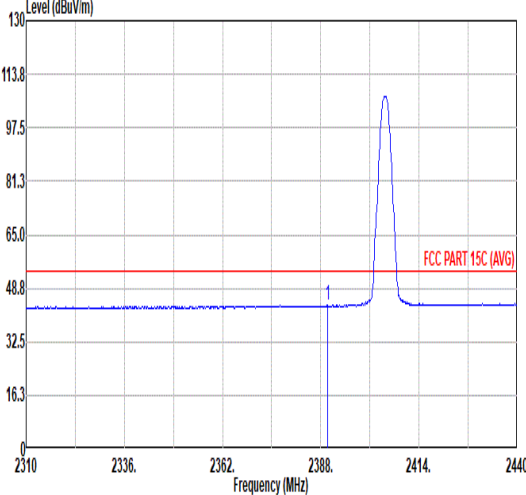
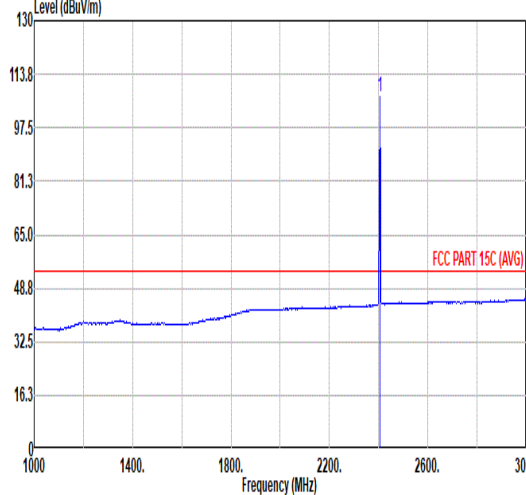


Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_Zigbee_CH11_2405MHz																																																						
ANT	1																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>42.57</td><td>32.12</td><td>6.70</td><td>32.43</td><td>6.00</td><td>283 316 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	54.96	74.00	-19.04	42.57	32.12	6.70	32.43	6.00	283 316 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2386.05	54.96	74.00	-19.04	42.57	32.12	6.70	32.43	6.00	283 316 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>109.59</td><td>-----</td><td>-----</td><td>97.06</td><td>32.22</td><td>6.73</td><td>32.42</td><td>6.00</td><td>283 316 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	109.59	-----	-----	97.06	32.22	6.73	32.42	6.00	283 316 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2405.00	109.59	-----	-----	97.06	32.22	6.73	32.42	6.00	283 316 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>43.48</td><td>54.00</td><td>-10.52</td><td>31.05</td><td>32.14</td><td>6.71</td><td>32.42</td><td>6.00</td><td>283 316 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	43.48	54.00	-10.52	31.05	32.14	6.71	32.42	6.00	283 316 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.82	43.48	54.00	-10.52	31.05	32.14	6.71	32.42	6.00	283 316 AVERAGE																																													
AVERAGE																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>106.96</td><td>-----</td><td>-----</td><td>94.43</td><td>32.22</td><td>6.73</td><td>32.42</td><td>6.00</td><td>283 316 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	106.96	-----	-----	94.43	32.22	6.73	32.42	6.00	283 316 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2405.00	106.96	-----	-----	94.43	32.22	6.73	32.42	6.00	283 316 AVERAGE																																													

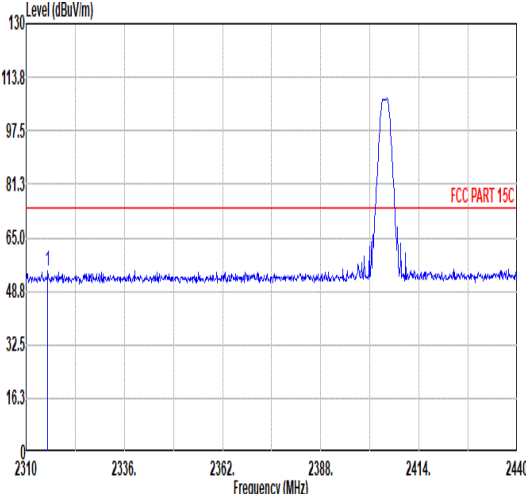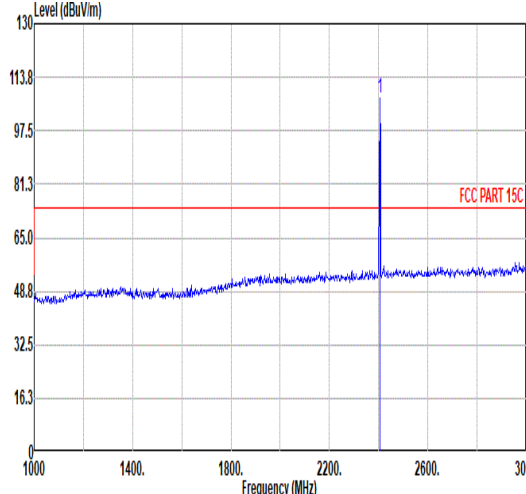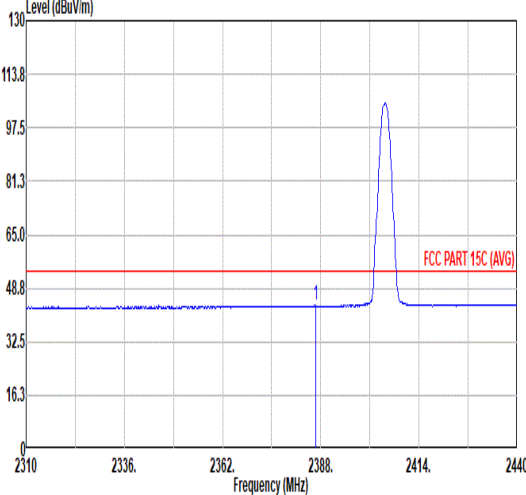
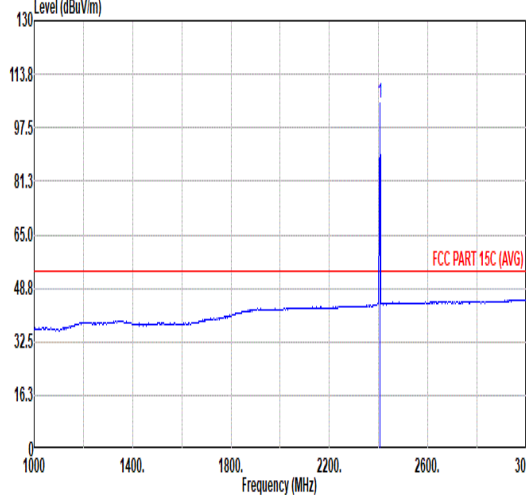


Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2315.72</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>43.14</td><td>31.83</td><td>6.60</td><td>32.45</td><td>6.00</td><td>304</td><td>109</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2315.72	55.12	74.00	-18.88	43.14	31.83	6.60	32.45	6.00	304	109	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>107.36</td><td>-----</td><td>-----</td><td>94.83</td><td>32.22</td><td>6.73</td><td>32.42</td><td>6.00</td><td>304</td><td>109</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	107.36	-----	-----	94.83	32.22	6.73	32.42	6.00	304	109	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2315.72	55.12	74.00	-18.88	43.14	31.83	6.60	32.45	6.00	304	109	PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	107.36	-----	-----	94.83	32.22	6.73	32.42	6.00	304	109	PEAK																																																																																								
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>31.06</td><td>32.12</td><td>6.70</td><td>32.43</td><td>6.00</td><td>304</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	43.45	54.00	-10.55	31.06	32.12	6.70	32.43	6.00	304	109	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>104.75</td><td>-----</td><td>-----</td><td>92.22</td><td>32.22</td><td>6.73</td><td>32.42</td><td>6.00</td><td>304</td><td>109</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	104.75	-----	-----	92.22	32.22	6.73	32.42	6.00	304	109	AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2386.57	43.45	54.00	-10.55	31.06	32.12	6.70	32.43	6.00	304	109	AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2405.00	104.75	-----	-----	92.22	32.22	6.73	32.42	6.00	304	109	AVERAGE																																																																																								



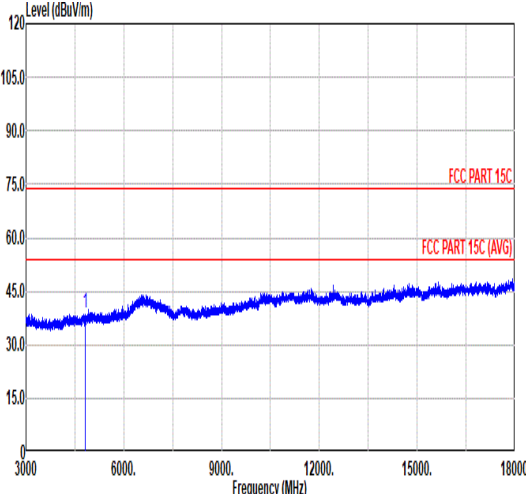
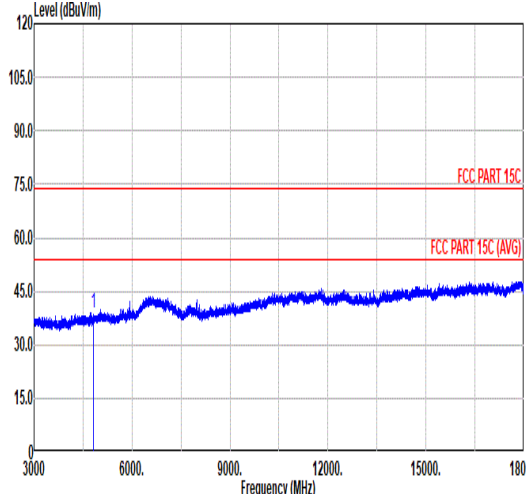


Mode	1																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>38.94</td><td>74.00</td><td>-35.06</td><td>61.15</td><td>34.22</td><td>9.54</td><td>65.97</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	38.94	74.00	-35.06	61.15	34.22	9.54	65.97	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4810.00</td><td>38.95</td><td>74.00</td><td>-35.05</td><td>61.16</td><td>34.22</td><td>9.54</td><td>65.97</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4810.00	38.95	74.00	-35.05	61.16	34.22	9.54	65.97	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4810.00	38.94	74.00	-35.06	61.15	34.22	9.54	65.97	0.00	---	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	4810.00	38.95	74.00	-35.05	61.16	34.22	9.54	65.97	0.00	---	PEAK																																																																																											



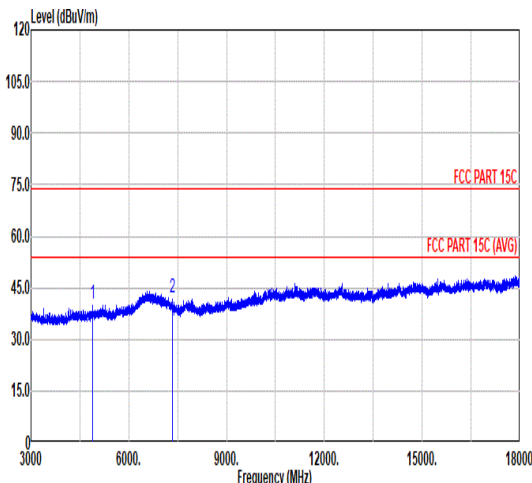
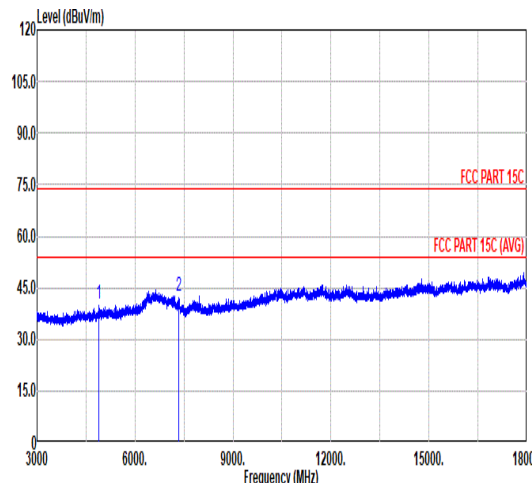


Mode	2																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>40.16</td><td>74.00</td><td>-33.84</td><td>62.17</td><td>34.22</td><td>9.62</td><td>65.85</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7335.00</td><td>41.90</td><td>74.00</td><td>-32.10</td><td>59.73</td><td>35.53</td><td>11.89</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4890.00	40.16	74.00	-33.84	62.17	34.22	9.62	65.85	0.00	---	---	PEAK	2	7335.00	41.90	74.00	-32.10	59.73	35.53	11.89	65.25	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4890.00</td><td>40.26</td><td>74.00</td><td>-33.74</td><td>62.27</td><td>34.22</td><td>9.62</td><td>65.85</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7335.00</td><td>42.43</td><td>74.00</td><td>-31.57</td><td>60.26</td><td>35.53</td><td>11.89</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4890.00	40.26	74.00	-33.74	62.27	34.22	9.62	65.85	0.00	---	---	PEAK	2	7335.00	42.43	74.00	-31.57	60.26	35.53	11.89	65.25	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4890.00	40.16	74.00	-33.84	62.17	34.22	9.62	65.85	0.00	---	---	PEAK																																																																																																																		
2	7335.00	41.90	74.00	-32.10	59.73	35.53	11.89	65.25	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4890.00	40.26	74.00	-33.74	62.27	34.22	9.62	65.85	0.00	---	---	PEAK																																																																																																																		
2	7335.00	42.43	74.00	-31.57	60.26	35.53	11.89	65.25	0.00	---	---	PEAK																																																																																																																		

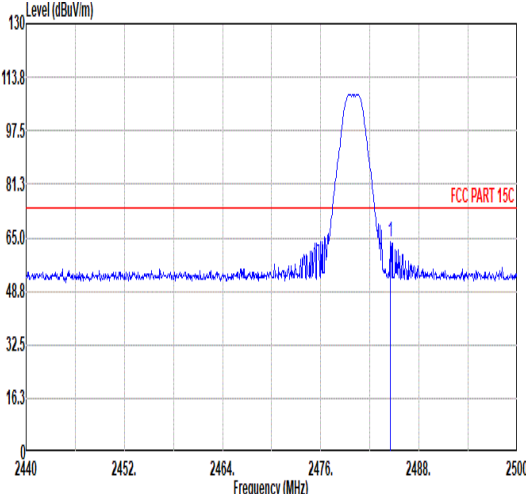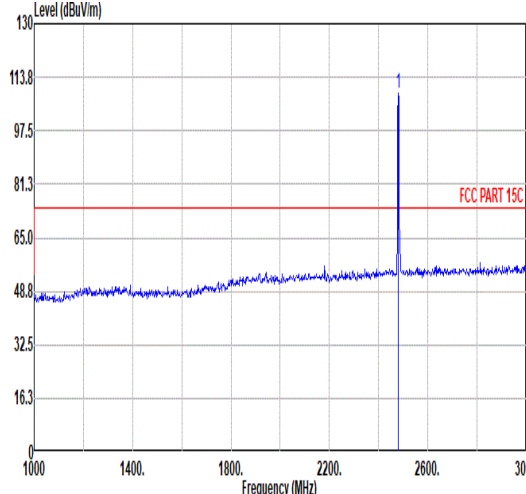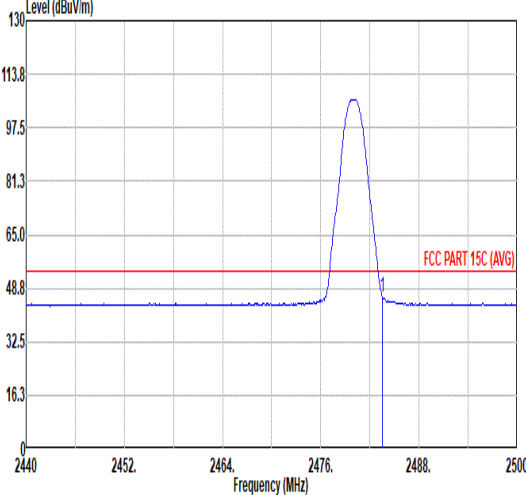
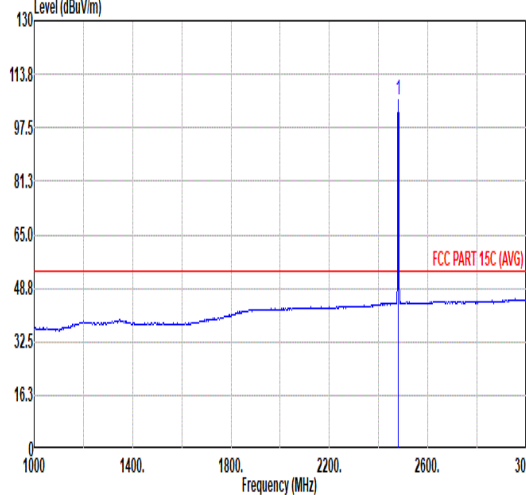


Mode	3																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.46</td><td>63.68</td><td>74.00</td><td>-10.32</td><td>50.86</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>380</td><td>61 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.46	63.68	74.00	-10.32	50.86	32.40	6.83	32.41	6.00	380	61 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>108.78</td><td>-----</td><td>-----</td><td>95.96</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>380</td><td>61 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.78	-----	-----	95.96	32.40	6.83	32.41	6.00	380	61 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2484.46	63.68	74.00	-10.32	50.86	32.40	6.83	32.41	6.00	380	61 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2480.00	108.78	-----	-----	95.96	32.40	6.83	32.41	6.00	380	61 PEAK																																																																																											
Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>46.30</td><td>54.00</td><td>-7.70</td><td>33.48</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>380</td><td>61 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.30	54.00	-7.70	33.48	32.40	6.83	32.41	6.00	380	61 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>106.15</td><td>-----</td><td>-----</td><td>93.33</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>380</td><td>61 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	106.15	-----	-----	93.33	32.40	6.83	32.41	6.00	380	61 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.50	46.30	54.00	-7.70	33.48	32.40	6.83	32.41	6.00	380	61 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2480.00	106.15	-----	-----	93.33	32.40	6.83	32.41	6.00	380	61 AVERAGE																																																																																											

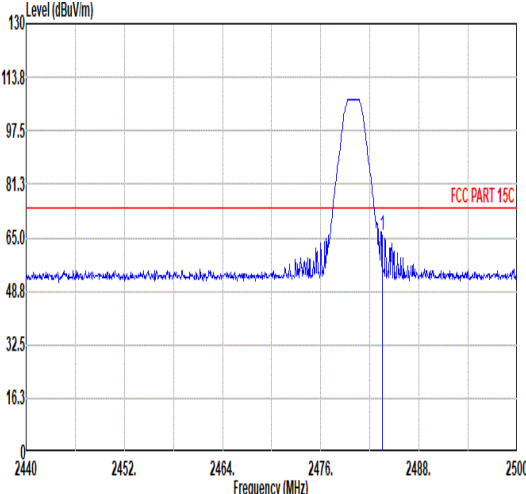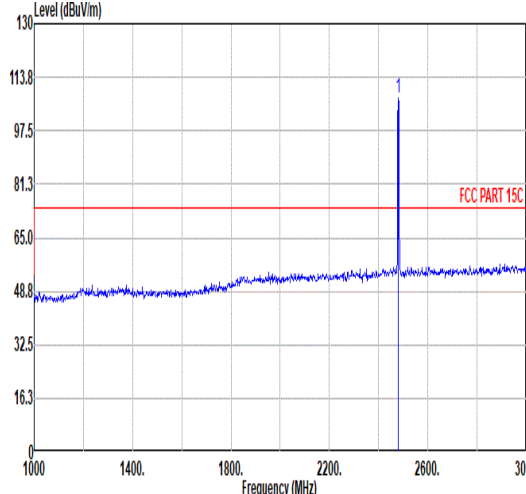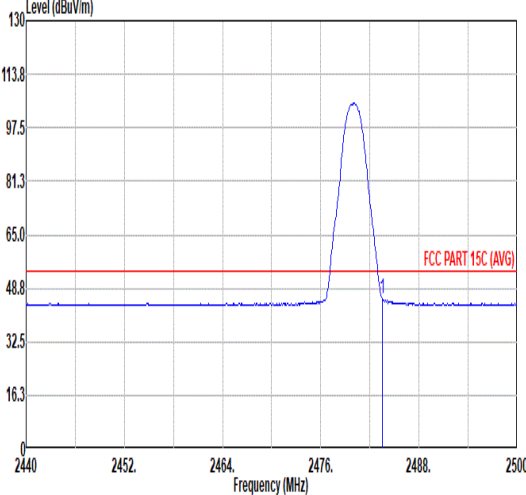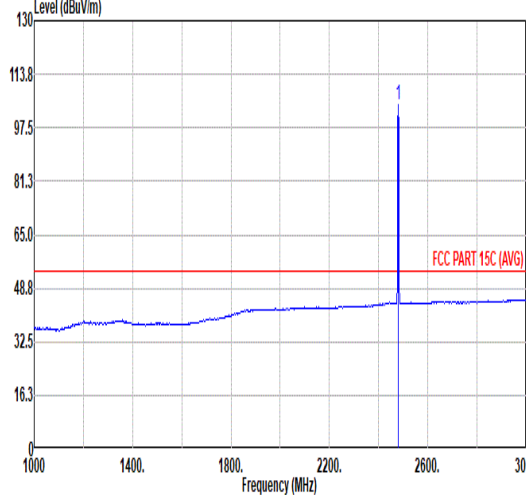

Mode	3																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>65.89</td><td>74.00</td><td>-8.11</td><td>53.07</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>298</td><td>277 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	65.89	74.00	-8.11	53.07	32.40	6.83	32.41	6.00	298	277 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>107.46</td><td>-----</td><td>-----</td><td>94.64</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>298</td><td>277 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.46	-----	-----	94.64	32.40	6.83	32.41	6.00	298
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	65.89	74.00	-8.11	53.07	32.40	6.83	32.41	6.00	298	277 PEAK																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	107.46	-----	-----	94.64	32.40	6.83	32.41	6.00	298	277 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>45.67</td><td>54.00</td><td>-8.33</td><td>32.85</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>298</td><td>277 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	45.67	54.00	-8.33	32.85	32.40	6.83	32.41	6.00	298	277 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>104.34</td><td>-----</td><td>-----</td><td>91.52</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>298</td><td>277 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	104.34	-----	-----	91.52	32.40	6.83	32.41	6.00	298
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	45.67	54.00	-8.33	32.85	32.40	6.83	32.41	6.00	298	277 AVERAGE																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2480.00	104.34	-----	-----	91.52	32.40	6.83	32.41	6.00	298	277 AVERAGE																																																																																						

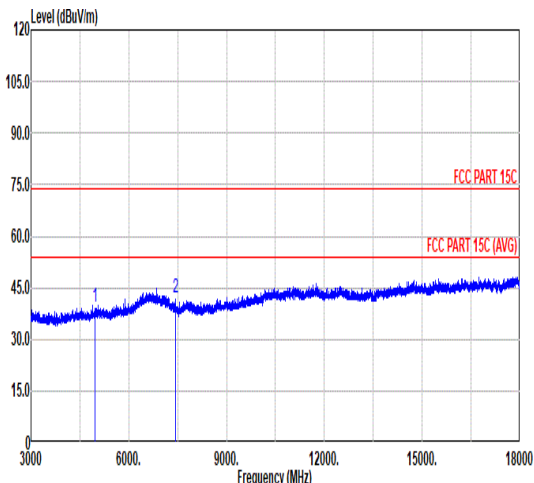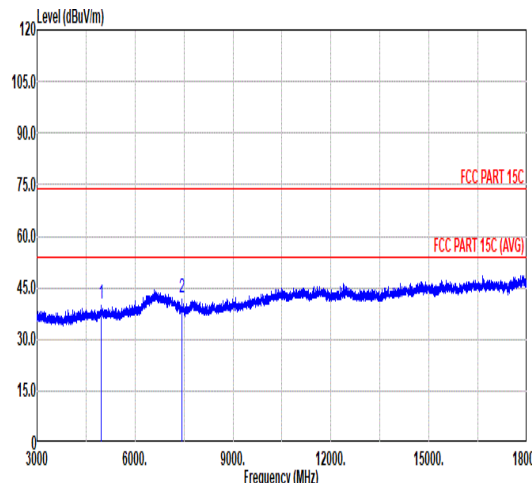

Mode	3																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>39.51</td><td>74.00</td><td>-34.49</td><td>61.54</td><td>34.02</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>42.01</td><td>74.00</td><td>-31.99</td><td>60.00</td><td>35.62</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	39.51	74.00	-34.49	61.54	34.02	9.70	65.75	0.00	---	---	PEAK	2	7440.00	42.01	74.00	-31.99	60.00	35.62	11.96	65.57	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.36</td><td>74.00</td><td>-33.64</td><td>62.39</td><td>34.02</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>41.93</td><td>74.00</td><td>-32.07</td><td>59.92</td><td>35.62</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.36	74.00	-33.64	62.39	34.02	9.70	65.75	0.00	---	---	PEAK	2	7440.00	41.93	74.00	-32.07	59.92	35.62	11.96	65.57	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	39.51	74.00	-34.49	61.54	34.02	9.70	65.75	0.00	---	---	PEAK																																																																																																																		
2	7440.00	42.01	74.00	-31.99	60.00	35.62	11.96	65.57	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.36	74.00	-33.64	62.39	34.02	9.70	65.75	0.00	---	---	PEAK																																																																																																																		
2	7440.00	41.93	74.00	-32.07	59.92	35.62	11.96	65.57	0.00	---	---	PEAK																																																																																																																		







Mode	3	
	18G-25G	
	2400-2483.5_Zigbee_CH26_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg	Horizontal Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line fluctuating around 48.8 dBuV/m, with two red horizontal lines indicating FCC PART 15C limits at 65.0 dBuV/m and 81.3 dBuV/m. The x-axis ranges from 18000 to 25000 MHz, and the y-axis ranges from 0 to 130 dBuV/m.	Vertical Polarization Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue signal line fluctuating around 48.8 dBuV/m, with two red horizontal lines indicating FCC PART 15C limits at 65.0 dBuV/m and 81.3 dBuV/m. The x-axis ranges from 18000 to 25000 MHz, and the y-axis ranges from 0 to 130 dBuV/m.







Mode	3																																																																																																		
	30-1G																																																																																																		
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal																																																																																																		
Peak Avg	Horizontal Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line and a blue signal line with peaks labeled 1 through 6. A red label 'Part 15C' is present in the upper right corner. <table><thead><tr><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>147.37</td><td>25.48</td><td>43.50</td><td>-18.02</td><td>38.49</td><td>17.20</td><td>1.85</td><td>32.06</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>202.66</td><td>33.10</td><td>43.50</td><td>-10.40</td><td>48.24</td><td>14.78</td><td>2.16</td><td>32.08</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>214.30</td><td>34.10</td><td>43.50</td><td>-9.40</td><td>48.90</td><td>14.99</td><td>2.23</td><td>32.02</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>341.37</td><td>31.88</td><td>46.00</td><td>-14.12</td><td>41.09</td><td>20.00</td><td>2.82</td><td>32.03</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>392.78</td><td>28.30</td><td>46.00</td><td>-17.70</td><td>35.90</td><td>21.50</td><td>3.02</td><td>32.12</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>649.83</td><td>31.65</td><td>46.00</td><td>-14.35</td><td>33.80</td><td>26.12</td><td>3.91</td><td>32.18</td><td>--</td><td>-- Peak</td></tr></tbody></table>											Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	147.37	25.48	43.50	-18.02	38.49	17.20	1.85	32.06	--	-- Peak	2	202.66	33.10	43.50	-10.40	48.24	14.78	2.16	32.08	--	-- Peak	3	214.30	34.10	43.50	-9.40	48.90	14.99	2.23	32.02	--	-- Peak	4	341.37	31.88	46.00	-14.12	41.09	20.00	2.82	32.03	--	-- Peak	5	392.78	28.30	46.00	-17.70	35.90	21.50	3.02	32.12	--	-- Peak	6	649.83	31.65	46.00	-14.35	33.80	26.12	3.91	32.18	--	-- Peak
	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	147.37	25.48	43.50	-18.02	38.49	17.20	1.85	32.06	--	-- Peak																																																																																									
2	202.66	33.10	43.50	-10.40	48.24	14.78	2.16	32.08	--	-- Peak																																																																																									
3	214.30	34.10	43.50	-9.40	48.90	14.99	2.23	32.02	--	-- Peak																																																																																									
4	341.37	31.88	46.00	-14.12	41.09	20.00	2.82	32.03	--	-- Peak																																																																																									
5	392.78	28.30	46.00	-17.70	35.90	21.50	3.02	32.12	--	-- Peak																																																																																									
6	649.83	31.65	46.00	-14.35	33.80	26.12	3.91	32.18	--	-- Peak																																																																																									
Peak Avg	Vertical Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line and a blue signal line with peaks labeled 1 through 6. A red label 'Part 15C' is present in the upper right corner. <table><thead><tr><th>Freq</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>43.58</td><td>35.96</td><td>40.00</td><td>-4.04</td><td>49.49</td><td>17.64</td><td>1.01</td><td>32.18</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>202.66</td><td>33.66</td><td>43.50</td><td>-9.84</td><td>48.80</td><td>14.78</td><td>2.16</td><td>32.08</td><td>--</td><td>-- Peak</td></tr><tr><td>3</td><td>214.30</td><td>32.85</td><td>43.50</td><td>-10.65</td><td>47.65</td><td>14.99</td><td>2.23</td><td>32.02</td><td>--</td><td>-- Peak</td></tr><tr><td>4</td><td>392.78</td><td>23.46</td><td>46.00</td><td>-22.54</td><td>31.06</td><td>21.50</td><td>3.02</td><td>32.12</td><td>--</td><td>-- Peak</td></tr><tr><td>5</td><td>609.09</td><td>33.33</td><td>46.00</td><td>-12.67</td><td>35.79</td><td>25.74</td><td>3.77</td><td>31.97</td><td>--</td><td>-- Peak</td></tr><tr><td>6</td><td>861.29</td><td>29.74</td><td>46.00</td><td>-16.26</td><td>27.08</td><td>29.68</td><td>4.45</td><td>31.47</td><td>--</td><td>-- Peak</td></tr></tbody></table>											Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	43.58	35.96	40.00	-4.04	49.49	17.64	1.01	32.18	--	-- Peak	2	202.66	33.66	43.50	-9.84	48.80	14.78	2.16	32.08	--	-- Peak	3	214.30	32.85	43.50	-10.65	47.65	14.99	2.23	32.02	--	-- Peak	4	392.78	23.46	46.00	-22.54	31.06	21.50	3.02	32.12	--	-- Peak	5	609.09	33.33	46.00	-12.67	35.79	25.74	3.77	31.97	--	-- Peak	6	861.29	29.74	46.00	-16.26	27.08	29.68	4.45	31.47	--	-- Peak
	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	43.58	35.96	40.00	-4.04	49.49	17.64	1.01	32.18	--	-- Peak																																																																																									
2	202.66	33.66	43.50	-9.84	48.80	14.78	2.16	32.08	--	-- Peak																																																																																									
3	214.30	32.85	43.50	-10.65	47.65	14.99	2.23	32.02	--	-- Peak																																																																																									
4	392.78	23.46	46.00	-22.54	31.06	21.50	3.02	32.12	--	-- Peak																																																																																									
5	609.09	33.33	46.00	-12.67	35.79	25.74	3.77	31.97	--	-- Peak																																																																																									
6	861.29	29.74	46.00	-16.26	27.08	29.68	4.45	31.47	--	-- Peak																																																																																									





Co-location

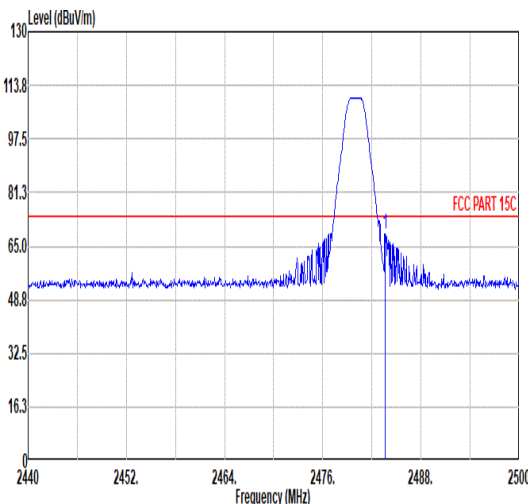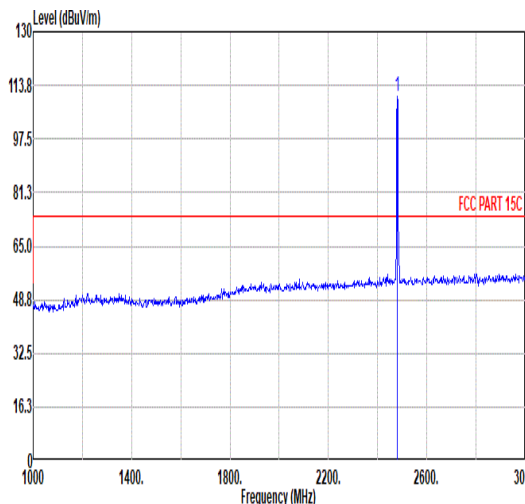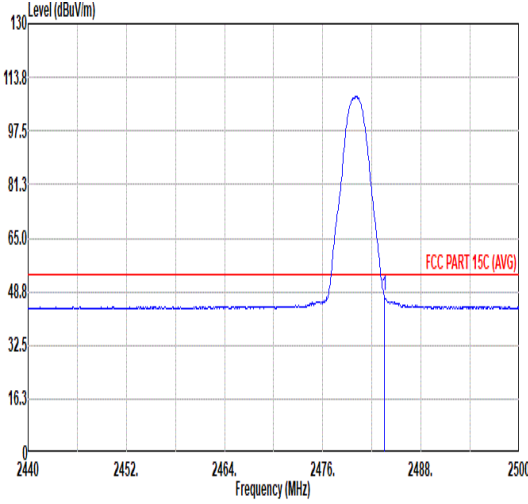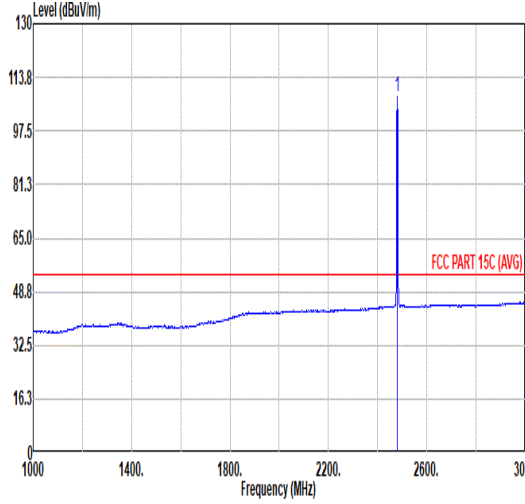Mode	4																																																																																																		
	Band Edge																																																																																																		
	Zigbee_CH26_2480MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>68.91</td><td>74.00</td><td>-5.09</td><td>56.09</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>279 310 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	68.91	74.00	-5.09	56.09	32.40	6.83	32.41	6.00	279 310 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>110.41</td><td>-----</td><td>-----</td><td>97.59</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>279 310 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	110.41	-----	-----	97.59	32.40	6.83	32.41	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.62	68.91	74.00	-5.09	56.09	32.40	6.83	32.41	6.00	279 310 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	110.41	-----	-----	97.59	32.40	6.83	32.41	6.00	279 310 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>34.64</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>279 310 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.46	54.00	-6.54	34.64	32.40	6.83	32.41	6.00	279 310 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>107.81</td><td>-----</td><td>-----</td><td>94.99</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>279 310 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	107.81	-----	-----	94.99	32.40	6.83	32.41	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	47.46	54.00	-6.54	34.64	32.40	6.83	32.41	6.00	279 310 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2480.00	107.81	-----	-----	94.99	32.40	6.83	32.41	6.00	279 310 AVERAGE																																																																																									

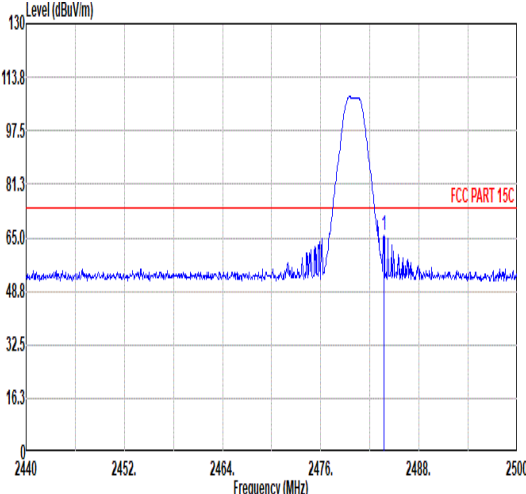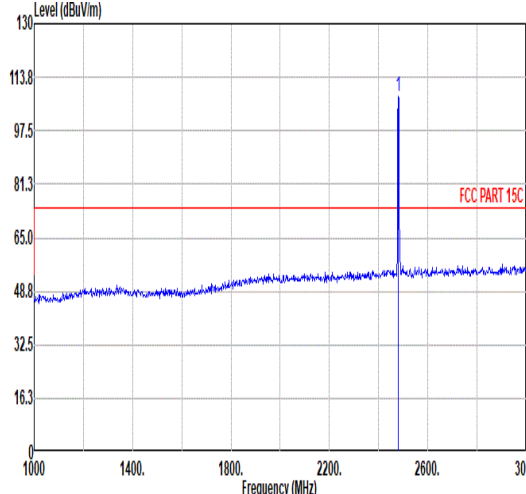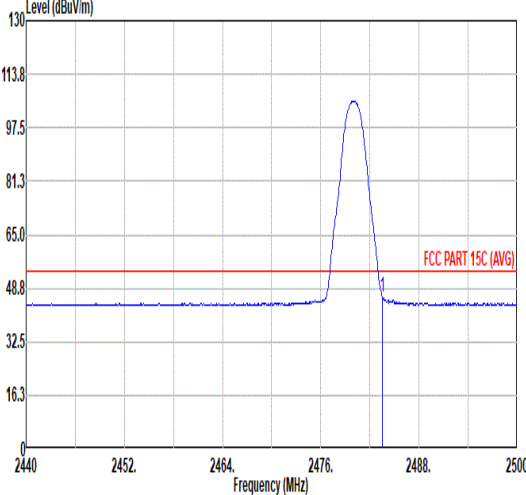
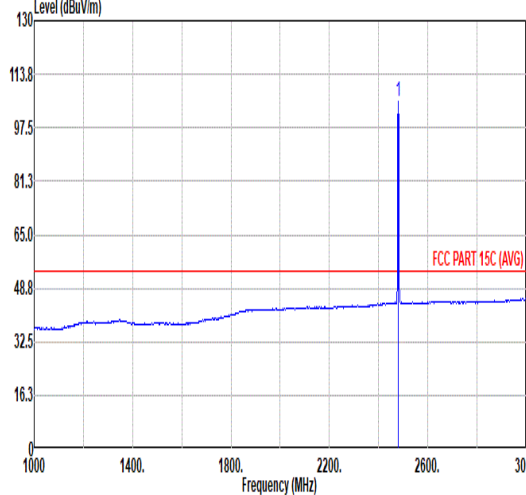


Mode	4																																																																																														
	Band Edge																																																																																														
	Zigbee_CH26_2480MHz																																																																																														
ANT	1																																																																																														
Pol.	Vertical					Fundamental																																																																																									
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>65.64</td><td>74.00</td><td>-8.36</td><td>52.82</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>387</td><td>271 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	65.64	74.00	-8.36	52.82	32.40	6.83	32.41	6.00	387	271 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>108.06</td><td>-----</td><td>-----</td><td>95.24</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>387</td><td>271 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	108.06	-----	-----	95.24	32.40	6.83	32.41	6.00	387
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2483.74	65.64	74.00	-8.36	52.82	32.40	6.83	32.41	6.00	387	271 PEAK																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2480.00	108.06	-----	-----	95.24	32.40	6.83	32.41	6.00	387	271 PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.22</td><td>54.00</td><td>-7.78</td><td>33.40</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>387</td><td>271 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.22	54.00	-7.78	33.40	32.40	6.83	32.41	6.00	387	271 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.49</td><td>-----</td><td>-----</td><td>92.67</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>387</td><td>271 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.49	-----	-----	92.67	32.40	6.83	32.41	6.00	387
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2483.50	46.22	54.00	-7.78	33.40	32.40	6.83	32.41	6.00	387	271 AVERAGE																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2480.00	105.49	-----	-----	92.67	32.40	6.83	32.41	6.00	387	271 AVERAGE																																																																																				

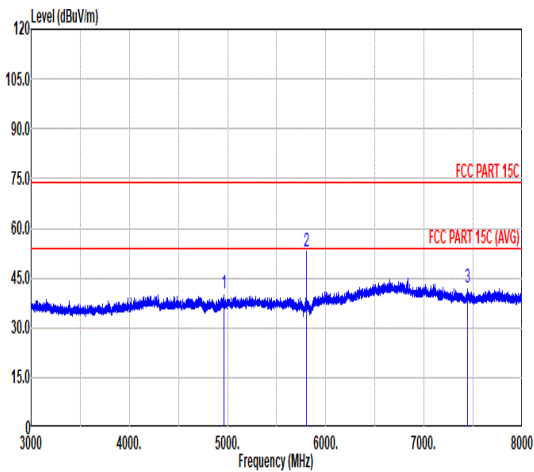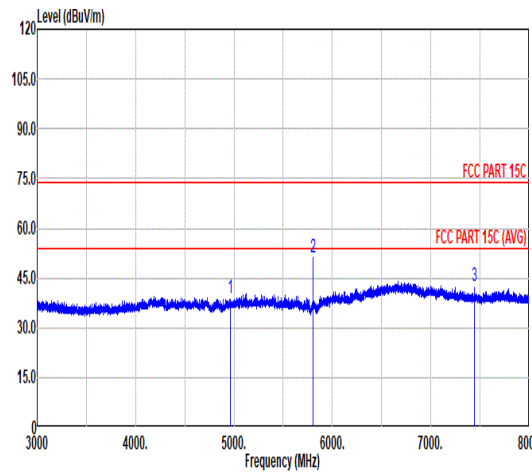

Mode	4																																																																																																																																																													
	Harmonic																																																																																																																																																													
	Zigbee_CH26_2480MHz																																																																																																																																																													
ANT	1																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.41</td><td>74.00</td><td>-33.59</td><td>62.42</td><td>34.04</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>5800.00</td><td>53.02</td><td>114.00</td><td>-60.98</td><td>74.23</td><td>34.70</td><td>10.50</td><td>66.41</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.25</td><td>74.00</td><td>-31.75</td><td>60.08</td><td>35.78</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.41	74.00	-33.59	62.42	34.04	9.70	65.75	0.00	---	---	PEAK	2	5800.00	53.02	114.00	-60.98	74.23	34.70	10.50	66.41	0.00	---	---	Peak	3	7440.00	42.25	74.00	-31.75	60.08	35.78	11.96	65.57	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>39.10</td><td>74.00</td><td>-34.90</td><td>61.11</td><td>34.04</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>5800.00</td><td>51.10</td><td>114.00</td><td>-62.90</td><td>72.31</td><td>34.70</td><td>10.50</td><td>66.41</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7440.00</td><td>42.69</td><td>74.00</td><td>-31.31</td><td>60.52</td><td>35.78</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	39.10	74.00	-34.90	61.11	34.04	9.70	65.75	0.00	---	---	PEAK	2	5800.00	51.10	114.00	-62.90	72.31	34.70	10.50	66.41	0.00	---	---	Peak	3	7440.00	42.69	74.00	-31.31	60.52	35.78	11.96	65.57	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4960.00	40.41	74.00	-33.59	62.42	34.04	9.70	65.75	0.00	---	---	PEAK																																																																																																																																																		
2	5800.00	53.02	114.00	-60.98	74.23	34.70	10.50	66.41	0.00	---	---	Peak																																																																																																																																																		
3	7440.00	42.25	74.00	-31.75	60.08	35.78	11.96	65.57	0.00	---	---	PEAK																																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4960.00	39.10	74.00	-34.90	61.11	34.04	9.70	65.75	0.00	---	---	PEAK																																																																																																																																																		
2	5800.00	51.10	114.00	-62.90	72.31	34.70	10.50	66.41	0.00	---	---	Peak																																																																																																																																																		
3	7440.00	42.69	74.00	-31.31	60.52	35.78	11.96	65.57	0.00	---	---	PEAK																																																																																																																																																		

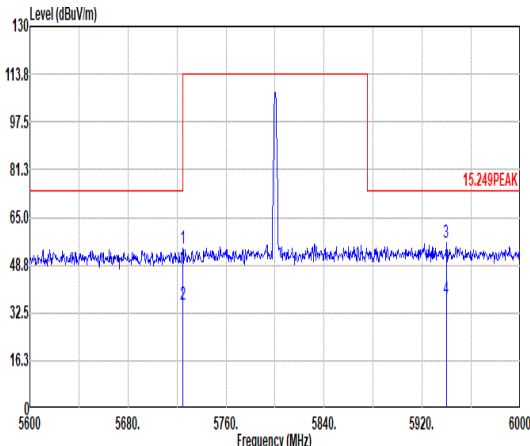
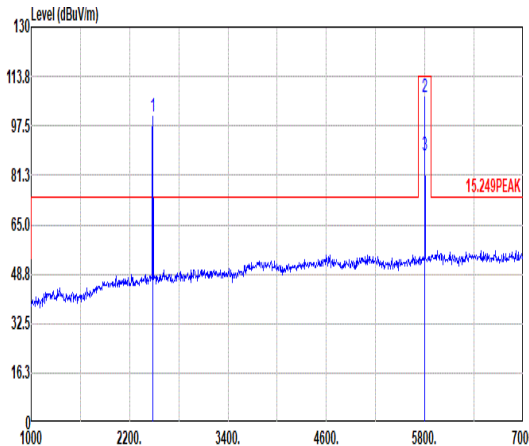


Mode	4																																																																																															
	Band Edge																																																																																															
	Low Power Wideband Radio in Wi-Fi 5GHz 140M _5800MHz																																																																																															
ANT	2																																																																																															
Pol.	Horizontal																																																																																															
Peak																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5724.80</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>41.47</td><td>34.55</td><td>10.43</td><td>31.96</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>2</td><td>5724.80</td><td>35.49</td><td>54.00</td><td>-18.51</td><td>22.47</td><td>34.55</td><td>10.43</td><td>31.96</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr><tr><td>3</td><td>5939.60</td><td>56.20</td><td>74.00</td><td>-17.80</td><td>42.31</td><td>35.18</td><td>10.57</td><td>31.86</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>4</td><td>5939.60</td><td>37.20</td><td>54.00</td><td>-16.80</td><td>23.31</td><td>35.18</td><td>10.57</td><td>31.86</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5724.80	54.49	74.00	-19.51	41.47	34.55	10.43	31.96	0.00	300	165	PEAK	2	5724.80	35.49	54.00	-18.51	22.47	34.55	10.43	31.96	0.00	300	165	Average	3	5939.60	56.20	74.00	-17.80	42.31	35.18	10.57	31.86	0.00	300	165	PEAK	4	5939.60	37.20	54.00	-16.80	23.31	35.18	10.57	31.86	0.00	300	165	Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5724.80	54.49	74.00	-19.51	41.47	34.55	10.43	31.96	0.00	300	165	PEAK																																																																																				
2	5724.80	35.49	54.00	-18.51	22.47	34.55	10.43	31.96	0.00	300	165	Average																																																																																				
3	5939.60	56.20	74.00	-17.80	42.31	35.18	10.57	31.86	0.00	300	165	PEAK																																																																																				
4	5939.60	37.20	54.00	-16.80	23.31	35.18	10.57	31.86	0.00	300	165	Average																																																																																				
Fundamental																																																																																																
Peak																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2482.00</td><td>100.34</td><td>-----</td><td>-----</td><td>93.52</td><td>32.40</td><td>6.83</td><td>32.41</td><td>0.00</td><td>300</td><td>165</td><td>Peak</td></tr><tr><td>2</td><td>5800.00</td><td>106.70</td><td>114.00</td><td>-7.30</td><td>93.15</td><td>34.80</td><td>10.50</td><td>31.75</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr><tr><td>3</td><td>5800.00</td><td>87.70</td><td>94.00</td><td>-6.30</td><td>74.15</td><td>34.80</td><td>10.50</td><td>31.75</td><td>0.00</td><td>300</td><td>165</td><td>Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2482.00	100.34	-----	-----	93.52	32.40	6.83	32.41	0.00	300	165	Peak	2	5800.00	106.70	114.00	-7.30	93.15	34.80	10.50	31.75	0.00	300	165	PEAK	3	5800.00	87.70	94.00	-6.30	74.15	34.80	10.50	31.75	0.00	300	165	Average													
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																							
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2482.00	100.34	-----	-----	93.52	32.40	6.83	32.41	0.00	300	165	Peak																																																																																				
2	5800.00	106.70	114.00	-7.30	93.15	34.80	10.50	31.75	0.00	300	165	PEAK																																																																																				
3	5800.00	87.70	94.00	-6.30	74.15	34.80	10.50	31.75	0.00	300	165	Average																																																																																				







Mode	4																																																																																																																																																																								
	Band Edge																																																																																																																																																																								
	Low Power Wideband Radio in Wi-Fi 5GHz 140M _5800MHz																																																																																																																																																																								
ANT	3																																																																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																																																																		
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5710.00</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>41.64</td><td>34.52</td><td>10.41</td><td>32.00</td><td>0.00</td><td>134</td><td>150</td><td>PEAK</td></tr><tr><td>2</td><td>5710.00</td><td>35.57</td><td>54.00</td><td>-18.43</td><td>22.64</td><td>34.52</td><td>10.41</td><td>32.00</td><td>0.00</td><td>134</td><td>150</td><td>Average</td></tr><tr><td>3</td><td>5928.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>41.47</td><td>35.16</td><td>10.56</td><td>31.88</td><td>0.00</td><td>134</td><td>150</td><td>PEAK</td></tr><tr><td>4</td><td>5928.00</td><td>36.31</td><td>54.00</td><td>-17.69</td><td>22.47</td><td>35.16</td><td>10.56</td><td>31.88</td><td>0.00</td><td>134</td><td>150</td><td>Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5710.00	54.57	74.00	-19.43	41.64	34.52	10.41	32.00	0.00	134	150	PEAK	2	5710.00	35.57	54.00	-18.43	22.64	34.52	10.41	32.00	0.00	134	150	Average	3	5928.00	55.31	74.00	-18.69	41.47	35.16	10.56	31.88	0.00	134	150	PEAK	4	5928.00	36.31	54.00	-17.69	22.47	35.16	10.56	31.88	0.00	134	150	Average	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2482.00</td><td>103.01</td><td>-----</td><td>-----</td><td>96.19</td><td>32.40</td><td>6.83</td><td>32.41</td><td>0.00</td><td>134</td><td>150</td><td>Peak</td></tr><tr><td>2</td><td>5800.00</td><td>104.52</td><td>114.00</td><td>-9.48</td><td>90.97</td><td>34.80</td><td>10.50</td><td>31.75</td><td>0.00</td><td>134</td><td>150</td><td>PEAK</td></tr><tr><td>3</td><td>5800.00</td><td>85.52</td><td>94.00</td><td>-8.48</td><td>71.97</td><td>34.80</td><td>10.50</td><td>31.75</td><td>0.00</td><td>134</td><td>150</td><td>Average</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2482.00	103.01	-----	-----	96.19	32.40	6.83	32.41	0.00	134	150	Peak	2	5800.00	104.52	114.00	-9.48	90.97	34.80	10.50	31.75	0.00	134	150	PEAK	3	5800.00	85.52	94.00	-8.48	71.97	34.80	10.50	31.75	0.00	134	150	Average
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	5710.00	54.57	74.00	-19.43	41.64	34.52	10.41	32.00	0.00	134	150	PEAK																																																																																																																																																													
2	5710.00	35.57	54.00	-18.43	22.64	34.52	10.41	32.00	0.00	134	150	Average																																																																																																																																																													
3	5928.00	55.31	74.00	-18.69	41.47	35.16	10.56	31.88	0.00	134	150	PEAK																																																																																																																																																													
4	5928.00	36.31	54.00	-17.69	22.47	35.16	10.56	31.88	0.00	134	150	Average																																																																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																															
1	2482.00	103.01	-----	-----	96.19	32.40	6.83	32.41	0.00	134	150	Peak																																																																																																																																																													
2	5800.00	104.52	114.00	-9.48	90.97	34.80	10.50	31.75	0.00	134	150	PEAK																																																																																																																																																													
3	5800.00	85.52	94.00	-8.48	71.97	34.80	10.50	31.75	0.00	134	150	Average																																																																																																																																																													



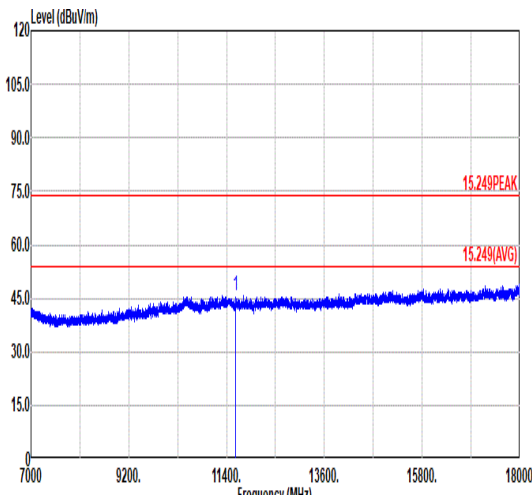
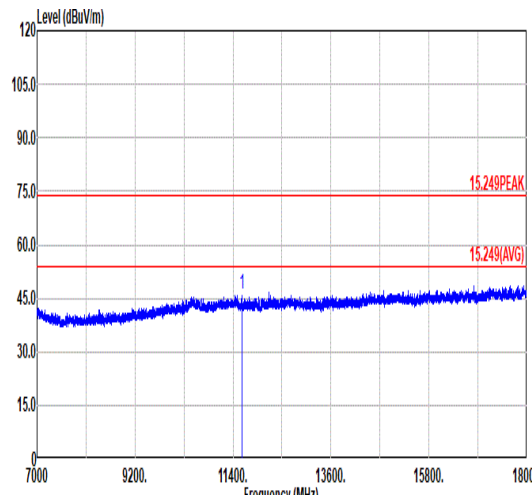


Mode	4																																																																																																									
	Harmonic																																																																																																									
	Low Power Wideband Radio in Wi-Fi 5GHz 140M _5800MHz																																																																																																									
ANT	3																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11600.00</td><td>45.80</td><td>74.00</td><td>-28.20</td><td>57.30</td><td>38.10</td><td>14.68</td><td>64.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11600.00	45.80	74.00	-28.20	57.30	38.10	14.68	64.28	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11600.00</td><td>46.11</td><td>74.00</td><td>-27.89</td><td>57.61</td><td>38.10</td><td>14.68</td><td>64.28</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11600.00	46.11	74.00	-27.89	57.61	38.10	14.68	64.28	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11600.00	45.80	74.00	-28.20	57.30	38.10	14.68	64.28	0.00	---	---	PEAK																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	11600.00	46.11	74.00	-27.89	57.61	38.10	14.68	64.28	0.00	---	---	PEAK																																																																																														

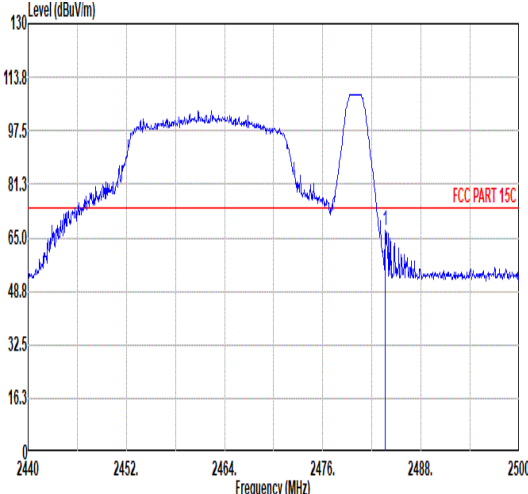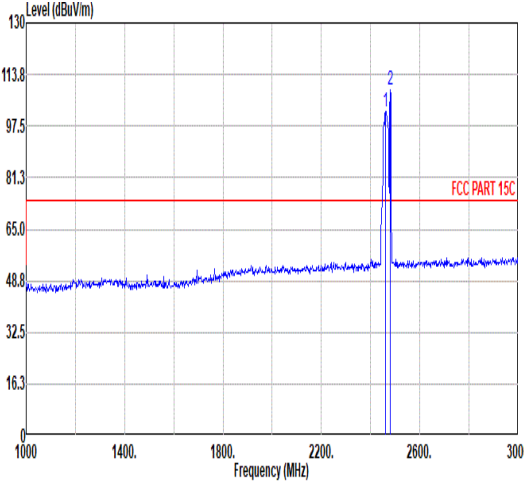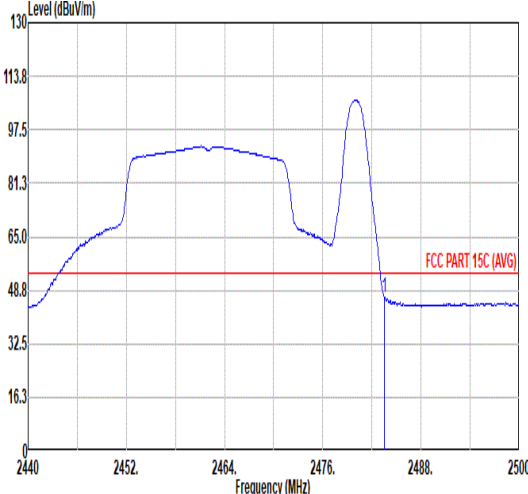
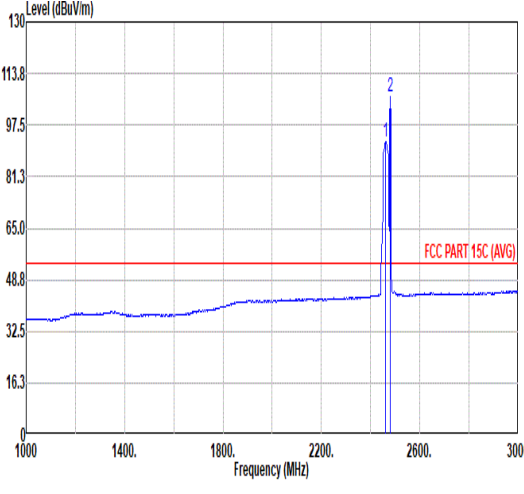


Mode	5																																																																																																													
	Band Edge - L																																																																																																													
	Zigbee_CH26_2480MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																							
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>67.30</td><td>74.00</td><td>-6.70</td><td>54.48</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>317</td><td>296 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	67.30	74.00	-6.70	54.48	32.40	6.83	32.41	6.00	317	296 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2460.00</td><td>102.14</td><td>-----</td><td>89.35</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>317</td><td>296 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>109.00</td><td>-----</td><td>96.18</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>317</td><td>296 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2460.00	102.14	-----	89.35	32.40	6.80	32.41	6.00	317	296 Peak	2	2480.00	109.00	-----	96.18	32.40	6.83	32.41	6.00	317
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.62	67.30	74.00	-6.70	54.48	32.40	6.83	32.41	6.00	317	296 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2460.00	102.14	-----	89.35	32.40	6.80	32.41	6.00	317	296 Peak																																																																																																				
2	2480.00	109.00	-----	96.18	32.40	6.83	32.41	6.00	317	296 PEAK																																																																																																				
Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>46.63</td><td>54.00</td><td>-7.37</td><td>33.81</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>317</td><td>296 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	46.63	54.00	-7.37	33.81	32.40	6.83	32.41	6.00	317	296 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.30</td><td>-----</td><td>79.51</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>317</td><td>296 Average</td></tr><tr><td>2</td><td>2480.00</td><td>106.40</td><td>-----</td><td>93.58</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>317</td><td>296 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.30	-----	79.51	32.40	6.80	32.41	6.00	317	296 Average	2	2480.00	106.40	-----	93.58	32.40	6.83	32.41	6.00	317
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.56	46.63	54.00	-7.37	33.81	32.40	6.83	32.41	6.00	317	296 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2462.00	92.30	-----	79.51	32.40	6.80	32.41	6.00	317	296 Average																																																																																																				
2	2480.00	106.40	-----	93.58	32.40	6.83	32.41	6.00	317	296 AVERAGE																																																																																																				

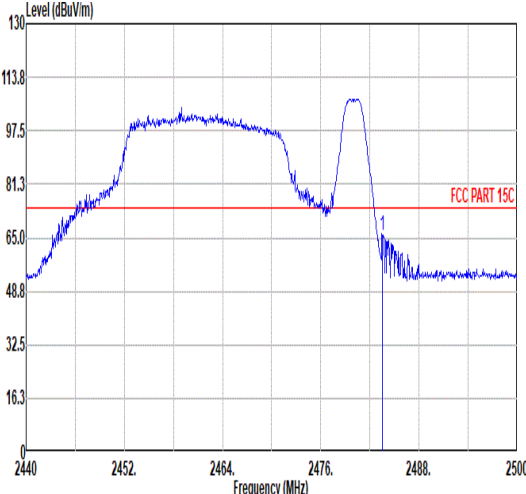
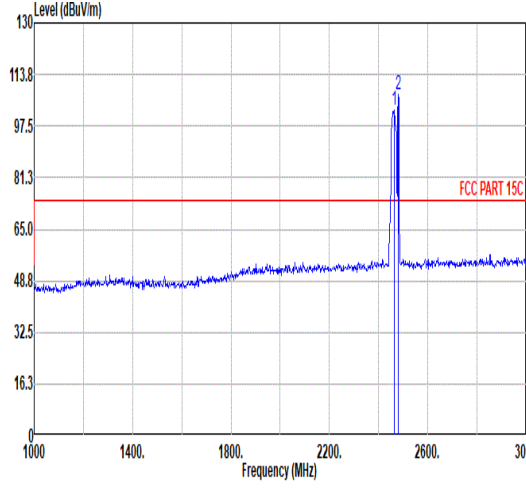
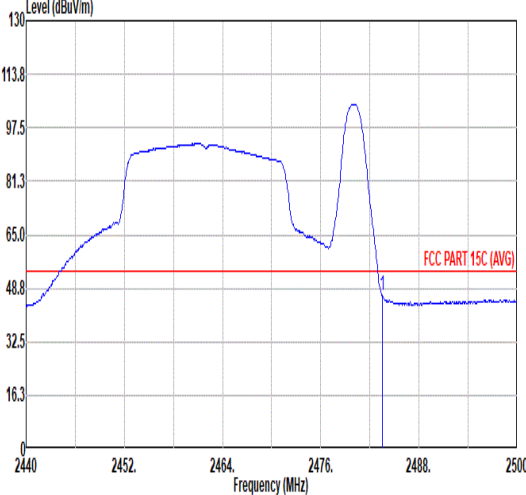
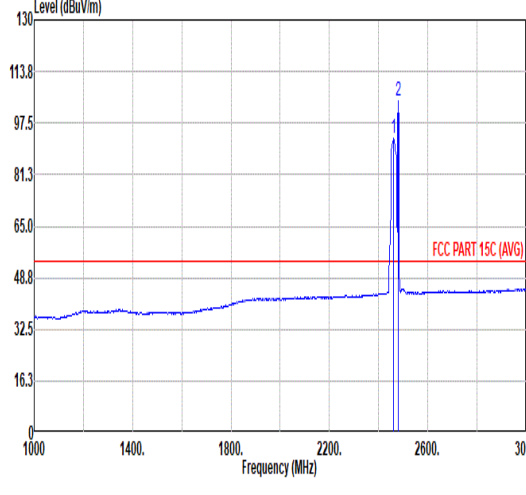


Mode	5																																																																																																													
	Band Edge - L																																																																																																													
	Zigbee_CH26_2480MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Vertical						Fundamental																																																																																																							
Peak																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>65.85</td><td>74.00</td><td>-8.15</td><td>53.03</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>400</td><td>266 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	65.85	74.00	-8.15	53.03	32.40	6.83	32.41	6.00	400	266 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2464.00</td><td>102.59</td><td>-----</td><td>89.79</td><td>32.40</td><td>6.81</td><td>32.41</td><td>6.00</td><td>400</td><td>266 Peak</td></tr><tr><td>2</td><td>2480.00</td><td>107.26</td><td>-----</td><td>94.44</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>400</td><td>266 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2464.00	102.59	-----	89.79	32.40	6.81	32.41	6.00	400	266 Peak	2	2480.00	107.26	-----	94.44	32.40	6.83	32.41	6.00	400
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.50	65.85	74.00	-8.15	53.03	32.40	6.83	32.41	6.00	400	266 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2464.00	102.59	-----	89.79	32.40	6.81	32.41	6.00	400	266 Peak																																																																																																				
2	2480.00	107.26	-----	94.44	32.40	6.83	32.41	6.00	400	266 PEAK																																																																																																				
Avg																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.73</td><td>54.00</td><td>-7.27</td><td>33.91</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>400</td><td>266 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.73	54.00	-7.27	33.91	32.40	6.83	32.41	6.00	400	266 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.52</td><td>-----</td><td>79.73</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>400</td><td>266 Average</td></tr><tr><td>2</td><td>2480.00</td><td>104.33</td><td>-----</td><td>91.51</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>400</td><td>266 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.52	-----	79.73	32.40	6.80	32.41	6.00	400	266 Average	2	2480.00	104.33	-----	91.51	32.40	6.83	32.41	6.00	400
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2483.50	46.73	54.00	-7.27	33.91	32.40	6.83	32.41	6.00	400	266 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2462.00	92.52	-----	79.73	32.40	6.80	32.41	6.00	400	266 Average																																																																																																				
2	2480.00	104.33	-----	91.51	32.40	6.83	32.41	6.00	400	266 AVERAGE																																																																																																				



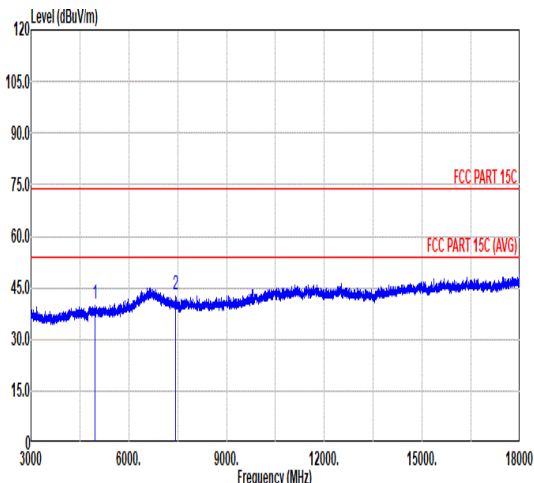
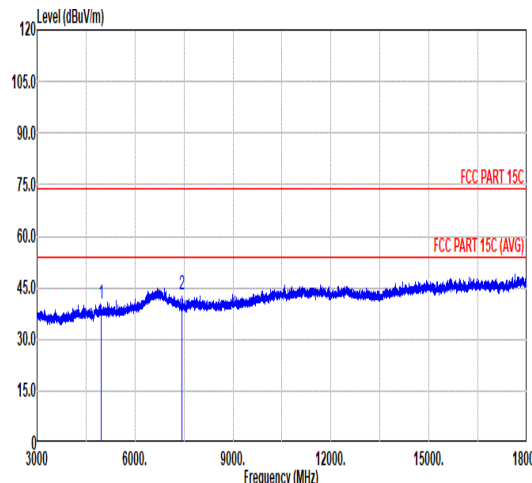


Mode	5																																																																																																																													
	Harmonic																																																																																																																													
	Zigbee_CH26_2480MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.38</td><td>74.00</td><td>-33.62</td><td>62.41</td><td>34.02</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>61.03</td><td>35.62</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.38	74.00	-33.62	62.41	34.02	9.70	65.75	0.00	---	---	PEAK	2	7440.00	43.04	74.00	-30.96	61.03	35.62	11.96	65.57	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4960.00</td><td>40.49</td><td>74.00</td><td>-33.51</td><td>62.52</td><td>34.02</td><td>9.70</td><td>65.75</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7440.00</td><td>43.17</td><td>74.00</td><td>-30.83</td><td>61.16</td><td>35.62</td><td>11.96</td><td>65.57</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4960.00	40.49	74.00	-33.51	62.52	34.02	9.70	65.75	0.00	---	---	PEAK	2	7440.00	43.17	74.00	-30.83	61.16	35.62	11.96	65.57	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.38	74.00	-33.62	62.41	34.02	9.70	65.75	0.00	---	---	PEAK																																																																																																																		
2	7440.00	43.04	74.00	-30.96	61.03	35.62	11.96	65.57	0.00	---	---	PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4960.00	40.49	74.00	-33.51	62.52	34.02	9.70	65.75	0.00	---	---	PEAK																																																																																																																		
2	7440.00	43.17	74.00	-30.83	61.16	35.62	11.96	65.57	0.00	---	---	PEAK																																																																																																																		

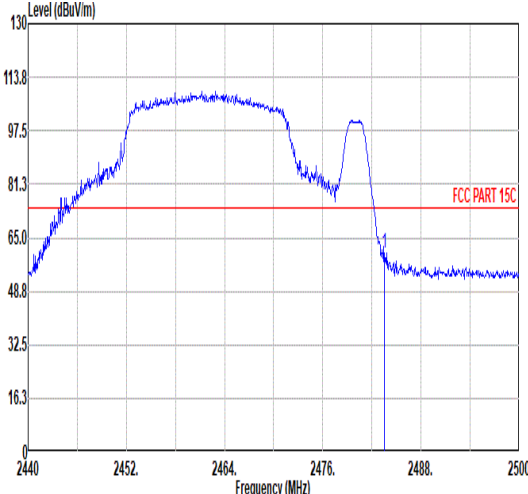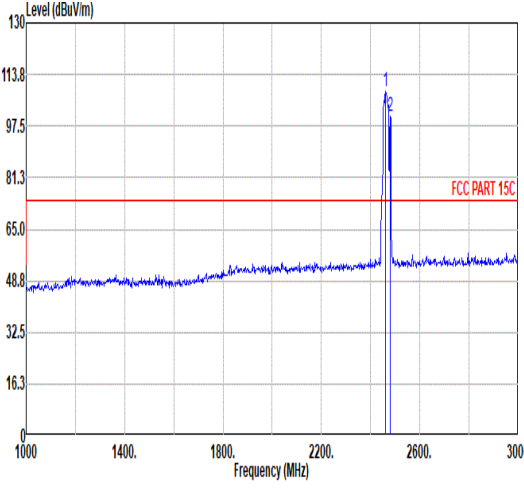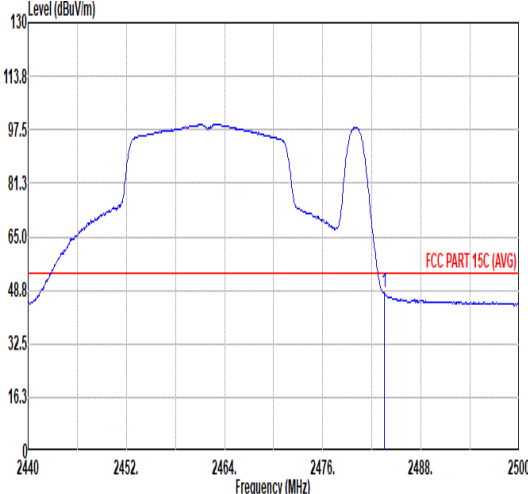
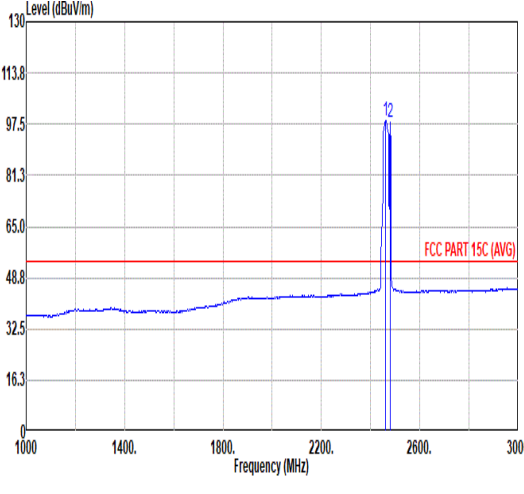


Mode	5																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																	
ANT	2																																																																	
Pol.	Horizontal																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>60.25</td><td>74.00</td><td>-13.75</td><td>47.43</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>248 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	60.25	74.00	-13.75	47.43	32.40	6.83	32.41	6.00	100	248 PEAK										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.56	60.25	74.00	-13.75	47.43	32.40	6.83	32.41	6.00	100	248 PEAK																																																							
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.45</td><td>-----</td><td>95.66</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>100</td><td>248 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>100.78</td><td>-----</td><td>87.96</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>248 Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.45	-----	95.66	32.40	6.80	32.41	6.00	100	248 PEAK	2	2480.00	100.78	-----	87.96	32.40	6.83	32.41	6.00	100	248 Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	108.45	-----	95.66	32.40	6.80	32.41	6.00	100	248 PEAK																																																								
2	2480.00	100.78	-----	87.96	32.40	6.83	32.41	6.00	100	248 Peak																																																								
Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.89</td><td>54.00</td><td>-6.11</td><td>35.07</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>248 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.89	54.00	-6.11	35.07	32.40	6.83	32.41	6.00	100	248 AVERAGE										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.50	47.89	54.00	-6.11	35.07	32.40	6.83	32.41	6.00	100	248 AVERAGE																																																							
AVERAGE																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.77</td><td>-----</td><td>85.98</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>100</td><td>248 AVERAGE</td></tr><tr><td>2</td><td>2480.00</td><td>97.95</td><td>-----</td><td>85.13</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>248 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.77	-----	85.98	32.40	6.80	32.41	6.00	100	248 AVERAGE	2	2480.00	97.95	-----	85.13	32.40	6.83	32.41	6.00	100	248 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	98.77	-----	85.98	32.40	6.80	32.41	6.00	100	248 AVERAGE																																																								
2	2480.00	97.95	-----	85.13	32.40	6.83	32.41	6.00	100	248 Average																																																								

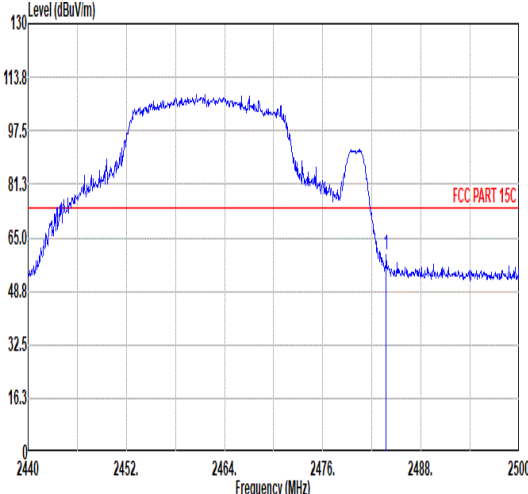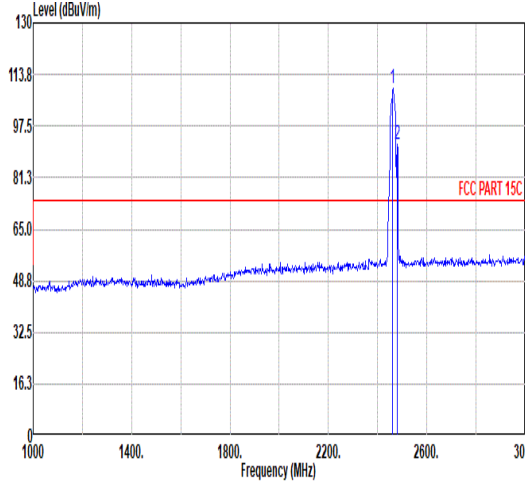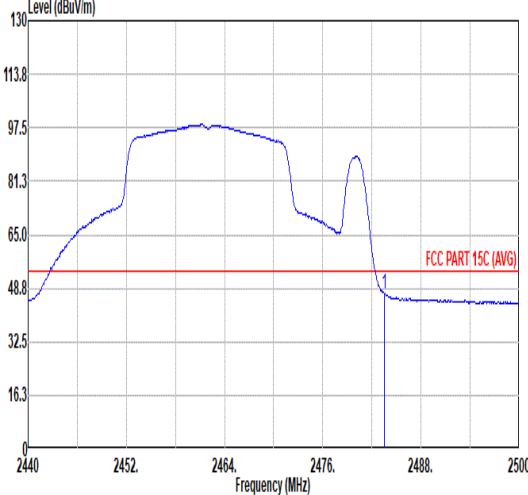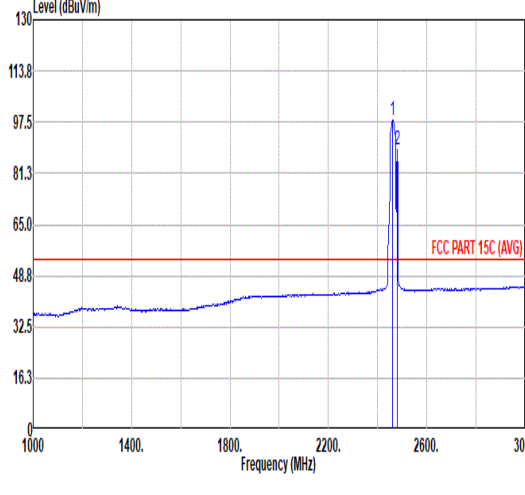

Mode	5																																																																	
	Band Edge																																																																	
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																	
ANT	2																																																																	
Pol.	Vertical																																																																	
Peak																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>59.97</td><td>74.00</td><td>-14.03</td><td>47.15</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>164 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	59.97	74.00	-14.03	47.15	32.40	6.83	32.41	6.00	100	164 PEAK										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.74	59.97	74.00	-14.03	47.15	32.40	6.83	32.41	6.00	100	164 PEAK																																																							
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>109.22</td><td>-----</td><td>96.42</td><td>32.40</td><td>6.81</td><td>32.41</td><td>6.00</td><td>100</td><td>164 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>91.79</td><td>-----</td><td>78.97</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>164 Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.22	-----	96.42	32.40	6.81	32.41	6.00	100	164 PEAK	2	2480.00	91.79	-----	78.97	32.40	6.83	32.41	6.00	100	164 Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	109.22	-----	96.42	32.40	6.81	32.41	6.00	100	164 PEAK																																																								
2	2480.00	91.79	-----	78.97	32.40	6.83	32.41	6.00	100	164 Peak																																																								
Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.33</td><td>54.00</td><td>-6.67</td><td>34.51</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>164 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.33	54.00	-6.67	34.51	32.40	6.83	32.41	6.00	100	164 AVERAGE										
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2483.50	47.33	54.00	-6.67	34.51	32.40	6.83	32.41	6.00	100	164 AVERAGE																																																							
Fundamental																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.07</td><td>-----</td><td>85.28</td><td>32.40</td><td>6.80</td><td>32.41</td><td>6.00</td><td>100</td><td>164 AVERAGE</td></tr><tr><td>2</td><td>2480.00</td><td>88.74</td><td>-----</td><td>75.92</td><td>32.40</td><td>6.83</td><td>32.41</td><td>6.00</td><td>100</td><td>164 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.07	-----	85.28	32.40	6.80	32.41	6.00	100	164 AVERAGE	2	2480.00	88.74	-----	75.92	32.40	6.83	32.41	6.00	100	164 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	2462.00	98.07	-----	85.28	32.40	6.80	32.41	6.00	100	164 AVERAGE																																																								
2	2480.00	88.74	-----	75.92	32.40	6.83	32.41	6.00	100	164 Average																																																								

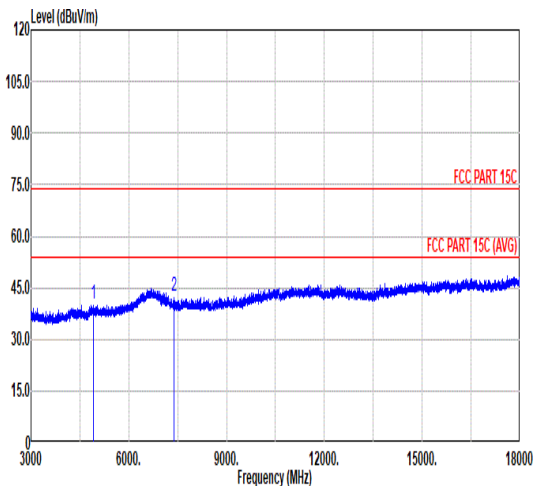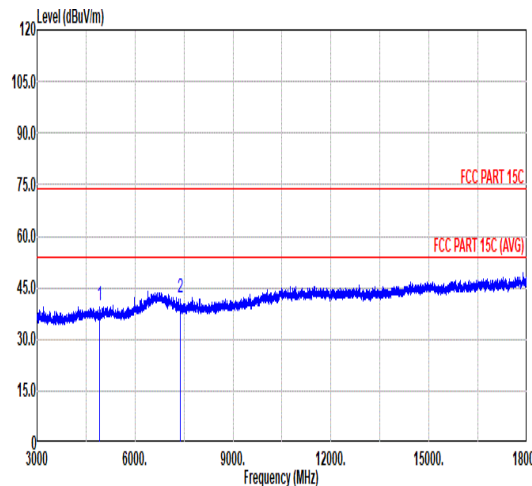

Mode	5																																																																																																																																		
	Harmonic																																																																																																																																		
	2400-2483.5_802.11ax HE20_CH11_Full RU_2462MHz																																																																																																																																		
ANT	2																																																																																																																																		
Pol.	Horizontal											Vertical																																																																																																																							
Peak Avg																																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.10</td><td>74.00</td><td>-33.90</td><td>62.14</td><td>34.10</td><td>9.66</td><td>65.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>60.30</td><td>35.64</td><td>11.94</td><td>65.40</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	40.10	74.00	-33.90	62.14	34.10	9.66	65.80	0.00	---	---	PEAK	2	7386.00	42.48	74.00	-31.52	60.30	35.64	11.94	65.40	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>39.92</td><td>74.00</td><td>-34.08</td><td>61.96</td><td>34.10</td><td>9.66</td><td>65.80</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.92</td><td>74.00</td><td>-32.08</td><td>59.74</td><td>35.64</td><td>11.94</td><td>65.40</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	39.92	74.00	-34.08	61.96	34.10	9.66	65.80	0.00	---	---	PEAK	2	7386.00	41.92	74.00	-32.08	59.74	35.64	11.94	65.40	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4924.00	40.10	74.00	-33.90	62.14	34.10	9.66	65.80	0.00	---	---	PEAK																																																																																																																							
2	7386.00	42.48	74.00	-31.52	60.30	35.64	11.94	65.40	0.00	---	---	PEAK																																																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																									
1	4924.00	39.92	74.00	-34.08	61.96	34.10	9.66	65.80	0.00	---	---	PEAK																																																																																																																							
2	7386.00	41.92	74.00	-32.08	59.74	35.64	11.94	65.40	0.00	---	---	PEAK																																																																																																																							

Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	57.71	1.048	0.954	1kHz

Zigbee mode

